

FEDERAL OPERATING PERMIT

A FEDERAL OPERATING PERMIT IS HEREBY ISSUED TO
Equistar Chemicals, LP

AUTHORIZING THE OPERATION OF
Equistar Chemicals La Porte Complex
La Porte Plant Olefins and Polymers Manufacturing Areas
Plastics Material and Resin Manufacturing

LOCATED AT
Harris County, Texas
Latitude 29° 42' 39" Longitude 95° 3' 45"
Regulated Entity Number: RN100210319

This permit is issued in accordance with and subject to the Texas Clean Air Act (TCAA), Chapter 382 of the Texas Health and Safety Code and Title 30 Texas Administrative Code Chapter 122 (30 TAC Chapter 122), Federal Operating Permits. Under 30 TAC Chapter 122, this permit constitutes the permit holder's authority to operate the site and emission units listed in this permit. Operations of the site and emission units listed in this permit are subject to all additional rules or amended rules and orders of the Commission pursuant to the TCAA.

This permit does not relieve the permit holder from the responsibility of obtaining New Source Review authorization for new, modified, or existing facilities in accordance with 30 TAC Chapter 116, Control of Air Pollution by Permits for New Construction or Modification.

The site and emission units authorized by this permit shall be operated in accordance with 30 TAC Chapter 122, the general terms and conditions, special terms and conditions, and attachments contained herein.

This permit shall expire five years from the date of issuance. The renewal requirements specified in 30 TAC § 122.241 must be satisfied in order to renew the authorization to operate the site and emission units.

Permit No: Q2223 Issuance Date: August 5, 2020

For the Commission

Table of Contents

Section	Page
General Terms and Conditions	1
Special Terms and Conditions:	1
Emission Limitations and Standards, Monitoring and Testing, and Recordkeeping and Reporting.....	1
Additional Monitoring Requirements	11
New Source Review Authorization Requirements	12
Compliance Requirements.....	13
Risk Management Plan	15
Protection of Stratospheric Ozone	15
Alternative Requirements.....	15
Permit Location	16
Permit Shield (30 TAC § 122.148)	16
Attachments	17
Applicable Requirements Summary.....	18
Additional Monitoring Requirements	289
Permit Shield	343
New Source Review Authorization References	350
Alternative Requirement.....	360
Appendix A.....	364
Acronym List	365
Appendix B.....	366

General Terms and Conditions

The permit holder shall comply with all terms and conditions contained in 30 TAC § 122.143 (General Terms and Conditions), 30 TAC § 122.144 (Recordkeeping Terms and Conditions), 30 TAC § 122.145 (Reporting Terms and Conditions), and 30 TAC § 122.146 (Compliance Certification Terms and Conditions).

In accordance with 30 TAC § 122.144(1), records of required monitoring data and support information required by this permit, or any applicable requirement codified in this permit, are required to be maintained for a period of five years from the date of the monitoring report, sample, or application unless a longer data retention period is specified in an applicable requirement. The five year record retention period supersedes any less stringent retention requirement that may be specified in a condition of a permit identified in the New Source Review Authorization attachment.

If the permit holder chooses to demonstrate that this permit is no longer required, a written request to void this permit shall be submitted to the Texas Commission on Environmental Quality (TCEQ) by the Responsible Official in accordance with 30 TAC § 122.161(e). The permit holder shall comply with the permit's requirements, including compliance certification and deviation reporting, until notified by the TCEQ that this permit is voided.

The permit holder shall comply with 30 TAC Chapter 116 by obtaining a New Source Review authorization prior to new construction or modification of emission units located in the area covered by this permit.

All reports required by this permit must include in the submittal a cover letter which identifies the following information: company name, TCEQ regulated entity number, air account number (if assigned), site name, area name (if applicable), and Air Permits Division permit number(s).

Special Terms and Conditions:

Emission Limitations and Standards, Monitoring and Testing, and Recordkeeping and Reporting

1. Permit holder shall comply with the following requirements:
 - A. Emission units (including groups and processes) in the Applicable Requirements Summary attachment shall meet the limitations, standards, equipment specifications, monitoring, recordkeeping, reporting, testing, and other requirements listed in the Applicable Requirements Summary attachment to assure compliance with the permit.
 - B. The textual description in the column titled "Textual Description" in the Applicable Requirements Summary attachment is not enforceable and is not deemed as a substitute for the actual regulatory language. The Textual Description is provided for information purposes only.
 - C. A citation listed on the Applicable Requirements Summary attachment, which has a notation [G] listed before it, shall include the referenced section and subsection for all commission rules, or paragraphs for all federal and state regulations and all subordinate paragraphs, subparagraphs and clauses, subclauses, and items contained within the referenced citation as applicable requirements.
 - D. When a grouped citation, notated with a [G] in the Applicable Requirements Summary, contains multiple compliance options, the permit holder must keep records of when each compliance option was used.
 - E. Emission units subject to 40 CFR Part 63, Subparts A, H, Y, YY, FFFF, ZZZZ and DDDDD as identified in the attached Applicable Requirements Summary table are

subject to 30 TAC Chapter 113, Subchapter C, §§ 113.100, 113.130, 113.300, 113.560 113.890, 113.1090 and 113.1130, respectively, which incorporates the 40 CFR Part 63 Subpart by reference.

- F. For the purpose of generating emission reduction credits through 30 TAC Chapter 101, Subchapter H, Division 1 (Emission Credit Banking and Trading), the permit holder shall comply with the following requirements:
- (i) Title 30 TAC § 101.302 (relating to General Provisions)
 - (ii) Title 30 TAC § 101.303 (relating to Emission Reduction Credit Generation Certification)
 - (iii) Title 30 TAC § 101.304 (relating to Mobile Emission Reduction Credit Generation and Certification)
 - (iv) Title 30 TAC § 101.309 (relating to Emission Credit Banking and Trading)
 - (v) The terms and conditions by which the emission limits are established to generate the reduction credit are applicable requirements of this permit
- G. The permit holder shall comply with the following 30 TAC Chapter 101, Subchapter H, Division 3 (Mass Emission Cap and Trade Program) Requirements:
- (i) Title 30 TAC § 101.352 (relating to General Provisions)
 - (ii) Title 30 TAC § 101.353 (relating to Allocation of Allowances)
 - (iii) Title 30 TAC § 101.354 (relating to Allowance Deductions)
 - (iv) Title 30 TAC § 101.356 (relating to Allowance Banking and Trading)
 - (v) Title 30 TAC § 101.359 (relating to Reporting)
 - (vi) Title 30 TAC § 101.360 (relating to Level of Activity Certification)
 - (vii) The terms and conditions by which the emission limits are established to meet or exceed the cap are applicable requirements of this permit
- H. For the purpose of generating discrete emission reduction credits through 30 TAC Chapter 101, Subchapter H, Division 4 (Discrete Emission Credit Banking and Trading), the permit holder shall comply with the following requirements:
- (i) Title 30 TAC § 101.372 (relating to General Provisions)
 - (ii) Title 30 TAC § 101.373 (relating to Discrete Emission Reduction Credit Generation and Certification)
 - (iii) Title 30 TAC § 101.374 (relating to Mobile Discrete Emission Reduction Credit Generation and Certification)
 - (iv) Title 30 TAC § 101.378 (relating to Discrete Emission Credit Banking and Trading)

- (v) The terms and conditions by which the emission limits are established to generate the discrete reduction credit are applicable requirements of this permit
- I. The permit holder shall comply with the following 30 TAC Chapter 101, Subchapter H, Division 6 (Highly Reactive Volatile Organic Compound Emissions Cap and Trade Program) requirements:
 - (i) Title 30 TAC § 101.393 (relating to General Provisions)
 - (ii) Title 30 TAC § 101.394 (relating to Allocation of Allowances)
 - (iii) Title 30 TAC § 101.396 (relating to Allowance Deductions)
 - (iv) Title 30 TAC § 101.399 (relating to Allowance Banking and Trading)
 - (v) Title 30 TAC § 101.400 (relating to Reporting)
 - (vi) The terms and conditions by which the emission limits are established to meet or exceed the cap are applicable requirements of this permit
- 2. The permit holder shall comply with the following sections of 30 TAC Chapter 101 (General Air Quality Rules):
 - A. Title 30 TAC § 101.1 (relating to Definitions), insofar as the terms defined in this section are used to define the terms used in other applicable requirements
 - B. Title 30 TAC § 101.3 (relating to Circumvention)
 - C. Title 30 TAC § 101.8 (relating to Sampling), if such action has been requested by the TCEQ
 - D. Title 30 TAC § 101.9 (relating to Sampling Ports), if such action has been requested by the TCEQ
 - E. Title 30 TAC § 101.10 (relating to Emissions Inventory Requirements)
 - F. Title 30 TAC § 101.201 (relating to Emission Event Reporting and Recordkeeping Requirements)
 - G. Title 30 TAC § 101.211 (relating to Scheduled Maintenance, Start-up, and Shutdown Reporting and Recordkeeping Requirements)
 - H. Title 30 TAC § 101.221 (relating to Operational Requirements)
 - I. Title 30 TAC § 101.222 (relating to Demonstrations)
 - J. Title 30 TAC § 101.223 (relating to Actions to Reduce Excessive Emissions)
- 3. Permit holder shall comply with the following requirements of 30 TAC Chapter 111:
 - A. Visible emissions from stationary vents with a flow rate of less than 100,000 actual cubic feet per minute and constructed after January 31, 1972 that are not listed in the Applicable Requirements Summary attachment for 30 TAC Chapter 111, Subchapter A, Division 1, shall not exceed 20% opacity averaged over a six-minute period. The permit

holder shall comply with the following requirements for stationary vents at the site subject to this standard:

- (i) Title 30 TAC § 111.111(a)(1)(B) (relating to Requirements for Specified Sources)
- (ii) Title 30 TAC § 111.111(a)(1)(E)
- (iii) Title 30 TAC § 111.111(a)(1)(F)(i), (ii), (iii), or (iv)
- (iv) For emission units with vent emissions subject to 30 TAC § 111.111(a)(1)(B), complying with 30 TAC § 111.111(a)(1)(F)(ii), (iii), or (iv), and capable of producing visible emissions from, but not limited to, particulate matter, acid gases and NO_x, the permit holder shall also comply with the following periodic monitoring requirements for the purpose of annual compliance certification under 30 TAC § 122.146. These periodic monitoring requirements do not apply to vents that are not capable of producing visible emissions such as vents that emit only colorless VOCs; vents from non-fuming liquids; vents that provide passive ventilation, such as plumbing vents; or vent emissions from any other source that does not obstruct the transmission of light. Vents, as specified in the "Applicable Requirements Summary" attachment, that are subject to the emission limitation of 30 TAC § 111.111(a)(1)(B) are not subject to the following periodic monitoring requirements:
 - (1) An observation of stationary vents from emission units in operation shall be conducted at least once during each calendar quarter unless the emission unit is not operating for the entire quarter.
 - (2) For stationary vents from a combustion source, if an alternative to the normally fired fuel is fired for a period greater than or equal to 24 consecutive hours, the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are present. If such period is greater than 3 months, observations shall be conducted once during each quarter. Supplementing the normally fired fuel with natural gas or fuel gas to increase the net heating value to the minimum required value does not constitute creation of an alternative fuel.
 - (3) Records of all observations shall be maintained.
 - (4) Visible emissions observations of emission units operated during daylight hours shall be conducted no earlier than one hour after sunrise and no later than one hour before sunset. Visible emissions observations of emission units operated only at night must be made with additional lighting and the temporary installation of contrasting backgrounds. Visible emissions observations shall be made during times when the activities described in 30 TAC § 111.111(a)(1)(E) are not taking place. Visible emissions shall be determined with each stationary vent in clear view of the observer. The observer shall be at least 15 feet, but not more than 0.25 mile, away from each stationary vent during the observation. For outdoor locations, the observer shall select a position where the sun is not directly in the observer's eyes. When condensed water vapor is present within the plume, as it emerges from the emissions outlet, observations must be made beyond the point in the plume at which condensed water vapor is no longer visible. When water vapor within the plume condenses and becomes visible at a distance from the emissions outlet, the observation shall be evaluated at the outlet

prior to condensation of water vapor. A certified opacity reader is not required for visible emissions observations.

(5) Compliance Certification:

- (a) If visible emissions are not present during the observation, the RO may certify that the source is in compliance with the applicable opacity requirement in 30 TAC § 111.111(a)(1) and (a)(1)(B).
- (b) However, if visible emissions are present during the observation, the permit holder shall either list this occurrence as a deviation on the next deviation report as required under 30 TAC § 122.145(2) or conduct the appropriate opacity test specified in 30 TAC § 111.111(a)(1)(F) as soon as practicable, but no later than 24 hours after observing visible emissions to determine if the source is in compliance with the opacity requirements. If an opacity test is performed and the source is determined to be in compliance, the RO may certify that the source is in compliance with the applicable opacity requirement. However, if an opacity test is performed and the source is determined to be out of compliance, the permit holder shall list this occurrence as a deviation on the next deviation report as required under 30 TAC § 122.145(2). The opacity test must be performed by a certified opacity reader.
- (c) Some vents may be subject to multiple visible emission or monitoring requirements. All credible data must be considered when certifying compliance with this requirement even if the observation or monitoring was performed to demonstrate compliance with a different requirement.

B. For visible emissions from a building, enclosed facility, or other structure; the permit holder shall comply with the following requirements:

- (i) Title 30 TAC § 111.111(a)(7)(A) (relating to Requirements for Specified Sources)
- (ii) Title 30 TAC § 111.111(a)(7)(B)(i) or (ii)
- (iii) For a building containing an air emission source, enclosed facility, or other structure containing or associated with an air emission source subject to 30 TAC § 111.111(a)(7)(A), complying with 30 TAC § 111.111(a)(7)(B)(i) or (ii), and capable of producing visible emissions from, but not limited to, particulate matter, acid gases and NO_x, the permit holder shall also comply with the following periodic monitoring requirements for the purpose of annual compliance certification under 30 TAC § 122.146:
 - (1) An observation of visible emissions from a building containing an air emission source, enclosed facility, or other structure containing or associated with an air emission source which is required to comply with 30 TAC § 111.111(a)(7)(A) shall be conducted at least once during each calendar quarter unless the air emission source or enclosed facility is not operating for the entire quarter.
 - (2) Records of all observations shall be maintained.

- (3) Visible emissions observations of air emission sources or enclosed facilities operated during daylight hours shall be conducted no earlier than one hour after sunrise and no later than one hour before sunset. Visible emissions observations of air emission sources or enclosed facilities operated only at night must be made with additional lighting and the temporary installation of contrasting backgrounds. Visible emissions shall be determined with each emissions outlet in clear view of the observer. The observer shall be at least 15 feet, but not more than 0.25 mile, away from each emissions outlet during the observation. For outdoor locations, the observer shall select a position where the sun is not directly in the observer's eyes. When condensed water vapor is present within the plume, as it emerges from the emissions outlet, observations must be made beyond the point in the plume at which condensed water vapor is no longer visible. When water vapor within the plume condenses and becomes visible at a distance from the emissions outlet, the observation shall be evaluated at the outlet prior to condensation of water vapor. A certified opacity reader is not required for visible emissions observations.
 - (4) Compliance Certification:
 - (a) If visible emissions are not present during the observation, the RO may certify that the source is in compliance with the applicable opacity requirement in 30 TAC § 111.111(a)(7) and (a)(7)(A).
 - (b) However, if visible emissions are present during the observation, the permit holder shall either list this occurrence as a deviation on the next deviation report as required under 30 TAC § 122.145(2) or conduct the appropriate opacity test specified in 30 TAC § 111.111(a)(7)(B) as soon as practicable, but no later than 24 hours after observing visible emissions to determine if the source is in compliance with the opacity requirements. If an opacity test is performed and the source is determined to be in compliance, the RO may certify that the source is in compliance with the applicable opacity requirement. However, if an opacity test is performed and the source is determined to be out of compliance, the permit holder shall list this occurrence as a deviation on the next deviation report as required under 30 TAC § 122.145(2). The opacity test must be performed by a certified opacity reader.
- C. Certification of opacity readers determining opacities under Method 9 (as outlined in 40 CFR Part 60, Appendix A) to comply with opacity monitoring requirements shall be accomplished by completing the Visible Emissions Evaluators Course, or approved agency equivalent, no more than 180 days before the opacity reading.
- D. For emission units with contributions from uncombined water, the permit holder shall comply with the requirements of 30 TAC § 111.111(b).
- E. Emission limits on nonagricultural processes, except for the steam generators specified in 30 TAC § 111.153, shall comply with the following requirements:
 - (i) Emissions of PM from any source may not exceed the allowable rates as required in 30 TAC § 111.151(a) (relating to Allowable Emissions Limits)

- (ii) Sources with an effective stack height (h_e) less than the standard effective stack height (H_e), must reduce the allowable emission level by multiplying it by $[h_e/H_e]^2$ as required in 30 TAC § 111.151(b)
 - (iii) Effective stack height shall be calculated by the equation specified in 30 TAC § 111.151(c)
- F. Outdoor burning, as stated in 30 TAC § 111.201, shall not be authorized unless the following requirements are satisfied:
 - (i) Title 30 TAC § 111.205 (relating to Exception for Fire Training)
 - (ii) Title 30 TAC § 111.207 (relating to Exception for Recreation, Ceremony, Cooking, and Warmth)
 - (iii) Title 30 TAC § 111.219 (relating to General Requirements for Allowable Outdoor Burning)
 - (iv) Title 30 TAC § 111.221 (relating to Responsibility for Consequences of Outdoor Burning)
- 4. For storage vessels maintaining working pressure as specified in 30 TAC Chapter 115, Subchapter B, Division 1: Storage of Volatile Organic Compounds, the permit holder shall comply with the requirements of 30 TAC § 115.112(e)(1).
- 5. For industrial wastewater specified in 30 TAC Chapter 115, Subchapter B, the permit holder shall comply with the following requirements:
 - A. Title 30 TAC § 115.145 (relating to Approved Test Methods)
 - B. Title 30 TAC § 115.146 (relating to Recordkeeping Requirements)
 - C. Title 30 TAC § 115.147(1) (relating to Exemptions)
 - D. Title 30 TAC § 115.148 (relating to Determination of Wastewater Characteristics)
- 6. The permit holder shall comply with the following requirements of 30 TAC Chapter 115, Subchapter F, Division 3, Degassing of Storage Tanks, Transport Vessels and Marine Vessels:
 - A. For degassing of stationary VOC storage tanks, the permit holder shall comply with the following requirements:
 - (i) Title 30 TAC § 115.541(a) - (c) (relating to Emission Specifications)
 - (ii) Title 30 TAC § 115.541(f) (relating to Emission Specifications), for floating roof storage tanks
 - (iii) Title 30 TAC § 115.542(a) and (a)(1), (a)(2), (a)(3) or (a)(4) (relating to Control Requirements). Where the requirements of 30 TAC Chapter 115, Subchapter F contain multiple compliance options, the permit holder shall keep records of when each compliance option was used.
 - (iv) Title 30 TAC § 115.542(b) - (d), (relating to Control Requirements)
 - (v) Title 30 TAC § 115.543 (relating to Alternate Control Requirements)

- (vi) Title 30 TAC § 115.544(a)(1) and (a)(2) (relating to Inspection, Monitoring, and Testing Requirements), for inspections
- (vii) Title 30 TAC § 115.544(b) (relating to Inspection, Monitoring, and Testing Requirements), for monitoring
- (viii) Title 30 TAC § 115.544(b)(1) and (b)(2) (relating to Inspection, Monitoring, and Testing Requirements), for monitoring of control devices
- (ix) Title 30 TAC § 115.544(b)(2)(A) - (J) (relating to Inspection, Monitoring, and Testing Requirements), for monitoring (as appropriate to the control device)
- (x) Title 30 TAC § 115.544(b)(3), (b)(4) and (b)(6) (relating to Inspection, Monitoring, and Testing Requirements), for VOC concentration or lower explosive limit threshold monitoring
- (xi) Title 30 TAC § 115.544(c), and (c)(1) - (c)(3) (relating to Inspection, Monitoring, and Testing Requirements), for testing of control devices used to comply with 30 TAC § 115.542(a)(1)
- (xii) Title 30 TAC § 115.545(1) - (7), (9) - (11) and (13) (relating to Approved Test Methods)
- (xiii) Title 30 TAC § 115.546(a), (a)(1) and (a)(3) (relating to Recordkeeping and Notification Requirements), for recordkeeping
- (xiv) Title 30 TAC § 115.546(a)(2) and (a)(2)(A) - (J) (relating to Recordkeeping and Notification Requirements), for recordkeeping (as appropriate to the control device)
- (xv) Title 30 TAC § 115.546(a)(4) (relating to Recordkeeping and Notification Requirements), for recordkeeping of testing of control devices used to comply with 30 TAC § 115.542(a)(1)
- (xvi) Title 30 TAC § 115.546(b) (relating to Recordkeeping and Notification Requirements), for notification
- (xvii) Title 30 TAC § 115.547(4) (relating to Exemptions)

7. The permit holder shall comply with the following requirements for units subject to any subpart of 40 CFR Part 60, unless otherwise stated in the applicable subpart:

- A. Title 40 CFR § 60.7 (relating to Notification and Recordkeeping)
- B. Title 40 CFR § 60.8 (relating to Performance Tests)
- C. Title 40 CFR § 60.11 (relating to Compliance with Standards and Maintenance Requirements)
- D. Title 40 CFR § 60.12 (relating to Circumvention)
- E. Title 40 CFR § 60.13 (relating to Monitoring Requirements)
- F. Title 40 CFR § 60.14 (relating to Modification)

- G. Title 40 CFR § 60.15 (relating to Reconstruction)
 - H. Title 40 CFR § 60.19 (relating to General Notification and Reporting Requirements)
8. The permit holder shall comply with the following requirements for units subject to any subpart of 40 CFR Part 61, unless otherwise stated in the applicable subpart:
- A. Title 40 CFR § 61.05 (relating to Prohibited Activities)
 - B. Title 40 CFR § 61.07 (relating to Application for Approval of Construction or Modification)
 - C. Title 40 CFR § 61.09 (relating to Notification of Start-up)
 - D. Title 40 CFR § 61.10 (relating to Source Reporting and Request Waiver)
 - E. Title 40 CFR § 61.12 (relating to Compliance with Standards and Maintenance Requirements)
 - F. Title 40 CFR § 61.13 (relating to Emissions Tests and Waiver of Emission Tests)
 - G. Title 40 CFR § 61.14 (relating to Monitoring Requirements)
 - H. Title 40 CFR § 61.15 (relating to Modification)
 - I. Title 40 CFR § 61.19 (relating to Circumvention)
9. For facilities where total annual benzene quantity from waste is greater than or equal to 10 megagrams per year and subject to emission standards in 40 CFR Part 61, Subpart FF, the permit holder shall comply with the following requirements:
- A. Title 40 CFR § 61.342(c)(1)(i) - (iii) (relating to Standards: General)
 - B. Title 40 CFR § 61.342(c)(2) (relating to Standards: General)
 - C. For exempting waste streams:
 - (i) Title 40 CFR § 61.342(c)(3)(ii)(A) - (C) (relating to Standards: General)
 - D. Title 40 CFR § 61.342(f)(1), and (2) (relating to Standards: General)
 - E. Title 40 CFR § 61.342(g) (relating to Standards: General)
 - F. Title 40 CFR § 61.350(a) and (b) (relating to Standards: Delay of Repair)
 - G. Title 40 CFR § 61.355(a)(1)(iii), (a)(2), (a)(6), (b), and (c)(1) - (3) (relating to Test Methods, Procedures, and Compliance Provisions)
 - H. Title 40 CFR § 61.355(j) (relating to Test Methods, Procedures, and Compliance Provisions), for calculation procedures
 - I. Title 40 CFR § 61.356(a) (relating to Recordkeeping Requirements)
 - J. Title 40 CFR § 61.356(b), and (b)(1) (relating to Recordkeeping Requirements)
 - K. Title 40 CFR § 61.356(b)(2)(i) - (ii) (relating to Recordkeeping Requirements)

- L. Title 40 CFR § 61.356(b)(5) (relating to Recordkeeping Requirements)
 - M. Title 40 CFR § 61.356(c) (relating to Recordkeeping Requirements)
 - N. Title 40 CFR § 61.357(a), (d)(1), (d)(2) (d)(6) and (d)(8) (relating to Reporting Requirements)
 - O. Title 40 CFR § 61.357(d)(3) (relating to Reporting Requirements)
10. For facilities with containers subject to emission standards in 40 CFR Part 61, Subpart FF, the permit holder shall comply with the following requirements:
- A. Title 40 CFR § 61.345(a)(1) - (3), (b), and (c) (relating to Standards: Containers)
 - B. Title 40 CFR § 61.355(h) (relating to Test Methods, Procedures and Compliance Provisions)
 - C. Title 40 CFR § 61.356(g) (relating to Recordkeeping Requirements)
 - D. Title 40 CFR § 61.356(h) (relating to Recordkeeping Requirements)
11. For facilities with individual drain systems subject to emission standards in 40 CFR Part 61, Subpart FF, the permit holder shall comply with the following requirements:
- A. Title 40 CFR § 61.346(a)(1)(i)(A), (B), (ii), (2), and (3) (relating to Standards: Individual Drain Systems)
 - B. Title 40 CFR § 61.355(h) (relating to Test Methods, Procedures and Compliance Provisions)
 - C. Title 40 CFR § 61.356(g) (relating to Recordkeeping Requirements)
 - D. Title 40 CFR § 61.356(h) (relating to Recordkeeping Requirements)
12. The permit holder shall comply with the requirements of 30 TAC Chapter 113, Subchapter C, § 113.100 for units subject to any subpart of 40 CFR Part 63, unless otherwise stated in the applicable subpart.
13. For transfer of waste from ethylene production facilities subject to 40 CFR Part 63, Subpart YY the permit holder shall comply with the following requirements (Title 30 TAC Chapter 113, Subchapter C, § 113.560 incorporated by reference):
- A. Title 40 CFR § 63.1096(a) - (d) (Title 30 TAC Chapter 113, Subchapter C, § 113.550 incorporated by reference)
 - B. Title 40 CFR § 63.1109(a) and (c)
14. For benzene laden waste streams from ethylene process facilities subject to 40 CFR Part 63, Subpart YY with total annual benzene quantity from the facility of 10 megagrams per year or more the permit holder shall comply with the following requirements as specified in 40 CFR § 63.1095(b)(2) (Title 30 TAC Chapter 113, Subchapter C, § 113.560 incorporated by reference):
- A. For facilities with waste managed in containers the permit holder shall comply with the following requirements:

- (i) Title 40 CFR § 61.355(h) (relating to Test Methods, Procedures and Compliance Provisions)
 - (ii) Title 40 CFR § 61.356(g) (relating to Recordkeeping Requirements)
 - (iii) Title 40 CFR § 61.356(h) (relating to Recordkeeping Requirements)
- B. For facilities with waste managed in individual drain systems the permit holder shall comply with the following requirements:
 - (i) Title 40 CFR § 61.346(a)(1)(i)(A), (B), (ii), (2), and (3) (relating to Standards: Individual Drain Systems)
 - (ii) Title 40 CFR § 61.355(h) (relating to Test Methods, Procedures and Compliance Provisions)
 - (iii) Title 40 CFR § 61.356(g) (relating to Recordkeeping Requirements)
 - (iv) Title 40 CFR § 61.356(h) (relating to Recordkeeping Requirements)
- 15. For miscellaneous chemical process facilities subject to maintenance wastewater requirements as specified in 40 CFR § 63.2485, Table 7, the permit holder shall comply with the requirements of 40 CFR § 63.105 (relating to Maintenance Wastewater Requirements) (Title 30 TAC Chapter 113, Subchapter C, § 113.890 incorporated by reference).
- 16. For miscellaneous chemical process facilities with Group 2 wastewater streams subject to wastewater operations requirements in 40 CFR Part 63, Subpart FFFF, the permit holder shall comply with the requirements of 40 CFR § 63.132(a), (a)(1), (a)(1)(i), and (a)(3) as specified in § 63.2485(a) (Title 30 TAC Chapter 113, Subchapter C, § 113.890 incorporated by reference).
- 17. The permit holder shall comply with certified registrations submitted to the TCEQ for purposes of establishing federally enforceable emission limits. A copy of the certified registration shall be maintained with the permit. Records sufficient to demonstrate compliance with the established limits shall be maintained. The certified registration and records demonstrating compliance shall be provided, on request, to representatives of the appropriate TCEQ regional office and any local air pollution control agency having jurisdiction over the site. The permit holder shall submit updated certified registrations when changes at the site require establishment of new emission limits. If changes result in emissions that do not remain below major source thresholds, the permit holder shall submit a revision application to codify the appropriate requirements in the permit.

Additional Monitoring Requirements

- 18. Unless otherwise specified, the permit holder shall comply with the compliance assurance monitoring requirements as specified in the attached "CAM Summary" upon issuance of the permit. In addition, the permit holder shall comply with the following:
 - A. The permit holder shall comply with the terms and conditions contained in 30 TAC § 122.147 (General Terms and Conditions for Compliance Assurance Monitoring).
 - B. The permit holder shall report, consistent with the averaging time identified in the "CAM Summary," deviations as defined by the deviation limit in the "CAM Summary." Any monitoring data below a minimum limit or above a maximum limit, that is collected in accordance with the requirements specified in 40 CFR § 64.7(c), shall be reported as a

deviation. Deviations shall be reported according to 30 TAC § 122.145 (Reporting Terms and Conditions).

- C. The permit holder may elect to collect monitoring data on a more frequent basis and average the data, consistent with the averaging time or minimum frequency specified in the "CAM Summary," for purposes of determining whether a deviation has occurred. However, the additional data points must be collected on a regular basis. In no event shall data be collected and used in particular instances in order to avoid reporting deviations. All monitoring data shall be collected in accordance with the requirements specified in 40 CFR § 64.7(c).
 - D. The permit holder shall operate the monitoring, identified in the attached "CAM Summary," in accordance with the provisions of 40 CFR § 64.7.
 - E. The permit holder shall comply with either of the following requirements for any capture system associated with the VOC control device subject to CAM. If the results of the following inspections indicate that the capture system is not working properly, the permit holder shall promptly take necessary corrective actions:
 - (i) Once a year the permit holder shall inspect the capture system in compliance of CAM for leaks in accordance with 40 CFR Part 60, Appendix A, Test Method 21. Leaks shall be indicated by an instrument reading greater than or equal to 500 ppm above background or as defined by the underlying applicable requirement; or
 - (ii) Once a month, the permit holder shall conduct a visual, audible, and/or olfactory inspection of the capture system in compliance of CAM to detect leaking components.
 - F. The permit holder shall comply with the requirements of 40 CFR § 70.6(a)(3)(ii)(A) and 30 TAC § 122.144(1)(A)-(F) for documentation of all required inspections.
19. The permit holder shall comply with the periodic monitoring requirements as specified in the attached "Periodic Monitoring Summary" upon issuance of the permit. Except for, as applicable, monitoring malfunctions, associated repairs, and required quality assurance or control activities (including, as applicable, calibration checks and required zero and span adjustments), the permit holder shall conduct all monitoring in continuous operation (or shall collect data at all required intervals) at all times that the pollutant-specific emissions unit is operating. The permit holder may elect to collect monitoring data on a more frequent basis and average the data, consistent with the averaging time or minimum frequency specified in the "Periodic Monitoring Summary," for purposes of determining whether a deviation has occurred. However, the additional data points must be collected on a regular basis. In no event shall data be collected and used in particular instances to avoid reporting deviations. Deviations shall be reported according to 30 TAC § 122.145 (Reporting Terms and Conditions).

New Source Review Authorization Requirements

20. Permit holder shall comply with the requirements of New Source Review authorizations issued or claimed by the permit holder for the permitted area, including permits, permits by rule (including the terms, conditions, monitoring, recordkeeping, and reporting identified in registered PBRs and permits by rule identified in the PBR Supplemental Tables dated July 12, 2023 in the application for project 35347), standard permits, flexible permits, special permits, permits for existing facilities including Voluntary Emissions Reduction Permits and Electric Generating Facility Permits issued under 30 TAC Chapter 116, Subchapter I, or special exemptions referenced in the New Source Review Authorization References attachment. These requirements:

- A. Are incorporated by reference into this permit as applicable requirements
 - B. Shall be located with this operating permit
 - C. Are not eligible for a permit shield
21. The permit holder shall comply with the general requirements of 30 TAC Chapter 106, Subchapter A or the general requirements, if any, in effect at the time of the claim of any PBR.
22. The permit holder shall maintain records to demonstrate compliance with any emission limitation or standard that is specified in a permit by rule (PBR) or Standard Permit listed in the New Source Review Authorizations attachment. The records shall yield reliable data from the relevant time period that are representative of the emission unit's compliance with the PBR or Standard Permit. These records may include, but are not limited to, production capacity and throughput, hours of operation, safety data sheets (SDS), chemical composition of raw materials, speciation of air contaminant data, engineering calculations, maintenance records, fugitive data, performance tests, capture/control device efficiencies, direct pollutant monitoring (CEMS, COMS, or PEMS), or control device parametric monitoring. These records shall be made readily accessible and available as required by 30 TAC § 122.144. Any monitoring or recordkeeping data indicating noncompliance with the PBR or Standard Permit shall be considered and reported as a deviation according to 30 TAC § 122.145 (Reporting Terms and Conditions).
23. The permit holder shall comply with the following requirements for Air Quality Standard Permits:
- A. Registration requirements listed in 30 TAC § 116.611, unless otherwise provided for in an Air Quality Standard Permit
 - B. General Conditions listed in 30 TAC § 116.615, unless otherwise provided for in an Air Quality Standard Permit
 - C. Boiler Standard Permit
 - D. Requirements of the non-rule Air Quality Standard Permit for Pollution Control Projects

Compliance Requirements

24. The permit holder shall certify compliance in accordance with 30 TAC § 122.146. The permit holder shall comply with 30 TAC § 122.146 using at a minimum, but not limited to, the continuous or intermittent compliance method data from monitoring, recordkeeping, reporting, or testing required by the permit and any other credible evidence or information. The certification period may not exceed 12 months and the certification must be submitted within 30 days after the end of the period being certified.
25. Permit holder shall comply with the following 30 TAC Chapter 117 requirements:
- A. The permit holder shall comply with the compliance schedules and submit written notification to the TCEQ Executive Director as required in 30 TAC Chapter 117, Subchapter H, Division 1:
 - (i) For sources in the Houston-Galveston-Brazoria Nonattainment area, 30 TAC § 117.9020:
 - (1) Title 30 TAC § 117.9020(2)(A), (C), and (D)

- B. The permit holder shall comply with the Initial Control Plan unit listing requirement in 30 TAC § 117.350(c) and (c)(1).
 - C. The permit holder shall comply with the requirements of 30 TAC § 117.354 for Final Control Plan Procedures for Attainment Demonstration Emission Specifications and 30 TAC § 117.356 for Revision of Final Control Plan.
26. Use of Emission Credits to comply with applicable requirements:
- A. Unless otherwise prohibited, the permit holder may use emission credits to comply with the following applicable requirements listed elsewhere in this permit:
 - (i) Title 30 TAC Chapter 115
 - (ii) Title 30 TAC Chapter 117
 - (iii) Offsets for Title 30 TAC Chapter 116
 - B. The permit holder shall comply with the following requirements in order to use the emission credits to comply with the applicable requirements:
 - (i) The permit holder must notify the TCEQ according to 30 TAC § 101.306(c)-(d)
 - (ii) The emission credits to be used must meet all the geographic, timeliness, applicable pollutant type, and availability requirements listed in 30 TAC Chapter 101, Subchapter H, Division 1
 - (iii) The executive director has approved the use of the credit according to 30 TAC § 101.306(c)-(d)
 - (iv) The permit holder keeps records of the use of credits towards compliance with the applicable requirements in accordance with 30 TAC § 101.302(g) and 30 TAC Chapter 122
 - (v) Title 30 TAC § 101.305 (relating to Emission Reductions Achieved Outside the United States)
27. Use of Discrete Emission Credits to comply with the applicable requirements:
- A. Unless otherwise prohibited, the permit holder may use discrete emission credits to comply with the following applicable requirements listed elsewhere in this permit:
 - (i) Title 30 TAC Chapter 115
 - (ii) Title 30 TAC Chapter 117
 - (iii) If applicable, offsets for Title 30 TAC Chapter 116
 - (iv) Temporarily exceed state NSR permit allowables
 - B. The permit holder shall comply with the following requirements in order to use the credit to comply with the applicable requirements:
 - (i) The permit holder must notify the TCEQ according to 30 TAC § 101.376(d)

- (ii) The discrete emission credits to be used must meet all the geographic, timeliness, applicable pollutant type, and availability requirements listed in 30 TAC Chapter 101, Subchapter H, Division 4
- (iii) The executive director has approved the use of the discrete emission credits according to 30 TAC § 101.376(d)(1)(A)
- (iv) The permit holder keeps records of the use of credits towards compliance with the applicable requirements in accordance with 30 TAC § 101.372(h) and 30 TAC Chapter 122
- (v) Title 30 TAC § 101.375 (relating to Emission Reductions Achieved Outside the United States)

Risk Management Plan

28. For processes subject to 40 CFR Part 68 and specified in 40 CFR § 68.10, the permit holder shall comply with the requirements of the Accidental Release Prevention Provisions in 40 CFR Part 68. The permit holder shall submit to the appropriate agency either a compliance schedule for meeting the requirements of 40 CFR Part 68 by the date provided in 40 CFR § 68.10(a), or as part of the compliance certification submitted under this permit, a certification statement that the source is in compliance with all requirements of 40 CFR Part 68, including the registration and submission of a risk management plan.

Protection of Stratospheric Ozone

29. Permit holders at a site subject to Title VI of the FCAA Amendments shall meet the following requirements for protection of stratospheric ozone:
- A. Any on site servicing, maintenance, and repair on refrigeration and nonmotor vehicle air-conditioning appliances using ozone-depleting refrigerants or non-exempt substitutes shall be conducted in accordance with 40 CFR Part 82, Subpart F. Permit holders shall ensure that repairs on or refrigerant removal from refrigeration and nonmotor vehicle air-conditioning appliances using ozone-depleting refrigerants are performed only by properly certified technicians using certified equipment. Records shall be maintained as required by 40 CFR Part 82, Subpart F.
 - B. The permit holder shall comply with 40 CFR Part 82, Subpart H related to Halon Emissions Reduction requirements as specified in 40 CFR § 82.250 - § 82.270 and the applicable Part 82 Appendices.

Alternative Requirements

30. The permit holder shall comply with the approved alternative means of control (AMOC); alternative monitoring, recordkeeping, or reporting requirements; or requirements determined to be equivalent to an otherwise applicable requirement contained in the Alternative Requirements attachment of this permit. Units complying with an approved alternative requirement have reference to the approval in the Applicable Requirements summary listing for the unit. The permit holder shall maintain the original documentation, from the TCEQ Executive Director, demonstrating the method or limitation utilized. Documentation shall be maintained and made available in accordance with 30 TAC § 122.144.

Permit Location

31. The permit holder shall maintain a copy of this permit and records related to requirements listed in this permit on site.

Permit Shield (30 TAC § 122.148)

32. A permit shield is granted for the emission units, groups, or processes specified in the attached "Permit Shield." Compliance with the conditions of the permit shall be deemed compliance with the specified potentially applicable requirements or specified potentially applicable state-only requirements listed in the attachment "Permit Shield." Permit shield provisions shall not be modified by the executive director until notification is provided to the permit holder. No later than 90 days after notification of a change in a determination made by the executive director, the permit holder shall apply for the appropriate permit revision to reflect the new determination. Provisional terms are not eligible for this permit shield. Any term or condition, under a permit shield, shall not be protected by the permit shield if it is replaced by a provisional term or condition or the basis of the term and condition changes.

Attachments

Applicable Requirements Summary

Additional Monitoring Requirements

Permit Shield

New Source Review Authorization References

Alternative Requirement

Applicable Requirements Summary

Unit Summary	19
---------------------------	-----------

Applicable Requirements Summary	53
--	-----------

Note: A “none” entry may be noted for some emission sources in this permit’s “Applicable Requirements Summary” under the heading of “Monitoring and Testing Requirements” and/or “Recordkeeping Requirements” and/or “Reporting Requirements.” Such a notation indicates that there are no requirements for the indicated emission source as identified under the respective column heading(s) for the stated portion of the regulation when the emission source is operating under the conditions of the specified SOP Index Number. However, other relevant requirements pursuant to 30 TAC Chapter 122 including Recordkeeping Terms and Conditions (30 TAC § 122.144), Reporting Terms and Conditions (30 TAC § 122.145), and Compliance Certification Terms and Conditions (30 TAC § 122.146) continue to apply.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
DGRLAPPING	SOLVENT DEGREASING MACHINES	N/A	R5412-1	30 TAC Chapter 115, Degreasing Processes	No changing attributes.
DGRMAINT	SOLVENT DEGREASING MACHINES	N/A	R5412-1	30 TAC Chapter 115, Degreasing Processes	No changing attributes.
DGRMOBILE	SOLVENT DEGREASING MACHINES	N/A	R5412-1	30 TAC Chapter 115, Degreasing Processes	No changing attributes.
DGROLEFIN	SOLVENT DEGREASING MACHINES	N/A	R5412-1	30 TAC Chapter 115, Degreasing Processes	No changing attributes.
DGRWBMURR	SOLVENT DEGREASING MACHINES	N/A	R5412-1	30 TAC Chapter 115, Degreasing Processes	No changing attributes.
DMFSUMPTK	STORAGE TANKS/VESSELS	N/A	R5112-2	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
J2202	SRIC ENGINES	N/A	R7300-ENG	30 TAC Chapter 117, Subchapter B	No changing attributes.
J2202	SRIC ENGINES	N/A	63ZZZZ-2	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
L2CT	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-1	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
L2V2101	STORAGE TANKS/VESSELS	N/A	R5112-3	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
L3ANV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5725-ANV	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
L3ANV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
L3ANV	EMISSION POINTS/STATIONARY	N/A	63-ANV	40 CFR Part 63, Subpart FFFF	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	VENTS/PROCESS VENTS				
L3BAFCOEG	SRIC ENGINES	N/A	R7300-1	30 TAC Chapter 117, Subchapter B	No changing attributes.
L3BAFCOEG	SRIC ENGINES	N/A	60III-1	40 CFR Part 60, Subpart IIII	No changing attributes.
L3BAFCOEG	SRIC ENGINES	N/A	63ZZZZ-1	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
L3BOILERCV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-1	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
L3BOILERCV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-3	30 TAC Chapter 115, Vent Gas Controls	Vent Type = Vent gas stream emissions of ethylene associated with the formation, handling, and storage of solidified low-density polyethylene in which no more than 1.1 pounds of ethylene per 1,000 pounds of product are emitted., Control Device Type = Boiler in which the vent gas stream is burned at a temperature of at least 1300 degrees F (704 degrees C).
L3BOILERCV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-BOIL	30 TAC Chapter 115, Vent Gas Controls	Vent Type = Vent gas stream emissions of ethylene associated with the formation, handling, and storage of solidified low-density polyethylene in which more than 1.1 pounds of ethylene per 1,000 pounds of product are emitted., Control Device Type = Vapor recovery system, as defined in 30 TAC § 115.10, other than an afterburner, blast furnace combustion device, boiler, catalytic

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					or direct flame incinerator, carbon adsorption system, chiller, flare or vapor combustor.
L3BOILERCV	POLYMER MANUFACTURING PROCESSES	N/A	60DDD-BOIL	40 CFR Part 60, Subpart DDD	No changing attributes.
L3BOILERCV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	63FFFF-1	40 CFR Part 63, Subpart FFFF	SS Device ID = UTBLRG
L3BOILERCV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	63FFFF-2	40 CFR Part 63, Subpart FFFF	SS Device ID = UTBLRH
L3FLARE	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
L3FLARE	FLARES	N/A	R5722-001	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
L3FLARE	FLARES	N/A	60A-1	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
L3FLARE	FLARES	N/A	60A-2	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
L3FLARE	FLARES	N/A	63A-1	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
L3FLARE	FLARES	N/A	63A-2	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm).
L3FLARECV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-1	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
L3FLARECV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-2	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
L3FLARECV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	63FFFF-1	40 CFR Part 63, Subpart FFFF	No changing attributes.
L3FUG	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
L3FUG	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
L3FUG	FUGITIVE EMISSION UNITS	N/A	63H-ALL	40 CFR Part 63, Subpart H	No changing attributes.
L3L4205	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
L3L4205	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-3	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
L3L4205	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	63FFFF-1	40 CFR Part 63, Subpart FFFF	No changing attributes.
L3RTOBF	EMISSION	N/A	R1111-1	30 TAC Chapter 111, Visible	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	POINTS/STATIONARY VENTS/PROCESS VENTS			Emissions	
L3SILOS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
L3SILOS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-3	30 TAC Chapter 115, HRVOC Vent Gas	Vent Gas Stream Control = Vent gas stream is controlled by a control device other than a flare.
L3SILOS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-4	30 TAC Chapter 115, HRVOC Vent Gas	Vent Gas Stream Control = Vent gas stream is uncontrolled.
L3SILOS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	Vent Type = Vent gas stream emissions of ethylene associated with the formation, handling, and storage of solidified low-density polyethylene in which more than 1.1 pounds of ethylene per 1,000 pounds of product are emitted., Alternate Control Requirement = Alternate control is not used., Control Device Type = Vapor recovery system, as defined in 30 TAC § 115.10, other than an afterburner, blast furnace combustion device, boiler, catalytic or direct flame incinerator, carbon adsorption system, chiller, flare or vapor combustor.
L3SILOS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-3	30 TAC Chapter 115, Vent Gas Controls	Vent Type = Vent gas stream emissions of ethylene associated with the formation, handling, and storage of solidified low-density

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					polyethylene in which no more than 1.1 pounds of ethylene per 1,000 pounds of product are emitted.
L3SILOS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	63FFFF-2	40 CFR Part 63, Subpart FFFF	No changing attributes.
L3V3387	STORAGE TANKS/VESSELS	N/A	R5112-1	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
L3V3387	STORAGE TANKS/VESSELS	N/A	63FFFF-1	40 CFR Part 63, Subpart FFFF	No changing attributes.
L3V3740	STORAGE TANKS/VESSELS	N/A	R5112-1	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
L3V3740-2	STORAGE TANKS/VESSELS	N/A	R5112-1	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
L3V4251	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-3	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
L3V4367	STORAGE TANKS/VESSELS	N/A	R5112-2	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
L3V4373	STORAGE TANKS/VESSELS	N/A	R5112-3	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
LB1PROCESS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-2	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
LB1PROCESS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-3	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
LBCCRGEN	SRIC ENGINES	N/A	R7300-ENG4	30 TAC Chapter 117, Subchapter B	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
LBCCRGEN	SRIC ENGINES	N/A	60III-3	40 CFR Part 60, Subpart IIII	No changing attributes.
LBCCRGEN	SRIC ENGINES	N/A	63ZZZZ-5	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
LBCT	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-1	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
LBFLARE	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
LBFLARE	FLARES	N/A	R5722-001	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
LBFLARE	FLARES	N/A	60A-1	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
LBFLARE	FLARES	N/A	60A-2	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
LBFUG	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
LBFUG	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
LBFUG	FUGITIVE EMISSION UNITS	N/A	63H-ALL	40 CFR Part 63, Subpart H	No changing attributes.
LBFWGEN	SRIC ENGINES	N/A	R7300-ENG4	30 TAC Chapter 117, Subchapter B	No changing attributes.
LBFWGEN	SRIC ENGINES	N/A	60III-3	40 CFR Part 60, Subpart IIII	No changing attributes.
LBFWGEN	SRIC ENGINES	N/A	63ZZZZ-5	40 CFR Part 63, Subpart	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
				ZZZZ	
LBSUBGEN	SRIC ENGINES	N/A	R7300-ENG4	30 TAC Chapter 117, Subchapter B	No changing attributes.
LBSUBGEN	SRIC ENGINES	N/A	60III-3	40 CFR Part 60, Subpart III	No changing attributes.
LBSUBGEN	SRIC ENGINES	N/A	63ZZZZ-5	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
LBUNIT	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-1	30 TAC Chapter 115, HRVOC Vent Gas	Alternative Monitoring = Using alternative monitoring and testing methods approved by the executive director., Vent Gas Stream Control = Vent gas stream is controlled by a flare.
LBUNIT	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-5	30 TAC Chapter 115, HRVOC Vent Gas	Testing Requirements = Meeting § 115.725(a)., Process Knowledge = Process knowledge and engineering calculations are used to determine HRVOC emissions during emission events and scheduled startup, shutdown, and maintenance activities., Waived Testing = The executive director has not waived testing for identical vents., Alternative Monitoring = Not using alternative monitoring and testing methods., Minor Modification = Not using any minor modification to the monitoring and testing methods of the rule., Vent Gas Stream Control = Vent gas stream is controlled by a control device other than a flare.
LBUNIT	EMISSION POINTS/STATIONARY	N/A	R5121-BOIL	30 TAC Chapter 115, Vent Gas Controls	Alternate Control Requirement = Alternate control is not used.,

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	VENTS/PROCESS VENTS				Control Device Type = Other vapor control/recovery system, as defined in 30 TAC § 115.10
LBUNIT	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-FLR	30 TAC Chapter 115, Vent Gas Controls	Alternate Control Requirement = Alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria and demonstrating substantially equivalent reduction efficiencies approved by the TCEQ Executive Director., Control Device Type = Smokeless flare
MONHEL1CT	INDUSTRIAL PROCESS COOLING TOWERS	N/A	63FFFF	40 CFR Part 63, Subpart FFFF	No changing attributes.
MRU3745	STORAGE TANKS/VESSELS	N/A	R5112-1	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
MRU3747	STORAGE TANKS/VESSELS	N/A	R5112-1	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
MRU3747	STORAGE TANKS/VESSELS	N/A	63FFFF-1	40 CFR Part 63, Subpart FFFF	No changing attributes.
MRUFUG	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
MRUFUG	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
MRUFUG	FUGITIVE EMISSION UNITS	N/A	63H-ALL	40 CFR Part 63, Subpart H	No changing attributes.
PAINT	SURFACE COATING OPERATIONS	N/A	R5422-1	30 TAC Chapter 115, Surface Coating Operations	Miscellaneous Coating Type = Extreme performance coating, including chemical milling maskants.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
PAINT	SURFACE COATING OPERATIONS	N/A	R5422-2	30 TAC Chapter 115, Surface Coating Operations	Miscellaneous Coating Type = Coating type other than low-bake coatings, coating using air or forced air dryers, extreme performance and clear coat/interior protective coating for pails and drums.
PRO-AB3RX	POLYMER MANUFACTURING PROCESSES	N/A	60DDD-BOIL	40 CFR Part 60, Subpart DDD	Continuous Control Device = Boiler or process heater with a design heat input capacity of 150 MMBtu/hr or greater.
PRO-AB3RX	POLYMER MANUFACTURING PROCESSES	N/A	60DDD-FLR	40 CFR Part 60, Subpart DDD	Continuous Control Device = Flare.
PRO-LB1	POLYMER MANUFACTURING PROCESSES	N/A	60DDD-ATM	40 CFR Part 60, Subpart DDD	Table 2 Threshold Emission Rates = The uncontrolled emission rate is less than or equal to the uncontrolled threshold emission rates in Table 2 of 40 CFR § 60.560., Weight Percent TOC = Weight percent of total organic compounds is less than 0.10%., Control of Continuous Emissions = Vent gas stream emissions are not controlled with an existing control device (as defined in 40 CFR § 60.561).
PRO-LB1	POLYMER MANUFACTURING PROCESSES	N/A	60DDD-BOIL	40 CFR Part 60, Subpart DDD	Table 2 Threshold Emission Rates = The uncontrolled emission rate is greater than the uncontrolled threshold emission rates in Table 2 of 40 CFR § 60.560., Weight Percent TOC = Weight percent of total organic compounds is 0.10% or

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					greater., Control of Continuous Emissions = All continuous emissions are controlled in an existing control device (as defined in 40 CFR § 60.561)., Continuous Control Device = Boiler or process heater with a design heat input capacity of 150 MMBtu/hr or greater., Annual Emissions Entering the Control Device = Annual emissions entering the control device are greater than or equal to the calculated threshold emissions levels calculated in Table 3., Emission Reduction from Control Device = Existing control device (as defined in 40 CFR § 60.561) reduces emissions by 98 percent or greater, or exit concentration is 20 ppmv or less.
PRO-LB1	POLYMER MANUFACTURING PROCESSES	N/A	60DDD-FLR	40 CFR Part 60, Subpart DDD	Table 2 Threshold Emission Rates = The uncontrolled emission rate is greater than the uncontrolled threshold emission rates in Table 2 of 40 CFR § 60.560., Weight Percent TOC = Weight percent of total organic compounds is 0.10% or greater., Control of Continuous Emissions = Vent gas stream emissions are not controlled with an existing control device (as defined in 40 CFR § 60.561)., Table 3 Control Requirements = Calculations from Table 3 do not require controls.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
PRO-Q1	POLYMER MANUFACTURING PROCESSES	N/A	60DDD-CIVCF	40 CFR Part 60, Subpart DDD	<p>Process Emissions = Process contains vent gas streams, some of which are emitted continuously and some which are emitted intermittently., Uncontrolled Annual Emissions = Uncontrolled annual emissions are 1.6 Mg/yr (1.76 tpy) or greater., Weight Percent TOC = Weight percent of total organic compounds is 0.10% or greater., Control of Continuous Emissions = All continuous emissions are controlled in an existing control device (as defined in 40 CFR § 60.561)., Continuous Control Device = Flare., Annual Emissions Entering the Control Device = Annual emissions entering the control device are greater than or equal to the calculated threshold emissions levels calculated in Table 3., Emission Reduction from Control Device = Existing control device (as defined in 40 CFR § 60.561) reduces emissions by 98 percent or greater, or exit concentration is 20 ppmv or less., Emergency Vent = Emissions are not an emergency vent stream from a new, modified, or reconstructed facility., Existing Control Device = The vent stream is not controlled in an existing control device (as defined in 40 CFR § 60.561) which has not been reconstructed, replaced, or its</p>

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					operating conditions modified as a result of state or local regulations., Intermittent Control Device = Flare.
PRO-Q1	POLYMER MANUFACTURING PROCESSES	N/A	60DDD-CIVINC	40 CFR Part 60, Subpart DDD	Process Emissions = Process contains vent gas streams, some of which are emitted continuously and some which are emitted intermittently., Uncontrolled Annual Emissions = Uncontrolled annual emissions are 1.6 Mg/yr (1.76 tpy) or greater., Weight Percent TOC = Weight percent of total organic compounds is 0.10% or greater., Control of Continuous Emissions = All continuous emissions are controlled in an existing control device (as defined in 40 CFR § 60.561)., Continuous Control Device = Incinerator other than a catalytic incinerator., Annual Emissions Entering the Control Device = Annual emissions entering the control device are greater than or equal to the calculated threshold emissions levels calculated in Table 3., Emission Reduction from Control Device = Existing control device (as defined in 40 CFR § 60.561) reduces emissions by 98 percent or greater, or exit concentration is 20 ppmv or less., Emergency Vent = Emissions are not an emergency vent stream from a new, modified, or reconstructed facility., Existing Control Device = The vent stream is

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					not controlled in an existing control device (as defined in 40 CFR ' 60.561) which has not been reconstructed, replaced, or its operating conditions modified as a result of state or local regulations., Intermittent Control Device = Incinerator other than a catalytic incinerator.
PRO-Q1	POLYMER MANUFACTURING PROCESSES	N/A	60DDD-CVU	40 CFR Part 60, Subpart DDD	Process Emissions = Individual vent gas streams emit continuous emissions., Uncontrolled Annual Emissions = Uncontrolled annual emissions are 1.6 Mg/yr (1.76 tpy) or greater., Weight Percent TOC = Weight percent of total organic compounds is 0.10% or greater., Control of Continuous Emissions = Vent gas stream emissions are not controlled with an existing control device (as defined in 40 CFR § 60.561)., Table 3 Control Requirements = Calculations from Table 3 do not require controls.
PRO-Q1	POLYMER MANUFACTURING PROCESSES	N/A	60DDD-EV	40 CFR Part 60, Subpart DDD	Process Emissions = Individual vent gas streams emit intermittent emissions., Emergency Vent = Emissions are an emergency vent stream from a new, modified, or reconstructed facility.
PROAB3	CHEMICAL MANUFACTURING PROCESS	N/A	63FFFF-1	40 CFR Part 63, Subpart FFFF	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
PROAB3	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	63FFFF-3	40 CFR Part 63, Subpart FFFF	No changing attributes.
PW7605JB	SRIC ENGINES	N/A	R7ICI-1	30 TAC Chapter 117, Subchapter B	No changing attributes.
PW7605JC	SRIC ENGINES	N/A	R7ICI-1	30 TAC Chapter 117, Subchapter B	No changing attributes.
PW7614JA	SRIC ENGINES	N/A	R7ICI-1	30 TAC Chapter 117, Subchapter B	No changing attributes.
PW7614JA	SRIC ENGINES	N/A	63ZZZZ-2	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
PWBLAST	SRIC ENGINES	N/A	R73010-ENG3	30 TAC Chapter 117, Subchapter B	No changing attributes.
PWBLAST	SRIC ENGINES	N/A	60IIII-2	40 CFR Part 60, Subpart IIII	No changing attributes.
PWBLAST	SRIC ENGINES	N/A	63ZZZZ-4	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
PWCWELL	SRIC ENGINES	N/A	R7300-ENG	30 TAC Chapter 117, Subchapter B	No changing attributes.
PWCWELL	SRIC ENGINES	N/A	63ZZZZ-2	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
PWW321	SRIC ENGINES	N/A	R7300-ENG2	30 TAC Chapter 117, Subchapter B	No changing attributes.
PWW321	SRIC ENGINES	N/A	60JJJJ-1	40 CFR Part 60, Subpart JJJJ	No changing attributes.
PWW321	SRIC ENGINES	N/A	63ZZZZ-3	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
Q1ANV	EMISSION POINTS/STATIONARY	N/A	R5725-ANV	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	VENTS/PROCESS VENTS				
Q1ANV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
Q1CT	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-1	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
Q1F01324	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-2	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
Q1F01324	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
Q1FUG	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
Q1FUG	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
Q1FUG	FUGITIVE EMISSION UNITS	N/A	60DDD-ALL	40 CFR Part 60, Subpart DDD	No changing attributes.
Q1FUG	FUGITIVE EMISSION UNITS	N/A	63H-ALL	40 CFR Part 63, Subpart H	No changing attributes.
Q1PROCESS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-1	30 TAC Chapter 115, HRVOC Vent Gas	Alternative Monitoring = Using alternative monitoring and testing methods approved by the executive director., Vent Gas Stream Control = Vent gas stream is controlled by a flare.
Q1PROCESS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-3	30 TAC Chapter 115, HRVOC Vent Gas	Testing Requirements = Meeting § 115.725(a)., Process Knowledge = Process knowledge and engineering

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					calculations are used to determine HRVOC emissions during emission events and scheduled startup, shutdown, and maintenance activities., Waived Testing = The executive director has not waived testing for identical vents., Alternative Monitoring = Not using alternative monitoring and testing methods., Minor Modification = Not using any minor modification to the monitoring and testing methods of the rule., Vent Gas Stream Control = Vent gas stream is controlled by a control device other than a flare.
Q1PROCESS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-FLR	30 TAC Chapter 115, Vent Gas Controls	Alternate Control Requirement = Alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria and demonstrating substantially equivalent reduction efficiencies approved by the TCEQ Executive Director., Control Device Type = Smokeless flare
Q1PROCESS	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-INC	30 TAC Chapter 115, Vent Gas Controls	Alternate Control Requirement = Alternate control is not used., Control Device Type = Direct flame incinerator in which the vent gas stream is burned at a temperature or at least 1300° F (704 C).
Q1V34001	VOLATILE ORGANIC COMPOUND WATER	N/A	R5131-1	30 TAC Chapter 115, Water Separation	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	SEPARATORS				
QE1001B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE1001B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1002B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE1002B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1003B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE1003B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1004B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE1004B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1005B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE1005B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1006B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
QE1006B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1007B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE1007B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1008B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE1008B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1009B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE1009B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1010B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE1010B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1011B	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE1011B	PROCESS HEATERS/FURNACES	N/A	R7310-PH1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE1416F	EMISSION POINTS/STATIONARY	N/A	R5722-1	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	VENTS/PROCESS VENTS				
QE1416F	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
QE1416FB	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-1	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
QE1416FB	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
QE2410F	STORAGE TANKS/VESSELS	N/A	R5112-1	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
QE3050B	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE3050B	FLARES	N/A	R5722-001	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
QE3050B	FLARES	N/A	60A-MAX	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
QE3050B	FLARES	N/A	60A-NORM	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
QE3050B	FLARES	N/A	63A-MAX	40 CFR Part 63, Subpart A	No changing attributes.
QE3416F	STORAGE TANKS/VESSELS	N/A	R5112-2	30 TAC Chapter 115, Storage of VOCs	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
QE3418F	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-1	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
QE3418F	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
QE5407FA	STORAGE TANKS/VESSELS	N/A	R5112-BOIL	30 TAC Chapter 115, Storage of VOCs	Control Device Type = Other control device, Alternate Control Requirement = Not using an alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria.
QE5407FA	STORAGE TANKS/VESSELS	N/A	R5112-FL	30 TAC Chapter 115, Storage of VOCs	Control Device Type = Flare, Alternate Control Requirement = Using alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria, and demonstrating substantially equivalent reduction efficiencies approved by the TCEQ executive director.
QE5407FA	STORAGE TANKS/VESSELS	N/A	63YY-TANK	40 CFR Part 63, Subpart YY	No changing attributes.
QE5407FB	STORAGE TANKS/VESSELS	N/A	R5112-BOIL	30 TAC Chapter 115, Storage of VOCs	Control Device Type = Other control device, Alternate Control Requirement = Not using an alternate method for demonstrating and documenting continuous compliance with applicable control

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					requirements or exemption criteria.
QE5407FB	STORAGE TANKS/VESSELS	N/A	R5112-FL	30 TAC Chapter 115, Storage of VOCs	Control Device Type = Flare, Alternate Control Requirement = Using alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria, and demonstrating substantially equivalent reduction efficiencies approved by the TCEQ executive director.
QE5407FB	STORAGE TANKS/VESSELS	N/A	63YY-TANK	40 CFR Part 63, Subpart YY	No changing attributes.
QE5802UA	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE5802UA	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	R7310-1	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE5802UA	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	60Db-1	40 CFR Part 60, Subpart Db	No changing attributes.
QE5802UA	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	63DDDDD-1	40 CFR Part 63, Subpart DDDDD	No changing attributes.
QE5802UB	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-V1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QE5802UB	BOILERS/STEAM GENERATORS/STEAM	N/A	R7310-2	30 TAC Chapter 117, Subchapter B	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	GENERATING UNITS				
QE5802UB	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	60Db-1	40 CFR Part 60, Subpart Db	No changing attributes.
QE5802UB	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	63DDDDD-1	40 CFR Part 63, Subpart DDDDD	No changing attributes.
QE638481	SRIC ENGINES	N/A	R7300-ENG4	30 TAC Chapter 117, Subchapter B	No changing attributes.
QE638481	SRIC ENGINES	N/A	60IIII-3	40 CFR Part 60, Subpart IIII	No changing attributes.
QE638481	SRIC ENGINES	N/A	63ZZZZ-5	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
QE6410F	STORAGE TANKS/VESSELS	N/A	R5112-3	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
QE6410F	STORAGE TANKS/VESSELS	N/A	63YY-TANK	40 CFR Part 63, Subpart YY	No changing attributes.
QE7409F	STORAGE TANKS/VESSELS	N/A	R5112-2	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
QE7411F	STORAGE TANKS/VESSELS	N/A	R5112-1	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
QE7412F	STORAGE TANKS/VESSELS	N/A	R5112-1	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
QE7801U	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-2	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
QE8001A	WASTEWATER UNITS	N/A	R5142-1	30 TAC Chapter 115, Industrial Wastewater	No changing attributes.
QE8050B	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
QE8050B	FLARES	N/A	R5722-001	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
QE8050B	FLARES	N/A	60A-MAX	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
QE8050B	FLARES	N/A	60A-NORM	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
QE8050B	FLARES	N/A	63A-MAX	40 CFR Part 63, Subpart A	Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
QE8050B	FLARES	N/A	63A-NORM	40 CFR Part 63, Subpart A	Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm).
QEANALYZ2	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5725-ANV	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
QEANALYZ2	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
QEANALYZ4	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5725-ANV	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
QEANALYZ4	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
QEANALYZ5	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5725-ANV	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
QEANALYZ5	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
QEARU	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-2	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
QEARU	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-FLARE	30 TAC Chapter 115, Vent Gas Controls	Alternate Control Requirement = Alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria and demonstrating substantially equivalent reduction efficiencies approved by the TCEQ Executive Director., Control Device Type = Smokeless flare
QEARU	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-FURN	30 TAC Chapter 115, Vent Gas Controls	Alternate Control Requirement = Alternate control is not used., Control Device Type = Other vapor control/recovery system, as defined in 30 TAC § 115.10, Total Design Capacity = Total design capacity is greater than or equal to 1,100 tons per year for all chemicals produced within that unit., Flow Rate or VOC Concentration = Flow rate is greater than or equal to 0.011 scm/min or the VOC concentration is greater than or equal to 500 ppmv., 40 CFR 60 Subpart NNN Requirements =

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					The distillation unit vent gas stream satisfies neither of the following requirements of 40 CFR Part 60, Subpart NNN: TRE index value is greater than 8.0; or TRE index value is greater than 1.0 without the use of VOC emission control devices., 40 CFR 60 Subpart RRR Requirements = The reactor process vent gas stream satisfies neither of the following requirements of 40 CFR Part 60, Subpart RRR: TRE index value is greater than 8.0; or TRE index value is greater than 1.0 without the use of VOC emission control devices.
QEARU	DISTILLATION OPERATIONS	N/A	60NNN-1	40 CFR Part 60, Subpart NNN	TOC Reduction = Compliance is achieved through use of a flare or recovery device., Subpart NNN Control Device = Flare.
QEARU	DISTILLATION OPERATIONS	N/A	60NNN-2	40 CFR Part 60, Subpart NNN	TOC Reduction = Compliance is achieved by reducing total organic compound emissions (less methane and ethane) by 98 weight-percent or to a concentration of 20 ppmv dry basis corrected to 3 percent oxygen using a VOC emissions non-flare combustion control device., Subpart NNN Control Device = Boiler or process heater design heat input capacity greater than or equal to 44 MW (150 MMBtu/hr).
QEBARGE	LOADING/UNLOADING	N/A	R5212-3	30 TAC Chapter 115,	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	OPERATIONS			Loading and Unloading of VOC	
QEBARGE	LOADING/UNLOADING OPERATIONS	N/A	61BB-1	40 CFR Part 61, Subpart BB	No changing attributes.
QEBARGE	LOADING/UNLOADING OPERATIONS	N/A	63Y-1	40 CFR Part 63, Subpart Y	No changing attributes.
QECAUSTSUM	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
QEFUG	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
QEFUG	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
QEFUG	FUGITIVE EMISSION UNITS	N/A	60VVa-ALL	40 CFR Part 60, Subpart VVa	No changing attributes.
QEFUG	FUGITIVE EMISSION UNITS	N/A	63H-ALL	40 CFR Part 63, Subpart H	No changing attributes.
QEFUG	FUGITIVE EMISSION UNITS	N/A	63YY-FUG	40 CFR Part 63, Subpart YY	No changing attributes.
QEH2FLAR	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
QELAB	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-1	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
QELOAD	LOADING/UNLOADING OPERATIONS	N/A	R5212-1	30 TAC Chapter 115, Loading and Unloading of VOC	Alternate Control Requirement (ACR) = Under 30 TAC § 115.213(a), using an alternate method for demonstrating and documenting continuous compliance

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					with applicable control requirements or exemption criteria., True Vapor Pressure = True vapor pressure greater than or equal to 0.5 psia., Daily Throughput = Daily throughput not determined since 30 TAC § 115.217(a)(2)(A) or 30 TAC § 115.217(b)(3)(A) exemption is not utilized., Chapter 115 Control Device Type = Vapor control system with a flare., Control Options = Vapor control system that maintains a control efficiency of at least 90%., Vapor Tight = All liquid and vapor lines are equipped with fittings which make vapor-tight connections that close automatically when disconnected.
QELOAD	LOADING/UNLOADING OPERATIONS	N/A	R5212-2	30 TAC Chapter 115, Loading and Unloading of VOC	Alternate Control Requirement (ACR) = No alternate control requirements are being utilized., True Vapor Pressure = True vapor pressure less than 0.5 psia.
QEUNIT	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-FLARE	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
QEUNIT	REACTOR	N/A	60RRR-QE1009B	40 CFR Part 60, Subpart RRR	No changing attributes.
QEUNITM	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5722-2	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
QEUNITM	EMISSION	N/A	R5121-EMACT	30 TAC Chapter 115, Vent	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	POINTS/STATIONARY VENTS/PROCESS VENTS			Gas Controls	
QEUNITEM	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	63YY-1	40 CFR Part 63, Subpart YY	No changing attributes.
QEUNITNNN	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-BF	30 TAC Chapter 115, Vent Gas Controls	Alternate Control Requirement = Alternate control is not used., Control Device Type = Vapor recovery system, as defined in 30 TAC § 115.10, other than an afterburner, blast furnace combustion device, boiler, catalytic or direct flame incinerator, carbon adsorption system, chiller, flare or vapor combustor.
QEUNITNNN	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-FLARE	30 TAC Chapter 115, Vent Gas Controls	Alternate Control Requirement = Alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria and demonstrating substantially equivalent reduction efficiencies approved by the TCEQ Executive Director., Control Device Type = Smokeless flare
QEUNITNNN	DISTILLATION OPERATIONS	N/A	60NNN-1	40 CFR Part 60, Subpart NNN	TOC Reduction = Compliance is achieved through use of a flare or recovery device., Subpart NNN Control Device = Flare.
QEUNITNNN	DISTILLATION OPERATIONS	N/A	60NNN-2	40 CFR Part 60, Subpart NNN	TOC Reduction = Compliance is achieved by reducing total organic compound emissions (less methane

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					and ethane) by 98 weight-percent or to a concentration of 20 ppmv dry basis corrected to 3 percent oxygen using a VOC emissions non-flare combustion control device., Subpart NNN Control Device = Boiler or process heater design heat input capacity greater than or equal to 44 MW (150 MMBtu/hr).
REGVLOAD	LOADING/UNLOADING OPERATIONS	N/A	R5211-1	30 TAC Chapter 115, Loading and Unloading of VOC	Alternate Control Requirement (ACR) = No alternate control requirements are being utilized., True Vapor Pressure = True vapor pressure greater than or equal to 0.5 psia., Daily Throughput = Daily throughput not determined since 30 TAC § 115.217(a)(2)(A) or 30 TAC § 115.217(b)(3)(A) exemption is not utilized., Chapter 115 Control Device Type = No control device., Transfer Type = Loading and unloading., Control Options = Vapor balance system., Vapor Tight = All liquid and vapor lines are equipped with fittings which make vapor-tight connections that close automatically when disconnected.
REGVLOAD	LOADING/UNLOADING OPERATIONS	N/A	R5211-2	30 TAC Chapter 115, Loading and Unloading of VOC	Alternate Control Requirement (ACR) = No alternate control requirements are being utilized., True Vapor Pressure = True vapor pressure greater than or equal to 0.5 psia., Daily Throughput = Daily throughput not determined since 30

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					TAC § 115.217(a)(2)(A) or 30 TAC § 115.217(b)(3)(A) exemption is not utilized., Chapter 115 Control Device Type = No control device., Transfer Type = Loading and unloading., Control Options = Pressurized loading system., Vapor Tight = All liquid and vapor lines are equipped with fittings which make vapor-tight connections that close automatically when disconnected.
REGVLOAD	LOADING/UNLOADING OPERATIONS	N/A	R5211-3	30 TAC Chapter 115, Loading and Unloading of VOC	Alternate Control Requirement (ACR) = Under 30 TAC § 115.213(a), using an alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria., True Vapor Pressure = True vapor pressure greater than or equal to 0.5 psia., Daily Throughput = Daily throughput not determined since 30 TAC § 115.217(a)(2)(A) or 30 TAC § 115.217(b)(3)(A) exemption is not utilized., Chapter 115 Control Device Type = Vapor control system with a flare., Transfer Type = Only unloading., Control Options = Vapor control system that maintains a control efficiency of at least 90%., Vapor Tight = All liquid and vapor lines are equipped with fittings which make vapor-tight connections that close automatically when disconnected.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
REGVLOAD	LOADING/UNLOADING OPERATIONS	N/A	R5211-4	30 TAC Chapter 115, Loading and Unloading of VOC	Alternate Control Requirement (ACR) = Under 30 TAC § 115.213(a), using an alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria., True Vapor Pressure = True vapor pressure greater than or equal to 0.5 psia., Daily Throughput = Daily throughput not determined since 30 TAC § 115.217(a)(2)(A) or 30 TAC § 115.217(b)(3)(A) exemption is not utilized., Chapter 115 Control Device Type = Vapor control system with a flare., Transfer Type = Only loading., Control Options = Vapor control system that maintains a control efficiency of at least 90%., Vapor Tight = All liquid and vapor lines are equipped with fittings which make vapor-tight connections that close automatically when disconnected.
REGVLOAD	LOADING/UNLOADING OPERATIONS	N/A	R5211-5	30 TAC Chapter 115, Loading and Unloading of VOC	Alternate Control Requirement (ACR) = No alternate control requirements are being utilized., True Vapor Pressure = True vapor pressure less than 0.5 psia., Transfer Type = Loading and unloading.
UTBLRG	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
UTBLRG	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	R7310-1BOIL	30 TAC Chapter 117, Subchapter B	No changing attributes.
UTBLRG	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	63DDDDD-1	40 CFR Part 63, Subpart DDDDD	No changing attributes.
UTBLRH	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
UTBLRH	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	R7310-2BOIL	30 TAC Chapter 117, Subchapter B	No changing attributes.
UTBLRH	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	63DDDDD-1	40 CFR Part 63, Subpart DDDDD	No changing attributes.
UTBLRN	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	R7310-1	30 TAC Chapter 117, Subchapter B	No changing attributes.
UTBLRN	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	60Dc-1	40 CFR Part 60, Subpart Dc	No changing attributes.
UTBLRN	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	63DDDDD-1	40 CFR Part 63, Subpart DDDDD	No changing attributes.
UTBLRS	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	R7310-1	30 TAC Chapter 117, Subchapter B	No changing attributes.
UTBLRS	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	60Dc-1	40 CFR Part 60, Subpart Dc	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
UTBLRS	BOILERS/STEAM GENERATORS/STEAM GENERATING UNITS	N/A	63DDDDD-1	40 CFR Part 63, Subpart DDDDD	No changing attributes.
UTV2026	STORAGE TANKS/VESSELS	N/A	R5112-3	30 TAC Chapter 115, Storage of VOCs	No changing attributes.

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
DGRLAPPING	EU	R5412-1	VOC	30 TAC Chapter 115, Degreasing Processes	§ 115.412(1) § 115.411(1) § 115.411(2) [G]§ 115.412(1)(A) § 115.412(1)(C) [G]§ 115.412(1)(F)	No person shall own or operate a system utilizing a VOC for the cold solvent cleaning of objects without the controls listed in §115.412(1)(A)-(F), except as exempted in §115.411.	[G]§ 115.415(1) § 115.415(3) ** See Periodic Monitoring Summary	None	None
DGRMAINT	EU	R5412-1	VOC	30 TAC Chapter 115, Degreasing Processes	§ 115.412(1) § 115.411(1) § 115.411(2) [G]§ 115.412(1)(A) § 115.412(1)(C) [G]§ 115.412(1)(F)	No person shall own or operate a system utilizing a VOC for the cold solvent cleaning of objects without the controls listed in §115.412(1)(A)-(F), except as exempted in §115.411.	[G]§ 115.415(1) § 115.415(3) ** See Periodic Monitoring Summary	None	None
DGRMOBILE	EU	R5412-1	VOC	30 TAC Chapter 115, Degreasing Processes	§ 115.412(1) § 115.411(1) § 115.411(2) [G]§ 115.412(1)(A) § 115.412(1)(C) [G]§ 115.412(1)(F)	No person shall own or operate a system utilizing a VOC for the cold solvent cleaning of objects without the controls listed in §115.412(1)(A)-(F), except as exempted in §115.411.	[G]§ 115.415(1) § 115.415(3) ** See Periodic Monitoring Summary	None	None
DGROLEFIN	EU	R5412-1	VOC	30 TAC Chapter 115, Degreasing Processes	§ 115.412(1) § 115.411(1) § 115.411(2) [G]§ 115.412(1)(A) § 115.412(1)(C) [G]§ 115.412(1)(F)	No person shall own or operate a system utilizing a VOC for the cold solvent cleaning of objects without the controls listed in §115.412(1)(A)-(F), except as exempted in §115.411.	[G]§ 115.415(1) § 115.415(3) ** See Periodic Monitoring Summary	None	None
DGRWBMU RR	EU	R5412-1	VOC	30 TAC Chapter 115, Degreasing Processes	§ 115.412(1) § 115.411(1) § 115.411(2) [G]§ 115.412(1)(A) § 115.412(1)(C) [G]§ 115.412(1)(F)	No person shall own or operate a system utilizing a VOC for the cold solvent cleaning of objects without the controls listed in §115.412(1)(A)-(F), except as exempted in §115.411.	[G]§ 115.415(1) § 115.415(3) ** See Periodic Monitoring Summary	None	None
DMFSUMPT	EU	R5112-2	VOC	30 TAC Chapter	§ 115.113	Alternate means of	** See Alternative	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
K				115, Storage of VOCs	§ 115.910	compliance with the applicable control requirements or exemption criteria in this division may be approved per 30 TAC §115.910, if emission reductions are substantially equal.	Requirement		
J2202	EU	R7300-ENG	Exempt	30 TAC Chapter 117, Subchapter B	§ 117.303(a)(6)(D) [G]§ 117.310(f)	Units exempted from the provisions of this division, except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1), and 117.354(a)(5), include stationary gas turbines and stationary internal combustion engines that are used exclusively in emergency situations, except that operation for testing or maintenance purposes is allowed for up to 52 hours per year, based on a rolling 12-month average.	§ 117.8140(a) § 117.8140(a)(3)	§ 117.340(j) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None
J2202	EU	63ZZZZ-2	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6602-Table2c.1 § 63.6595(a)(1) § 63.6605(a) § 63.6605(b) § 63.6625(e) § 63.6625(h) § 63.6625(i) § 63.6640(f)(1) § 63.6640(f)(2) § 63.6640(f)(2)(i) § 63.6640(f)(3)	For each existing emergency stationary CI RICE and black start stationary CI RICE, located at a major source, you must comply with the requirements as specified in Table 2c.1.a-c.	§ 63.6625(f) § 63.6625(i) § 63.6640(a) § 63.6640(a)-Table6.9.a.i § 63.6640(a)-Table6.9.a.ii	§ 63.6625(i) § 63.6655(d) § 63.6655(e) § 63.6655(f) § 63.6660(a) § 63.6660(b) § 63.6660(c)	§ 63.6640(e) § 63.6650(f)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
L2CT	EU	R5760-1	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.761(c)(1) § 115.761(c)(3) § 115.764(a)(1) § 115.766(i)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 1 of this subchapter must not exceed 1,200 pounds of HRVOCs per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.764(a)(1) § 115.764(a)(3) [G]§ 115.764(a)(6) § 115.764(c) § 115.764(g)(2)	§ 115.766(a)(1) § 115.766(a)(2) § 115.766(a)(3) § 115.766(a)(5) § 115.766(a)(6) § 115.766(c) [G]§ 115.766(g) [G]§ 115.766(h) § 115.766(i)(1)	§ 115.766(i)(2)
L2V2101	EU	R5112-3	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.111(a)(1)	Except as provided in § 115.118, a storage tank storing VOC with a true vapor pressure less than 1.5 psia is exempt from the requirements of this division.	[G]§ 115.117	§ 115.118(a)(1) § 115.118(a)(5) § 115.118(a)(7)	None
L3ANV	EP	R5725-ANV	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100 dry standard cubic feet per hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this title than 0.5 tpy.	None	§ 115.726(e)(3)(A) § 115.726(j)(1) § 115.726(j)(2)	None
L3ANV	EP	R5121-1	VOC	30 TAC Chapter	§ 115.127(a)(4)(C)	Any reactor process or	[G]§ 115.125	§ 115.126	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				115, Vent Gas Controls	[G]§ 115.122(a)(4)	distillation operation vent gas stream with a flow rate less than 0.388 standard cubic feet per minute or a VOC concentration less than 500 ppmv is exempt from the requirements of §115.121(a)(2)(A) of this title.	§ 115.126(2) § 115.126(3)(D)	§ 115.126(2) § 115.126(3) § 115.126(3)(D)	
L3ANV	EP	63-ANV	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2455(b) § 63.2455(b)(1) § 63.2455(b)(2) § 63.2455(b)(3)	For each continuous process vent, you must either designate the vent as a Group 1 continuous process vent or determine the total resource effectiveness (TRE) index value as specified in §63.115(d), except as specified in paragraphs (b)(1)-(3) of this section.	§ 63.115(d) [G]§ 63.115(d)(1) § 63.115(d)(2) § 63.115(d)(2)(i) [G]§ 63.115(d)(2)(ii) § 63.115(d)(2)(iii) § 63.115(d)(2)(iv) § 63.115(d)(3)(i) § 63.115(d)(3)(ii)	None	None
L3BAFCOE G	EU	R7300-1	Exempt	30 TAC Chapter 117, Subchapter B	[G]§ 117.303(a)(11) [G]§ 117.310(f)	Units exempted from the provisions of this division except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1) and 117.354(a)(5) include new, modified, reconstructed, or relocated stationary diesel engine placed into service on or after October 1, 2001, that operates less than 100 hours per year, based on a rolling 12-month average, in other than emergency situations; and meets the requirements for non-road engines as specified.	None	§ 117.340(j) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						§117.303(a)(11)(A)-(B)			
L3BAFCOEG	EU	60IIII-1	CO	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.112(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 3.5 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).	None	None	[G]§ 60.4214(d)
L3BAFCOEG	EU	60IIII-1	NMHC and NO _x	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.112(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 75 KW and less than or equal to 560 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with an NMHC+NO _x emission limit of 4.0 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).	None	None	[G]§ 60.4214(d)
L3BAFCOEG	EU	60IIII-1	PM	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 130 KW and less	None	None	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 60.4211(f) § 60.4218 § 89.112(a)	than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a PM emission limit of 0.20 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).			
L3BAFCOE G	EU	63ZZZZ-1	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(c)	Stationary RICE subject to Regulations under 40 CFR Part 60. An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines as applicable. No further requirements apply for such engines under this part.	None	None	None
L3BOILER C V	EP	R5722-1	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(c)(1) § 115.722(c)(3) § 115.725(a)(2)(A) § 115.725(a)(2)(B) § 115.725(a)(2)(C) § 115.725(a)(2)(D) § 115.725(a)(3) [G]§ 115.725(a)(4) [G]§ 115.725(l) [G]§ 115.726(a)(2)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 2 of this subchapter must not exceed 1,200 pounds of HRVOC per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.725(a) § 115.725(a)(2)(A) § 115.725(a)(2)(B) § 115.725(a)(2)(C) § 115.725(a)(2)(D) § 115.725(a)(3) § 115.725(a)(3)(B) [G]§ 115.725(a)(4) § 115.725(a)(5) [G]§ 115.725(l) § 115.725(n) ** See CAM	§ 115.726(b)(1) § 115.726(b)(2) § 115.726(b)(3) [G]§ 115.726(h) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	[G]§ 115.725(a)(4) § 115.725(a)(5) § 115.725(n) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							Summary		
L3BOILERCV	EP	R5121-3	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(1) [G]§ 115.122(a)(4)	A vent gas stream from a low-density polyethylene plant is exempt from §115.121(a)(1) of this title if no more than 1.1 pounds of ethylene per 1,000 pounds of product are emitted from all the vent gas streams associated with the formation, handling, and storage of solidified product.	[G]§ 115.125 § 115.126(2) § 115.126(3)(A)	§ 115.126 § 115.126(2) § 115.126(3) § 115.126(3)(A)	None
L3BOILERCV	EP	R5121-BOIL	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(C)	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(C) § 115.126(2) ** See CAM Summary	§ 115.126 § 115.126(1) § 115.126(1)(C) § 115.126(2)	None
L3BOILERCV	PRO	60DDD-BOIL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-1(a)(1) § 60.562-1(a)(1)(i) § 60.562-1(a)(1)(ii)(B) § 60.562-1(a)(1)(iii) § 60.562-1(a)(1)(iii)(A) § 60.562-1(d) § 60.562-1(e)	For each vent stream that emits continuous emissions from affected facility, use procedures in paragraphs (a)(1)(ii)-(iii) for determining which continuous emissions to control as specified.	[G]§ 60.563(a) § 60.563(b)(3) § 60.563(b)(3)(ii) § 60.563(c) § 60.563(d)(1) § 60.563(d)(2) § 60.564(a) § 60.564(a)(1) § 60.564(a)(2) § 60.564(a)(3) [G]§ 60.564(d)	[G]§ 60.563(a) § 60.563(b)(3)(ii) § 60.563(d)(1) § 60.565(a) § 60.565(a)(2) § 60.565(a)(2)(i) [G]§ 60.565(b)(2) § 60.565(d) § 60.565(d)(1) [G]§ 60.565(g) § 60.565(j)	§ 60.565(a) § 60.565(a)(2) § 60.565(a)(2)(i) § 60.565(b)(1) § 60.565(i) § 60.565(j) § 60.565(k) § 60.565(k)(2) § 60.565(k)(3) § 60.565(l)
L3BOILERCV	EP	63FFFF-1	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2455(a)-Table 1.1.a.i § 63.2450(b)	For each Group 1 continuous process vent, the owner or operator must	[G]§ 63.115(d)(2)(v) § 63.115(d)(3)(iii) § 63.2450(g)	§ 63.2450(k)(6) § 63.2525(g) § 63.2525(h)	§ 63.2450(q) § 63.996(b)(2) § 63.996(c)(6)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.2455(a) § 63.2455(b) § 63.2455(b)(1) § 63.982(c) § 63.982(c)(2) § 63.983(a)(1) § 63.983(a)(2) § 63.983(d)(1) § 63.983(d)(1)(i) [G]§ 63.983(d)(2) § 63.983(d)(3) § 63.988(a)(1) § 63.988(a)(2) § 63.988(a)(3) § 63.988(b)(2) § 63.996(c)(1) § 63.996(c)(2) § 63.996(c)(2)(i) § 63.996(c)(3) § 63.996(c)(4) § 63.996(c)(5) § 63.996(c)(6) § 63.997(c)(3)	reduce emissions of total organic HAP by greater than or equal to 98 percent by weight by venting emissions through a closed-vent system to any combination of control devices (except flare).	§ 63.2450(g)(1) § 63.2450(g)(2) [G]§ 63.2450(g)(3) § 63.2450(g)(4) § 63.2450(k)(6) § 63.983(b) [G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3) [G]§ 63.983(c)(1) § 63.983(c)(2) § 63.983(c)(3) § 63.983(d)(1) § 63.983(d)(1)(ii) § 63.996(b)(1) § 63.996(b)(1)(i) § 63.996(b)(2) § 63.997(c)(2) § 63.997(c)(3) § 63.997(c)(3)(iii)	§ 63.983(b) [G]§ 63.983(d)(2) § 63.996(c)(2)(ii) § 63.998(a)(2)(ii)(B)(5) [G]§ 63.998(b)(1) [G]§ 63.998(b)(2) [G]§ 63.998(b)(3) [G]§ 63.998(b)(5) [G]§ 63.998(c)(1) § 63.998(c)(2)(iii) § 63.998(c)(3)(iii) [G]§ 63.998(d)(1) § 63.998(d)(3)(i) § 63.998(d)(3)(ii) § 63.998(d)(5)	§ 63.997(c)(3) [G]§ 63.998(b)(3) [G]§ 63.999(a)(1) [G]§ 63.999(b)(3) § 63.999(b)(5) § 63.999(c)(1) § 63.999(c)(2)(i) § 63.999(c)(6) [G]§ 63.999(c)(6)(i) § 63.999(c)(6)(iv)
L3BOILERCV	EP	63FFFF-2	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2455(a)-Table 1.1.a.i § 63.2450(b) § 63.2455(a) § 63.2455(b) § 63.2455(b)(1) § 63.982(c) § 63.982(c)(2) § 63.983(a)(1) § 63.983(a)(2) § 63.983(d)(1) § 63.983(d)(1)(i) [G]§ 63.983(d)(2) § 63.983(d)(3) § 63.988(a)(1) § 63.988(a)(2)	For each Group 1 continuous process vent, the owner or operator must reduce emissions of total organic HAP by greater than or equal to 98 percent by weight by venting emissions through a closed-vent system to any combination of control devices (except flare).	[G]§ 63.115(d)(2)(v) § 63.115(d)(3)(iii) § 63.2450(g) § 63.2450(g)(1) § 63.2450(g)(2) [G]§ 63.2450(g)(3) § 63.2450(g)(4) § 63.2450(k)(6) § 63.983(b) [G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3) [G]§ 63.983(c)(1) § 63.983(c)(2) § 63.983(c)(3) § 63.983(d)(1)	§ 63.2450(k)(6) § 63.2525(g) § 63.2525(h) § 63.983(b) [G]§ 63.983(d)(2) § 63.996(c)(2)(ii) § 63.998(a)(2)(ii)(B)(5) [G]§ 63.998(b)(1) [G]§ 63.998(b)(2) [G]§ 63.998(b)(3) [G]§ 63.998(b)(5) [G]§ 63.998(c)(1) § 63.998(c)(2)(iii) § 63.998(c)(3)(iii) [G]§ 63.998(d)(1) § 63.998(d)(3)(i)	§ 63.2450(q) § 63.996(b)(2) § 63.996(c)(6) § 63.997(c)(3) [G]§ 63.998(b)(3) [G]§ 63.999(a)(1) [G]§ 63.999(b)(3) § 63.999(b)(5) § 63.999(c)(1) § 63.999(c)(2)(i) § 63.999(c)(6) [G]§ 63.999(c)(6)(i) § 63.999(c)(6)(iv)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.988(a)(3) § 63.988(b)(2) § 63.996(c)(1) § 63.996(c)(2) § 63.996(c)(2)(i) § 63.996(c)(3) § 63.996(c)(4) § 63.996(c)(5) § 63.996(c)(6) § 63.997(c)(3)		§ 63.983(d)(1)(ii) § 63.996(b)(1) § 63.996(b)(1)(i) § 63.996(b)(2) § 63.997(c)(2) § 63.997(c)(3) § 63.997(c)(3)(iii)	§ 63.998(d)(3)(ii) § 63.998(d)(5)	
L3FLARE	CD	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
L3FLARE	EP	R5722-001	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)		§ 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1) [G]§ 115.725(l) § 115.725(m) § 115.725(n) ** See Alternative Requirement		
L3FLARE	CD	60A-1	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(i) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
L3FLARE	CD	60A-2	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(ii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
L3FLARE	CD	63A-1	Opacity	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(i)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
L3FLARE	CD	63A-2	Opacity	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(ii)	minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.			
L3FLARECV	EP	R5722-1	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(c)(1) § 115.722(c)(3) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 2 of this subchapter must not exceed 1,200 pounds of HRVOC per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.725(n) ** See CAM Summary ** See Alternative Requirement	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) [G]§ 115.726(h) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)
L3FLARECV	EP	R5121-2	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.123(a)(1) § 115.910	Alternate methods of demonstrating and documenting continuous compliance with the applicable control requirements or exemption criteria in this division may be approved by the Executive Director in accordance with §115.910 of this title if emission reduction are demonstrated to be substantially equivalent.	[G]§ 115.125 § 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126 § 115.126(2)	None
L3FLARECV	EP	63FFFF-1	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2455(a)-Table 1.1.a.ii § 63.11(b) § 63.2450(b) § 63.2455(a) § 63.2455(b) § 63.2455(b)(1) § 63.982(b)	For each Group 1continuous process vent, the owner or operator must reduce emissions of total organic HAP by venting emissions through a closed vent system to a flare.	[G]§ 63.115(d)(2)(v) § 63.115(d)(3)(iii) § 63.983(b) [G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3) [G]§ 63.983(c)(1) § 63.983(c)(2)	§ 63.2450(f)(2) § 63.2450(f)(2)(i) § 63.2450(f)(2)(ii) § 63.983(b) [G]§ 63.983(d)(2) § 63.987(c) § 63.998(a)(1)(ii) § 63.998(a)(1)(iii)(A)	§ 63.2450(f)(2)(ii) § 63.2450(q) § 63.997(b)(1) § 63.997(c)(3) § 63.998(a)(1)(iii)(A) [G]§ 63.998(b)(3) [G]§ 63.999(a)(1) § 63.999(b)(5)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.983(a)(1) § 63.983(a)(2) § 63.983(d)(1) § 63.983(d)(1)(i) [G]§ 63.983(d)(2) § 63.983(d)(3) § 63.987(a) § 63.997(b)(1) § 63.997(c)(3)		§ 63.983(c)(3) § 63.983(d)(1) § 63.983(d)(1)(ii) § 63.987(c) § 63.997(b) § 63.997(b)(1) § 63.997(c)(2) § 63.997(c)(3) § 63.997(c)(3)(i) § 63.997(c)(3)(ii)	§ 63.998(a)(1)(iii)(B) [G]§ 63.998(b)(1) [G]§ 63.998(b)(2) [G]§ 63.998(b)(3) [G]§ 63.998(b)(5) [G]§ 63.998(d)(1) § 63.998(d)(3)(i) § 63.998(d)(3)(ii) § 63.998(d)(5)	§ 63.999(c)(1) § 63.999(c)(2)(i) § 63.999(c)(3) § 63.999(c)(6) [G]§ 63.999(c)(6)(i) § 63.999(c)(6)(iv) [G]§ 63.999(d)(1) [G]§ 63.999(d)(2)
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)				
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)				
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.788(g) § 115.789(1)(B)
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c).	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.		§ 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	used to satisfy the requirements of this subsection.			
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii)	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § § 115.788(a)(2)(C)(i) § § 115.788(a)(2)(C)(ii) § § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	500 ppmv above background as methane for all components.		[G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ § 115.782(c)(1)(B)(i) § § 115.782(c)(1)(B)(ii) [G]§ § 115.782(c)(1)(B)(iii)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(B)(iv)	defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)		
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) §	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.781(g)(4) § 115.781(g)(5) § 115.781(g)(6) § 115.781(g)(7) § 115.781(g)(8) § 115.781(g)(9) § 115.781(g)(10) § 115.781(g)(11) § 115.781(g)(12) § 115.781(g)(13) § 115.781(g)(14) § 115.781(g)(15) § 115.781(g)(16) § 115.781(g)(17) § 115.781(g)(18) § 115.781(g)(19) § 115.781(g)(20) § 115.781(g)(21) § 115.781(g)(22) § 115.781(g)(23) § 115.781(g)(24) § 115.781(g)(25) § 115.781(g)(26) § 115.781(g)(27) § 115.781(g)(28) § 115.781(g)(29) § 115.781(g)(30) § 115.781(g)(31) § 115.781(g)(32) § 115.781(g)(33) § 115.781(g)(34) § 115.781(g)(35) § 115.781(g)(36) § 115.781(g)(37) § 115.781(g)(38) § 115.781(g)(39) § 115.781(g)(40) § 115.781(g)(41) § 115.781(g)(42) § 115.781(g)(43) § 115.781(g)(44) § 115.781(g)(45) § 115.781(g)(46) § 115.781(g)(47) § 115.781(g)(48) § 115.781(g)(49) § 115.781(g)(50) § 115.781(g)(51) § 115.781(g)(52) § 115.781(g)(53) § 115.781(g)(54) § 115.781(g)(55) § 115.781(g)(56) § 115.781(g)(57) § 115.781(g)(58) § 115.781(g)(59) § 115.781(g)(60) § 115.781(g)(61) § 115.781(g)(62) § 115.781(g)(63) § 115.781(g)(64) § 115.781(g)(65) § 115.781(g)(66) § 115.781(g)(67) § 115.781(g)(68) § 115.781(g)(69) § 115.781(g)(70) § 115.781(g)(71) § 115.781(g)(72) § 115.781(g)(73) § 115.781(g)(74) § 115.781(g)(75) § 115.781(g)(76) § 115.781(g)(77) § 115.781(g)(78) § 115.781(g)(79) § 115.781(g)(80) § 115.781(g)(81) § 115.781(g)(82) § 115.781(g)(83) § 115.781(g)(84) § 115.781(g)(85) § 115.781(g)(86) § 115.781(g)(87) § 115.781(g)(88) § 115.781(g)(89) § 115.781(g)(90) § 115.781(g)(91) § 115.781(g)(92) § 115.781(g)(93) § 115.781(g)(94) § 115.781(g)(95) § 115.781(g)(96) § 115.781(g)(97) § 115.781(g)(98) § 115.781(g)(99) § 115.781(g)(100)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)			§ 115.786(e) § 115.786(g)	
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.788(g)				
L3FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.			
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	based on sight, smell, or sound.			
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10)	No pump seals shall be allowed to have a VOC leak, for more than 15 days	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		[G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(8)				
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	or exuding of process fluid based on sight, smell, or sound.		§ 115.356(5)	
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356(5)	
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.357(1)	[G]§ 115.356(3)(C) § 115.356(5)	
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						this title.			
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
L3FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.168 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h)	Standards: Valves in gas/vapor service and in light liquid service. §63.168(a)-(j)	[G]§ 63.168 [G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(1)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.171 [G]§ 63.175			[G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7)	
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.163 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176	Standards: Pumps in light liquid service. §63.163(a)-(j)	[G]§ 63.163 [G]§ 63.176 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) § 63.181(h)(8)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.167 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Open-ended valves or lines. §63.167(a)-(e).	[G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.174 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in gas/vapor service and in light liquid service. §63.174(a)-(j)	[G]§ 63.174 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.173 § 63.162(a) § 63.162(c)	Standards: Agitators gas/vapor service and in light liquid service.	[G]§ 63.173 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	§63.173(a)-(j).		[G]§ 63.181(d)	[G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.170 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Surge control vessels and bottom receivers.	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.162(h) [G]§ 63.171				[G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Valves in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.166 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Sampling connection systems. §63.166(a)-(c)	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.165 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief device in gas/vapor service. §63.165(a)-(d)	[G]§ 63.165 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.164 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Compressors. §63.164(a)-(i)	[G]§ 63.164 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
L3FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.162(e) § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h)	Equipment that is in organic HAP service less than 300 hours per year is excluded from the requirements of §§63.163 - 63.174 and §63.178 if it is identified as required in §63.181(j).	[G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i) § 63.181(j)	[G]§ 63.182(a) [G]§ 63.182(b)
L3L4205	EP	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
L3L4205	EP	R5121-3	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(1) [G]§ 115.122(a)(4)	A vent gas stream from a low-density polyethylene plant is exempt from §115.121(a)(1) of this title if no more than 1.1 pounds of ethylene per 1,000 pounds of product are emitted from all the vent gas streams associated with the formation, handling, and storage of solidified product.	[G]§ 115.125 § 115.126(2) § 115.126(3)(A)	§ 115.126 § 115.126(2) § 115.126(3) § 115.126(3)(A)	None
L3L4205	EP	63FFFF-1	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2455(a)-Table 1.1.a.ii § 63.11(b) § 63.2450(b) § 63.2455(a) § 63.2455(b) § 63.2455(b)(1) § 63.982(b) § 63.983(a)(1) § 63.983(a)(2) § 63.983(d)(1) § 63.983(d)(1)(i)	For each Group 1continuous process vent, the owner or operator must reduce emissions of total organic HAP by venting emissions through a closed vent system to a flare.	[G]§ 63.115(d)(2)(v) § 63.115(d)(3)(iii) § 63.983(b) [G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3) [G]§ 63.983(c)(1) § 63.983(c)(2) § 63.983(c)(3) § 63.983(d)(1) § 63.983(d)(1)(ii) § 63.987(c)	§ 63.2450(f)(2) § 63.2450(f)(2)(i) § 63.2450(f)(2)(ii) § 63.983(b) [G]§ 63.983(d)(2) § 63.987(c) § 63.998(a)(1)(ii) § 63.998(a)(1)(iii)(A) § 63.998(a)(1)(iii)(B) [G]§ 63.998(b)(1) [G]§ 63.998(b)(2) [G]§ 63.998(b)(3)	§ 63.2450(f)(2)(ii) § 63.2450(q) § 63.997(b)(1) § 63.997(c)(3) § 63.998(a)(1)(iii)(A) [G]§ 63.998(b)(3) [G]§ 63.999(a)(1) § 63.999(b)(5) § 63.999(c)(1) § 63.999(c)(2)(i) § 63.999(c)(3) § 63.999(c)(6)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.983(d)(2) § 63.983(d)(3) § 63.987(a) § 63.997(b)(1) § 63.997(c)(3)		§ 63.997(b) § 63.997(b)(1) § 63.997(c)(2) § 63.997(c)(3) § 63.997(c)(3)(i) § 63.997(c)(3)(ii)	[G]§ 63.998(b)(5) [G]§ 63.998(d)(1) § 63.998(d)(3)(i) § 63.998(d)(3)(ii) § 63.998(d)(5)	[G]§ 63.999(c)(6)(i) § 63.999(c)(6)(iv) [G]§ 63.999(d)(1) [G]§ 63.999(d)(2)
L3RTOBF	EP	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
L3SILOS	EP	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
L3SILOS	EP	R5722-3	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(c)(1) § 115.722(c)(3) § 115.725(a)(2)(A) § 115.725(a)(2)(B) § 115.725(a)(2)(C) § 115.725(a)(2)(D) § 115.725(a)(3) [G]§ 115.725(a)(4) [G]§ 115.725(l) [G]§ 115.726(a)(2)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 2 of this subchapter must not exceed 1,200 pounds of HRVOC per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.725(a) § 115.725(a)(2)(A) § 115.725(a)(2)(B) § 115.725(a)(2)(C) § 115.725(a)(2)(D) § 115.725(a)(3) § 115.725(a)(3)(B) [G]§ 115.725(a)(4) § 115.725(a)(5) [G]§ 115.725(l) § 115.725(n)	§ 115.726(b)(1) § 115.726(b)(2) § 115.726(b)(3) [G]§ 115.726(h) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	[G]§ 115.725(a)(4) § 115.725(a)(5) § 115.725(n) [G]§ 115.726(a)(2)
L3SILOS	EP	R5722-4	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(c)(1) § 115.722(c)(3) § 115.725(a)(1)(A) § 115.725(a)(1)(B)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 2 of this	§ 115.725(a) § 115.725(a)(1)(A) § 115.725(a)(1)(B) § 115.725(a)(1)(C)	§ 115.726(b)(1) § 115.726(b)(2) § 115.726(b)(3) [G]§ 115.726(h)	[G]§ 115.725(a)(4) § 115.725(a)(5) § 115.725(n) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.725(a)(1)(C) § 115.725(a)(3) [G]§ 115.725(a)(4) [G]§ 115.725(l) [G]§ 115.726(a)(2)	subchapter must not exceed 1,200 pounds of HRVOC per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.725(a)(3) § 115.725(a)(3)(B) [G]§ 115.725(a)(4) § 115.725(a)(5) [G]§ 115.725(l) § 115.725(n)	§ 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	
L3SILOS	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(C)	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(C) § 115.126(2)	§ 115.126 § 115.126(1) § 115.126(1)(C) § 115.126(2)	None
L3SILOS	EP	R5121-3	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(1) [G]§ 115.122(a)(4)	A vent gas stream from a low-density polyethylene plant is exempt from §115.121(a)(1) of this title if no more than 1.1 pounds of ethylene per 1,000 pounds of product are emitted from all the vent gas streams associated with the formation, handling, and storage of solidified product.	[G]§ 115.125 § 115.126(2) § 115.126(3)(A)	§ 115.126 § 115.126(2) § 115.126(3) § 115.126(3)(A)	None
L3SILOS	EP	63FFFF-2	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2505(a)(1) § 63.2505 § 63.2505(a)(1)(i) § 63.2505(a)(1)(i)(A) § 63.2505(a)(1)(i)(B) § 63.2505(a)(2) § 63.2505(b)	You must route vent streams through a closed-vent system to a control device that reduces HAP emissions as specified in either §63.2505(a)(1)(i) or (ii).	§ 63.2450(g) § 63.2450(g)(1) § 63.2450(g)(2) [G]§ 63.2450(g)(3) § 63.2450(g)(4) § 63.2505(b) § 63.983(a)(3) § 63.983(a)(3)(i) § 63.983(b)	§ 63.2505(b) § 63.983(a)(3)(i) § 63.983(b) [G]§ 63.983(d)(2) [G]§ 63.998(d)(1)	§ 63.2505(b) § 63.2505(b)(5) § 63.999(c)(2)(i) § 63.999(c)(2)(ii)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.2505(b)(1) § 63.983(a)(1) § 63.983(a)(2) § 63.983(a)(3) § 63.983(a)(3)(i) § 63.983(d)(1) § 63.983(d)(1)(i) [G]§ 63.983(d)(2) § 63.983(d)(3)		[G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3) [G]§ 63.983(b)(4) [G]§ 63.983(c)(1) § 63.983(c)(2) § 63.983(c)(3) § 63.983(d)(1) § 63.983(d)(1)(ii)		
L3V3387	EU	R5112-1	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.113 § 115.910	Alternate means of compliance with the applicable control requirements or exemption criteria in this division may be approved per 30 TAC §115.910, if emission reductions are substantially equal.	** See Alternative Requirement	None	None
L3V3387	EU	63FFFF-1	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2470(a)-Table 4.1.b.iii § 63.11(b) § 63.2450(b) § 63.2470(a) § 63.2470(d) § 63.982(b) § 63.983(a)(1) § 63.983(a)(2) § 63.983(d)(1) § 63.983(d)(1)(i) [G]§ 63.983(d)(2) § 63.983(d)(3) § 63.987(a) § 63.987(b)(1) § 63.987(b)(3) [G]§ 63.997(c)(1) § 63.997(c)(3)	For each Group 1 storage tank for which the maximum true vapor pressure of total HAP at the storage temperature is < 76.6 kilopascals, you may reduce total organic HAP emissions by venting emissions through a closed vent system to a flare.	[G]§ 63.115(d)(2)(v) § 63.115(d)(3)(iii) § 63.2470(c)(1) § 63.983(b) [G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3) [G]§ 63.983(c)(1) § 63.983(c)(2) § 63.983(c)(3) § 63.983(d)(1) § 63.983(d)(1)(ii) [G]§ 63.987(b)(3)(i) § 63.987(b)(3)(ii) § 63.987(b)(3)(iii) § 63.987(b)(3)(iv) § 63.987(c) § 63.997(a) [G]§ 63.997(c)(1) § 63.997(c)(2)	§ 63.2450(f)(2) § 63.2450(f)(2)(i) § 63.2450(f)(2)(ii) § 63.2470(c)(1) § 63.983(b) [G]§ 63.983(d)(2) § 63.987(c) § 63.998(a)(1) [G]§ 63.998(a)(1)(i) § 63.998(a)(1)(ii) § 63.998(a)(1)(iii)(A) § 63.998(a)(1)(iii)(B) [G]§ 63.998(b)(1) [G]§ 63.998(b)(2) [G]§ 63.998(b)(3) [G]§ 63.998(b)(5) [G]§ 63.998(c)(1) [G]§ 63.998(d)(1) § 63.998(d)(3)(i) § 63.998(d)(3)(ii)	§ 63.2450(f)(2)(ii) § 63.2450(q) § 63.2470(d) § 63.997(c)(3) § 63.998(a)(1)(iii)(A) [G]§ 63.998(b)(3) [G]§ 63.999(a)(1) [G]§ 63.999(a)(2) § 63.999(b)(5) § 63.999(c)(1) § 63.999(c)(2)(i) § 63.999(c)(3) § 63.999(c)(6) [G]§ 63.999(c)(6)(i) § 63.999(c)(6)(iv) [G]§ 63.999(d)(1) [G]§ 63.999(d)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 63.997(c)(3) § 63.997(c)(3)(i) § 63.997(c)(3)(ii)	§ 63.998(d)(5)	
L3V3740	EU	R5112-1	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.113 § 115.910	Alternate means of compliance with the applicable control requirements or exemption criteria in this division may be approved per 30 TAC §115.910, if emission reductions are substantially equal.	** See Alternative Requirement	None	None
L3V3740-2	EU	R5112-1	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.113 § 115.910	Alternate means of compliance with the applicable control requirements or exemption criteria in this division may be approved per 30 TAC §115.910, if emission reductions are substantially equal.	** See Alternative Requirement	None	None
L3V4251	EP	R5121-3	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(1) [G]§ 115.122(a)(4)	A vent gas stream from a low-density polyethylene plant is exempt from §115.121(a)(1) of this title if no more than 1.1 pounds of ethylene per 1,000 pounds of product are emitted from all the vent gas streams associated with the formation, handling, and storage of solidified product.	[G]§ 115.125 § 115.126(2) § 115.126(3)(A)	§ 115.126 § 115.126(2) § 115.126(3) § 115.126(3)(A)	None
L3V4367	EU	R5112-2	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.112(e)(1) § 115.112(e)(2) § 115.112(e)(2)(A) § 115.112(e)(2)(B) § 115.112(e)(2)(C)	No person shall place, store, or hold VOC in any storage tank unless the storage tank is capable of maintaining working	§ 115.114(a)(1) § 115.114(a)(1)(A) [G]§ 115.117	§ 115.118(a)(3) § 115.118(a)(5) § 115.118(a)(6)(C) § 115.118(a)(7)	§ 115.114(a)(1)(B) § 115.118(a)(3)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.112(e)(2)(D) § 115.112(e)(2)(F) [G]§ 115.112(e)(2)(I) § 115.114(a)(1)(A)	pressure sufficient at all times to prevent any vapor or gas loss to the atmosphere or is in compliance with the control requirements specified in Table 1 of this paragraph for VOC other than crude oil and condensate or Table 2 of subsection (a)(1) of this paragraph for crude oil and condensate.			
L3V4373	EU	R5112-3	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.111(a)(1)	Except as provided in § 115.118, a storage tank storing VOC with a true vapor pressure less than 1.5 psia is exempt from the requirements of this division.	[G]§ 115.117	§ 115.118(a)(1) § 115.118(a)(5) § 115.118(a)(7)	None
LB1PROCES	EP	R5722-2	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100 dry standard cubic feet per hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this title than 0.5 tpy.	None	§ 115.726(e)(3)(A) § 115.726(j)(1) § 115.726(j)(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
LB1PROCES	EP	R5121-3	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(1) [G]§ 115.122(a)(4)	A vent gas stream from a low-density polyethylene plant is exempt from §115.121(a)(1) of this title if no more than 1.1 pounds of ethylene per 1,000 pounds of product are emitted from all the vent gas streams associated with the formation, handling, and storage of solidified product.	[G]§ 115.125 § 115.126(2) § 115.126(3)(A)	§ 115.126 § 115.126(2) § 115.126(3) § 115.126(3)(A)	None
LBCCRGEN	EU	R7300-ENG4	Exempt	30 TAC Chapter 117, Subchapter B	§ 117.303(a)(6)(D) [G]§ 117.310(f)	Units exempted from the provisions of this division, except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1), and 117.354(a)(5), include stationary gas turbines and stationary internal combustion engines that are used exclusively in emergency situations, except that operation for testing or maintenance purposes is allowed for up to 52 hours per year, based on a rolling 12-month average.	§ 117.8140(a) § 117.8140(a)(3)	§ 117.340(j) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None
LBCCRGEN	EU	60III-3	CO	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4211(f)(1) § 60.4211(f)(2)(i) § 60.4218	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder	None	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 89.112(a)	and is a 2007 model year and later must comply with a CO emission limit of 3.5 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).			
LBCCRGEN	EU	60IIII-3	NMHC and NO _x	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4211(f)(1) § 60.4211(f)(2)(i) § 60.4218 § 89.112(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 75 KW and less than or equal to 560 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with an NMHC+NO _x emission limit of 4.0 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).	None	None	None
LBCCRGEN	EU	60IIII-3	PM	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.112(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a PM emission limit of 0.20 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).	None	None	[G]§ 60.4214(d)
LBCCRGEN	EU	60IIII-3	PM	40 CFR Part 60,	§ 60.4205(b)	Emergency stationary CI	None	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			(Opacity)	Subpart IIII	§ 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4211(f)(1) § 60.4211(f)(2)(i) § 60.4218 § 89.113(a)(1) § 89.113(a)(2) § 89.113(a)(3)	ICE, that are not fire pump engines, with displacement < 10 lpc and not constant-speed engines, with max engine power < 2237 KW and a 2007 model year and later or max engine power > 2237 KW and a 2011 model year and later, must comply with following opacity emission limits: 20% during acceleration, 15% during lugging, 50% during peaks in either acceleration or lugging modes as stated in §60.4202(a)(1)-(2), (b)(2) and §89.113(a)(1)-(3) and §1039.105(b)(1)-(3).			
LBCCRG	EU	63ZZZZ-5	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(c)	Stationary RICE subject to Regulations under 40 CFR Part 60. An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines as applicable. No further requirements apply for such engines under this part.	None	None	None
LBCT	EU	R5760-1	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.767(2)	Any cooling tower heat exchange system in which no individual heat	None	§ 115.766(b) § 115.766(b)(2) § 115.766(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						exchanger has greater than 100 ppmw HRVOCs in the process side fluid is exempt from the requirements of this division, with the exception of the recordkeeping requirements of §115.766(b) and (c) of this title.			
LBFLARE	CD	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
LBFLARE	EP	R5722-001	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) §	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)		§ 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1) [G]§ 115.725(l) § 115.725(m) § 115.725(n) ** See Alternative Requirement		
LBFLARE	CD	60A-1	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(i) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
LBFLARE	CD	60A-2	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(ii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	but not specifically selected for alternative work practice monitoring.	§ 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	[G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) §	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) §	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) §	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) §	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) §	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)				
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.787(b)(1)				
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
LBFUG	EU	R5780-ALL	Highly Reactive	30 TAC Chapter 115, HRVOC	§ 115.781(b)(9) § 115.780(b)	Flanges or other connectors within a petroleum refinery;	§ 115.354(1) § 115.354(10)	§ 115.354(10) § 115.356	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			VOC	Fugitive Emissions	[G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	§ 115.789(1)(B)
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) [G]§ 115.782(c)(1)(B)(iv)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)		
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)			§ 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) §	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
LBFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(3)(B) [G]§ 115.788(g)				
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(1) § 115.357(8) § 115.357(9)	based on sight, smell, or sound.			
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(8) § 115.357(12) § 115.357(8)	background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.357(1)	[G]§ 115.356(3)(C) § 115.356(5)	
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.			
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(12) § 115.357(8)				
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
LBFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(7)	concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B)	40 CFR Part 63,	§ 63.170	Standards: Surge control	[G]§ 63.180(b)	§ 63.181(a)	[G]§ 63.182(a)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			HAPS	Subpart H	§ 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	vessels and bottom receivers.	[G]§ 63.180(d)	[G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.173 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators gas/vapor service and in light liquid service. §63.173(a)-(j).	[G]§ 63.173 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.174 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in gas/vapor service and in light liquid service. §63.174(a)-(j)	[G]§ 63.174 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.163 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176	Standards: Pumps in light liquid service. §63.163(a)-(j)	[G]§ 63.163 [G]§ 63.176 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) § 63.181(h)(8)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.167 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Open-ended valves or lines. §63.167(a)-(e).	[G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
								[G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.168 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Valves in gas/vapor service and in light liquid service. §63.168(a)-(j)	[G]§ 63.168 [G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.162(e) § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h)	Equipment that is in organic HAP service less than 300 hours per year is excluded from the requirements of §§63.163 - 63.174 and §63.178 if it is identified as required in §63.181(j).	[G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i) § 63.181(j)	[G]§ 63.182(a) [G]§ 63.182(b)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.164 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Compressors. §63.164(a)-(i)	[G]§ 63.164 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.165 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief device in gas/vapor service. §63.165(a)-(d)	[G]§ 63.165 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B)	40 CFR Part 63,	[G]§ 63.166	Standards: Sampling	[G]§ 63.180(b)	§ 63.181(a)	[G]§ 63.182(a)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			HAPS	Subpart H	§ 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	connection systems. §63.166(a)-(c)	[G]§ 63.180(d)	[G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Valves in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
LBFWGEN	EU	R7300-ENG4	Exempt	30 TAC Chapter 117, Subchapter B	§ 117.303(a)(6)(D) [G]§ 117.310(f)	Units exempted from the provisions of this division, except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1), and 117.354(a)(5), include stationary gas turbines and stationary internal combustion engines that are used exclusively in emergency situations, except that operation for testing or maintenance purposes is allowed for up to 52 hours per year, based on a rolling 12-month average.	§ 117.8140(a) § 117.8140(a)(3)	§ 117.340(j) § 117.345(f) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
LBFWGEN	EU	60III-3	CO	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 1042.101 § 60.4202(f)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4211(f)(1) § 60.4211(f)(2)(i) § 60.4218	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a displacement of greater than or equal to 10 liters per cylinder and less than 30 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 5.0 g/KW-hr, as stated in 40 CFR 60.4202(e)-(f) and 40 CFR 94.8(a)(2) and 40 CFR 1042.101.	None	None	None
LBFWGEN	EU	60III-3	HC and NO _x	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 1042.101 § 60.4202(f)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4211(f)(1) § 60.4211(f)(2)(i) § 60.4218	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power less than 600 KW and a displacement of greater than or equal to 15 liters per cylinder and less than 20 liters per cylinder and is a 2014 model year and later must comply with an HC+NO _x emission limit of 6.2 g/KW-hr, as stated in 40 CFR 60.4202(f)(2) and 40 CFR 1042.101.	None	None	None
LBFWGEN	EU	60III-3	PM	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 1042.101 § 60.4202(f)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4211(f)(1)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power less than 600 KW and a displacement of greater than or equal to 15 liters per cylinder and less	None	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.4211(f)(2)(i) § 60.4218	than 20 liters per cylinder and is a 2014 model year and later must comply with a PM emission limit of 0.14 g/KW-hr, as stated in 40 CFR 60.4202(f)(2) and 40 CFR 1042.101.			
LBFWGEN	EU	63ZZZZ-5	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(b)(1) § 63.6595(c) § 63.6640(f)(1) § 63.6640(f)(2) § 63.6640(f)(2)(i) § 63.6640(f)(3)	An affected source which meets either of the criteria in paragraphs §63.6590(b)(1)(i)-(ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of §63.6645(f).	None	None	§ 63.6645(f)
LBSUBGEN	EU	R7300-ENG4	Exempt	30 TAC Chapter 117, Subchapter B	§ 117.303(a)(6)(D) [G]§ 117.310(f)	Units exempted from the provisions of this division, except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1), and 117.354(a)(5), include stationary gas turbines and stationary internal combustion engines that are used exclusively in emergency situations, except that operation for testing or maintenance purposes is allowed for up to 52 hours per year, based on a rolling 12-month average.	§ 117.8140(a) § 117.8140(a)(3)	§ 117.340(j) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None
LBSUBGEN	EU	60IIII-3	CO	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 1042.101	Owners and operators of emergency stationary CI	None	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.4202(f)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4211(f)(1) § 60.4211(f)(2)(i) § 60.4218	ICE, that are not fire pump engines, with a displacement of greater than or equal to 10 liters per cylinder and less than 30 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 5.0 g/KW-hr, as stated in 40 CFR 60.4202(e)-(f) and 40 CFR 94.8(a)(2) and 40 CFR 1042.101.			
LBSUBGEN	EU	60III-3	HC and NO _x	40 CFR Part 60, Subpart III	§ 60.4205(b) § 1042.101 § 60.4202(f)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4211(f)(1) § 60.4211(f)(2)(i) § 60.4218	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power less than 600 KW and a displacement of greater than or equal to 15 liters per cylinder and less than 20 liters per cylinder and is a 2014 model year and later must comply with an HC+NO _x emission limit of 6.2 g/KW-hr, as stated in 40 CFR 60.4202(f)(2) and 40 CFR 1042.101.	None	None	None
LBSUBGEN	EU	60III-3	PM	40 CFR Part 60, Subpart III	§ 60.4205(b) § 1042.101 § 60.4202(f)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4211(f)(1) § 60.4211(f)(2)(i) § 60.4218	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power less than 600 KW and a displacement of greater than or equal to 15 liters per cylinder and less than 20 liters per cylinder and is a 2014 model year	None	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						and later must comply with a PM emission limit of 0.14 g/KW-hr, as stated in 40 CFR 60.4202(f)(2) and 40 CFR 1042.101.			
LBSUBGEN	EU	63ZZZZ-5	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(b)(1) § 63.6595(c) § 63.6640(f)(1) § 63.6640(f)(2) § 63.6640(f)(2)(i) § 63.6640(f)(3)	An affected source which meets either of the criteria in paragraphs §63.6590(b)(1)(i)-(ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of §63.6645(f).	None	None	§ 63.6645(f)
LBUNIT	EP	R5722-1	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(c)(1) § 115.722(c)(3) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 2 of this subchapter must not exceed 1,200 pounds of HRVOC per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.725(n) ** See CAM Summary ** See Alternative Requirement	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) [G]§ 115.726(h) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)
LBUNIT	EP	R5722-5	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(c)(1) § 115.722(c)(3) § 115.725(a)(2)(A) § 115.725(a)(2)(B) § 115.725(a)(2)(C) § 115.725(a)(2)(D) § 115.725(a)(3) [G]§ 115.725(a)(4) [G]§ 115.725(l) [G]§ 115.726(a)(2)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 2 of this subchapter must not exceed 1,200 pounds of HRVOC per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.725(a) § 115.725(a)(2)(A) § 115.725(a)(2)(B) § 115.725(a)(2)(C) § 115.725(a)(2)(D) § 115.725(a)(3) § 115.725(a)(3)(B) [G]§ 115.725(a)(4) § 115.725(a)(5) [G]§ 115.725(l) § 115.725(n)	§ 115.726(b)(1) § 115.726(b)(2) § 115.726(b)(3) [G]§ 115.726(h) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	[G]§ 115.725(a)(4) § 115.725(a)(5) § 115.725(n) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
LBUNIT	EP	R5121-BOIL	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(C)	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(C) § 115.126(2) ** See CAM Summary	§ 115.126 § 115.126(1) § 115.126(1)(C) § 115.126(2)	None
LBUNIT	EP	R5121-FLR	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.123(a)(1) § 115.910	Alternate methods of demonstrating and documenting continuous compliance with the applicable control requirements or exemption criteria in this division may be approved by the Executive Director in accordance with §115.910 of this title if emission reduction are demonstrated to be substantially equivalent.	[G]§ 115.125 § 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126 § 115.126(2)	None
MONHEL1C T	EU	63FFFF	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2490(a)-Table10 § 63.104(a) [G]§ 63.104(d) § 63.104(e) § 63.104(e)(1) [G]§ 63.104(e)(2) § 63.2490(a) § 63.2490(b) § 63.2490(c)	For each heat exchange system, as defined in §63.101, comply with the requirements of §63.104 and the requirements referenced therein except as specified in §63.2490.	[G]§ 63.104(b)	[G]§ 63.104(e)(2) [G]§ 63.104(f)(1)	[G]§ 63.104(f)(2)
MRU3745	EU	R5112-1	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.112(e)(1)	No person shall place, store, or hold VOC in any storage tank unless the	[G]§ 115.117 ** See Periodic Monitoring	§ 115.118(a)(5) § 115.118(a)(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						storage tank is capable of maintaining working pressure sufficient at all times to prevent any vapor or gas loss to the atmosphere or is in compliance with the control requirements specified in Table 1 of this paragraph for VOC other than crude oil and condensate or Table 2 of subsection (a)(1) of this paragraph for crude oil and condensate.	Summary		
MRU3747	EU	R5112-1	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.112(e)(1)	No person shall place, store, or hold VOC in any storage tank unless the storage tank is capable of maintaining working pressure sufficient at all times to prevent any vapor or gas loss to the atmosphere or is in compliance with the control requirements specified in Table 1 of this paragraph for VOC other than crude oil and condensate or Table 2 of subsection (a)(1) of this paragraph for crude oil and condensate.	[G]§ 115.117 ** See Periodic Monitoring Summary	§ 115.118(a)(5) § 115.118(a)(7)	None
MRU3747	EU	63FFFF-1	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2470(a)-Table 4.1.b.iii § 63.11(b) § 63.2450(b) § 63.2470(a) § 63.2470(d) § 63.982(b)	For each Group 1 storage tank for which the maximum true vapor pressure of total HAP at the storage temperature is < 76.6 kilopascals, you may reduce total organic HAP emissions	[G]§ 63.115(d)(2)(v) § 63.115(d)(3)(iii) § 63.2470(c)(1) § 63.983(b) [G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3)	§ 63.2450(f)(2) § 63.2450(f)(2)(i) § 63.2450(f)(2)(ii) § 63.2470(c)(1) § 63.983(b) [G]§ 63.983(d)(2) § 63.987(c)	§ 63.2450(f)(2)(ii) § 63.2450(q) § 63.2470(d) § 63.997(c)(3) § 63.998(a)(1)(iii)(A) [G]§ 63.998(b)(3) [G]§ 63.999(a)(1)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.983(a)(1) § 63.983(a)(2) § 63.983(d)(1) § 63.983(d)(1)(i) [G]§ 63.983(d)(2) § 63.983(d)(3) § 63.987(a) § 63.987(b)(1) § 63.987(b)(3) [G]§ 63.997(c)(1) § 63.997(c)(3)	by venting emissions through a closed vent system to a flare.	[G]§ 63.983(c)(1) § 63.983(c)(2) § 63.983(c)(3) § 63.983(d)(1) § 63.983(d)(1)(ii) [G]§ 63.987(b)(3)(i) § 63.987(b)(3)(ii) § 63.987(b)(3)(iii) § 63.987(b)(3)(iv) § 63.987(c) § 63.997(a) [G]§ 63.997(c)(1) § 63.997(c)(2) § 63.997(c)(3) § 63.997(c)(3)(i) § 63.997(c)(3)(ii)	§ 63.998(a)(1) [G]§ 63.998(a)(1)(i) § 63.998(a)(1)(ii) § 63.998(a)(1)(iii)(A) § 63.998(a)(1)(iii)(B) [G]§ 63.998(b)(1) [G]§ 63.998(b)(2) [G]§ 63.998(b)(3) [G]§ 63.998(b)(5) [G]§ 63.998(c)(1) [G]§ 63.998(d)(1) § 63.998(d)(3)(i) § 63.998(d)(3)(ii) § 63.998(d)(5)	[G]§ 63.999(a)(2) § 63.999(b)(5) § 63.999(c)(1) § 63.999(c)(2)(i) § 63.999(c)(3) § 63.999(c)(6) [G]§ 63.999(c)(6)(i) § 63.999(c)(6)(iv) [G]§ 63.999(d)(1) [G]§ 63.999(d)(2)
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material,	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(iii)(I) § 115.783(4)(A)(iii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)			§ 115.786(g) [G]§ 115.788(g)	
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						500 ppmv above background as methane for all components.	§ 115.789(1)(B)		
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
MRUFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a)	All compressors that are equipped with a shaft sealing system that	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.		§ 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.			
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355 § 115.357(1)	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(A) § 115.352(1)	No valves shall be allowed to have a VOC leak, for	§ 115.354(1) § 115.354(2)	§ 115.352(7) § 115.356	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8) § 115.357(9)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(1)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(12) § 115.357(8)				
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	or exuding of process fluid based on sight, smell, or sound.			
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		[G]§ 115.356(3)(C) § 115.356(5)	
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
MRUFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
MRUFUG	EU	63H-ALL	112(B)	40 CFR Part 63,	§ 63.162(e)	Equipment that is in organic	[G]§ 63.180(d)	§ 63.181(a)	[G]§ 63.182(a)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			HAPS	Subpart H	§ 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h)	HAP service less than 300 hours per year is excluded from the requirements of §§63.163 - 63.174 and §63.178 if it is identified as required in §63.181(j).		[G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i) § 63.181(j)	[G]§ 63.182(b)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.168 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Valves in gas/vapor service and in light liquid service. §63.168(a)-(j)	[G]§ 63.168 [G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.165 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief device in gas/vapor service. §63.165(a)-(d)	[G]§ 63.165 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.166 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Sampling connection systems. §63.166(a)-(c)	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Valves in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B)	40 CFR Part 63,	§ 63.170	Standards: Surge control	[G]§ 63.180(b)	§ 63.181(a)	[G]§ 63.182(a)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			HAPS	Subpart H	§ 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	vessels and bottom receivers.	[G]§ 63.180(d)	[G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.173 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators gas/vapor service and in light liquid service. §63.173(a)-(j).	[G]§ 63.173 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.174 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in gas/vapor service and in light liquid service. §63.174(a)-(j)	[G]§ 63.174 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.163 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176	Standards: Pumps in light liquid service. §63.163(a)-(j)	[G]§ 63.163 [G]§ 63.176 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) § 63.181(h)(8)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.167 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Open-ended valves or lines. §63.167(a)-(e).	[G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
								[G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	
MRUFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.164 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Compressors. §63.164(a)-(i)	[G]§ 63.164 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
PAINT	PRO	R5422-1	VOC	30 TAC Chapter 115, Surface Coating Operations	§ 115.421(8)(A) § 115.421 § 115.421(8)(B) § 115.421(8)(C) § 115.426	VOC emissions from the coating of miscellaneous metal parts and products shall not exceed 3.5 lbs/gal (0.42 kg/L) of coating (minus water and exempt solvent) delivered as an extreme performance coating, including chemical milling maskants.	§ 115.424(a) § 115.424(b) [G]§ 115.425(1) § 115.425(6) [G]§ 115.426(1)	§ 115.426 [G]§ 115.426(1)	None
PAINT	PRO	R5422-2	VOC	30 TAC Chapter 115, Surface Coating Operations	§ 115.421(8)(A) § 115.421 § 115.421(8)(B) § 115.421(8)(C) § 115.426	VOC emissions from the coating of miscellaneous metal parts and products shall not exceed 3.0 lbs/gal (0.36 kg/L) of coating (minus water and exempt solvent) delivered for all other coating applications, including high-bake coatings.	§ 115.424(a) § 115.424(b) [G]§ 115.425(1) § 115.425(6) [G]§ 115.426(1)	§ 115.426 [G]§ 115.426(1)	None
PRO-AB3RX	PRO	60DDD-BOIL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-1(a)(1) § 60.562-1(a)(1)(i) § 60.562-1(a)(1)(i)(B) § 60.562-1(a)(1)(iii) § 60.562-	For each vent stream that emits continuous emissions from affected facility, use procedures in paragraphs (a)(1)(ii)-(iii) for determining which continuous emissions	[G]§ 60.563(a) § 60.563(b)(3) § 60.563(b)(3)(ii) § 60.563(c) § 60.563(d)(1) § 60.563(d)(2)	[G]§ 60.563(a) § 60.563(b)(3)(ii) § 60.563(d)(1) § 60.565(a) § 60.565(a)(2) § 60.565(a)(2)(i)	§ 60.565(a) § 60.565(a)(2) § 60.565(a)(2)(i) § 60.565(b)(1) § 60.565(i) § 60.565(j)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					1(a)(1)(iii)(A) § 60.562-1(d) § 60.562-1(e)	to control as specified.	§ 60.564(a) § 60.564(a)(1) § 60.564(a)(2) § 60.564(a)(3) [G]§ 60.564(d)	[G]§ 60.565(b)(2) § 60.565(d) § 60.565(d)(1) [G]§ 60.565(g) § 60.565(j)	§ 60.565(k) § 60.565(k)(2) § 60.565(k)(3) § 60.565(l)
PRO-AB3RX	PRO	60DDD-FLR	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-1(a)(1) § 60.18 § 60.562-1(a)(1)(i) § 60.562-1(a)(1)(i)(C) § 60.562-1(a)(1)(iii) § 60.562-1(a)(1)(iii)(A) § 60.562-1(d) § 60.562-1(e)	For each vent stream that emits continuous emissions from affected facility, use procedures in paragraphs (a)(1)(ii)-(iii) for determining which continuous emissions to control as specified.	[G]§ 60.563(a) § 60.563(b) § 60.563(b)(2)(i) § 60.563(c) § 60.563(d)(1) § 60.563(d)(2) § 60.564(a) § 60.564(a)(1) § 60.564(a)(3) [G]§ 60.564(d) [G]§ 60.564(e) [G]§ 60.564(f) [G]§ 60.564(g)	[G]§ 60.563(a) § 60.563(d)(1) § 60.565(a) [G]§ 60.565(a)(3) [G]§ 60.565(b)(2) [G]§ 60.565(e) [G]§ 60.565(g) § 60.565(j)	§ 60.565(a) [G]§ 60.565(a)(3) § 60.565(b)(1) § 60.565(i) § 60.565(j) § 60.565(k) § 60.565(k)(2) § 60.565(k)(4) § 60.565(l)
PRO-LB1	PRO	60DDD-ATM	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.560(g)	Vent streams emitting continuous emissions with uncontrolled annual emissions of < 1.6 Mg/yr (1.76 Tons/yr) or with weight % TOC of < 0.10 % from facilities as specified, exempted from §60.562-1(a)(1).	[G]§ 60.564(d)	§ 60.565(a) § 60.565(a)(10) § 60.565(h)	§ 60.565(a) § 60.565(a)(10) § 60.565(k) § 60.565(k)(6) § 60.565(k)(7)
PRO-LB1	PRO	60DDD-BOIL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-1(a)(1) § 60.562-1(a)(1)(i) § 60.562-1(a)(1)(i)(B) § 60.562-1(a)(1)(iii) § 60.562-1(a)(1)(iii)(A) § 60.562-1(d) § 60.562-1(e)	For each vent stream that emits continuous emissions from affected facility, use procedures in paragraphs (a)(1)(ii)-(iii) for determining which continuous emissions to control as specified.	[G]§ 60.563(a) § 60.563(b)(3) § 60.563(b)(3)(ii) § 60.563(c) § 60.563(d)(1) § 60.563(d)(2) § 60.564(a) § 60.564(a)(1) § 60.564(a)(2) § 60.564(a)(3) [G]§ 60.564(d)	[G]§ 60.563(a) § 60.563(b)(3)(ii) § 60.563(d)(1) § 60.565(a) § 60.565(a)(2) § 60.565(a)(2)(i) [G]§ 60.565(b)(2) § 60.565(d) § 60.565(d)(1) [G]§ 60.565(g) § 60.565(j)	§ 60.565(a) § 60.565(a)(2) § 60.565(a)(2)(i) § 60.565(b)(1) § 60.565(i) § 60.565(j) § 60.565(k) § 60.565(k)(2) § 60.565(k)(3) § 60.565(l)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
PRO-LB1	PRO	60DDD-FLR	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-1(a)(1) § 60.562-1(a)(1)(ii) § 60.562-1(d) § 60.562-1(e)	For each vent stream that emits continuous emissions from affected facility, use procedures in paragraphs (a)(1)(ii)-(iii) for determining which continuous emissions to control as specified.	[G]§ 60.563(a) § 60.563(d)(1) § 60.563(d)(2) § 60.564(a) § 60.564(a)(1) § 60.564(a)(3) [G]§ 60.564(d)	[G]§ 60.563(a) § 60.563(d)(1) § 60.565(a) [G]§ 60.565(b)(2) [G]§ 60.565(g) § 60.565(j)	§ 60.565(a) § 60.565(b)(1) § 60.565(i) § 60.565(j) § 60.565(k) § 60.565(k)(2) § 60.565(l)
PRO-Q1	EU	60DDD-CIVCF	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-1(a)(1) § 60.18 § 60.562-1(a)(1)(i) § 60.562-1(a)(1)(i)(C) § 60.562-1(a)(1)(iii) § 60.562-1(a)(1)(iii)(A) § 60.562-1(d) § 60.562-1(e)	For each vent stream that emits continuous emissions from affected facility, use procedures in paragraphs (a)(1)(ii)-(iii) for determining which continuous emissions to control as specified.	[G]§ 60.563(a) § 60.563(b) § 60.563(b)(2)(i) § 60.563(c) § 60.563(d)(1) § 60.563(d)(2) § 60.564(a) § 60.564(a)(1) § 60.564(a)(3) [G]§ 60.564(d) [G]§ 60.564(e) [G]§ 60.564(f) [G]§ 60.564(g)	[G]§ 60.563(a) § 60.563(d)(1) § 60.565(a) [G]§ 60.565(a)(3) [G]§ 60.565(b)(2) [G]§ 60.565(e) [G]§ 60.565(g) § 60.565(j)	§ 60.565(a) [G]§ 60.565(a)(3) § 60.565(b)(1) § 60.565(i) § 60.565(j) § 60.565(k) § 60.565(k)(2) § 60.565(k)(4) § 60.565(l)
PRO-Q1	EU	60DDD-CIVCF	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-1(a)(2) [G]§ 60.562-1(a)(2)(i) § 60.562-1(d) § 60.562-1(e)	Each vent stream that emits intermittent emissions as defined in §60.560-1(a)(1) shall be controlled as specified; prior to control modification/reconstruction/replacement, the vent stream is exempted.	[G]§ 60.563(a) § 60.563(b) § 60.563(b)(2)(ii) § 60.563(c) § 60.563(d)(1) § 60.563(d)(2) § 60.564(a) § 60.564(a)(1) § 60.564(a)(3) [G]§ 60.564(e)	[G]§ 60.563(a) § 60.563(d)(1) § 60.565(a) [G]§ 60.565(a)(5) [G]§ 60.565(b)(2) [G]§ 60.565(e) [G]§ 60.565(g) § 60.565(j)	§ 60.565(a) [G]§ 60.565(a)(5) § 60.565(b)(1) § 60.565(i) § 60.565(j) § 60.565(k) § 60.565(k)(2) § 60.565(k)(4) § 60.565(l)
PRO-Q1	EU	60DDD-CIVINC	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-1(a)(2) § 60.562-1(a)(2)(ii) § 60.562-1(d) § 60.562-1(e)	Each vent stream that emits intermittent emissions as defined in §60.560-1(a)(1) shall be controlled as specified; prior to control modification/reconstruction/replacement, the vent stream is exempted.	[G]§ 60.563(a) § 60.563(b)(1)(i) § 60.563(c) § 60.563(d)(1) § 60.563(d)(2) § 60.564(a) § 60.564(a)(1) § 60.564(a)(3)	[G]§ 60.563(a) § 60.563(d)(1) § 60.565(a) § 60.565(a)(4) [G]§ 60.565(b)(2) [G]§ 60.565(g) § 60.565(j)	§ 60.565(a) § 60.565(a)(4) § 60.565(b)(1) § 60.565(i) § 60.565(j) § 60.565(k) § 60.565(k)(2) § 60.565(l)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
PRO-Q1	EU	60DDD-CIVINC	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-1(a)(1) § 60.562-1(a)(1)(i) § 60.562-1(a)(1)(i)(A) § 60.562-1(a)(1)(iii) § 60.562-1(a)(1)(iii)(A) § 60.562-1(d) § 60.562-1(e)	For each vent stream that emits continuous emissions from affected facility, use procedures in paragraphs (a)(1)(ii)-(iii) for determining which continuous emissions to control as specified.	[G]§ 60.563(a) § 60.563(b) § 60.563(b)(1)(i) § 60.563(c) § 60.563(d)(1) § 60.563(d)(2) § 60.564(a) § 60.564(a)(1) § 60.564(a)(3) [G]§ 60.564(b) [G]§ 60.564(c) [G]§ 60.564(d)	[G]§ 60.563(a) § 60.563(d)(1) § 60.565(a) [G]§ 60.565(a)(1) [G]§ 60.565(b)(2) § 60.565(c) § 60.565(c)(1) § 60.565(c)(2) § 60.565(c)(2)(i) [G]§ 60.565(g) § 60.565(j)	§ 60.565(a) [G]§ 60.565(a)(1) § 60.565(b)(1) § 60.565(i) § 60.565(j) § 60.565(k) § 60.565(k)(1) § 60.565(k)(2) § 60.565(l)
PRO-Q1	PRO	60DDD-CVU	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-1(a)(1) § 60.562-1(a)(1)(ii) § 60.562-1(d) § 60.562-1(e)	For each vent stream that emits continuous emissions from affected facility, use procedures in paragraphs (a)(1)(ii)-(iii) for determining which continuous emissions to control as specified.	[G]§ 60.563(a) § 60.563(d)(1) § 60.563(d)(2) § 60.564(a) § 60.564(a)(1) § 60.564(a)(3) [G]§ 60.564(d)	[G]§ 60.563(a) § 60.563(d)(1) § 60.565(a) [G]§ 60.565(b)(2) [G]§ 60.565(g) § 60.565(j)	§ 60.565(a) § 60.565(b)(1) § 60.565(i) § 60.565(j) § 60.565(k) § 60.565(k)(2) § 60.565(l)
PRO-Q1	PRO	60DDD-EV	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.560(h)	Emergency vent streams, as defined in §60.561, from a new, modified, or reconstructed polypropylene or polyethylene affected facility are exempt from the requirements of §60.562-1(a)(2).	None	None	None
PROAB3	PRO	63FFFF-1	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2440(a) § 63.2450(a) § 63.2450(l)	This subpart applies to each miscellaneous organic chemical manufacturing affected source.	§ 63.2445(d)	§ 63.2525 § 63.2525(a) [G]§ 63.2525(b) § 63.2525(c) § 63.2525(f) § 63.2525(j)	§ 63.2435(d) § 63.2445(c) § 63.2450(g)(5) § 63.2450(m) § 63.2450(m)(1) § 63.2450(m)(2) § 63.2515(a) § 63.2515(b)(1) § 63.2515(c) § 63.2520(a) [G]§ 63.2520(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
									[G]§ 63.2520(c) [G]§ 63.2520(d) § 63.2520(e) § 63.2520(e)(1) [G]§ 63.2520(e)(10) § 63.2520(e)(2) § 63.2520(e)(3) § 63.2520(e)(4) § 63.2520(e)(5) § 63.2520(e)(5)(i) [G]§ 63.2520(e)(5)(ii) [G]§ 63.2520(e)(5)(iii) § 63.2520(e)(6) § 63.2520(e)(7) § 63.2520(e)(9)
PROAB3	EP	63FFFF-3	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2455(a)-Table 1.1.a.ii § 63.11(b) § 63.2450(b) § 63.2455(a) § 63.2455(b) § 63.2455(b)(1) § 63.982(b) § 63.983(a)(1) § 63.983(a)(2) § 63.983(d)(1) § 63.983(d)(1)(i) [G]§ 63.983(d)(2) § 63.983(d)(3) § 63.987(a) § 63.997(b)(1) § 63.997(c)(3)	For each Group 1continuous process vent, the owner or operator must reduce emissions of total organic HAP by venting emissions through a closed vent system to a flare.	[G]§ 63.115(d)(2)(v) § 63.115(d)(3)(iii) § 63.983(b) [G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3) [G]§ 63.983(c)(1) § 63.983(c)(2) § 63.983(c)(3) § 63.983(d)(1) § 63.983(d)(1)(ii) § 63.987(c) § 63.997(b) § 63.997(b)(1) § 63.997(c)(2) § 63.997(c)(3) § 63.997(c)(3)(i) § 63.997(c)(3)(ii)	§ 63.2450(f)(2) § 63.2450(f)(2)(i) § 63.2450(f)(2)(ii) § 63.983(b) [G]§ 63.983(d)(2) § 63.987(c) § 63.998(a)(1)(ii) § 63.998(a)(1)(iii)(A) § 63.998(a)(1)(iii)(B) [G]§ 63.998(b)(1) [G]§ 63.998(b)(2) [G]§ 63.998(b)(3) [G]§ 63.998(b)(5) [G]§ 63.998(d)(1) § 63.998(d)(3)(i) § 63.998(d)(3)(ii) § 63.998(d)(5)	§ 63.2450(f)(2)(ii) § 63.2450(q) § 63.997(b)(1) § 63.997(c)(3) § 63.998(a)(1)(iii)(A) [G]§ 63.998(b)(3) [G]§ 63.999(a)(1) § 63.999(b)(5) § 63.999(c)(1) § 63.999(c)(2)(i) § 63.999(c)(3) § 63.999(c)(6) [G]§ 63.999(c)(6)(i) § 63.999(c)(6)(iv) [G]§ 63.999(d)(1) [G]§ 63.999(d)(2)
PW7605JB	EU	R7ICI-1	Exempt	30 TAC Chapter 117, Subchapter B	§ 117.303(a)(6)(D) [G]§ 117.310(f)	Units exempted from the provisions of this division, except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10),	§ 117.8140(a) § 117.8140(a)(3)	§ 117.340(j) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						117.350(c)(1), and 117.354(a)(5), include stationary gas turbines and stationary internal combustion engines that are used exclusively in emergency situations, except that operation for testing or maintenance purposes is allowed for up to 52 hours per year, based on a rolling 12-month average.			
PW7605JC	EU	R7ICI-1	Exempt	30 TAC Chapter 117, Subchapter B	§ 117.303(a)(6)(D) [G]§ 117.310(f)	Units exempted from the provisions of this division, except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1), and 117.354(a)(5), include stationary gas turbines and stationary internal combustion engines that are used exclusively in emergency situations, except that operation for testing or maintenance purposes is allowed for up to 52 hours per year, based on a rolling 12-month average.	§ 117.8140(a) § 117.8140(a)(3)	§ 117.340(j) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None
PW7614JA	EU	R7ICI-1	Exempt	30 TAC Chapter 117, Subchapter B	§ 117.303(a)(6)(D) [G]§ 117.310(f)	Units exempted from the provisions of this division, except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1), and 117.354(a)(5), include	§ 117.8140(a) § 117.8140(a)(3)	§ 117.340(j) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						stationary gas turbines and stationary internal combustion engines that are used exclusively in emergency situations, except that operation for testing or maintenance purposes is allowed for up to 52 hours per year, based on a rolling 12-month average.			
PW7614JA	EU	63ZZZZ-2	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6602-Table2c.1 § 63.6595(a)(1) § 63.6605(a) § 63.6605(b) § 63.6625(e) § 63.6625(h) § 63.6625(i) § 63.6640(f)(1) § 63.6640(f)(2) § 63.6640(f)(2)(i) § 63.6640(f)(3)	For each existing emergency stationary CI RICE and black start stationary CI RICE, located at a major source, you must comply with the requirements as specified in Table 2c.1.a-c.	§ 63.6625(f) § 63.6625(i) § 63.6640(a) § 63.6640(a)-Table6.9.a.i § 63.6640(a)-Table6.9.a.ii	§ 63.6625(i) § 63.6655(d) § 63.6655(e) § 63.6655(f) § 63.6660(a) § 63.6660(b) § 63.6660(c)	§ 63.6640(e) § 63.6650(f)
PWBLAST	EU	R73010-ENG3	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(B)	CO emissions must not exceed 3.0 g/hp-hr for stationary internal combustion engines.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.8000(b) § 117.8000(c) § 117.8000(c)(2) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)		
PWBLAST	EU	R73010-ENG3	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(9)(E)(v) (III) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) [G]§ 117.310(f) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(2)(C) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.340(p)(2)(A) § 117.340(p)(2)(B) § 117.340(p)(2)(C) § 117.8000(b) § 117.8000(c) § 117.8000(c)(1) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(3)(B) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) § 117.340(p)(2)(D) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
PWBLAST	EU	60III-2	CO	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a)	Owners and operators of non-emergency stationary CI ICE with a maximum	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	engine power greater than or equal to 37 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 5.0 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102 and 40 CFR 1039.101.			
PWBLAST	EU	60III-2	NO _x	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 56 KW but less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2014 model year and later must comply with a NO _x emission limit of 0.40 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	§ 60.4209(b)	§ 60.4214(c)	None
PWBLAST	EU	60III-2	Nonmethane Hydrocarbons	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 56 KW but less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2014 model year and later must comply with an NMHC	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						emission limit of 0.19 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.			
PWBLAST	EU	60IIII-2	PM	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 75 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2014 model year and later must comply with a PM emission limit of 0.02g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	§ 60.4209(b)	§ 60.4214(c)	None
PWBLAST	EU	63ZZZZ-4	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(c)	Stationary RICE subject to Regulations under 40 CFR Part 60. An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines as applicable. No further requirements apply for such engines under this part.	None	None	None
PWCWELL	EU	R7300-	Exempt	30 TAC Chapter	§ 117.303(a)(6)(D)	Units exempted from the	§ 117.8140(a)	§ 117.340(j)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ENG		117, Subchapter B	[G]§ 117.310(f)	provisions of this division, except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1), and 117.354(a)(5), include stationary gas turbines and stationary internal combustion engines that are used exclusively in emergency situations, except that operation for testing or maintenance purposes is allowed for up to 52 hours per year, based on a rolling 12-month average.	§ 117.8140(a)(3)	[G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	
PWCWELL	EU	63ZZZZ-2	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6602-Table2c.1 § 63.6595(a)(1) § 63.6605(a) § 63.6605(b) § 63.6625(e) § 63.6625(h) § 63.6625(i) § 63.6640(f)(1) § 63.6640(f)(2) § 63.6640(f)(2)(i) § 63.6640(f)(3)	For each existing emergency stationary CI RICE and black start stationary CI RICE, located at a major source, you must comply with the requirements as specified in Table 2c.1.a-c.	§ 63.6625(f) § 63.6625(i) § 63.6640(a) § 63.6640(a)-Table6.9.a.i § 63.6640(a)-Table6.9.a.ii	§ 63.6625(i) § 63.6655(d) § 63.6655(e) § 63.6655(f) § 63.6660(a) § 63.6660(b) § 63.6660(c)	§ 63.6640(e) § 63.6650(f)
PWW321	EU	R7300-ENG2	Exempt	30 TAC Chapter 117, Subchapter B	§ 117.303(a)(6)(D)	Units exempted from the provisions of this division, except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1), and 117.354(a)(5), include stationary gas turbines and stationary internal	§ 117.8140(a) § 117.8140(a)(3)	§ 117.340(j) [G]§ 117.345(f)(6)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						combustion engines that are used exclusively in emergency situations, except that operation for testing or maintenance purposes is allowed for up to 52 hours per year, based on a rolling 12-month average.			
PWW321	EU	60JJJJ-1	CO	40 CFR Part 60, Subpart JJJJ	§ 60.4233(c) § 1048.101(c) § 60.4231(c) § 60.4233(h) § 60.4234 § 60.4243(a) § 60.4243(a)(1) [G]§ 60.4243(d) § 60.4243(g) § 60.4246	Owners and operators of stationary emergency SI ICE with a maximum engine power greater than or equal to 97 KW that are rich burn engines that use LPG and were manufactured on or after 01/01/2009 must comply with a CO emission limit of 6.5 g/KW-hr, as stated in 40 CFR 60.4231(c) and 40 CFR 1048.101(c).	§ 60.4237(b)	§ 60.4243(a)(1) § 60.4245(a)(1) § 60.4245(a)(2) § 60.4245(a)(3) § 60.4245(b)	[G]§ 60.4245(e)
PWW321	EU	60JJJJ-1	HC and NO _x	40 CFR Part 60, Subpart JJJJ	§ 60.4233(c) § 1048.101(c) § 60.4231(c) § 60.4233(h) § 60.4234 § 60.4243(a) § 60.4243(a)(1) [G]§ 60.4243(d) § 60.4243(g) § 60.4246	Owners and operators of stationary emergency SI ICE with a maximum engine power greater than or equal to 97 KW that are rich burn engines that use LPG and were manufactured on or after 01/01/2009 must comply with an HC+NO _x emission limit of 3.8 g/KW-hr, as stated in 40 CFR 60.4231(c) and 40 CFR 1048.101(c).	§ 60.4237(b)	§ 60.4243(a)(1) § 60.4245(a)(1) § 60.4245(a)(2) § 60.4245(a)(3) § 60.4245(b)	[G]§ 60.4245(e)
PWW321	EU	63ZZZZ-3	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(c)	Stationary RICE subject to Regulations under 40 CFR Part 60. An affected source that meets any of the	None	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines as applicable. No further requirements apply for such engines under this part.			
Q1ANV	EP	R5725-ANV	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100 dry standard cubic feet per hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this title than 0.5 tpy.	None	§ 115.726(e)(3)(A) § 115.726(j)(1) § 115.726(j)(2)	None
Q1ANV	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(4)(C) [G]§ 115.122(a)(4)	Any reactor process or distillation operation vent gas stream with a flow rate less than 0.388 standard cubic feet per minute or a VOC concentration less	[G]§ 115.125 § 115.126(2) § 115.126(3)(D)	§ 115.126 § 115.126(2) § 115.126(3) § 115.126(3)(D)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						than 500 ppmv is exempt from the requirements of §115.121(a)(2)(A) of this title.			
Q1CT	EU	R5760-1	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.761(c)(1) § 115.761(c)(3) § 115.764(a)(1) § 115.766(i)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 1 of this subchapter must not exceed 1,200 pounds of HRVOCs per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.764(a)(1) § 115.764(a)(3) [G]§ 115.764(a)(6) § 115.764(c) § 115.764(g)(2)	§ 115.766(a)(1) § 115.766(a)(2) § 115.766(a)(3) § 115.766(a)(5) § 115.766(a)(6) § 115.766(c) [G]§ 115.766(g) [G]§ 115.766(h) § 115.766(i)(1)	§ 115.766(i)(2)
Q1F01324	EP	R5722-2	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100 dry standard cubic feet per hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this title than 0.5 tpy.	None	§ 115.726(e)(3)(A) § 115.726(j)(2)	None
Q1F01324	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(1) [G]§ 115.122(a)(4)	A vent gas stream from a low-density polyethylene plant is exempt from §115.121(a)(1) of this title if	[G]§ 115.125 § 115.126(2) § 115.126(3)(A)	§ 115.126 § 115.126(2) § 115.126(3) § 115.126(3)(A)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						no more than 1.1 pounds of ethylene per 1,000 pounds of product are emitted from all the vent gas streams associated with the formation, handling, and storage of solidified product.			
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)				
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) §	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(e) [G]§ 115.788(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	500 ppmv above background as methane for all components.	§ 115.781(g)(2) § 115.782(d)(2)	§ 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(iii)(I) § 115.783(4)(A)(iii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	all components.		§ 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) §	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(iv)	concentration greater than 500 ppmv above background as methane for all components.	§ 115.782(d)(2) § 115.789(1)(B)		
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.788(g) § 115.789(1)(B)
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c).	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.		§ 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	used to satisfy the requirements of this subsection.			
Q1FUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
Q1FUG	EU	R5352-	VOC	30 TAC Chapter	§ 115.352(1)(B)	No compressor seals shall	§ 115.354(1)	§ 115.352(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL		115, Pet. Refinery & Petrochemicals	§ 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.357(4) § 115.357(8)	sound.			
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(iii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	[G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(8) § 115.357(9)	sound.			
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)		
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						from the requirements of this division except §115.356(3)(C) of this title.			
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
Q1FUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(a) § 60.482-1(b) [G]§ 60.482-2 [G]§ 60.482-9 § 60.562-2(d) § 60.562-2(e)	Comply with the requirements as stated in §60.482-2 for pumps in light-liquid service.	[G]§ 60.482-2 § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 60.565(l)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(a) § 60.482-1(b) [G]§ 60.482-3 [G]§ 60.482-9 § 60.562-2(d) § 60.562-2(e)	Comply with the requirements as stated in §60.482-3 for compressors.	[G]§ 60.482-3 § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	[G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 60.565(l)
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(a) § 60.482-1(b) [G]§ 60.482-4 [G]§ 60.482-9 § 60.562-2(d) § 60.562-2(e)	Comply with the requirements in as stated in §60.482-4 for pressure relief devices in gas/vapor service.	[G]§ 60.482-4 § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(3) [G]§ 60.486(e)(4) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 60.565(l)
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(a) § 60.482-1(b) [G]§ 60.482-5 [G]§ 60.482-9 § 60.562-2(d) § 60.562-2(e)	Comply with the requirements in as stated in §60.482-5 for sampling connection systems.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 60.565(l)
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(a) § 60.482-1(b) [G]§ 60.482-6 [G]§ 60.482-9 § 60.562-2(d) § 60.562-2(e)	Comply with the requirements in as stated in §60.482-6 for open-ended valves and lines.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 60.565(l)
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(a) § 60.482-1(b) [G]§ 60.482-7 [G]§ 60.482-9 [G]§ 60.483-1 [G]§ 60.483-2	Comply with the requirements in as stated in §60.482-7 for valves in gas/vapor or light-liquid service.	[G]§ 60.482-7 [G]§ 60.483-1 [G]§ 60.483-2 § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d)	[G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(d) § 60.487(e) § 60.565(l)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.562-2(b) § 60.562-2(d) § 60.562-2(e)		[G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(f) [G]§ 60.486(g) § 60.486(j)	
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(a) § 60.482-1(b) [G]§ 60.482-8 [G]§ 60.482-9 § 60.562-2(d) § 60.562-2(e)	Comply with the requirements in as stated in §60.482-8 for pumps in heavy-liquid service.	[G]§ 60.482-8 § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 60.565(l)
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(a) § 60.482-1(b) [G]§ 60.482-8 [G]§ 60.482-9 § 60.562-2(d) § 60.562-2(e)	Comply with the requirements in as stated in §60.482-8 for valves in heavy-liquid service.	[G]§ 60.482-8 § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 60.565(l)
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(a) § 60.482-1(b) [G]§ 60.482-8 [G]§ 60.482-9 § 60.562-2(d) § 60.562-2(e)	Comply with the requirements in as stated in §60.482-8 for pressure relief devices in light-liquid service.	[G]§ 60.482-8 § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 60.565(l)
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(a) § 60.482-1(b) [G]§ 60.482-8 [G]§ 60.482-9 § 60.562-2(d) § 60.562-2(e)	Comply with the requirements in as stated in §60.482-8 for flanges or other connectors.	[G]§ 60.482-8 § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 60.565(l)
Q1FUG	EU	60DDD-ALL	VOC/TOC	40 CFR Part 60, Subpart DDD	§ 60.562-2(a) § 60.482-1(d) § 60.562-2(e)	Comply with the requirements as stated in §60.482-1(d) for equipment in vacuum service.	None	§ 60.486(e) § 60.486(e)(1) § 60.486(e)(5)	§ 60.562-2(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.165 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief device in gas/vapor service. §63.165(a)-(d)	[G]§ 63.165 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.173 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators gas/vapor service and in light liquid service. §63.173(a)-(j).	[G]§ 63.173 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.170 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Surge control vessels and bottom receivers.	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.163 § 63.162(a) § 63.162(c)	Standards: Pumps in light liquid service. §63.163(a)-(j)	[G]§ 63.163 [G]§ 63.176 [G]§ 63.180(b)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176		[G]§ 63.180(d)	[G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) § 63.181(h)(8)	[G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.167 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Open-ended valves or lines. §63.167(a)-(e).	[G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.168 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Valves in gas/vapor service and in light liquid service. §63.168(a)-(j)	[G]§ 63.168 [G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.162(e) § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h)	Equipment that is in organic HAP service less than 300 hours per year is excluded from the requirements of §§63.163 - 63.174 and §63.178 if it is identified as required in §63.181(j).	[G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i) § 63.181(j)	[G]§ 63.182(a) [G]§ 63.182(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.164 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Compressors. §63.164(a)-(i)	[G]§ 63.164 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.174 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in gas/vapor service and in light liquid service. §63.174(a)-(j)	[G]§ 63.174 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.166 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Sampling connection systems. §63.166(a)-(c)	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Valves in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a)	Standards: Connectors in heavy liquid service.	[G]§ 63.169 [G]§ 63.180(b)	§ 63.181(a) [G]§ 63.181(b)	[G]§ 63.182(a) [G]§ 63.182(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	§63.169(a)-(d)	[G]§ 63.180(d)	§ 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	§ 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1FUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
Q1PROCESS	EP	R5722-1	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(c)(1) § 115.722(c)(3) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 2 of this subchapter must not exceed 1,200 pounds of HRVOC per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.725(n) ** See Alternative Requirement	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) [G]§ 115.726(h) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)
Q1PROCESS	EP	R5722-3	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(c)(1) § 115.722(c)(3) § 115.725(a)(2)(A) § 115.725(a)(2)(B) § 115.725(a)(2)(C) § 115.725(a)(2)(D) § 115.725(a)(3) [G]§ 115.725(a)(4) [G]§ 115.725(l) [G]§ 115.726(a)(2)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 2 of this subchapter must not exceed 1,200 pounds of HRVOC per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.725(a) § 115.725(a)(2)(A) § 115.725(a)(2)(B) § 115.725(a)(2)(C) § 115.725(a)(2)(D) § 115.725(a)(3) § 115.725(a)(3)(B) [G]§ 115.725(a)(4) § 115.725(a)(5) [G]§ 115.725(l) § 115.725(n) ** See CAM Summary	§ 115.726(b)(1) § 115.726(b)(2) § 115.726(b)(3) [G]§ 115.726(h) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	[G]§ 115.725(a)(4) § 115.725(a)(5) § 115.725(n) [G]§ 115.726(a)(2)
Q1PROCESS	EP	R5121-	VOC	30 TAC Chapter	§ 115.123(a)(1)	Alternate methods of	[G]§ 115.125	§ 115.126	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
S		FLR		115, Vent Gas Controls	§ 115.910	demonstrating and documenting continuous compliance with the applicable control requirements or exemption criteria in this division may be approved by the Executive Director in accordance with §115.910 of this title if emission reduction are demonstrated to be substantially equivalent.	§ 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126(2)	
Q1PROCES S	EP	R5121-INC	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(A)	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(A) § 115.126(1)(A)(i) § 115.126(2) ** See CAM Summary	§ 115.126 § 115.126(1) § 115.126(1)(A) § 115.126(1)(A)(i) § 115.126(2)	None
Q1V34001	EU	R5131-1	VOC	30 TAC Chapter 115, Water Separation	§ 115.137(a)(2) [G]§ 115.132(a)(4)	Any single or multiple compartment VOC water separator which separates materials having a true vapor pressure of VOC < .5 psia obtained from any equipment is exempt from §115.132(a).	[G]§ 115.135(a) § 115.136(a)(1) § 115.136(a)(3) § 115.136(a)(4)	§ 115.136(a)(1) § 115.136(a)(3) § 115.136(a)(4)	None
QE1001B	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						100,000 acfm unless a CEMS is installed.			
QE1001B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O 2, dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8120(1)(A)		
QE1001B	EU	R7310-PH1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1002B	EP	R1111-V1	Opacity	30 TAC Chapter	§ 111.111(a)(1)(C)	Visible emissions from any	[G]§	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				111, Visible Emissions	§ 111.111(a)(1)(E)	stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	111.111(a)(1)(F) ** See Periodic Monitoring Summary		
QE1002B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O 2, dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							[G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)		
QE1002B	EU	R7310-PH1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							[G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)		
QE1003B	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
QE1003B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)		
QE1003B	EU	R7310-PH1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)		
QE1004B	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
QE1004B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)		
QE1004B	EU	R7310-PH1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)		
QE1005B	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
QE1005B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)		§ 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1005B	EU	R7310-PH1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						specified in § 117.9800 to comply with § 117.320.	§ 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)		[G]§ 117.8010(8) § 117.8100(c)
QE1006B	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
QE1006B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							[G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)		§ 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1006B	EU	R7310-PH1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)		[G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1007B	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
QE1007B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)		§ 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1007B	EU	R7310-PH1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)		§ 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1008B	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
QE1008B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A)	CO emissions must not exceed 400 ppmv at 3.0%	[G]§ 117.335(a)(1) § 117.335(a)(4)	§ 117.345(a) § 117.345(f)	§ 117.335(b) § 117.335(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 117.310(c)(3) § 117.340(f)(1)	O 2, dry basis.	§ 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)	[G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	[G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1008B	EU	R7310-PH1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B)	An owner or operator may not use the alternative methods specified in	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	§§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.335(c) § 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	[G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1009B	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						100,000 acfm unless a CEMS is installed.			
QE1009B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O 2, dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8120(1)(A)		
QE1009B	EU	R7310-PH1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1010B	EP	R1111-V1	Opacity	30 TAC Chapter	§ 111.111(a)(1)(C)	Visible emissions from any	[G]§	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				111, Visible Emissions	§ 111.111(a)(1)(E)	stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	111.111(a)(1)(F) ** See Periodic Monitoring Summary		
QE1010B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							[G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)		
QE1010B	EU	R7310-PH1	NH ₃	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(2) § 117.310(c)(2)(B) § 117.340(f)(1)	For process heaters that inject urea or ammonia into the exhaust stream for NO _x control, ammonia emissions must not exceed 10 ppmv at 3.0% O ₂ , dry.	§ 117.335(a)(2) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(b)(1) § 117.340(b)(3) § 117.340(d) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8130 § 117.8130(4)	§ 117.345(a) § 117.345(f) § 117.345(f)(11) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1010B	EU	R7310-	NO _x	30 TAC Chapter	§ 117.310(d)(3)	An owner or operator may	[G]§ 117.335(a)(1)	§ 117.345(a)	§ 117.335(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		PH1		117, Subchapter B	§ 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1011B	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	Summary		
QE1011B	EU	R7310-PH1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8120 § 117.8120(1) § 117.8120(1)(A)		
QE1011B	EU	R7310-PH1	NH ₃	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(2) § 117.310(c)(2)(B) § 117.340(f)(1)	For process heaters that inject urea or ammonia into the exhaust stream for NO _x control, ammonia emissions must not exceed 10 ppmv at 3.0% O ₂ , dry.	§ 117.335(a)(2) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(b)(1) § 117.340(b)(3) § 117.340(d) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8130 § 117.8130(4)	§ 117.345(a) § 117.345(f) § 117.345(f)(11) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1011B	EU	R7310-PH1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(2) § 117.345(f)(8)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.335(d) § 117.335(g) § 117.340(a)(2)(A) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
QE1416F	EP	R5722-1	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100	None	§ 115.726(e)(3)(A) § 115.726(j)(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						dry standard cubic feet per hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this title than 0.5 tpy.			
QE1416F	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(2)(A) [G]§ 115.122(a)(4) § 115.127(a)(2)	A vent gas stream having a combined weight of volatile organic compounds (VOC) < 100 lbs (45.4 kg) in any continuous 24-hour period is exempt from the requirements of § 115.121(a)(1).	[G]§ 115.125 § 115.126(2)	§ 115.126 § 115.126(2) § 115.126(4)	None
QE1416FB	EP	R5722-1	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100 dry standard cubic feet per hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this	None	§ 115.726(e)(3)(A) § 115.726(j)(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						title than 0.5 tpy.			
QE1416FB	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(2)(A) [G]§ 115.122(a)(4) § 115.127(a)(2)	A vent gas stream having a combined weight of volatile organic compounds (VOC) < 100 lbs (45.4 kg) in any continuous 24-hour period is exempt from the requirements of § 115.121(a)(1).	[G]§ 115.125 § 115.126(2)	§ 115.126 § 115.126(2) § 115.126(4)	None
QE2410F	EU	R5112-1	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.111(a)(1)	Except as provided in § 115.118, a storage tank storing VOC with a true vapor pressure less than 1.5 psia is exempt from the requirements of this division.	[G]§ 115.117	§ 115.118(a)(1) § 115.118(a)(5) § 115.118(a)(6)(A) § 115.118(a)(7)	None
QE3050B	EU	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
QE3050B	EP	R5722-001	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)		§ 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1) [G]§ 115.725(l) § 115.725(m) § 115.725(n) ** See Alternative Requirement		
QE3050B	CD	60A-MAX	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(iii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4) § 60.18(f)(5)	None	None
QE3050B	CD	60A-NORM	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(i) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
QE3050B	CD	63A-MAX	Opacity	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(iii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						60 of this chapter shall be used.			
QE3416F	EU	R5112-2	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.113 § 115.910	Alternate means of compliance with the applicable control requirements or exemption criteria in this division may be approved per 30 TAC §115.910, if emission reductions are substantially equal.	** See Alternative Requirement	None	None
QE3418F	EP	R5722-1	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100 dry standard cubic feet per hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this title than 0.5 tpy.	None	§ 115.726(e)(3)(A) § 115.726(j)(2)	None
QE3418F	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(2)(A) [G]§ 115.122(a)(4) § 115.127(a)(2)	A vent gas stream having a combined weight of volatile organic compounds (VOC) < 100 lbs (45.4 kg) in any continuous 24-hour period is exempt from the requirements of § 115.121(a)(1).	[G]§ 115.125 § 115.126(2)	§ 115.126 § 115.126(2) § 115.126(4)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
QE5407FA	EU	R5112-BOIL	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.112(e)(1) § 115.112(e)(3) § 115.112(e)(3)(A) § 115.112(e)(3)(A)(i) § 115.112(e)(3)(A)(ii)	No person shall place, store, or hold VOC in any storage tank unless the storage tank is capable of maintaining working pressure sufficient at all times to prevent any vapor or gas loss to the atmosphere or is in compliance with the control requirements specified in Table 1 of this paragraph for VOC other than crude oil and condensate or Table 2 of subsection (a)(1) of this paragraph for crude oil and condensate.	§ 115.115(a) § 115.115(a)(6) § 115.116(a)(1) [G]§ 115.117 ** See CAM Summary	§ 115.118(a)(4) § 115.118(a)(4)(F) § 115.118(a)(5) § 115.118(a)(7)	None
QE5407FA	EU	R5112-FL	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.113 § 115.910	Alternate means of compliance with the applicable control requirements or exemption criteria in this division may be approved per 30 TAC §115.910, if emission reductions are substantially equal.	** See Alternative Requirement	None	None
QE5407FA	EU	63YY-TANK	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
QE5407FB	EU	R5112-BOIL	VOC	30 TAC Chapter 115, Storage of	§ 115.112(e)(1) § 115.112(e)(3)	No person shall place, store, or hold VOC in any	§ 115.115(a) § 115.115(a)(6)	§ 115.118(a)(4) § 115.118(a)(4)(F)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				VOCs	§ 115.112(e)(3)(A) § 115.112(e)(3)(A)(i) § 115.112(e)(3)(A)(ii)	storage tank unless the storage tank is capable of maintaining working pressure sufficient at all times to prevent any vapor or gas loss to the atmosphere or is in compliance with the control requirements specified in Table 1 of this paragraph for VOC other than crude oil and condensate or Table 2 of subsection (a)(1) of this paragraph for crude oil and condensate.	§ 115.116(a)(1) [G]§ 115.117 ** See CAM Summary	§ 115.118(a)(5) § 115.118(a)(7)	
QE5407FB	EU	R5112-FL	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.113 § 115.910	Alternate means of compliance with the applicable control requirements or exemption criteria in this division may be approved per 30 TAC §115.910, if emission reductions are substantially equal.	** See Alternative Requirement	None	None
QE5407FB	EU	63YY-TANK	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
QE5802UA	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	Summary		
QE5802UA	EU	R7310-1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1) § 117.8120	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8120(1) § 117.8120(1)(A)		
QE5802UA	EU	R7310-1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(1)(A) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(1) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(6)		
QE5802UA	EU	60Db-1	NO _x	40 CFR Part 60, Subpart Db	§ 60.44b(e) § 60.44b(h) § 60.44b(i) § 60.46b(a)	Except in §60.44b(l), on/after §60.8 tests, no facility firing specified fuels shall discharge NO _x in excess of the specified formula, unless subject to federal ACF of 10% or less.	§ 60.46b(c) § 60.46b(e) § 60.46b(e)(1) [G]§ 60.48b(b) § 60.48b(c) § 60.48b(d) § 60.48b(e) [G]§ 60.48b(e)(2) § 60.48b(e)(3) § 60.48b(f)	[G]§ 60.48b(b) § 60.48b(c) [G]§ 60.49b(d) [G]§ 60.49b(g) § 60.49b(o)	§ 60.49b(a) § 60.49b(a)(1) § 60.49b(a)(2) § 60.49b(a)(3) § 60.49b(b) § 60.49b(i) § 60.49b(v) § 60.49b(w)
QE5802UA	EU	60Db-1	PM	40 CFR Part 60, Subpart Db	§ 60.40b(a)	This subpart applies to each steam generating unit constructed, modified, or reconstructed after 6/19/84, and that has a heat input capacity from fuels combusted in the unit > 29 MW (100 MMBtu/hr).	None	[G]§ 60.49b(d) § 60.49b(o)	§ 60.49b(a) § 60.49b(a)(1) § 60.49b(a)(3)
QE5802UA	EU	60Db-1	PM (Opacity)	40 CFR Part 60, Subpart Db	§ 60.40b(a)	This subpart applies to each steam generating unit constructed, modified, or reconstructed after 6/19/84, and that has a heat input capacity from fuels combusted in the unit > 29 MW (100 MMBtu/hr).	None	[G]§ 60.49b(d) § 60.49b(o)	§ 60.49b(a) § 60.49b(a)(1) § 60.49b(a)(3)
QE5802UA	EU	60Db-1	SO ₂	40 CFR Part 60, Subpart Db	§ 60.40b(a)	This subpart applies to each steam generating unit constructed, modified, or reconstructed after 6/19/84, and that has a heat input capacity from fuels combusted in the unit > 29 MW (100 MMBtu/hr).	None	[G]§ 60.49b(d) § 60.49b(o)	§ 60.49b(a) § 60.49b(a)(1) § 60.49b(a)(3)
QE5802UA	EU	63DDDDD	112(B)	40 CFR Part 63,	§ 63.7505	The permit holder shall	The permit holder	The permit holder shall	The permit holder shall

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		-1	HAPS	Subpart DDDDD	The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart DDDDD	comply with the applicable requirements of 40 CFR Part 63, Subpart DDDDD	shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart DDDDD	comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart DDDDD	comply with the applicable reporting requirements of 40 CFR Part 63, Subpart DDDDD
QE5802UB	EP	R1111-V1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
QE5802UB	EU	R7310-2	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1) § 117.8120	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) §	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120(1) § 117.8120(1)(A)		
QE5802UB	EU	R7310-2	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(1)(A) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(1) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)		
QE5802UB	EU	60Db-1	NO _x	40 CFR Part 60, Subpart Db	§ 60.44b(e) § 60.44b(h) § 60.44b(i) § 60.46b(a)	Except in §60.44b(l), on/after §60.8 tests, no facility firing specified fuels shall discharge NO _x in excess of the specified formula, unless subject to federal ACF of 10% or less.	§ 60.46b(c) § 60.46b(e) § 60.46b(e)(1) [G]§ 60.48b(b) § 60.48b(c) § 60.48b(d) § 60.48b(e) [G]§ 60.48b(e)(2) § 60.48b(e)(3) § 60.48b(f)	[G]§ 60.48b(b) § 60.48b(c) [G]§ 60.49b(d) [G]§ 60.49b(g) § 60.49b(o)	§ 60.49b(a) § 60.49b(a)(1) § 60.49b(a)(2) § 60.49b(a)(3) § 60.49b(b) § 60.49b(i) § 60.49b(v) § 60.49b(w)
QE5802UB	EU	60Db-1	PM	40 CFR Part 60, Subpart Db	§ 60.40b(a)	This subpart applies to each steam generating unit constructed, modified, or reconstructed after 6/19/84, and that has a heat input capacity from fuels combusted in the unit > 29 MW (100 MMBtu/hr).	None	[G]§ 60.49b(d) § 60.49b(o)	§ 60.49b(a) § 60.49b(a)(1) § 60.49b(a)(3)
QE5802UB	EU	60Db-1	PM (Opacity)	40 CFR Part 60, Subpart Db	§ 60.40b(a)	This subpart applies to each steam generating unit constructed, modified, or reconstructed after 6/19/84, and that has a heat input	None	[G]§ 60.49b(d) § 60.49b(o)	§ 60.49b(a) § 60.49b(a)(1) § 60.49b(a)(3)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						capacity from fuels combusted in the unit > 29 MW (100 MMBtu/hr).			
QE5802UB	EU	60Db-1	SO ₂	40 CFR Part 60, Subpart Db	§ 60.40b(a)	This subpart applies to each steam generating unit constructed, modified, or reconstructed after 6/19/84, and that has a heat input capacity from fuels combusted in the unit > 29 MW (100 MMBtu/hr).	None	[G]§ 60.49b(d) § 60.49b(o)	§ 60.49b(a) § 60.49b(a)(1) § 60.49b(a)(3)
QE5802UB	EU	63DDDDD-1	112(B) HAPS	40 CFR Part 63, Subpart DDDDD	§ 63.7505 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart DDDDD
QE638481	EU	R7300-ENG4	Exempt	30 TAC Chapter 117, Subchapter B	[G]§ 117.303(a)(11) [G]§ 117.310(f)	Units exempted from the provisions of this division except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1) and 117.354(a)(5) include new, modified, reconstructed, or relocated stationary diesel engine placed into service on or after October 1, 2001, that operates less than 100 hours per year, based on a rolling 12 month average, in other than emergency situations; and meets the requirements for non road	None	§ 117.340(j) § 117.345(f) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						engines as specified. §117.303(a)(11)(A)-(B)			
QE638481	EU	60IIII-3	CO	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 1042.101 § 60.4202(f)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a displacement of greater than or equal to 10 liters per cylinder and less than 30 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 5.0 g/KW-hr, as stated in 40 CFR 60.4202(e)-(f) and 40 CFR 94.8(a)(2) and 40 CFR 1042.101.	None	None	[G]§ 60.4214(d)
QE638481	EU	60IIII-3	HC and NO _x	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 1042.101 § 60.4202(f)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power less than 600 KW and a displacement of greater than or equal to 15 liters per cylinder and less than 20 liters per cylinder and is a 2014 model year and later must comply with an HC+NO _x emission limit of 6.2 g/KW-hr, as stated in 40 CFR 60.4202(f)(2) and 40 CFR 1042.101.	None	None	[G]§ 60.4214(d)
QE638481	EU	60IIII-3	PM	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 1042.101 § 60.4202(f)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power less than 600 KW and a displacement of	None	None	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.4211(c) [G]§ 60.4211(f) § 60.4218	greater than or equal to 15 liters per cylinder and less than 20 liters per cylinder and is a 2014 model year and later must comply with a PM emission limit of 0.14 g/KW-hr, as stated in 40 CFR 60.4202(f)(2) and 40 CFR 1042.101.			
QE638481	EU	63ZZZZ-5	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(b)(1) § 63.6595(c) § 63.6640(f)(1) § 63.6640(f)(2) § 63.6640(f)(2)(i) § 63.6640(f)(3)	An affected source which meets either of the criteria in paragraphs §63.6590(b)(1)(i)-(ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of §63.6645(f).	None	None	§ 63.6645(f)
QE6410F	EU	R5112-3	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.112(e)(1) § 115.112(e)(2) § 115.112(e)(2)(A) § 115.112(e)(2)(B) § 115.112(e)(2)(C) § 115.112(e)(2)(D) § 115.112(e)(2)(F) [G]§ 115.112(e)(2)(I) § 115.114(a)(1)(A)	No person shall place, store, or hold VOC in any storage tank unless the storage tank is capable of maintaining working pressure sufficient at all times to prevent any vapor or gas loss to the atmosphere or is in compliance with the control requirements specified in Table 1 of this paragraph for VOC other than crude oil and condensate or Table 2 of subsection (a)(1) of this paragraph for crude oil and condensate.	§ 115.114(a)(1) § 115.114(a)(1)(A) [G]§ 115.117	§ 115.118(a)(3) § 115.118(a)(5) § 115.118(a)(6)(C) § 115.118(a)(7)	§ 115.114(a)(1)(B) § 115.118(a)(3)
QE6410F	EU	63YY-	112(B)	40 CFR Part 63,	§ 63.1103	The permit holder shall	The permit holder	The permit holder shall	The permit holder shall

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		TANK	HAPS	Subpart YY	The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	comply with the applicable requirements of 40 CFR Part 63, Subpart YY	shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
QE7409F	EU	R5112-2	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.113 § 115.910	Alternate means of compliance with the applicable control requirements or exemption criteria in this division may be approved per 30 TAC §115.910, if emission reductions are substantially equal.	** See Alternative Requirement	None	None
QE7411F	EU	R5112-1	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.113 § 115.910	Alternate means of compliance with the applicable control requirements or exemption criteria in this division may be approved per 30 TAC §115.910, if emission reductions are substantially equal.	** See Alternative Requirement	None	None
QE7412F	EU	R5112-1	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.111(a)(1)	Except as provided in § 115.118, a storage tank storing VOC with a true vapor pressure less than 1.5 psia is exempt from the requirements of this division.	[G]§ 115.117	§ 115.118(a)(1) § 115.118(a)(5) § 115.118(a)(6)(A) § 115.118(a)(7)	None
QE7801U	EU	R5760-2	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.761(c)(1) § 115.761(c)(3) § 115.766(i)	HRVOC emissions at each site located in Harris County that is subject to this	§ 115.764(a)(3) [G]§ 115.764(a)(6) § 115.764(c)	§ 115.766(a)(1) § 115.766(a)(2) § 115.766(a)(3)	§ 115.766(i)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						division or Division 1 of this subchapter must not exceed 1,200 pounds of HRVOCs per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.764(e)(1)	§ 115.766(a)(5) § 115.766(a)(6) § 115.766(c) [G]§ 115.766(e) [G]§ 115.766(g) [G]§ 115.766(h) § 115.766(i)(1)	
QE8001A	EU	R5142-1	VOC	30 TAC Chapter 115, Industrial Wastewater	§ 115.147(2) [G]§ 115.142(4) [G]§ 115.148	An owner or operator may exempt from control requirements of §115.142 one or more affected VOC wastewater streams for which the total annual VOC loading is less than or equal to 10 Mg (11.03 tons).	§ 115.145 § 115.145(1) § 115.145(10) [G]§ 115.145(2) [G]§ 115.145(3) § 115.145(4) § 115.145(5) § 115.145(6) § 115.145(7) § 115.145(9) [G]§ 115.148	§ 115.146(1) § 115.146(3) § 115.146(4)	[G]§ 115.142(4)
QE8050B	EU	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period, except for upset emissions as provided in §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
QE8050B	EP	R5722-001	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) [G]§ 115.725(l) § 115.725(m)(2)(A) § 115.725(m)(2)(B) [G]§ 115.726(a)(2)		115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1) [G]§ 115.725(l) § 115.725(m) § 115.725(m)(2)(A) § 115.725(m)(2)(B) § 115.725(n) ** See Alternative Requirement		
QE8050B	CD	60A-MAX	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(iii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4) § 60.18(f)(5)	None	None
QE8050B	CD	60A-NORM	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(i) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
QE8050B	CD	63A-MAX	Opacity	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(iii)	minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.			
QE8050B	CD	63A-NORM	Opacity	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(ii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
QEANALYZ 2	EP	R5725-ANV	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100 dry standard cubic feet per hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this title than 0.5 tpy.	None	§ 115.726(e)(3)(A) § 115.726(j)(1) § 115.726(j)(2)	None
QEANALYZ 2	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(2)(A) [G]§ 115.122(a)(4) § 115.127(a)(2)	A vent gas stream having a combined weight of volatile organic compounds (VOC) equal to or less than 100 pounds in any continuous	[G]§ 115.125 § 115.126(2)	§ 115.126 § 115.126(2) § 115.126(4)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						24-hour period is exempt from §115.121(a)(1) of this title.			
QEANALYZ 4	EP	R5725-ANV	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100 dry standard cubic feet per hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this title than 0.5 tpy.	None	§ 115.726(e)(3)(A) § 115.726(j)(1) § 115.726(j)(2)	None
QEANALYZ 4	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(2)(A) [G]§ 115.122(a)(4) § 115.127(a)(2)	A vent gas stream having a combined weight of volatile organic compounds (VOC) equal to or less than 100 pounds in any continuous 24-hour period is exempt from §115.121(a)(1) of this title.	[G]§ 115.125 § 115.126(2)	§ 115.126 § 115.126(2) § 115.126(4)	None
QEANALYZ 5	EP	R5725-ANV	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100 dry standard cubic feet per	None	§ 115.726(e)(3)(A) § 115.726(j)(1) § 115.726(j)(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this title than 0.5 tpy.			
QEANALYZ 5	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(2)(A) [G]§ 115.122(a)(4) § 115.127(a)(2)	A vent gas stream having a combined weight of volatile organic compounds (VOC) equal to or less than 100 pounds in any continuous 24-hour period is exempt from §115.121(a)(1) of this title.	[G]§ 115.125 § 115.126(2)	§ 115.126 § 115.126(2) § 115.126(4)	None
QEARU	EP	R5722-2	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(c)(1) § 115.722(c)(3) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 2 of this subchapter must not exceed 1,200 pounds of HRVOC per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.725(n) ** See CAM Summary ** See Alternative Requirement	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) [G]§ 115.726(h) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)
QEARU	EP	R5121-FLARE	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.123(a)(1) § 115.910	Alternate methods of demonstrating and documenting continuous compliance with the applicable control requirements or exemption criteria in this division may be approved by the	[G]§ 115.125 § 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126 § 115.126(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						Executive Director in accordance with §115.910 of this title if emission reduction are demonstrated to be substantially equivalent.			
QEARU	EP	R5121-FURN	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(2) § 115.121(a)(2) § 115.122(a)(2)(B)	Any vent gas streams affected by §115.121(a)(2) of this title must be controlled properly with a control efficiency of at least 98% or to a VOC concentration of no more than 20 ppmv (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(C) § 115.126(2) ** See CAM Summary	§ 115.126 § 115.126(1) § 115.126(1)(C) § 115.126(2)	None
QEARU	EP	60NNN-1	VOC/TOC	40 CFR Part 60, Subpart NNN	§ 60.662(b) § 60.18	Each affected facility shall combust the emissions in a flare that meets the requirements of § 60.18.	§ 60.663(b) § 60.663(b)(1) § 60.663(b)(2) § 60.664(a) § 60.664(d) [G]§ 60.664(e) ** See CAM Summary	§ 60.663(b)(2) § 60.665(b) § 60.665(b)(3) § 60.665(d) § 60.665(f)	§ 60.665(a) § 60.665(b) § 60.665(b)(3) § 60.665(k) § 60.665(l) § 60.665(l)(2) § 60.665(l)(4)
QEARU	EP	60NNN-2	VOC/TOC	40 CFR Part 60, Subpart NNN	§ 60.662(a)	Affected facilities shall reduce TOC emissions by 98 weight-percent or to a concentration of 20ppmv, whichever is less stringent. Introduce the stream into the flame zone of a boiler/process heater.	§ 60.663(c) § 60.663(c)(1) § 60.663(d) § 60.664(c) ** See CAM Summary	§ 60.663(c)(1) § 60.663(d) § 60.665(b) § 60.665(b)(2) § 60.665(b)(2)(i) § 60.665(c) § 60.665(c)(4) § 60.665(d) § 60.665(e)	§ 60.665(a) § 60.665(b) § 60.665(b)(2) § 60.665(b)(2)(i) § 60.665(c) § 60.665(c)(4) § 60.665(k) § 60.665(l) § 60.665(l)(1) § 60.665(l)(2) § 60.665(l)(3)
QEBARGE	EU	R5212-3	VOC	30 TAC Chapter	§ 115.217(a)(5)(B)	The marine vessel transfer	§ 115.214(a)(3)(B)	§ 115.216	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				115, Loading and Unloading of VOC	§ 115.214(a)(3)(C) § 115.214(a)(3)(G) § 115.214(a)(3)(G)(i) § 115.217(a)(5)(B)(ii)	operations specified in § 115.217(a)(5)(B)(i)-(iv) are exempt from the requirements of §§ 115.212(a), 115.214(a), and 115.216 of this title, except as noted.	§ 115.214(a)(3)(B)(i) § 115.215 § 115.215(1) [G]§ 115.215(2)	§ 115.216(2)	
QEBARGE	EU	61BB-1	Benzene	40 CFR Part 61, Subpart BB	§ 61.300(b)	Any affected facility as per § 61.300(a), loading only liquid containing < 70 weight-percent benzene is exempt from this subpart, except for the recordkeeping and reporting in § 61.305(i).	None	[G]§ 61.305(i)	[G]§ 61.305(i)
QEBARGE	EU	63Y-1	Exempt	40 CFR Part 63, Subpart Y	§ 63.560(a)(2) § 153.282 § 63.560(a)(4)	Existing sources with emissions less than 10 and 25 tons must meet the submerged fill standards of 46 CFR 153.282. This submerged fill requirement does not apply to petroleum refineries.	§ 63.565(l)	§ 63.567(j)(4)	None
QECAUSTS UM	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(2)(A) [G]§ 115.122(a)(4) § 115.127(a)(2)	A vent gas stream having a combined weight of volatile organic compounds (VOC) < 100 lbs (45.4 kg) in any continuous 24-hour period is exempt from the requirements of § 115.121(a)(1).	[G]§ 115.125 § 115.126(2)	§ 115.126 § 115.126(2) § 115.126(4)	None
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	§115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.		§ 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	sealless pumps may be used to satisfy the requirements of this subsection.		§ 115.786(g)	
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) §	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	subsection.			
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(iii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(iii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	concentration greater than 500 ppmv above background as methane for all components.		[G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)		
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)			§ 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) §	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(3)(B) [G]§ 115.788(g)				
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material,	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	[G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) §	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	background as methane for all components.	§ 115.782(d)(2)	§ 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	
QEFUG	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	sight, smell, or sound.			
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(12) § 115.357(8)				
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		[G]§ 115.356(3)(C) § 115.356(5)	
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(iii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		§ 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
QEFUG	EU	R5352-	VOC	30 TAC Chapter	§ 115.352(1)(A)	No agitators shall be	§ 115.354(1)	§ 115.352(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL		115, Pet. Refinery & Petrochemicals	§ 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
QEFUG	EU	R5352-	VOC	30 TAC Chapter	§ 115.352(1)(A)	No valves shall be allowed	§ 115.354(1)	§ 115.352(7)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL		115, Pet. Refinery & Petrochemicals	§ 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(9)				
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.352(7) § 115.352(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(1) § 115.357(8) § 115.357(9)	based on sight, smell, or sound.			
QEFUG	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None
QEFUG	EU	60VVa-ALL	VOC	40 CFR Part 60, Subpart VVa	§ 60.480a(e)(2)(i) § 60.480a(e)(2)(ii) § 60.482-1a(a) § 60.482-1a(b) § 60.485a(f) § 60.486a(a)(1) § 60.486a(a)(2) § 60.486a(k)	Owners or operators may choose to comply with the provisions of 40 CFR Part 63, Subpart H, to satisfy the requirements of §§60.482-1a through 60.487a for an affected facility. When choosing to comply with 40 CFR Part 63, Subpart H, the requirements of §60.485a(d), (e), and (f), and §60.486a(i) and (j) still apply.	[G]§ 60.485a(d) [G]§ 60.485a(e)	§ 60.486a(i) § 60.486a(i)(1) § 60.486a(i)(2) § 60.486a(i)(3)	None
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.162(e) § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h)	Equipment that is in organic HAP service less than 300 hours per year is excluded from the requirements of §§63.163 - 63.174 and §63.178 if it is identified as required in §63.181(j).	[G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i) § 63.181(j)	[G]§ 63.182(a) [G]§ 63.182(b)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a)	Standards: Valves in heavy liquid service. §63.169(a)-	[G]§ 63.169 [G]§ 63.175	§ 63.181(a) [G]§ 63.181(b)	[G]§ 63.182(a) [G]§ 63.182(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	(d)	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	§ 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.167 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Open-ended valves or lines. §63.167(a)-(e).	[G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.163 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176	Standards: Pumps in light liquid service. §63.163(a)-(j)	[G]§ 63.163 [G]§ 63.176 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) § 63.181(h)(8)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.174 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h)	Standards: Connectors in gas/vapor service and in light liquid service. §63.174(a)-(j)	[G]§ 63.174 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.171				
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.173 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators gas/vapor service and in light liquid service. §63.173(a)-(j).	[G]§ 63.173 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.172(d) § 63.11(b) § 63.172(e) [G]§ 63.172(h) § 63.172(m)	Flares used to comply with this subpart shall comply with the requirements of § 63.11(b) of 40 CFR 63, Subpart A.	§ 63.172(e) [G]§ 63.172(h) [G]§ 63.180(b) [G]§ 63.180(d) [G]§ 63.180(e)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(ii) § 63.181(g)(1)(iii) § 63.181(g)(1)(iv) [G]§ 63.181(g)(2)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.172(a) [G]§ 63.172(h) § 63.172(i) § 63.172(m)	Owners/operators of closed-vent systems and control devices used to comply with provisions of this subpart shall comply with the provisions of this section, except as provided in §63.162(b).	[G]§ 63.172(f)(1) [G]§ 63.172(f)(2) § 63.172(g) [G]§ 63.172(h) [G]§ 63.172(i) [G]§ 63.180(b) [G]§ 63.180(d)	[G]§ 63.172(l) § 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(ii) [G]§ 63.181(g)(2) [G]§ 63.181(g)(3)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.170 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Surge control vessels and bottom receivers.	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.170 § 63.162(a)	Standards: Surge control vessels and bottom	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b)	[G]§ 63.182(a) [G]§ 63.182(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	receivers.		§ 63.181(c)	§ 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.162(g) § 63.162(h) [G]§ 63.171			[G]§ 63.181(i)	§ 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Valves in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.166 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Sampling connection systems. §63.166(a)-(c)	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.165 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief device in gas/vapor service. §63.165(a)-(d)	[G]§ 63.165 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.164 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Compressors. §63.164(a)-(i)	[G]§ 63.164 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.168 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Valves in gas/vapor service and in light liquid service. §63.168(a)-(j)	[G]§ 63.168 [G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.176 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
QEFUG	EU	63YY-FUG	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63,	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					Subpart YY				
QEH2FLAR	CD	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period, except for upset emissions as provided in §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
QELAB	EP	R5121-1	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(2)(A) [G]§ 115.122(a)(4) § 115.127(a)(2)	A vent gas stream having a combined weight of volatile organic compounds (VOC) < 100 lbs (45.4 kg) in any continuous 24-hour period is exempt from the requirements of § 115.121(a)(1).	[G]§ 115.125 § 115.126(2)	§ 115.126 § 115.126(2) § 115.126(4)	None
QELOAD	EU	R5212-1	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.213(a) § 115.910	Alternate methods of demonstrating compliance with the applicable control requirements or exemption criteria may be approved by the executive director in accordance with §115.910 if the emission reductions are demonstrated to be equivalent.	§ 115.213(a) ** See Alternative Requirement	§ 115.213(a)	None
QELOAD	EU	R5212-2	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.217(a)(1) § 115.212(a)(2) § 115.214(a)(1)(B) § 115.214(a)(1)(D) § 115.214(a)(1)(D)(i)	Vapor pressure (at land-based operations). All land-based loading and unloading of VOC with a true vapor pressure less than 0.5 psia is exempt from the requirements of this division, except as specified.	§ 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.215 § 115.215(4)	§ 115.216 § 115.216(2) § 115.216(3)(B)	None
QEUNIT	EP	R5121-	VOC	30 TAC Chapter	§ 115.123(a)(1)	Alternate methods of	[G]§ 115.125	§ 115.126	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		FLARE		115, Vent Gas Controls	§ 115.910	demonstrating and documenting continuous compliance with the applicable control requirements or exemption criteria in this division may be approved by the Executive Director in accordance with §115.910 of this title if emission reduction are demonstrated to be substantially equivalent.	§ 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126(2)	
QEUNIT	EP	60RRR-QE1009B	VOC/TOC	40 CFR Part 60, Subpart RRR	§ 60.700(c)(5)	Vent streams routed to distillation units subject to subpart NNN with no other air releases except for a pressure relief valve, are exempt from all provisions of this subpart except for §60.705(r).	None	None	§ 60.705(r)
QEUNITEM	EP	R5722-2	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(c)(1) § 115.722(c)(3) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	HRVOC emissions at each site located in Harris County that is subject to this division or Division 2 of this subchapter must not exceed 1,200 pounds of HRVOC per one-hour block period from any flare, vent, pressure relief valve, cooling tower, or any combination.	§ 115.725(n) ** See CAM Summary ** See Alternative Requirement	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) [G]§ 115.726(h) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)
QEUNITEM	EP	R5121-EMACT	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.123(a)(1) § 115.910	Alternate methods of demonstrating and documenting continuous compliance with the applicable control requirements or exemption	[G]§ 115.125 § 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126 § 115.126(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						criteria in this division may be approved by the Executive Director in accordance with §115.910 of this title if emission reduction are demonstrated to be substantially equivalent.			
QEUNITEM	EU	63YY-1	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
QEUNITNN N	EP	R5121-BF	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(2) § 115.121(a)(2) § 115.122(a)(2)(B)	Any vent gas streams affected by §115.121(a)(2) of this title must be controlled properly with a control efficiency of at least 98% or to a VOC concentration of no more than 20 ppmv (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(C) § 115.126(2) ** See CAM Summary	§ 115.126 § 115.126(1) § 115.126(1)(C) § 115.126(2)	None
QEUNITNN N	EP	R5121-FLARE	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.123(a)(1) § 115.910	Alternate methods of demonstrating and documenting continuous compliance with the applicable control requirements or exemption criteria in this division may be approved by the Executive Director in	[G]§ 115.125 § 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126 § 115.126(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						accordance with §115.910 of this title if emission reduction are demonstrated to be substantially equivalent.			
QEUNITNN	EP	60NNN-1	VOC/TOC	40 CFR Part 60, Subpart NNN	§ 60.662(b) § 60.18	Each affected facility shall combust the emissions in a flare that meets the requirements of § 60.18.	§ 60.663(b) § 60.663(b)(1) § 60.663(b)(2) § 60.664(a) § 60.664(d) [G]§ 60.664(e) ** See CAM Summary	§ 60.663(b)(2) § 60.665(b) § 60.665(b)(3) § 60.665(d) § 60.665(f)	§ 60.665(a) § 60.665(b) § 60.665(b)(3) § 60.665(k) § 60.665(l) § 60.665(l)(2) § 60.665(l)(4)
QEUNITNN	EP	60NNN-2	VOC/TOC	40 CFR Part 60, Subpart NNN	§ 60.662(a)	Affected facilities shall reduce TOC emissions by 98 weight-percent or to a concentration of 20ppmv, whichever is less stringent. Introduce the stream into the flame zone of a boiler/process heater.	§ 60.663(c) § 60.663(c)(1) § 60.663(d) § 60.664(c) ** See CAM Summary	§ 60.663(c)(1) § 60.663(d) § 60.665(b) § 60.665(b)(2) § 60.665(b)(2)(i) § 60.665(c) § 60.665(c)(4) § 60.665(c)(4) § 60.665(d) § 60.665(e)	§ 60.665(a) § 60.665(b) § 60.665(b)(2) § 60.665(b)(2)(i) § 60.665(c) § 60.665(c)(4) § 60.665(k) § 60.665(l) § 60.665(l)(1) § 60.665(l)(2) § 60.665(l)(3)
REGVLOAD	EU	R5211-1	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.212(a)(1) § 115.212(a)(1)(B) § 115.212(a)(2) § 115.212(a)(3)(A) § 115.212(a)(3)(A)(i) § 115.212(a)(3)(B) [G]§ 115.212(a)(3)(C) § 115.212(a)(3)(D) § 115.212(a)(3)(E) § 115.214(a)(1)(B) § 115.214(a)(1)(C)	At operations other than gasoline terminals, gasoline bulk plants, and marine terminals, vapors from loading VOC with a true vapor pressure of 0.5 psia or greater must be controlled by one of the methods specified in § 115.212(a)(1)(A)-(C).	§ 115.212(a)(3)(B) § 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.214(a)(1)(A)(ii) § 115.214(a)(1)(A)(iii) § 115.215 § 115.215(1) § 115.215(10) [G]§ 115.215(2) § 115.215(4) § 115.215(9)	§ 115.216 § 115.216(2) § 115.216(3)(A) § 115.216(3)(A)(i) § 115.216(3)(A)(ii) § 115.216(3)(A)(iii) § 115.216(3)(B)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
REGVLOAD	EU	R5211-2	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.212(a)(1) § 115.212(a)(1)(C) § 115.212(a)(2) § 115.212(a)(3)(A) § 115.212(a)(3)(A)(i) § 115.212(a)(3)(B) [G]§ 115.212(a)(3)(C) § 115.212(a)(3)(D) § 115.212(a)(3)(E) § 115.214(a)(1)(B) § 115.214(a)(1)(C)	At operations other than gasoline terminals, gasoline bulk plants, and marine terminals, vapors from loading VOC with a true vapor pressure of 0.5 psia or greater must be controlled by one of the methods specified in § 115.212(a)(1)(A)-(C).	§ 115.212(a)(3)(B) § 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.214(a)(1)(A)(ii) § 115.214(a)(1)(A)(iii) § 115.215 § 115.215(1) § 115.215(10) [G]§ 115.215(2) § 115.215(4) § 115.215(9)	§ 115.216 § 115.216(2) § 115.216(3)(A) § 115.216(3)(A)(i) § 115.216(3)(A)(ii) § 115.216(3)(A)(iii) § 115.216(3)(B)	None
REGVLOAD	EU	R5211-3	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.212(a)(3) § 115.212(a)(2) § 115.212(a)(3)(A) § 115.212(a)(3)(A)(i) § 115.212(a)(3)(B) [G]§ 115.212(a)(3)(C) § 115.212(a)(3)(D) § 115.214(a)(1)(B) § 115.214(a)(1)(C)	All land-based VOC transfer to or from transport vessels shall be conducted in the manner specified for leak-free operations.	§ 115.212(a)(3)(B) § 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.214(a)(1)(A)(ii) § 115.214(a)(1)(A)(iii) ** See Alternative Requirement	§ 115.216 § 115.216(3)(A) § 115.216(3)(A)(i) § 115.216(3)(A)(iii)	None
REGVLOAD	EU	R5211-3	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.213(a) § 115.910	Alternate methods of demonstrating compliance with the applicable control requirements or exemption criteria may be approved by the executive director in accordance with §115.910 if the emission reductions are demonstrated to be equivalent.	§ 115.213(a)	§ 115.213(a)	None
REGVLOAD	EU	R5211-4	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.213(a) § 115.910	Alternate methods of demonstrating compliance with the applicable control	§ 115.213(a) ** See Alternative Requirement	§ 115.213(a)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						requirements or exemption criteria may be approved by the executive director in accordance with §115.910 if the emission reductions are demonstrated to be equivalent.			
REGVLOAD	EU	R5211-5	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.217(a)(1) § 115.212(a)(2) § 115.214(a)(1)(B) § 115.214(a)(1)(D) § 115.214(a)(1)(D)(i)	Vapor pressure (at land-based operations). All land-based loading and unloading of VOC with a true vapor pressure less than 0.5 psia is exempt from the requirements of this division, except as specified.	§ 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.215 § 115.215(4)	§ 115.216 § 115.216(2) § 115.216(3)(B)	None
UTBLRG	EP	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least 100,000 acfm unless a CEMS is installed.	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None
UTBLRG	EU	R7310-1BOIL	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1) § 117.8120	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120(1) § 117.8120(1)(A)		[G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
UTBLRG	EU	R7310-1BOIL	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(1)(A) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(1) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)		§ 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
UTBLRG	EU	63DDDDD-1	112(B) HAPS	40 CFR Part 63, Subpart DDDDD	§ 63.7505 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart DDDDD
UTBLRH	EP	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(1)(C) § 111.111(a)(1)(E)	Visible emissions from any stationary vent shall not exceed an opacity of 15% averaged over a six minute period for any source with a total flow rate of at least	[G]§ 111.111(a)(1)(F) ** See Periodic Monitoring Summary	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						100,000 acfm unless a CEMS is installed.			
UTBLRH	EU	R7310-2BOIL	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1) § 117.8120	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(B)(iii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120(1) § 117.8120(1)(A)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
UTBLRH	EU	R7310-2BOIL	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(1)(A) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(1) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii)) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
UTBLRH	EU	63DDDDD	112(B)	40 CFR Part 63,	§ 63.7505	The permit holder shall	The permit holder	The permit holder shall	The permit holder shall

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		-1	HAPS	Subpart DDDDD	The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart DDDDD	comply with the applicable requirements of 40 CFR Part 63, Subpart DDDDD	shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart DDDDD	comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart DDDDD	comply with the applicable reporting requirements of 40 CFR Part 63, Subpart DDDDD
UTBLRN	EU	R7310-1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(B) § 117.310(c)(3)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a) § 117.8000(b) § 117.8000(c) § 117.8000(c)(2) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) ** See Periodic Monitoring Summary	§ 117.345(a) § 117.345(f) § 117.345(f)(1) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
UTBLRN	EU	R7310-1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(1)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(2)(C) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.340(p)(2)(A) § 117.340(p)(2)(B)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) § 117.340(p)(2)(D) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.340(p)(2)(C) § 117.8000(b) § 117.8000(c) § 117.8000(c)(1) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d)		[G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
UTBLRN	EU	60Dc-1	PM	40 CFR Part 60, Subpart Dc	§ 60.40c(a)	This subpart applies to each steam generating unit constructed, reconstructed, or modified after 6/9/89 and that has a maximum design heat input capacity of 2.9-29 megawatts (MW).	None	§ 60.48c(g)(1) § 60.48c(g)(2) § 60.48c(g)(3) § 60.48c(i)	[G]§ 60.48c(a) § 60.48c(j)
UTBLRN	EU	60Dc-1	PM (Opacity)	40 CFR Part 60, Subpart Dc	§ 60.40c(a)	This subpart applies to each steam generating unit constructed, reconstructed, or modified after 6/9/89 and that has a maximum design heat input capacity of 2.9-29 megawatts (MW).	None	§ 60.48c(g)(1) § 60.48c(g)(2) § 60.48c(g)(3) § 60.48c(i)	[G]§ 60.48c(a) § 60.48c(j)
UTBLRN	EU	60Dc-1	SO ₂	40 CFR Part 60, Subpart Dc	§ 60.40c(a)	This subpart applies to each steam generating unit constructed, reconstructed, or modified after 6/9/89 and that has a maximum design heat input capacity of 2.9-29 megawatts (MW).	None	§ 60.48c(g)(1) § 60.48c(g)(2) § 60.48c(g)(3) § 60.48c(i)	[G]§ 60.48c(a) § 60.48c(j)
UTBLRN	EU	63DDDDD-1	112(B) HAPS	40 CFR Part 63, Subpart DDDDD	§ 63.7505 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart DDDDD

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					CFR Part 63, Subpart DDDDD				
UTBLRS	EU	R7310-1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(B) § 117.310(c)(3)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a) § 117.8000(b) § 117.8000(c) § 117.8000(c)(2) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) ** See Periodic Monitoring Summary	§ 117.345(a) § 117.345(f) § 117.345(f)(1) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
UTBLRS	EU	R7310-1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(1)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(2)(C) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.340(p)(2)(A) § 117.340(p)(2)(B) § 117.340(p)(2)(C) § 117.8000(b) § 117.8000(c) § 117.8000(c)(1) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) § 117.340(p)(2)(D) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						comply with § 117.320.	[G]§ 117.8000(d)		
UTBLRS	EU	60Dc-1	PM	40 CFR Part 60, Subpart Dc	§ 60.40c(a)	This subpart applies to each steam generating unit constructed, reconstructed, or modified after 6/9/89 and that has a maximum design heat input capacity of 2.9-29 megawatts (MW).	None	§ 60.48c(g)(1) § 60.48c(g)(2) § 60.48c(g)(3) § 60.48c(i)	[G]§ 60.48c(a) § 60.48c(j)
UTBLRS	EU	60Dc-1	PM (Opacity)	40 CFR Part 60, Subpart Dc	§ 60.40c(a)	This subpart applies to each steam generating unit constructed, reconstructed, or modified after 6/9/89 and that has a maximum design heat input capacity of 2.9-29 megawatts (MW).	None	§ 60.48c(g)(1) § 60.48c(g)(2) § 60.48c(g)(3) § 60.48c(i)	[G]§ 60.48c(a) § 60.48c(j)
UTBLRS	EU	60Dc-1	SO ₂	40 CFR Part 60, Subpart Dc	§ 60.40c(a)	This subpart applies to each steam generating unit constructed, reconstructed, or modified after 6/9/89 and that has a maximum design heat input capacity of 2.9-29 megawatts (MW).	None	§ 60.48c(g)(1) § 60.48c(g)(2) § 60.48c(g)(3) § 60.48c(i)	[G]§ 60.48c(a) § 60.48c(j)
UTBLRS	EU	63DDDDDD-1	112(B) HAPS	40 CFR Part 63, Subpart DDDDD	§ 63.7505 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart DDDDD
UTV2026	EU	R5112-3	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.111(a)(1)	Except as provided in § 115.118, a storage tank storing VOC with a true vapor pressure less than	[G]§ 115.117	§ 115.118(a)(1) § 115.118(a)(5) § 115.118(a)(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						1.5 psia is exempt from the requirements of this division.			

Additional Monitoring Requirements

Compliance Assurance Monitoring Summary	290
Periodic Monitoring Summary	314

CAM Summary

Unit/Group/Process Information	
ID No.: L3BOILERCV	
Control Device ID No.: UTBLRG	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Control Device ID No.: UTBLRH	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5722-1
Pollutant: Highly Reactive VOC	Main Standard: § 115.722(c)(1)
Monitoring Information	
Indicator: Period of Operation	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: Any period of operation that is not recorded.	
CAM Text: Monitor and record the periods of operation of the steam generating units or process heater. The records must be readily available for inspection.	

CAM Summary

Unit/Group/Process Information	
ID No.: L3BOILERCV	
Control Device ID No.: UTBLRG	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Control Device ID No.: UTBLRH	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-BOIL
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Period of Operation	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: All periods of operation that is not recorded.	
CAM Text: Monitor and record the periods of operation of the steam generating units or process heater. The records must be readily available for inspection.	

CAM Summary

Unit/Group/Process Information	
ID No.: L3FLARECV	
Control Device ID No.: L3FLARE	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5722-1
Pollutant: Highly Reactive VOC	Main Standard: § 115.722(c)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of a flame	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventive maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: L3FLARECV	
Control Device ID No.: L3FLARE	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-2
Pollutant: VOC	Main Standard: § 115.123(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of a flame.	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventive maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: LBUNIT	
Control Device ID No.: LBFLARE	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5722-1
Pollutant: Highly Reactive VOC	Main Standard: § 115.722(c)(1)
Monitoring Information	
Indicator: Pilot flame	
Minimum Frequency: continuous	
Averaging Period: N/A	
Deviation Limit: Absence of flame	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventative Maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p> <p>Follow the equipment manufacturer's requirements or recommendations for installation and start-up operation.</p> <p>The thermocouple sensor shall be installed in a location in accordance with the manufacturer's recommendation to produce voltage consistent with the presence or absence of the flare pilot flame.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: LBUNIT	
Control Device ID No.: UTBLRG	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Control Device ID No.: UTBLRH	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-BOIL
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Period of Operation	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: Any period of operation that is not recorded.	
CAM Text: Monitor and record the periods of operation of the steam generating units or process heater. The records must be readily available for inspection.	

CAM Summary

Unit/Group/Process Information	
ID No.: LBUNIT	
Control Device ID No.: LBFLARE	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-FLR
Pollutant: VOC	Main Standard: § 115.123(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of a flame.	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventative Maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p> <p>Follow the equipment manufacturer's requirements or recommendations for installation and start-up operation.</p> <p>The thermocouple sensor shall be installed in a location in accordance with the manufacturer's recommendation to produce voltage consistent with the presence or absence of the flare pilot flame.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: Q1PROCESS	
Control Device ID No.: LBFLARE	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5722-3
Pollutant: Highly Reactive VOC	Main Standard: § 115.722(c)(1)
Monitoring Information	
Indicator: Pilot flame	
Minimum Frequency: continuous	
Averaging Period: N/A	
Deviation Limit: Absence of a flame	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventative Maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p> <p>Follow the equipment manufacturer's requirements or recommendations for installation and start-up operation.</p> <p>The thermocouple sensor shall be installed in a location in accordance with the manufacturer's recommendation to produce voltage consistent with the presence or absence of the flare pilot flame.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: Q1PROCESS	
Control Device ID No.: LBFLARE	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-FLR
Pollutant: VOC	Main Standard: § 115.123(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of a flame.	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventative Maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p> <p>Follow the equipment manufacturer's requirements or recommendations for installation and start-up operation.</p> <p>The thermocouple sensor shall be installed in a location in accordance with the manufacturer's recommendation to produce voltage consistent with the presence or absence of the flare pilot flame.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: Q1PROCESS	
Control Device ID No.: Q1INC	Control Device Type: Thermal incinerator (direct flame incinerator/regenerative thermal oxidizer)
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-INC
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Combustion Temperature / Exhaust Gas Temperature	
Minimum Frequency: once per day	
Averaging Period: N/A	
Deviation Limit: Combustion temperature less than 1462 degrees Fahrenheit is a deviation.	
<p>CAM Text: The monitoring device should be installed in the combustion chamber or immediately downstream of the combustion chamber. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications, other written procedures that provide an adequate assurance that the device is calibrated accurately, or at least annually, whichever is more frequent, and shall be accurate to within one of the following:</p> <ul style="list-style-type: none"> ± 0.75% of the temperature being measured expressed in degrees Celsius; or ± 2.5 degrees Celsius. 	

CAM Summary

Unit/Group/Process Information	
ID No.: QE5407FA	
Control Device ID No.: QE5802UA	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Control Device ID No.: QE5802UB	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-BOIL
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Period of Operation	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: All periods of operation that are not recorded.	
CAM Text: Monitor and record the periods of operation of the steam generating units or process heater. The records must be readily available for inspection.	

CAM Summary

Unit/Group/Process Information	
ID No.: QE5407FB	
Control Device ID No.: QE5802UA	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Control Device ID No.: QE5802UB	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-BOIL
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Period of Operation	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: All periods of operation that are not recorded.	
CAM Text: Monitor and record the periods of operation of the steam generating units or process heater. The records must be readily available for inspection.	

CAM Summary

Unit/Group/Process Information	
ID No.: QEARU	
Control Device ID No.: QE3050B	Control Device Type: Flare
Control Device ID No.: QE8050B	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5722-2
Pollutant: Highly Reactive VOC	Main Standard: § 115.722(c)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: No pilot flame	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventive maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: QEARU	
Control Device ID No.: QE3050B	Control Device Type: Flare
Control Device ID No.: QE8050B	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-FLARE
Pollutant: VOC	Main Standard: § 115.123(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: No pilot flame.	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: QEARU	
Control Device ID No.: QE1001B-1011B	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-FURN
Pollutant: VOC	Main Standard: § 115.122(a)(2)
Monitoring Information	
Indicator: Period of Operation	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: All periods of operation that are not recorded.	
CAM Text: Monitor and record the periods of operation of the steam generating units or process heater. The records must be readily available for inspection.	

CAM Summary

Unit/Group/Process Information	
ID No.: QEARU	
Control Device ID No.: QE3050B	Control Device Type: Flare
Control Device ID No.: QE8050B	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 40 CFR Part 60, Subpart NNN	SOP Index No.: 60NNN-1
Pollutant: VOC/TOC	Main Standard: § 60.662(b)
Monitoring Information	
Indicator: Pilot flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of a flame	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventative Maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p> <p>Follow the equipment manufacturer's requirements or recommendations for installation and start-up operation.</p> <p>The thermocouple sensor shall be installed in a location in accordance with the manufacturer's recommendation to produce voltage consistent with the presence or absence of the flare pilot flame.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: QEARU	
Control Device ID No.: QE1001B-1011B	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Applicable Regulatory Requirement	
Name: 40 CFR Part 60, Subpart NNN	SOP Index No.: 60NNN-2
Pollutant: VOC/TOC	Main Standard: § 60.662(a)
Monitoring Information	
Indicator: Period of Operation	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: All periods of operation of the steam generating units and process heaters that are not recorded is a deviation.	
CAM Text: Monitor and record the periods of operation of the steam generating units or process heater. The records must be readily available for inspection.	

CAM Summary

Unit/Group/Process Information	
ID No.: QEUNIT	
Control Device ID No.: QE8050B	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-FLARE
Pollutant: VOC	Main Standard: § 115.123(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of a flame.	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventive maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: QEUNITEM	
Control Device ID No.: QE8050B	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5722-2
Pollutant: Highly Reactive VOC	Main Standard: § 115.722(c)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: No pilot flame	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventive maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: QEUNITEM	
Control Device ID No.: QE8050B	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-EMACT
Pollutant: VOC	Main Standard: § 115.123(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of a flame.	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventative Maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: QEUNITNNN	
Control Device ID No.: QE1001B-1011B	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Control Device ID No.: QE5802UA	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Control Device ID No.: QE5802UB	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-BF
Pollutant: VOC	Main Standard: § 115.122(a)(2)
Monitoring Information	
Indicator: Period of Operation	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: All periods of operation that are not recorded.	
CAM Text: Monitor and record the periods of operation of the steam generating units or process heater. The records must be readily available for inspection.	

CAM Summary

Unit/Group/Process Information	
ID No.: QEUNITNNN	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-FLARE
Pollutant: VOC	Main Standard: § 115.123(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: No pilot flame.	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventive maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: QEUNITNNN	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 40 CFR Part 60, Subpart NNN	SOP Index No.: 60NNN-1
Pollutant: VOC/TOC	Main Standard: § 60.662(b)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame	
<p>CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of alarm events and duration of alarm events. Each monitoring device shall be accurate to within manufacturer's recommendations. Preventative Maintenance will be performed annually on the flame monitoring system to ensure proper functionality.</p> <p>Follow the equipment manufacturer's requirements or recommendations for installation and start-up operation.</p> <p>The thermocouple sensor shall be installed in a location in accordance with the manufacturer's recommendation to produce voltage consistent with the presence or absence of the flare pilot flame.</p>	

CAM Summary

Unit/Group/Process Information	
ID No.: QEUNITNNN	
Control Device ID No.: QE1001B-1011B	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Control Device ID No.: QE5802UA	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Control Device ID No.: QE5802UB	Control Device Type: Steam generating unit (boiler)/process heater (design heat input is greater than or equal to 44 megawatts)
Applicable Regulatory Requirement	
Name: 40 CFR Part 60, Subpart NNN	SOP Index No.: 60NNN-2
Pollutant: VOC/TOC	Main Standard: § 60.662(a)
Monitoring Information	
Indicator: Period of Operation	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: Any period of operation that is not recorded is a deviation.	
CAM Text: Monitor and record the periods of operation of the steam generating units or process heater. The records must be readily available for inspection.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: DGRLAPPING	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Degreasing Processes	SOP Index No.: R5412-1
Pollutant: VOC	Main Standard: § 115.412(1)
Monitoring Information	
Indicator: Visual Inspection	
Minimum Frequency: Monthly	
Averaging Period: N/A	
Deviation Limit: Any monitoring data which indicates that the cold cleaner is not in compliance with the applicable requirements of 30 TAC 115.412(1)(A)-(F) shall be considered and reported as a deviation.	
Periodic Monitoring Text: Inspect equipment and record data monthly to ensure compliance with any applicable requirements in § 115.412(1)(A)-(F). Any monitoring data which indicates that the cold cleaner is not in compliance with the applicable requirements of § 115.412(1)(A)-(F) shall be considered and reported as a deviation.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: DGRMAINT	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Degreasing Processes	SOP Index No.: R5412-1
Pollutant: VOC	Main Standard: § 115.412(1)
Monitoring Information	
Indicator: Visual Inspection	
Minimum Frequency: Monthly	
Averaging Period: N/A	
Deviation Limit: Any monitoring data which indicates that the cold cleaner is not in compliance with the applicable requirements of 30 TAC 115.412(1)(A)-(F) shall be considered and reported as a deviation.	
Periodic Monitoring Text: Inspect equipment and record data monthly to ensure compliance with any applicable requirements in § 115.412(1)(A)-(F). Any monitoring data which indicates that the cold cleaner is not in compliance with the applicable requirements of § 115.412(1)(A)-(F) shall be considered and reported as a deviation.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: DGRMOBILE	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Degreasing Processes	SOP Index No.: R5412-1
Pollutant: VOC	Main Standard: § 115.412(1)
Monitoring Information	
Indicator: Visual Inspection	
Minimum Frequency: Monthly	
Averaging Period: N/A	
Deviation Limit: Any monitoring data which indicates that the cold cleaner is not in compliance with the applicable requirements of 30 TAC 115.412(1)(A)-(F) shall be considered and reported as a deviation.	
Periodic Monitoring Text: Inspect equipment and record data monthly to ensure compliance with any applicable requirements in § 115.412(1)(A)-(F). Any monitoring data which indicates that the cold cleaner is not in compliance with the applicable requirements of § 115.412(1)(A)-(F) shall be considered and reported as a deviation.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: DGROLEFIN	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Degreasing Processes	SOP Index No.: R5412-1
Pollutant: VOC	Main Standard: § 115.412(1)
Monitoring Information	
Indicator: Visual Inspection	
Minimum Frequency: Monthly	
Averaging Period: N/A	
Deviation Limit: Any monitoring data which indicates that the cold cleaner is not in compliance with the applicable requirements of 30 TAC 115.412(1)(A)-(F) shall be considered and reported as a deviation.	
Periodic Monitoring Text: Inspect equipment and record data monthly to ensure compliance with any applicable requirements in § 115.412(1)(A)-(F). Any monitoring data which indicates that the cold cleaner is not in compliance with the applicable requirements of § 115.412(1)(A)-(F) shall be considered and reported as a deviation.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: DGRWBMURR	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Degreasing Processes	SOP Index No.: R5412-1
Pollutant: VOC	Main Standard: § 115.412(1)
Monitoring Information	
Indicator: Visual Inspection	
Minimum Frequency: Monthly	
Averaging Period: N/A	
Deviation Limit: Any monitoring data which indicates that the cold cleaner is not in compliance with the applicable requirements of 30 TAC 115.412(1)(A)-(F) shall be considered and reported as a deviation.	
Periodic Monitoring Text: Inspect equipment and record data monthly to ensure compliance with any applicable requirements in § 115.412(1)(A)-(F). Any monitoring data which indicates that the cold cleaner is not in compliance with the applicable requirements of § 115.412(1)(A)-(F) shall be considered and reported as a deviation.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: L3L4205	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if an alternate fuel is fired for a period greater than 24 consecutive hours or if visible emissions are observed or if opacity > 15%.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: L3RTOBF	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if an alternate fuel is fired for a period greater than 24 consecutive hours or if visible emissions are observed or if opacity > 15%.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: L3SILOS	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if an alternate fuel is fired for a period greater than 24 consecutive hours or if visible emissions are observed or if opacity > 15%.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: MRU3745	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-1
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Record of Tank Construction Specifications	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: It is a deviation if the fill pipe is not submerged.	
<p>Periodic Monitoring Text: Keep a record of tank construction specifications (e.g. engineering drawings) that show a fill pipe that extends from the top of a tank to have a maximum clearance of six inches (15.2 centimeters) from the bottom or, when the tank is loaded from the side, a discharge opening entirely submerged when the pipe used to withdraw liquid from the tank can no longer withdraw liquid in normal operation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: MRU3745	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-1
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Structural Integrity of the Pipe	
Minimum Frequency: Emptied and degassed	
Averaging Period: N/A	
Deviation Limit: A damaged fill pipe after refilling of the storage vessel is a deviation.	
<p>Periodic Monitoring Text: Inspect to determine the structural integrity of the fill pipe and record each time the storage vessel is emptied and degassed to ensure that it continues to meet the specifications in the above requirement. If the structural integrity of the fill pipe is in question, repairs shall be made before the storage vessel is refilled. It shall be considered and reported as a deviation if the repairs are not completed prior to refilling the storage vessel.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: MRU3747	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-1
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Record of Tank Construction Specifications	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: It is a deviation if the fill pipe is not submerged.	
<p>Periodic Monitoring Text: Keep a record of tank construction specifications (e.g. engineering drawings) that show a fill pipe that extends from the top of a tank to have a maximum clearance of six inches (15.2 centimeters) from the bottom or, when the tank is loaded from the side, a discharge opening entirely submerged when the pipe used to withdraw liquid from the tank can no longer withdraw liquid in normal operation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: MRU3747	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-1
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Structural Integrity of the Pipe	
Minimum Frequency: Emptied and degassed	
Averaging Period: N/A	
Deviation Limit: A damaged fill pipe after refilling of the storage vessel is a deviation.	
<p>Periodic Monitoring Text: Inspect to determine the structural integrity of the fill pipe and record each time the storage vessel is emptied and degassed to ensure that it continues to meet the specifications in the above requirement. If the structural integrity of the fill pipe is in question, repairs shall be made before the storage vessel is refilled. It shall be considered and reported as a deviation if the repairs are not completed prior to refilling the storage vessel.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1001B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15 % over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1002B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15 % over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1003B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15 % over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1004B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15 % over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1005B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15 % over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1006B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15 % over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1007B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15 % over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1008B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15 % over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1009B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15 % over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1010B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15% over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE1011B	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if alternate fuel is fired or opacity is greater than 15% over a six-minute period.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE5802UA	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if an alternate fuel is fired either alone or in combination with the specified gas.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: QE5802UB	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-V1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if an alternate fuel is fired either alone or in combination with the specified gas.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: UTBLRG	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if an alternate fuel is fired for a period greater than 24 consecutive hours or if visible emissions are observed or if opacity > 15%.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: UTBLRH	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 111, Visible Emissions	SOP Index No.: R1111-1
Pollutant: Opacity	Main Standard: § 111.111(a)(1)(C)
Monitoring Information	
Indicator: Fuel Type	
Minimum Frequency: Annually or at any time an alternate fuel is used	
Averaging Period: N/A	
Deviation Limit: It is a deviation if an alternate fuel is fired for a period greater than 24 consecutive hours or if visible emissions are observed or if opacity > 15%.	
<p>Periodic Monitoring Text: Record the type of fuel used by the unit. If an alternate fuel is fired, either alone or in combination with the specified gas, for a period greater than or equal to 24 consecutive hours it shall be considered and reported as a deviation or the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are observed. Any time an alternate fuel is fired for a period of greater than 7 consecutive days then visible emissions observations will be conducted no less than once per week. Documentation of all observations shall be maintained. If visible emissions are present during the firing of an alternate fuel, the permit holder shall either list this occurrence as a deviation or the permit holder may determine the opacity consistent with Test Method 9. Any opacity readings that are above the opacity limit from the underlying applicable requirement shall be reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: UTBLRN	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 117, Subchapter B	SOP Index No.: R7310-1
Pollutant: CO	Main Standard: § 117.310(c)(1)
Monitoring Information	
Indicator: CO Concentration	
Minimum Frequency: Annually	
Averaging Period: N/A	
Deviation Limit: Maximum CO concentration = 400 ppmv at 3.0% O ₂ , dry basis.	
<p>Periodic Monitoring Text: Measure and record the carbon monoxide concentration using a portable analyzer. Establish a maximum carbon monoxide concentration using the most recent performance test data, manufacturer's recommendations, engineering calculations, and/or historical data. The portable analyzer shall be operated in accordance with the Environmental Protection Agency's, Office of Air Quality Planning & Standards, Emission Measurement Center Conditional Test Method Determination of Oxygen, Carbon Monoxide, and Oxides of Nitrogen from Stationary Sources For Periodic Monitoring (Portable Electrochemical Analyzer Procedure) [CTM-034] (September 8, 1999). Any monitoring data above the maximum limit shall be considered and reported as a deviation.</p>	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: UTBLRS	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 117, Subchapter B	SOP Index No.: R7310-1
Pollutant: CO	Main Standard: § 117.310(c)(1)
Monitoring Information	
Indicator: CO Concentration	
Minimum Frequency: Annually	
Averaging Period: N/A	
Deviation Limit: Maximum CO concentration = 400 ppmv at 3.0% O ₂ , dry basis.	
<p>Periodic Monitoring Text: Measure and record the carbon monoxide concentration using a portable analyzer. Establish a maximum carbon monoxide concentration using the most recent performance test data, manufacturer's recommendations, engineering calculations, and/or historical data. The portable analyzer shall be operated in accordance with the Environmental Protection Agency's, Office of Air Quality Planning & Standards, Emission Measurement Center Conditional Test Method Determination of Oxygen, Carbon Monoxide, and Oxides of Nitrogen from Stationary Sources For Periodic Monitoring (Portable Electrochemical Analyzer Procedure) [CTM-034] (September 8, 1999). Any monitoring data above the maximum limit shall be considered and reported as a deviation.</p>	

Permit Shield

Permit Shield	344
----------------------------	------------

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
DIESELFUG	N/A	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	Fugitive emission unit is not a petroleum refinery, a natural gas/gasoline processing operation, or a synthetic organic chemical/polymer/resin/methyl tert-butyl ether manufacturing process.
DIESELLOAD	N/A	30 TAC Chapter 115, Loading and Unloading of VOC	Motor vehicle fuel dispensing facilities are exempt from the division relating to Loading and Unloading of VOCs.
DMFSUMPTK	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is less than 19,800 gallons.
GASFUG	N/A	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	Fugitive emission unit is not a petroleum refinery, a natural gas/gasoline processing operation, or a synthetic organic chemical/polymer/resin/methyl tert-butyl ether manufacturing process.
GASLOAD	N/A	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	Motor vehicle fuel dispensing facilities are exempt from the division relating to Loading and Unloading of VOCs.
L2CT	N/A	40 CFR Part 63, Subpart Q	The industrial cooling tower is not operated with chromium-based water treatment chemicals.
L2V2101	N/A	40 CFR Part 60, Subpart K	Storage tank capacity is less than 40,000 gallons and does not store petroleum liquids.
L2V2101	N/A	40 CFR Part 60, Subpart Ka	Storage tank capacity is less than 40,000 gallons and does not store petroleum liquids.
L2V2101	N/A	40 CFR Part 60, Subpart Kb	Storage tank was constructed prior to July 23, 1984 and not modified or reconstructed.
L3V3301	N/A	30 TAC Chapter 115, Storage of VOCs	Storage tank capacity is less than 1,000 gallons.

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
L3V3301	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is less than 19,800 gallons.
L3V3387	N/A	40 CFR Part 60, Subpart K	Storage tank capacity is less than 40,000 gallons and does not store petroleum liquids.
L3V3387	N/A	40 CFR Part 60, Subpart Ka	Storage tank capacity is less than 40,000 gallons and does not store petroleum liquids.
L3V3387	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is less than 19,800 gallons.
L3V3740	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is less than 19,800 gallons.
L3V4367	N/A	40 CFR Part 60, Subpart K	Storage tank capacity is less than 40,000 gallons and does not store petroleum liquids.
L3V4367	N/A	40 CFR Part 60, Subpart Ka	Storage tank capacity is less than 4,000 gallons and does not store petroleum liquids.
L3V4367	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is less than 19,800 gallons.
L3V4373	N/A	40 CFR Part 60, Subpart K	Storage tank was constructed prior to June 11, 1973 and not modified or reconstructed.
LBCT	N/A	40 CFR Part 63, Subpart Q	The industrial cooling tower does not operate with chromium-based water treatment chemicals.
MRU3745	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is < 19,800 gallons.
MRU3746	N/A	30 TAC Chapter 115, Storage of VOCs	Storage tank capacity is less than 1,000 gallons.
MRUFUG	N/A	40 CFR Part 61, Subpart V	This unit does not have equipment intended for operation in VHAP service.

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
PROAB3	N/A	40 CFR Part 60, Subpart DDD	Unit constructed, modified, or reconstructed prior to 9/30/1987.
PW7605JB	N/A	40 CFR Part 63, Subpart ZZZZ	This is an existing emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.
PW7605JC	N/A	40 CFR Part 63, Subpart ZZZZ	This is an existing emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.
Q1FUG	N/A	40 CFR Part 61, Subpart V	No source, as listed in 61.240 (a), is intended to operate in VHAP service
Q1INC	N/A	30 TAC Chapter 117, Subchapter B	The incinerator has a maximum rated capacity less than 40 MMBtu/hr.
Q1INC	N/A	40 CFR Part 60, Subpart E	The incinerator charging rate is less than 45 metric tons per day.
QE1001B	N/A	30 TAC Chapter 112, Sulfur Compounds	Liquid fuel is not burnt at this facility.
QE1002B	N/A	30 TAC Chapter 112, Sulfur Compounds	Does not burn liquid fuel.
QE1003B	N/A	30 TAC Chapter 112, Sulfur Compounds	This unit does not burn liquid fuel.
QE1004B	N/A	30 TAC Chapter 112, Sulfur Compounds	This unit does not burn liquid fuel.
QE1005B	N/A	30 TAC Chapter 112, Sulfur Compounds	This unit does not burn liquid fuel.
QE1006B	N/A	30 TAC Chapter 112, Sulfur Compounds	This unit does not burn liquid fuel.
QE1007B	N/A	30 TAC Chapter 112, Sulfur Compounds	This unit does not burn liquid fuel.
QE1008B	N/A	30 TAC Chapter 112, Sulfur Compounds	This unit does not burn liquid fuel.
QE1009B	N/A	30 TAC Chapter 112, Sulfur Compounds	Does not burn liquid fuel.
QE1010B	N/A	30 TAC Chapter 112, Sulfur Compounds	This unit does not burn liquid fuel.

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
QE1011B	N/A	30 TAC Chapter 112, Sulfur Compounds	This unit does not burn liquid fuel.
QE2410F	N/A	40 CFR Part 60, Subpart Kb	Tank stores a VOL with maximum TVP < 0.5 psia.
QE3416F	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity < 19,800 gallons
QE5407FA	N/A	40 CFR Part 60, Subpart Kb	Tank stores a VOL with maximum TVP < 0.5 psia.
QE5407FB	N/A	40 CFR Part 60, Subpart Kb	Tank stores a VOL with maximum TVP < 0.5 psia.
QE5802UA	N/A	40 CFR Part 60, Subpart D	Any affected facility meeting the applicability requirements under paragraph (a) of this section and commencing construction, modification, or reconstruction after June 19, 1986 is not subject to subpart D
QE5802UA	N/A	40 CFR Part 60, Subpart Dc	Construction, modification, or reconstruction commenced prior to June 9, 1989.
QE5802UB	N/A	40 CFR Part 60, Subpart D	Construction, modification or reconstruction commenced prior to August 17, 1971.
QE5802UB	N/A	40 CFR Part 60, Subpart Dc	Construction, modification or reconstruction commenced prior to June 9, 1989.
QE6410F	N/A	40 CFR Part 60, Subpart Kb	This tank is subject to 40 CFR Part 63, Subpart YY (MACT YY) and 40 CFR Part 60, Subpart Kb (NSPS Kb), but complies only with MACT YY because MACT YY supersedes NSPS Kb.
QE6410F	N/A	40 CFR Part 61, Subpart Y	Does not store benzene with a specific gravity specified in 61.270(a).
QE7409F	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is less than 19,800

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
			gallons.
QE7411F	N/A	40 CFR Part 60, Subpart Kb	Storage tank stores a VOL with a maximum true vapor pressure less than 0.5 psia.
QE7412F	N/A	40 CFR Part 60, Subpart Kb	Tank stores a VOL with maximum TVP < 0.5 psia.
QE7605JBDF	N/A	30 TAC Chapter 115, Storage of VOCs	Storage tank capacity is less than 1,000 gallons.
QE7605JBDF	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is less than 19,800 gallons.
QE7605JCDF	N/A	30 TAC Chapter 115, Storage of VOCs	Storage tank capacity is less than 1,000 gallons.
QE7605JCDF	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is less than 19,800 gallons.
QE7614JADF	N/A	30 TAC Chapter 115, Storage of VOCs	Storage tank capacity is less than 1,000 gallons.
QE7614JADF	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is less than 19,800 gallons.
QE7801U	N/A	40 CFR Part 63, Subpart Q	Industrial cooling tower is not operated with chromium-based water treatment chemicals.
QEFUG	N/A	40 CFR Part 60, Subpart VV	The fugitive components are potentially subject to 40 CFR Part 60, Subpart VV (NSPS VV), but is required to comply with 40 CFR Part 63, Subpart YY (MACT YY) only because MACT YY supersedes NSPS VV.
QEFUG	N/A	40 CFR Part 61, Subpart V	The fugitive components are potentially subject to 40 CFR Part 61, Subpart V (NESHAP V), but is required to comply with 40 CFR Part 63, Subpart YY (MACT YY) only because MACT YY supersedes NESHAP V.

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
QELOAD	N/A	40 CFR Part 61, Subpart BB	Facility loads only benzene-laden waste (covered under NESHAP FF).
UTBLRG	N/A	40 CFR Part 60, Subpart D	Construction or modification commenced prior to August 17, 1971.
UTBLRG	N/A	40 CFR Part 60, Subpart Db	Construction, modification, or reconstruction commenced prior to June 19, 1984.
UTBLRG	N/A	40 CFR Part 60, Subpart Dc	Construction, modification, or reconstruction commenced prior to June 9, 1989.
UTBLRH	N/A	40 CFR Part 60, Subpart D	Construction or modification commenced prior to August 17, 1971.
UTBLRH	N/A	40 CFR Part 60, Subpart Db	Construction, modification, or reconstruction commenced prior to June 19, 1984.
UTBLRH	N/A	40 CFR Part 60, Subpart Dc	Construction, modification, or reconstruction commenced prior to June 9, 1989.
UTV01235	N/A	30 TAC Chapter 115, Storage of VOCs	Storage tank is located at a motor vehicle fuel dispensing facility and has a storage capacity less than 25,000 gallons.
UTV01235	N/A	40 CFR Part 60, Subpart Ka	Storage tank capacity is less than 40,000 gallons.
UTV01235	N/A	40 CFR Part 60, Subpart Kb	Storage vessel is located at a gasoline service station.
UTV2026	N/A	40 CFR Part 60, Subpart Ka	Storage tank capacity is less than 40,000 gallons.
UTV2026	N/A	40 CFR Part 60, Subpart Kb	Storage tank capacity is less than 19,800 gallons.

New Source Review Authorization References

New Source Review Authorization References	351
New Source Review Authorization References by Emission Unit	353

New Source Review Authorization References

The New Source Review authorizations listed in the table below are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Prevention of Significant Deterioration (PSD) Permits	
PSD Permit No.: GHGPSDTX12	Issuance Date: 04/26/2019
PSD Permit No.: PSDTX752M5	Issuance Date: 06/30/2023
Nonattainment (NA) Permits	
NA Permit No.: N162M1	Issuance Date: 06/30/2023
NA Permit No.: N190M1	Issuance Date: 03/24/2023
Title 30 TAC Chapter 116 Permits, Special Permits, and Other Authorizations (Other Than Permits By Rule, PSD Permits, or NA Permits) for the Application Area.	
Authorization No.: 4477	Issuance Date: 03/30/2023
Authorization No.: 5226	Issuance Date: 06/06/2022
Authorization No.: 18978	Issuance Date: 06/30/2023
Authorization No.: 19109	Issuance Date: 07/30/2021
Authorization No.: 83822	Issuance Date: 03/24/2023
Authorization No.: 114809	Issuance Date: 03/24/2023
Authorization No.: 153017	Issuance Date: 08/14/2018
Authorization No.: 153696	Issuance Date: 10/25/2018
Authorization No.: 159535	Issuance Date: 01/28/2020
Authorization No.: 166297	Issuance Date: 10/08/2021
Authorization No.: 166298	Issuance Date: 10/22/2021
Permits By Rule (30 TAC Chapter 106) for the Application Area	
Number: 106.261	Version No./Date: 11/01/2003
Number: 106.262	Version No./Date: 11/01/2003
Number: 106.263	Version No./Date: 11/01/2001
Number: 106.264	Version No./Date: 09/04/2000
Number: 106.373	Version No./Date: 09/04/2000
Number: 106.412	Version No./Date: 09/04/2000
Number: 106.433	Version No./Date: 09/04/2000
Number: 106.452	Version No./Date: 09/04/2000
Number: 106.454	Version No./Date: 09/04/2000
Number: 106.454	Version No./Date: 11/01/2001
Number: 106.472	Version No./Date: 09/04/2000
Number: 106.476	Version No./Date: 09/04/2000
Number: 106.478	Version No./Date: 09/04/2000

New Source Review Authorization References

The New Source Review authorizations listed in the table below are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Number: 106.492	Version No./Date: 09/04/2000
Number: 106.511	Version No./Date: 09/04/2000
Number: 106.512	Version No./Date: 06/13/2001
Number: 106.532	Version No./Date: 09/04/2000

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
DGRLAPPING	LAPPING ROOM DEGREASER	106.454/11/01/2001 [51571]
DGRMAINT	MAINTENANCE SHOP DEGREASER	106.454/11/01/2001 [51571]
DGRMOBILE	MOBILE SHOP DEGREASER	106.454/11/01/2001 [51571]
DGROLEFIN	QE-1 SOLVENT DEGREASER	106.454/11/01/2001 [51571]
DGRWBMURR	WEBB-MURRAY DEGREASER	106.454/09/04/2000 [46127]
DIESELFUG	DIESEL FUGITIVES	106.412/09/04/2000
DIESELLOAD	DIESEL LOADING	106.472/09/04/2000
DMFSUMPTK	DMF SUMP TANK	18978, PSDTX752M5, N162M1
GASFUG	GASOLINE FUGITIVES	106.412/09/04/2000
GASLOAD	GASOLINE LOADING	106.472/09/04/2000
J2202	DIESEL FIREWATER PUMP	106.512/06/13/2001
L2CT	ABIII COOLING TOWER	4477
L2V2101	ISOPAR STORAGE TANK V76	4477, 106.261/11/01/2003 [152926]
L3ANV	AB3 ANALYZER VENTS	106.261/11/01/2003 [168301]
L3BAFCOEG	BAFCO EMERGENCY GENERATOR	106.511/09/04/2000
L3BOILERCV	ABIII COMBINED VENT TO BOILER G & H	4477
L3FLARE	ABIII FLARE	4477, 153696, 159535, 106.261/11/01/2003 [134079]
L3FLARECV	ABIII/MRU COMBINED VENT	4477, 153696
L3FUG	ABIII FUGITIVE EMISSIONS	4477, 153696, 106.261/11/01/2003 [151085, 133377], 106.262/11/01/2003 [151085], 106.264/09/04/2000

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
L3L4205	ABIII DRYER VENT	4477
L3RTOBF	ABIII SILO CYCLONE VENTS TO RTO	4477, 153696
L3SILOS	ABIII SILO CYCLONE VENTS TO RTO	4477, 153696
L3V3301	SLOP OIL TANK	4477
L3V3387	STORAGE TANK	4477
L3V3740	RECOVERED ORGANICS TANK	4477
L3V3740-2	RECOVERED ORGANICS TANK 2	4477
L3V4251	BLOW DOWN DRUM VENT	4477
L3V4367	VAM TANK	4477
L3V4373	LUBE OIL STORAGE TANK	4477
LB1PROCESS	LB-1 UNCONTROLLED PROCESS VENTS	114809, N190M1
LBCCRGEN	NEW CCR EMERGENCY GENERATOR	106.511/09/04/2000
LBCT	LB-1 COOLING TOWER	114809, N190M1
LBFLARE	LB-1 FLARE	114809, N190M1
LBFUG	LB-1 PROCESS FUGITIVES	114809, N190M1, 106.264/09/04/2000
LBFWGEN	FW PUMP	106.511/09/04/2000
LBSUBGEN	MCC EMERGENCY GENERATOR	106.511/09/04/2000
LBUNIT	LB-1 CONTROLLED PROCESS VENTS	114809, N190M1
MONHEL1CT	L1 COOLING SYSTEM	4477
MRU3745	MRU BOTTOMS TANK	4477
MRU3746	MRU VAM PRODUCT CHECK TANK	4477

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
MRU3747	MRU VAM PRODUCT TANK	4477
MRUFUG	FUGITIVES FOR MODIFIER RECOVERY UNIT	4477
PAINT	PAINT YARD	106.433/09/04/2000 [102494]
PRO-AB3RX	VENTS IN UNIT SUBJECT TO NSPS DDD	4477
PRO-LB1	LB-1 PROCESS	114809, N190M1
PRO-Q1	Q1 POLYMER PROCESS	19109
PROAB3	ABIII POLYMER MANUFACTURING PROCESS	4477, 106.261/11/01/2003, 106.262/11/01/2003
PW7605JB	QE-1 EMERGENCY GENERATOR	18978, PSDTX752M5, N162M1
PW7605JC	QE-1 EMERGENCY GENERATOR	18978, PSDTX752M5, N162M1
PW7614JA	QE-1 EMERGENCY GENERATOR	18978, PSDTX752M5, N162M1
PWBLAST	BLAST YARD AIR COMPRESSOR	106.511/09/04/2000
PWCWELL	ABIII DIESEL WELL PUMP	106.511/09/04/2000
PWW321	RADIO SYSTEM EMERGENCY GENERATOR	106.512/06/13/2001
Q1ANV	Q1 ANALYZER VENTS	106.261/11/01/2003 [168047]
Q1CT	Q1 COOLING TOWER	19109
Q1F01324	MIXER FEED HOPPER	19109, 106.261/11/01/2003 [138607, 152172], 106.262/11/01/2003 [138607, 152172]
Q1FUG	PROCESS FUGITIVES	19109, 106.261/11/01/2003 [151085, 168302], 106.262/11/01/2003 [151085], 106.264/09/04/2000
Q1INC	INCINERATOR	19109, 106.261/11/01/2003 [138607], 106.262/11/01/2003 [138607]
Q1PROCESS	VENTS FROM Q-1	19109

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
Q1V34001	OIL/WATER SEPARATOR	106.532/09/04/2000
QE1001B	PYROLYSIS FURNACE 1	18978, PSDTX752M5, N162M1
QE1002B	PYROLYSIS FURNACE 2	18978, PSDTX752M5, N162M1
QE1003B	PYROLYSIS FURNACE 3	18978, PSDTX752M5, N162M1
QE1004B	PYROLYSIS FURNACE 4	18978, PSDTX752M5, N162M1
QE1005B	PYROLYSIS FURNACE 5	18978, PSDTX752M5, N162M1
QE1006B	PYROLYSIS FURNACE 6	18978, PSDTX752M5, N162M1
QE1007B	PYROLYSIS FURNACE 7	18978, PSDTX752M5, N162M1
QE1008B	PYROLYSIS FURNACE 8	18978, PSDTX752M5, N162M1
QE1009B	PYROLYSIS FURNACE #9	18978, PSDTX752M5, N162M1
QE1010B	PYROLYSIS FURNACE 10	18978, GHGPSDTX12, PSDTX752M5, N162M1
QE1011B	PYROLYSIS FURNACE 11	18978, GHGPSDTX12, PSDTX752M5, N162M1
QE1416F	DECOKING DRUM	18978, PSDTX752M5, N162M1
QE1416FB	DECOKING DRUM	18978, GHGPSDTX12, PSDTX752M5, N162M1
QE2410F	WASH OIL DAY TANK	18978, PSDTX752M5, N162M1
QE3050B	ARU FLARE 3050B	18978, 166297, GHGPSDTX12, PSDTX752M5, N162M1, 106.261/11/01/2003 [165070], 106.262/11/01/2003 [165070]
QE3416F	METHANOL STORAGE	18978, PSDTX752M5, N162M1
QE3418F	MAPD DECOKING POT 3418F	18978, PSDTX752M5, N162M1
QE5407FA	SPENT CAUSTIC STORAGE TANK	18978, PSDTX752M5, N162M1

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
QE5407FB	SPENT CAUSTIC STORAGE TANK	18978, PSDTX752M5, N162M1
QE5802UA	BOILER A	18978, PSDTX752M5, N162M1, 106.261/11/01/2003 [155981], 106.262/11/01/2003 [155981]
QE5802UB	BOILER B	18978, PSDTX752M5, N162M1, 106.261/11/01/2003 [155981], 106.262/11/01/2003 [155981]
QE638481	EMERGENCY AIR COMPRESSOR	106.511/09/04/2000
QE6410F	PY GAS TANK	18978, PSDTX752M5, N162M1
QE7409F	DMS STORAGE TANK	18978, PSDTX752M5, N162M1
QE7411F	DMF STORAGE TANK	18978, PSDTX752M5, N162M1
QE7412F	WASH OIL TANK 7412F	18978, PSDTX752M5, N162M1
QE7605JBDF	DIESEL TANK	106.472/09/04/2000
QE7605JCDF	DIESEL STORAGE TANK #1	106.472/09/04/2000
QE7614JADF	DIESEL TANK	106.472/09/04/2000
QE7801U	COOLING TOWER	18978, PSDTX752M5, N162M1
QE8001A	WASTEWATER SYSTEM	18978, PSDTX752M5, N162M1
QE8050B	ELEVATED FLARE 8050B	18978, 83822, 166298, GHGPSDTX12, PSDTX752M5, N162M1, 106.261/11/01/2003 [155981], 106.262/11/01/2003 [155981]
QEANALYZ2	QEANALYZ2	18978, PSDTX752M5, N162M1
QEANALYZ4	ANALYZER VENT	18978, PSDTX752M5, N162M1
QEANALYZ5	FLARE ANALYZER	18978, PSDTX752M5, N162M1

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
QEARU	PROCESS VENTS FROM ARU	18978, PSDTX752M5, N162M1
QEBARGE	BARGE LOADING	18978, PSDTX752M5, N162M1
QECAUSTSUM	CAUSTIC SUMP	18978, PSDTX752M5, N162M1
QEFUG	PROCESS FUGITIVES	18978, GHGPSDTX12, PSDTX752M5, N162M1, 106.261/11/01/2003 [155981, 166468], 106.262/11/01/2003 [155981, 166468], 106.264/09/04/2000
QEH2FLAR	HYDROGEN FLARE	18978, PSDTX752M5, N162M1
QELAB	LABORATORY EMISSIONS	18978, PSDTX752M5, N162M1
QELOAD	ORGANIC LOADING	18978, PSDTX752M5, N162M1, 106.261/11/01/2003 [165070], 106.262/11/01/2003 [165070]
QEUNIT	PROCESS VENTS FROM QE-1	18978, PSDTX752M5, N162M1
QEUNITM	VENTS IN UNIT SUBJECT TO NSPS EACT	18978, PSDTX752M5, N162M1
QEUNITNNN	VENTS IN UNIT SUBJECT TO NSPS NNN	18978, PSDTX752M5, N162M1
REGVLOAD	LOADING/UNLOADING	4477
UTBLRG	G BOILER	5226, 153017
UTBLRH	H BOILER	5226, 153017
UTBLRN	PACKAGE BOILER NORTH	5226
UTBLRS	PACKAGE BOILER SOUTH	5226
UTV01235	GASOLINE STORAGE TANK	106.472/09/04/2000
UTV2026	DIESEL STORAGE TANK	106.472/09/04/2000 [53387]

**This column may include Permit by Rule (PBR) numbers and version dates, PBR Registration numbers in brackets, Standard Permit Registration numbers,

Minor NSR permit numbers, and Major NSR permit numbers.

Alternative Requirement

Alternative Requirement.....	361
-------------------------------------	------------

Jon Niermann, *Chairman*
Emily Lindley, *Commissioner*
Bobby Janecka, *Commissioner*
Toby Baker, *Executive Director*



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

Protecting Texas by Reducing and Preventing Pollution

December 30, 2020

MR HEATH MCCARTNEY
HSE SUPERVISOR LA PORTE COMPLEX
EQUISTAR CHEMICALS LP
PO DRAWER D
DEER PARK TX 77536-1900

Re: Alternative Method of Compliance (AMOC) No. 162 Revision
Alternative Method of Compliance for Flares
Equistar Chemicals La Porte Complex
Regulated Entity Number: RN100210319
Customer Reference Number: CN600124705
Associated Permit Numbers: 4477, 18978, 83822, 114809, 159535, N162M1, N190M2,
PSDTX752M5, O1606, and O2223

Dear Mr. McCartney:

This correspondence is in response to Equistar Chemicals, LP's (Equistar's) December 11, 2020 request to revise the compliance schedule of the Alternative Method of Compliance (AMOC) issued July 8, 2020 for several flares at the Equistar Chemicals La Porte Complex. This AMOC will be used to comply with applicable portions of 30 TAC Chapter 115.

We understand that the flares listed below will demonstrate compliance with Chapter 115 by complying with requirements equivalent to the EPA amendments to 40 CFR Part 63, Subpart YY National Emission Standards for Ethylene Manufacturing Process Units: Heat Exchange Systems and Waste Operations (EMACT) which was promulgated July 6, 2020. The EMACT requirements are at least as stringent as current state SIP flare requirements and are considered more robust to ensure continuous compliance. For all listed flares, compliance with the attached Plan, use of supplemental fuel, and associated operations will be implemented by December 31, 2021 for the LB-1 Unit and ARU Unit Flares, June 30, 2021 for the AB3 Unit Flare, and June 30, 2022 for the Olefins Unit Elevated Flare.

Production Unit	Olefins Unit	Olefins Unit	LB-1 Unit	AB3 Unit
Permit No.	18978, N162M1, PSDTX752M5	18978, N162M1, PSDTX752M5	114809, N190M2, PSDTX1574	PCP SP 159535
Name(s)	Elevated Flare and Elevated Flare Maintenance	ARU Flare and ARU Flare Maintenance	LB-1 Flare and MSS Flaring	Flare (Normal Operations)
EPN(s)	QE8050B and QE8050BMAINT	QE3050B and QE3050MAINT	LBFLARE	L3FLARE
Associated Permit No.	83822	83822		83822
Name(s)	Elevated Flare	ARU Flare		AB-III Tank Flare
EPN(s)	QE8050B	QE3050B		L3FLARE
Associated Permit				4477
Name(s)				Flare (Normal Operations) and Flare (MSS Emissions)
EPN(s)				L3FLARE
Title V Permit	O2223	O2223 and O1606	O1606	O1606

P.O. Box 13087 • Austin, Texas 78711-3087 • 512-239-1000 • tceq.texas.gov

How is our customer service? tceq.texas.gov/customer-survey
printed on recycled paper

December 30, 2020

Page 2

Mr. Heath McCartney

Re: Permit Numbers: 4477, 18978, 83822, 114809, 159535, N162M1, N190M2, PSDTX752M5, O1606, and O2223

Flare Type	Steam-assisted	Steam-assisted	Steam-assisted	Steam-assisted
Sources Controlled	Process Vents, Storage Tanks, and Loading from QE-1 Unit	Process Vents, Storage Tanks, and Loading from QE-1 Unit	Process Vents and Storage Tanks	Process Vents and Storage Tanks
Normal Operations or MSS	Normal & MSS	Normal & MSS	Normal & MSS	Normal & MSS
115, Subchapter B, Division 1 Storage Tanks	Yes	No	Yes	Yes
115, Subchapter B, Division 2 Vents	Yes	Yes	Yes	Yes
115, Subchapter C Loading	Yes	Yes	Yes	Yes
115, Subchapter D Fugitives	Yes	Yes	Yes	Yes
115, Subchapter F, Division 3 Degassing	Yes	No	Yes	Yes
115, Subchapter H, Division 1 HRVOC Vents	Yes	Yes	Yes	Yes
115, Subchapter H, Division 3 HRVOC Fugitives	Yes	Yes	Yes	Yes

The Texas Commission on Environmental Quality (TCEQ) Executive Director has made a final decision to approve your AMOC request. The TCEQ has been delegated authority to enforce the above cited standards and is authorized to approve this AMOC. You are reminded that approval of any AMOC shall not abrogate the Executive Director or Administrator's authority under the Act or in any way prohibit later canceling the AMOC. By copy of this letter we are informing the Environmental Protection Agency, Region 6, of this decision as required by TCEQ's delegation of authority.

This AMOC approval may supersede certain requirements or representations in Permit Nos. 4477, 18978, 83822, 114809, 159535, N162M1, N190M2, PSDTX752M5. To ensure effective and consistent enforceability, we request that Equistar determine if additional revisions to incorporate this AMOC into the permits through submittal of alterations are needed, and if so, submit alterations no later than 90 days after this approval.

This approval may also change applicable requirements for the site, which are identified in the site operating permit (SOP) O1606 and O2223. The TCEQ recommends the submittal of a SOP administrative revision if any changes are necessary. Changes meeting the criteria for an administrative revision can be operated before issuance of the revision if a complete application is submitted to the TCEQ and this information is maintained with the SOP records at the site.

If you need further information or have any questions, please contact Ms. Anne Inman, P.E. at (512) 239-1276 or write to the Texas Commission on Environmental Quality, Office of Air, Air Permits Division, MC-163, P.O. Box 13087, Austin, Texas 78711-3087.

Sincerely,



December 30, 2020

Page 3

Mr. Heath McCartney

Re: Permit Numbers: 4477, 18978, 83822, 114809, 159535, N162M1, N190M2, PSDTX752M5, O1606,
and O2223

Samuel Short, Deputy Director

Air Permits Division

Office of Air

Texas Commission on Environmental Quality

cc: Director, Harris County, Pollution Control Services, Pasadena

Air Section Manager, Region 12 - Houston

Jesse E. Chacon, P.E., Manager, Operating Permits Section, Air Permits Division, OA: MC-163

Rebecca Partee, Manager, Chemical New Source Review Permits Section, Air Permits Division,
OA: MC-163

Air Permits Section Chief, New Source Review Section (6PD-R), U.S. Environmental Protection
Agency, Region 6, Dallas

Project Number: 322638

Appendix A

Acronym List 365

Acronym List

The following abbreviations or acronyms may be used in this permit:

ACFM	actual cubic feet per minute
AMOC	alternate means of control
ARP	Acid Rain Program
ASTM	American Society of Testing and Materials
B/PA	Beaumont/Port Arthur (nonattainment area)
CAM	Compliance Assurance Monitoring
CD	control device
CEMS	continuous emissions monitoring system
CFR	Code of Federal Regulations
COMS	continuous opacity monitoring system
CVS	closed vent system
D/FW	Dallas/Fort Worth (nonattainment area)
EP	emission point
EPA	U.S. Environmental Protection Agency
EU	emission unit
FCAA Amendments	Federal Clean Air Act Amendments
FOP	federal operating permit
gr/100 scf	grains per 100 standard cubic feet
HAP	hazardous air pollutant
H/G/B	Houston/Galveston/Brazoria (nonattainment area)
H ₂ S	hydrogen sulfide
ID No.	identification number
lb/hr	pound(s) per hour
MACT	Maximum Achievable Control Technology (40 CFR Part 63)
MMBtu/hr	Million British thermal units per hour
NA	nonattainment
N/A	not applicable
NADB	National Allowance Data Base
NESHAP	National Emission Standards for Hazardous Air Pollutants (40 CFR Part 61)
NO _x	nitrogen oxides
NSPS	New Source Performance Standard (40 CFR Part 60)
NSR	New Source Review
ORIS	Office of Regulatory Information Systems
Pb	lead
PBR	Permit By Rule
PEMS	predictive emissions monitoring system
PM	particulate matter
ppmv	parts per million by volume
PRO	process unit
PSD	prevention of significant deterioration
psia	pounds per square inch absolute
SIP	state implementation plan
SO ₂	sulfur dioxide
TCEQ	Texas Commission on Environmental Quality
TSP	total suspended particulate
TVP	true vapor pressure
U.S.C.	United States Code
VOC	volatile organic compound

Appendix B

Major NSR Summary Table 367

Major NSR Summary Table

Permit Numbers: 114809 and N190M1					Issuance Date: March 24, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
LBCT	LB-1 Cooling Tower	PM	0.40	1.55	9, 10	9, 10, 29	
		PM ₁₀	0.25	0.98			
		PM _{2.5}	<0.01	<0.01			
LBFUG	LB-1 Process Fugitives (5)	VOC	2.26	9.90	3, 15, 16	3, 15, 16, 29	3
LBRVE	Residual VOC Emissions (6)	VOC	9.24	20.25	4, 5, 6	4, 5, 6, 29	
LBFLARE	LB-1 Flare	CO	327.55	86.56	3, 7, 8	3, 7, 8, 29	3
		NO _x	69.59	17.21			
		SO ₂	345.84	4.67			
		VOC	530.14	39.88			
	MSS Flaring	CO	458.95	37.95	3, 7, 8, 27	3, 7, 8, 27, 29	3
		NO _x	91.37	7.43			
		SO ₂	2.08	1.24			
		VOC	543.82	14.06			
LBWW	LB-1 Wastewater Flow	VOC	0.52	0.38	3	3	3
LBANALYZ	LB-1 Analyzers	VOC	0.02	0.01	3	3	3

Major NSR Summary Table

Permit Numbers: 114809 and N190M1					Issuance Date: March 24, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
MSS-LB1RM	LB-1 Routine Maintenance	VOC	2.63	<0.01	22, 23, 24, 26	22, 23, 24, 26, 29	
MSS-LB1RMA	LB1 MSS - Attachment A	VOC	1.25	0.01	22, 26	22, 26, 29	
		Tetrachloroethylene	1.26	0.04			
MSS-LB1-VC	LB-1 Vessel Clearing	VOC	31.64	0.58	22, 23, 24, 25, 26	22, 23, 24, 25, 26, 29	
		CO	0.04	<0.01			
LBV603	Alkyls Seal Oil Pot Vent	VOC	<0.01	<0.01	3	3	3
LBD108	Mineral Oil Storage Drum	VOC	0.01	0.01	3	3	3

Major NSR Summary Table

Permit Numbers: 114809 and N190M1					Issuance Date: March 24, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
LBF806	Additive Feed Vent System	PM	0.07	0.30	11, 13	11, 13, 29	
		PM ₁₀	0.07	0.30			
		PM _{2.5}	0.07	0.30			
LBF807	Housekeeping Clean-up Vacuum System	PM	0.08	0.09	11, 13, 14	11, 13, 14, 29	
		PM ₁₀	0.08	0.09			
		PM _{2.5}	0.08	0.09			
LBF816	Bulk Additive Silo Filter (Talc)	PM	0.10	0.02	11, 13, 14	11, 13, 14, 29	
		PM ₁₀	0.10	0.02			
		PM _{2.5}	0.10	0.02			
LBOHG	LB-1 Oil Hydraulic Guard D114	VOC	<0.01	<0.01	3	3	3
LBD817	TNPP Additive Drum Vent	VOC	<0.01	<0.01	3	3	3
LB30F965	30-F-965 Filter	PM	0.40	1.63	11, 13, 19, 21	11, 13, 19, 21, 29	21
		PM ₁₀	0.40	1.63			
		PM _{2.5}	0.10	0.41			

Major NSR Summary Table

Permit Numbers: 114809 and N190M1					Issuance Date: March 24, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
LB30F900A	30-F-900A Elutriator Vent	PM	0.14	0.46	11, 13, 14, 19, 21	11, 13, 14, 19, 21, 29	21
		PM ₁₀	0.14	0.46			
		PM _{2.5}	0.04	0.11			
LB30F900B	30-F-900B Elutriator Vent	PM	0.14	0.46	11, 13, 14, 19, 21	11, 13, 14, 19, 21, 29	21
		PM ₁₀	0.14	0.46			
		PM _{2.5}	0.04	0.11			
LBBL980	Hopper Blower	PM	0.14	0.15	11, 13, 14, 19, 21	11, 13, 14, 19, 21, 29	21
		PM ₁₀	0.14	0.15			
		PM _{2.5}	0.03	0.04			
LBPK810	Pellet Dryer Vent	PM	0.17	0.75	12, 21	12, 21, 29	21
		PM ₁₀	0.17	0.75			
		PM _{2.5}	0.17	0.75			

- (1) Emission point identification - either specific equipment designation or emission point number from plot plan.
- (2) Specific point source name. For fugitive sources, use area name or fugitive source name.
- (3) VOC
 - volatile organic compounds as defined in Title 30 Texas Administrative Code § 101.1
 - NO_x
 - total oxides of nitrogen
 - SO₂
 - sulfur dioxide
 - PM
 - total particulate matter, suspended in the atmosphere, including PM₁₀ and PM_{2.5}, as represented
 - PM₁₀
 - total particulate matter equal to or less than 10 microns in diameter, including PM_{2.5}, as represented
 - PM_{2.5}
 - particulate matter equal to or less than 2.5 microns in diameter
 - CO
 - carbon monoxide
- (4) Compliance with annual emission limits (tons per year) is based on a 12-month rolling period.
- (5) Emission rate is an estimate and is enforceable through compliance with the applicable special condition(s) and permit application representations.
- (6) VOC emissions shown at this point represent the total allowable VOC emission rates for all emission points in the process downstream of the buffer flushing silo.

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
QE1001B	Furnace 1	NO _x	30.30	121.26	8, 10, 24, 25	10, 24, 25	24, 25
		CO	24.71	31.34			
		SO ₂	0.30	1.31			
		VOC	0.30	0.75			
		PM	1.00	3.50			
		PM ₁₀	1.00	3.50			
		PM _{2.5}	1.00	3.50			
QE1002B	Furnace 2	NO _x	30.30	121.26	8, 10, 24, 25	10, 24, 25	24, 25
		CO	24.71	31.34			
		SO ₂	0.30	1.31			
		VOC	0.30	0.75			
		PM	1.00	3.50			
		PM ₁₀	1.00	3.50			
		PM _{2.5}	1.00	3.50			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
QE1003B	Furnace 3	NO _x	30.30	121.26	8, 10, 24, 25	10, 24, 25	24, 25
		CO	24.71	31.34			
		SO ₂	0.30	1.31			
		VOC	0.30	0.75			
		PM	1.00	3.50			
		PM ₁₀	1.00	3.50			
		PM _{2.5}	1.00	3.50			
QE1004B	Furnace 4	NO _x	30.30	121.26	8, 10, 24, 25	10, 24, 25	24, 25
		CO	24.71	31.34			
		SO ₂	0.30	1.31			
		VOC	0.30	0.75			
		PM	1.00	3.50			
		PM ₁₀	1.00	3.50			
		PM _{2.5}	1.00	3.50			
QE1005B	Furnace 5	NO _x	30.30	121.26	8, 10, 24, 25	10, 24, 25	24, 25

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
		CO	24.71	31.34			
		SO ₂	0.30	1.31			
		VOC	0.30	0.75			
		PM	1.00	3.50			
		PM ₁₀	1.00	3.50			
		PM _{2.5}	1.00	3.50			
QE1006B	Furnace 6	NO _x	30.30	121.26	8, 10, 24, 25	10, 24, 25	24, 25
		CO	24.71	31.34			
		SO ₂	0.30	1.31			
		VOC	0.30	0.75			
		PM	1.00	3.50			
		PM ₁₀	1.00	3.50			
		PM _{2.5}	1.00	3.50			
QE1007B	Furnace 7	NO _x	30.30	121.26	8, 10, 24, 25	10, 24, 25	24, 25
		CO	24.71	31.34			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
		SO ₂	0.30	1.31			
		VOC	0.30	0.75			
		PM	1.00	3.50			
		PM ₁₀	1.00	3.50			
		PM _{2.5}	1.00	3.50			
QE1008B	Furnace 8	NO _x	30.30	121.26	8, 10, 24, 25	10, 24, 25	24, 25
		CO	24.71	31.34			
		SO ₂	0.30	1.31			
		VOC	0.30	0.75			
		PM	1.00	3.50			
		PM ₁₀	1.00	3.50			
		PM _{2.5}	1.00	3.50			
QE1009B	Furnace 9	NO _x	31.75	126.58	8, 10, 24, 25	10, 24, 25	24, 25
		CO	33.92	34.45			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
		SO ₂	0.36	1.56			
		VOC	0.30	0.75			
		PM	2.10	6.57			
		PM ₁₀	2.10	6.57			
		PM _{2.5}	2.10	6.57			
QE1010B	Furnace 10	NO _x (Routine)	9.00	24.09	8, 10, 24, 25	10, 24, 25	24, 25
		NO _x (Decoke / Hot stand by)	12.50				
		NO _x (MSS)	14.00				
		CO	20.36	81.76			
		SO ₂	0.35	1.42			
		VOC	0.61	1.50			
		PM	4.30	17.25			
		PM ₁₀	4.30	17.25			
		PM _{2.5}	4.30	17.25			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
		NH ₃	3.11	13.62			
QE1011B	Furnace 11	NO _x (Routine)	9.00	24.09	8, 10, 24, 25	10, 24, 25	24, 25
		NO _x (Decoke / Hot stand by)	12.50				
		NO _x (MSS)	14.00				
		CO	20.36	81.76			
		SO ₂	0.35	1.42			
		VOC	0.61	1.50			
		PM	4.30	17.25			
		PM ₁₀	4.30	17.25			
		PM _{2.5}	4.30	17.25			
		NH ₃	3.11	13.62			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
QE5802UA	Boiler A	NO _x	22.50	89.70	8, 24, 25	24, 25	24, 25
		CO	20.14	30.27			
		SO ₂	0.14	0.61			
		VOC	1.43	1.91			
		PM	0.34	1.49			
		PM ₁₀	0.34	1.49			
		PM _{2.5}	0.34	1.49			
QE5802UB	Boiler B	NO _x	22.50	89.70	8, 24, 25	24, 25	24, 25
		CO	20.14	30.27			
		SO ₂	0.14	0.61			
		VOC	1.43	1.91			
		PM	0.34	1.49			
		PM ₁₀	0.34	1.49			
		PM _{2.5}	0.34	1.49			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
QE6410F	Pyrolysis Gasoline IFR Tank	VOC	2.12	5.95	11	11	
QE2410F	Wash Oil Drum	VOC	0.52	0.02	11	11	
QE1416F	Decoking Drum	CO (8)	877.90	—	8, 10, 19, 20	10, 19, 20	
		PM	33.41	—			
		PM ₁₀ (8)	33.41	—			
		PM _{2.5} (8)	16.37	—			
		VOC	2.05	—			
QE1423F	Decoking Drum	CO	877.90	—	8, 10, 19, 20	10, 19, 20	
		PM	33.41	—			
		PM ₁₀	33.41	—			
		PM _{2.5}	16.37	—			
		VOC	2.05	—			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
QE1416F and QE1423F	QE1416F and QE1423F	CO	—	388.47	8, 10, 19, 20	10, 19, 20	
		PM	—	13.43			
		PM ₁₀	—	13.43			
		PM _{2.5}	—	6.51			
		VOC	—	3.78			
QE7801U	Cooling Tower (5)	VOC	7.88	5.34	27, 28	27, 28	
		PM	2.67	11.69			
		PM ₁₀	1.31	5.73			
		PM _{2.5}	0.01	0.02			
QE3418F	MAPD Decoke Pot	CO	17.30	0.31	10	10	
QE3050B	ARU Flare	CO (PSD)	21.00	8.98	17, 29	17, 29	
		NO _x (PSD)	4.04	1.73			
		SO ₂	0.10	0.10			
		VOC	15.02	1.38			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
QE3050MAINT	ARU Flare Maintenance	CO	50.65	1.27	9, 17, 29	9, 17, 29	
		NO _x	9.74	0.24			
		SO ₂	0.10	0.10			
		VOC	78.63	1.97			
QE8050B	Elevated Flare	CO (PSD)	266.80	87.66	17, 29	17, 29	
		NO _x (PSD)	85.21	30.11			
		SO ₂	81.32	4.25			
		VOC	50.83	11.89			
QE8050MAINT	Elevated Flare Maintenance	CO	82.50	0.30	9, 17, 29	9, 17, 29	
		NO _x	16.16	0.10			
		SO ₂	101.78	0.06			
		VOC	58.18	0.15			
QEH2FLARE	Hydrogen Flare	CO	93.84	56.31	17, 29	17, 29	
		NO _x	32.87	19.72			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
		VOC	5.99	3.59			
		SO ₂	0.01	0.01			
QE7412F	Wash Oil Tank	VOC	0.70	0.08	11	11	
QELOAD	Organic Loading	VOC	0.16	0.03	12, 13, 15	12, 15	
QESTORE	Organic Storage	VOC	1.33	1.01	15	15	
QE8001A	Wastewater System	VOC	0.35	1.55			
QELAB	Sampling	VOC	7.04	2.25			
QEFUG	Process Fugitives (6)	VOC	19.76	86.45	21, 22, 23	21, 22, 23	
		NH ₃	0.12	0.54			
		Chlorine	0.04	0.17			
QEANALYZ5	Main Flare Analyzer	VOC	<0.01	<0.01			
QEANALYZ2	Main Flare HRVOC Analyzer	NO _x	0.01	0.01			
		CO	0.01	0.01			
		VOC	0.01	0.01			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
QE1ANLYZR4	Furnace 10-11 Analyzers	NO _x	0.01	0.01			
		CO	0.01	0.01			
		VOC	0.04	0.17			
QEUNIT	Dock Thermal Oxidizer (7)	NO _x (PSD)	14.68	4.70	12, 13, 14, 18	12, 13, 14, 18	
		CO (PSD)	17.73	6.25			
		VOC	23.77	7.22			
		PM	0.01	0.02			
		PM ₁₀	0.01	0.02			
		PM _{2.5}	0.01	0.02			
PW7614JA	Emergency Engine	NO _x	15.10	1.70	26		
		CO	3.25	0.37			
		VOC	1.22	0.14			
		SO ₂	1.00	0.11			
		PM	1.07	0.12			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
		PM ₁₀	1.07	0.12			
		PM _{2.5}	1.07	0.12			
PW7605JB	Emergency Engine	NO _x	15.84	6.94	26		
		CO	3.63	1.59			
		VOC	0.47	0.20			
		SO ₂	5.34	2.34			
		PM	0.46	0.20			
		PM ₁₀	0.46	0.20			
		PM _{2.5}	0.46	0.20			
PW7605JC	Emergency Engine	NO _x	15.84	6.94	26		
		CO	3.63	1.59			
		VOC	0.47	0.20			
		SO ₂	5.34	2.34			
		PM	0.46	0.20			

Major NSR Summary Table

Permit Numbers: 18978, PSDTX752M5, and N162M1					Issuance Date: June 30, 2023		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
		PM ₁₀	0.46	0.20			
		PM _{2.5}	0.46	0.20			
7407F	Sulfuric Acid Tank	H ₂ SO ₄	0.01	0.01	11	11	
7701LL3F	Sulfuric Acid Tank	H ₂ SO ₄	0.01	0.01	11	11	
QEPGCIN	PGC Seal Oil/Lube Oil	VOC	0.32	1.38			
QENH3SC	Ammonia Clearing	NH ₃	1.00	0.01	16	16	

- (1) Emission point identification - either specific equipment designation or emission point number from plot plan.
- (2) Specific point source name. For fugitive sources, use area name or fugitive source name.
- (3) VOC
 - volatile organic compounds as defined in Title 30 Texas Administrative Code § 101.1
 - NO_x
 - total oxides of nitrogen
 - SO₂
 - sulfur dioxide
 - PM
 - total particulate matter, suspended in the atmosphere, including PM₁₀ and PM_{2.5}, as represented
 - PM₁₀
 - total particulate matter equal to or less than 10 microns in diameter, including PM_{2.5}, as represented
 - PM_{2.5}
 - particulate matter equal to or less than 2.5 microns in diameter
 - CO
 - carbon monoxide
 - NH₃
 - ammonia
 - H₂SO₄
 - sulfuric acid
- (4) Compliance with annual emission limits (tons per year) is based on a 12 month rolling period.
- (5) Emission rate is an estimate only and is enforceable through compliance with the permit Special Conditions applicable to the cooling tower and with cooling water circulation flow rates represented in the permit application.
- (6) Emission rate is an estimate only and is enforceable through compliance with the permit Special Conditions applicable to fugitives and with representations in the permit application.
- (7) The dock thermal oxidizer is owned and operated by LyondellBasell Acetyls, LLC, under Permit Number 4751.
- (8) The Decoking Drum (EPN QE1416F) CO, PM₁₀, and PM_{2.5} emissions were subject to PSD review in TCEQ NSR Projects 77035, 77466, 160526, and 166225.

Major NSR Summary Table

Permit Number: GHGPSDTX12					Issuance Date: April 26, 2019		
EPN	Description	GHG Mass Basis		TPY CO ₂ e ^{1,2}	Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			TPY ¹		Special Condition/Application Information	Special Condition/Application Information	Special Condition/Application Information
QE1010B	Cracking Furnace	CO ₂	281,506	281,766	III.A.1.b. through h., III.A.1.m. through p., III.A.1.s. through u., III.B.1.through 3., IV.A.1., V.A. through V.C., V.E. through H.	III.A.1.b., III.A.1.e., III.A.1.f., III.A.1.n., III.A.1.u., III.B.1., IV.A.1., IV.A.2. through 4., IV.A.8., V.E.	III.B.1., III.B.3., IV.A.4., V.A., V.B., V.C.
		CH ₄	5				
		N ₂ O	0.5				
QE1011B	Cracking Furnace	CO ₂	281,506	281,766	III.A.1.b. through h., III.A.1.m. through p., III.A.1.s. through u., III.B.1.through 3., IV.A.1., V.A. through V.C., V.E. through H.	III.A.1.b., III.A.1.e., III.A.1.f., III.A.1.n., III.A.1.u., III.B.1., IV.A.1., IV.A.2. through 4., IV.A.8., V.E.	III.B.1., III.B.3., IV.A.4., V.A., V.B., V.C.
		CH ₄	5				
		N ₂ O	0.5				
QE3050B	ARU Flare	CO ₂	6,037	6,121	III.A.2.b., III.A.2.f., III.A.2.g., III.A.2.i, IV.A.1.	III.A.2.f. through III.A.2.h., IV.A.1., IV.A.2. through 4., IV.A.8.	IV.A.4.
		CH ₄	4				
		N ₂ O	Negligible ³				
QE8050B	Elevated Flare	CO ₂	32,563	33,025	III.A.2.b., III.A.2.f., III.A.2.g., III.A.2.i, IV.A.1.	III.A.2.f. through III.A.2.h., IV.A.1., IV.A.2. through 4., IV.A.8.	IV.A.4.
		CH ₄	22				
		N ₂ O	Negligible ³				
QE1416FB ⁵	Decoking Drum	CO ₂	1,047	1,047	IV.A.1.	III.A.1.q., IV.A.1., IV.A.2. through 4., IV.A.8.	IV.A.4.
QE1423F ⁵	Decoking Drum	CO ₂	3,805	3,805	IV.A.1	III.A.1.q. through III.A.1.u., IV.A.1. through IV.A.4., IV.A.8 and IV.A.9.	IV.A.4.
QEFUG	Fugitive Process Emissions	CH ₄	Not Applicable	Not Applicable	III.A.3.a., III.A.3.b., III.A.3.d.	III.A.3.a., III.A.3.b., III.A.3.d., IV.A.1., IV.A.2. through 4., IV.A.8.	III.A.3.a., IV.A.4.
Totals ⁶		CO ₂	605,417	CO ₂ e 606,483			
Totals ⁴		CO ₂	602,659	CO ₂ e 603,872			
		CH ₄	43				
		N ₂ O	1.0				

- (1) The TPY emission limits specified in this table are not to be exceeded for this facility and include emissions from the facility during all operations and include MSS activities.
- (2) Global Warming Potentials (GWP): CO₂ = 1, CH₄ = 21, N₂O = 310
- (3) All values indicated as negligible are less than 0.01 TPY with appropriate rounding.
- (4) Total emissions include the PTE for fugitive emissions. Totals are given for informational purposes only and do not constitute emission limits. The CO₂ total becomes invalid immediately when the decoking drum (EPN QE1423F) is in operation.
- (5) The emissions from EPN QE1416FB become invalid immediately when the decoking drum (EPN QE1423F) is in operation.
- (6) The Totals for CO₂ include EPN QE1423F and excludes EPN QE1416FB.



Texas Commission on Environmental Quality Air Quality Permit

A Permit Is Hereby Issued To
Equistar Chemicals, LP
Authorizing the Construction and Operation of
Equistar Chemicals La Porte Complex
Located at La Porte, Harris County, Texas
Latitude 29.7175 Longitude -95.068055

Permits: 114809 and N190M1

Revision Date: March 24, 2023

Expiration Date: February 19, 2026

A handwritten signature in black ink, reading "Brian E. Chamallo".

For the Commission

1. **Facilities** covered by this permit shall be constructed and operated as specified in the application for the permit. All representations regarding construction plans and operation procedures contained in the permit application shall be conditions upon which the permit is issued. Variations from these representations shall be unlawful unless the permit holder first makes application to the Texas Commission on Environmental Quality (commission) Executive Director to amend this permit in that regard and such amendment is approved. [Title 30 Texas Administrative Code (TAC) Section 116.116 (30 TAC § 116.116)]¹
2. **Voiding of Permit.** A permit or permit amendment is automatically void if the holder fails to begin construction within 18 months of the date of issuance, discontinues construction for more than 18 months prior to completion, or fails to complete construction within a reasonable time. Upon request, the executive director may grant an 18-month extension. Before the extension is granted the permit may be subject to revision based on best available control technology, lowest achievable emission rate, and netting or offsets as applicable. One additional extension of up to 18 months may be granted if the permit holder demonstrates that emissions from the facility will comply with all rules and regulations of the commission, the intent of the Texas Clean Air Act (TCAA), including protection of the public's health and physical property; and (b)(1) the permit holder is a party to litigation not of the permit holder's initiation regarding the issuance of the permit; or (b)(2) the permit holder has spent, or committed to spend, at least 10 percent of the estimated total cost of the project up to a maximum of \$5 million. A permit holder granted an extension under subsection (b)(1) of this section may receive one subsequent extension if the permit holder meets the conditions of subsection (b)(2) of this section. [30 TAC § 116.120]
3. **Construction Progress.** Start of construction, construction interruptions exceeding 45 days, and completion of construction shall be reported to the appropriate regional office of the commission not later than 15 working days after occurrence of the event. [30 TAC § 116.115(b)(2)(A)]
4. **Start-up Notification.** The appropriate air program regional office shall be notified prior to the commencement of operations of the facilities authorized by the permit in such a manner that a representative of the commission may be present. The permit holder shall provide a separate notification for the commencement of operations for each unit of phased construction, which may involve a series of units commencing operations at different times. Prior to operation of the facilities authorized by the permit, the permit holder shall identify the source or sources of allowances to be utilized for compliance with Chapter 101, Subchapter H, Division 3 of this title (relating to Mass Emissions Cap and Trade Program). [30 TAC § 116.115(b)(2)(B)]
5. **Sampling Requirements.** If sampling is required, the permit holder shall contact the commission's Office of Compliance and Enforcement prior to sampling to obtain the proper data forms and procedures. All sampling and testing procedures must be approved by the executive director and coordinated with the regional representatives of the commission. The permit holder is also responsible for providing sampling facilities and conducting the sampling operations or contracting with an independent sampling consultant. [30 TAC § 116.115(b)(2)(C)]
6. **Equivalency of Methods.** The permit holder must demonstrate or otherwise justify the equivalency of emission control methods, sampling or other emission testing methods, and monitoring methods proposed as alternatives to methods indicated in the conditions of the permit. Alternative methods shall be applied for in writing and must be reviewed and approved by the executive director prior to their use in fulfilling any requirements of the permit. [30 TAC § 116.115(b)(2)(D)]
7. **Recordkeeping.** The permit holder shall maintain a copy of the permit along with records containing the information and data sufficient to demonstrate compliance with the permit, including production records and

operating hours; keep all required records in a file at the plant site. If, however, the facility normally operates unattended, records shall be maintained at the nearest staffed location within Texas specified in the application; make the records available at the request of personnel from the commission or any air pollution control program having jurisdiction in a timely manner; comply with any additional recordkeeping requirements specified in special conditions in the permit; and retain information in the file for at least two years following the date that the information or data is obtained. [30 TAC § 116.115(b)(2)(E)]

8. **Maximum Allowable Emission Rates.** The total emissions of air contaminants from any of the sources of emissions must not exceed the values stated on the table attached to the permit entitled "Emission Sources-- Maximum Allowable Emission Rates." [30 TAC § 116.115(b)(2)(F)] ¹
9. **Maintenance of Emission Control.** The permitted facilities shall not be operated unless all air pollution emission capture and abatement equipment is maintained in good working order and operating properly during normal facility operations. The permit holder shall provide notification in accordance with 30 TAC §101.201, 101.211, and 101.221 of this title (relating to Emissions Event Reporting and Recordkeeping Requirements; Scheduled Maintenance, Startup, and Shutdown Reporting and Recordkeeping Requirements; and Operational Requirements). [30 TAC§ 116.115(b)(2)(G)]
10. **Compliance with Rules.** Acceptance of a permit by an applicant constitutes an acknowledgment and agreement that the permit holder will comply with all rules and orders of the commission issued in conformity with the TCAA and the conditions precedent to the granting of the permit. If more than one state or federal rule or regulation or permit condition is applicable, the most stringent limit or condition shall govern and be the standard by which compliance shall be demonstrated. Acceptance includes consent to the entrance of commission employees and agents into the permitted premises at reasonable times to investigate conditions relating to the emission or concentration of air contaminants, including compliance with the permit. [30 TAC § 116.115(b)(2)(H)]
11. **This** permit may not be transferred, assigned, or conveyed by the holder except as provided by rule. [30 TAC § 116.110(e)]
12. **There** may be additional special conditions attached to a permit upon issuance or modification of the permit. Such conditions in a permit may be more restrictive than the requirements of Title 30 of the Texas Administrative Code. [30 TAC § 116.115(c)]
13. **Emissions** from this facility must not cause or contribute to "air pollution" as defined in Texas Health and Safety Code (THSC) §382.003(3) or violate THSC § 382.085. If the executive director determines that such a condition or violation occurs, the holder shall implement additional abatement measures as necessary to control or prevent the condition or violation.
14. **The** permit holder shall comply with all the requirements of this permit. Emissions that exceed the limits of this permit are not authorized and are violations of this permit. ¹

¹ Please be advised that the requirements of this provision of the general conditions may not be applicable to greenhouse gas emissions.

Common Acronyms in Air Permits

°C = Temperature in degrees Celsius	GLCmax = maximum (predicted) ground-level concentration
°F = Temperature in degrees Fahrenheit	gpm = gallon per minute
°K = Temperature in degrees Kelvin	gr/1000scf = grain per 1000 standard cubic feet
µg = microgram	gr/dscf = grain per dry standard cubic feet
µg/m ³ = microgram per cubic meter	H ₂ CO = formaldehyde
acfm = actual cubic feet per minute	H ₂ S = hydrogen sulfide
AMOC = alternate means of control	H ₂ SO ₄ = sulfuric acid
AOS = alternative operating scenario	HAP = hazardous air pollutant as listed in § 112(b) of the Federal Clean Air Act or Title 40 Code of Federal Regulations Part 63, Subpart C
AP-42 = Air Pollutant Emission Factors, 5th edition	HC = hydrocarbons
APD = Air Permits Division	HCl = hydrochloric acid, hydrogen chloride
API = American Petroleum Institute	Hg = mercury
APWL = air pollutant watch list	HGB = Houston/Galveston/Brazoria
BPA = Beaumont/ Port Arthur	hp = horsepower
BACT = best available control technology	hr = hour
BAE = baseline actual emissions	IFR = internal floating roof tank
bbl = barrel	in H ₂ O = inches of water
bbl/day = barrel per day	in Hg = inches of mercury
bhp = brake horsepower	IR = infrared
BMP = best management practices	ISC3 = Industrial Source Complex, a dispersion model
Btu = British thermal unit	ISCST3 = Industrial Source Complex Short-Term, a dispersion model
Btu/scf = British thermal unit per standard cubic foot or feet	K = Kelvin; extension of the degree Celsius scaled-down to absolute zero
CAA = Clean Air Act	LACT = lease automatic custody transfer
CAM = compliance-assurance monitoring	LAER = lowest achievable emission rate
CEMS = continuous emissions monitoring systems	lb = pound
cfm = cubic feet (per) minute	lb/day = pound per day
CFR = Code of Federal Regulations	lb/hr = pound per hour
CN = customer ID number	lb/MMBtu = pound per million British thermal units
CNG = compressed natural gas	LDAR = Leak Detection and Repair (Requirements)
CO = carbon monoxide	LNG = liquefied natural gas
COMS = continuous opacity monitoring system	LPG = liquefied petroleum gas
CPMS = continuous parametric monitoring system	LT/D = long ton per day
DFW = Dallas/ Fort Worth (Metroplex)	m = meter
DE = destruction efficiency	m ³ = cubic meter
DRE = destruction and removal efficiency	m/sec = meters per second
dscf = dry standard cubic foot or feet	MACT = maximum achievable control technology
dscfm = dry standard cubic foot or feet per minute	MAERT = Maximum Allowable Emission Rate Table
ED = (TCEQ) Executive Director	MERA = Modeling and Effects Review Applicability
EF = emissions factor	mg = milligram
EFR = external floating roof tank	mg/g = milligram per gram
EGU = electric generating unit	mL = milliliter
EI = Emissions Inventory	MMBtu = million British thermal units
ELP = El Paso	MMBtu/hr = million British thermal units per hour
EPA = (United States) Environmental Protection Agency	MSDS = material safety data sheet
EPN = emission point number	MSS = maintenance, startup, and shutdown
ESL = effects screening level	MW = megawatt
ESP = electrostatic precipitator	NAAQS = National Ambient Air Quality Standards
FCAA = Federal Clean Air Act	NESHAP = National Emission Standards for Hazardous Air Pollutants
FCCU = fluid catalytic cracking unit	NGL = natural gas liquids
FID = flame ionization detector	NNSR = nonattainment new source review
FIN = facility identification number	NO _x = total oxides of nitrogen
ft = foot or feet	NSPS = New Source Performance Standards
ft/sec = foot or feet per second	
g = gram	
gal/wk = gallon per week	
gal/yr = gallon per year	
GLC = ground level concentration	

PAL = plant-wide applicability limit
PBR = Permit(s) by Rule
PCP = pollution control project
PEMS = predictive emission monitoring system
PID = photo ionization detector
PM = periodic monitoring
PM = total particulate matter, suspended in the atmosphere, including PM₁₀ and PM_{2.5}, as represented
PM_{2.5} = particulate matter equal to or less than 2.5 microns in diameter
PM₁₀ = total particulate matter equal to or less than 10 microns in diameter, including PM_{2.5}, as represented
POC = products of combustion
ppb = parts per billion
ppm = parts per million
ppmv = parts per million (by) volume
psia = pounds (per) square inch, absolute
psig = pounds (per) square inch, gage
PTE = potential to emit
RA = relative accuracy
RATA = relative accuracy test audit
RM = reference method
RVP = Reid vapor pressure
scf = standard cubic foot or feet
scfm = standard cubic foot or feet (per) minute
SCR = selective catalytic reduction
SIL = significant impact levels
SNCR = selective non-catalytic reduction
SO₂ = sulfur dioxide
SOCMI = synthetic organic chemical manufacturing industry
SRU = sulfur recovery unit
TAC = Texas Administrative Code
TCAA = Texas Clean Air Act
TCEQ = Texas Commission on Environmental Quality
TD = Toxicology Division
TLV = threshold limit value
TMDL = total maximum daily load
tpd = tons per day
tpy = tons per year
TVP = true vapor pressure
VOC = volatile organic compounds as defined in Title 30 Texas Administrative Code § 101.1
VRU = vapor recovery unit or system

Special Conditions

Permit Numbers 114809 and N190M1

1. This permit covers only those sources of emissions listed in the attached table entitled "Emission Sources - Maximum Allowable Emission Rates" (MAERT), and those sources are limited to the emission limits and other conditions specified in that table.
2. Non-fugitive emissions from relief valves, safety valves, or rupture discs of gases containing volatile organic compounds (VOC) at a concentration of greater than 1 percent are not authorized by this permit unless authorized on the MAERT. Any releases directly to atmosphere from relief valves, safety valves, or rupture discs of gases containing VOC at a concentration greater than 1 weight percent are not consistent with good practice for minimizing emissions.

Federal Applicability

3. These facilities shall comply with all applicable requirements of the U.S. Environmental Protection Agency (EPA) regulations on Standards of Performance for New Stationary Sources promulgated in Title 40 Code of Federal Regulations Part 60 (40 CFR Part 60):

A. Subpart A, General Provisions.

B. Subpart VVa Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry in which Construction, Reconstruction, or Modification Commenced After November 7, 2006.

Alternatively, compliance with the provisions of 40 CFR part 63, subpart H, constitutes compliance with the requirements of Subpart VVa provided the recordkeeping and recording requirements of Subpart VVa are maintained.

C. Subpart DDD Standards of Performance for Volatile Organic Compound (VOC) Emissions from the Polymer Manufacturing Industry.

If any condition of this permit is more stringent than the applicable regulations listed above then for the purposes of complying with this permit, the permit shall govern and be the standard by which compliance shall be demonstrated.

Operation Limits

4. The facility will produce polymers to the production constraints contained in the Table 2 submitted with application form PI-1 dated September 15, 2017. Production records shall be updated monthly with the pounds of each type of polymer produced during the previous month and rolling 12-months to date. **(03/19)**
5. Residual VOC emissions from produced polyethylene, EPN LBRVE, shall not exceed 40 pounds of VOC per million (MM) pounds of polyethylene produced (ppmw) on a rolling 12-month average basis and 80 pounds of VOC per million (MM) of polyethylene produced on a monthly basis. **(03/19)**
 - A. The permit holder shall sample and test the polyethylene from the reactor train for residual VOC as follows:
 - (1) Collect three samples of polyethylene downstream of the reactor train monthly when the reactor is running for the entire month. When the reactor is not running the entire month, collect a sample each full calendar week the reactor is running.

- (2) Samples of polyethylene shall be taken to establish the actual pattern and quantities of air contaminants being emitted into the atmosphere downstream of the reactor train.
 - (3) Sampling and testing of the polyethylene shall be performed using a headspace analysis method (beverage can method) which measures the ppmw that might evolve off the product. Alternate sampling and testing methods shall be approved by the TCEQ Houston Regional Office.
- B. Uncontrolled residual VOC emissions in pounds (lbs) shall be calculated on a calendar month basis no later than six weeks after the calendar month in which the samples are taken by multiplying the average of the residual VOC (ppmw) for the samples of the reactor train, by the production for the month and subtracting the amount recovered by the control device.
- C. The rolling 12-month average residual VOC emissions in ppmw for polyethylene production shall be sum of the uncontrolled residual VOC emissions for the current month and the preceding 11-month period divided by the total polyethylene production for the current and preceding 11-month period.
- D. Monthly records shall include the following:
 - (1) Date and time of each sample.
 - (2) Actual pellet production rate at the time of sampling.
 - (3) Monthly total polyethylene production.
 - (4) Measured total VOC concentration (ppmw) in the polyethylene collected downstream of the reactor train resulting from the analysis specified in Special Condition No.5A(3).
 - (5) Calculated uncontrolled residual VOC emissions in lbs.
 - (6) Calculated rolling 12-month average residual VOC emissions in pounds per million pounds of product (lb/MMlbs).
 - (7) Calculated total rolling 12-month residual VOC emissions in tons per year.
- 6. The permit holder may perform operational tests and sampling of the polyethylene powder VOC emissions in order to characterize the influence of operating conditions on polymer residual VOC emissions. The above residual concentration limits do not apply during such testing. This operation for testing and sampling is subject to the following requirements: **(03/19)**
 - A. Any testing must occur within 180 days of initial unit startup. Equipment commissioning and trial runs are not considered part of initial unit startup. Startup notification(s) as required in General Condition 4 will be made to the local regional office for equipment commissioning and trial(s). A separate notification will be made to the local regional office for initial unit startup.
 - B. The permit holder is still subject to all MAERT limits during these periods.
 - C. The test periods shall be identified at least a week in advance.
 - D. Recordkeeping for test events shall include: the date and time of each period, the polymer production rate, sampling results, and the changes made to operating conditions.

Flares

7. The LB-1 Flare, EPN LBFLARE, shall be designed and operated in accordance with the following requirements: **(05/17)**

- A. The flare systems shall be designed such that the combined assist natural gas and waste stream to each flare meets the 40 CFR § 60.18 specifications of minimum heating value and maximum tip velocity at all times when emissions may be vented to them.

The heating value and velocity requirements shall be satisfied during operations authorized by this permit. Flare testing per 40 CFR § 60.18(f) may be requested by the appropriate regional office to demonstrate compliance with these requirements.

- B. The flare shall be operated with a flame present at all times and/or have a constant pilot flame. The pilot flame shall be continuously monitored by a thermocouple, infrared monitor, or ultraviolet monitor. The time, date, and duration of any loss of pilot flame shall be recorded. Each monitoring device shall be accurate to and shall be calibrated or have a calibration check performed at a frequency in accordance with, the manufacturer's specifications.
- C. The flare shall be operated with no visible emissions except periods not to exceed a total of five minutes during any two consecutive hours. This shall be ensured by the use of steam assist to the flare.
- D. The permit holder shall install a continuous flow monitor and composition analyzer that provide a record of the vent stream flow and composition (total VOC) to the flare. The flow monitor sensor and analyzer sample points shall be installed in the vent stream as near as possible to the flare inlet such that the total vent stream to the flare is measured and analyzed. Readings shall be taken at least once every 15 minutes and the average hourly values of the flow and composition (or Btu content) shall be recorded each hour.

The monitors shall be calibrated or have a calibration check performed once per calendar year with successive calibrations at least six months apart to meet the following accuracy specifications: the flow monitor shall be $\pm 5.0\%$, temperature monitor shall be $\pm 2.0\%$ at absolute temperature, and pressure monitor shall be ± 5.0 mm Hg;

Calibration of the analyzer shall follow the procedures and requirements of Section 10.0 of 40 CFR Part 60, Appendix B, Performance Specification 9, as amended through October 17, 2000 (65 FR 61744), except that the multi-point calibration procedure in Section 10.1 of Performance Specification 9 shall be performed at least once every calendar quarter instead of once every month, and the mid-level calibration check procedure in Section 10.2 of Performance Specification 9 shall be performed at least once every calendar week instead of once every 24 hours. The calibration gases used for calibration procedures shall be in accordance with Section 7.1 of Performance Specification 9. Net heating value of the gas combusted in the flare shall be calculated according to the equation given in 40 CFR §60.18(f)(3) as amended through October 17, 2000 (65 FR 61744).

The monitors and analyzers shall operate as required by this section at least 95% of the time when the flare is operational, averaged over a rolling 12-month period. Flared gas net heating value and actual exit velocity determined in accordance with 40 CFR §§60.18(f)(3) and 60.18(f)(4) shall be recorded at least once every hour. Hourly mass emission rates shall be determined and recorded using the above readings and the emission factors used in the permit application PI-1 dated May 31, 2019. **(11/20)**

E. The LB-1 Flare (EPN LBFLARE) shall operate in accordance with Attachment D of these permit Special Conditions and Alternative Method of Compliance (AMOC) No. 162. Compliance with the requirements of this paragraph shall be achieved by the earliest of the AMOC compliance schedule or Attachment D or an applicable Consent Decree issued by the U.S. Attachment D includes the requirements established in the Consent Decree issued by the U.S. EPA filed on October 13, 2021 in Civil Action No. 4:21-cv-03359. If there is a conflict in compliance with Attachment D, AMOC No. 162, and the Consent Decree the requirements in the Consent Decree shall be complied with for meeting this paragraph. Prior to the compliance requirements and schedule of this paragraph, Special Condition Nos. 7.A through 7.D shall apply. Compliance requirements in this paragraph were met and are effective as of January 19, 2022. **(03/23)**

8. The following requirements apply to the capture systems for the LB-1 Flare, EPN LBFLARE.
(07/22)

A. Either:

- (1) Conduct a once a month visual, audible, and/or olfactory inspection of the capture system to verify there are no leaking components in the capture system; or
- (2) Once per calendar year with successive inspections at least six months apart, verify the capture system is leak-free by inspecting in accordance with 40 CFR Part 60, Appendix A, Test Method 21. Leaks shall be indicated by an instrument reading greater than or equal to 500 ppmv above background. **(11/20)**

B. The control device shall not have a bypass.

Or

If there is a bypass for the control device, comply with either of the following requirements:

- (1) Install a flow indicator that records and verifies zero flow at least once every fifteen minutes immediately downstream of each valve that if opened would allow a vent stream to bypass the control device and be emitted, either directly or indirectly, to the atmosphere; or
- (2) Once a month, inspect the valves, verifying that the position of the valves and the condition of the car seals prevent flow out the bypass.

A bypass does not include blind flanges, authorized analyzer vents, highpoint bleeder vents, low point drains, or rupture discs upstream of pressure relief valves if the pressure between the disc and relief valve is monitored and recorded at least weekly. A bypass also does not include equipment needed for safety purposes. A deviation shall be reported if the monitoring or inspections indicate bypass of the control device when it is required to be in service. **(07/22)**

C. The date and results of each inspection performed shall be recorded. If the results of any inspection are not satisfactory, the deficiencies shall be recorded, and the permit holder shall promptly take necessary corrective action, recording each action with the date completed.

Cooling Tower

9. The cooling tower, EPN LBCT shall be operated and monitored in accordance with the following:
- A. The cooling tower water system and the process fluid streams shall be designed and operated at all times according to the permit amendment application dated November 4, 2013 and subsequent permit application updates. Equipment shall be maintained so as to minimize leakage into the closed cooling water heat exchanger loop. Equipment shall be maintained such that there is zero leakage of process fluid into the cooling tower loop.

VOC emissions from the cooling tower (EPN LBCT) are not authorized in this permit. **(03/19)**

- B. The cooling tower shall be equipped with drift eliminators having a manufacturer's design assurance of 0.0005% drift or less. Drift eliminators shall be maintained and inspected at least once per calendar year with successive inspection at least six months apart. The permit holder shall maintain records of all inspections and repairs. **(11/20)**
- C. Total dissolved solids (TDS) shall not exceed 3,000 parts per million by weight (ppmw). Dissolved solids in the cooling water drift are considered to be emitted as PM, PM₁₀, and PM_{2.5} as represented in the permit application calculations.
- D. Cooling towers shall be analyzed for particulate emissions using one of the following methods:
- (1) Cooling water shall be sampled at least once per day for TDS; or
 - (2) TDS monitoring may be reduced to weekly if conductivity is monitored daily and TDS is calculated using a ratio of TDS-to-conductivity (in ppmw per $\mu\text{mho/cm}$ or ppmw/siemens). The ratio of TDS-to-conductivity shall be determined by concurrently monitoring TDS and conductivity on a weekly basis. The permit holder may use the average of two consecutive TDS-to-conductivity ratios to calculate daily TDS; or
 - (3) TDS monitoring may be reduced to quarterly if conductivity is monitored daily and TDS is calculated using a correlation factor established for each cooling tower. The correlation factor shall be the average of nine consecutive weekly TDS-to-conductivity ratios determined using C (2) above provided the highest ratio is not more than 10% larger than the smallest ratio.
 - (4) The permit holder shall validate the TDS-to-conductivity correlation factor once each calendar quarter. If the ratio of concurrently sampled TDS and conductivity is more than 10% higher or lower than the established factor, the permit holder shall increase TDS monitoring to weekly until a new correlation factor can be established.
- E. Cooling water sampling shall be representative of the cooling tower return water and shall be conducted using approved methods.
- (1) The analysis method for TDS shall be EPA Method 160.1, ASTM D5907, or SM 2540 C [SM - 19th edition of Standard Methods for Examination of Water]. Water samples should be capped upon collection and transferred to a laboratory area for analysis.
 - (2) The analysis method for conductivity shall be either ASTM D1125-95A (field or routine laboratory testing) or ASTM D1125-95B (continuous monitor). The analysis may be conducted at the sample site or with a calibrated process conductivity meter. If a

conductivity meter is used, it shall be calibrated at least annually. Documentation of the method and any associated calibration records shall be maintained.

(3) Alternate sampling and analysis methods may be used to comply with D (1) and D (2) with written approval from the TCEQ Regional Director.

(4) Records of all instrument calibrations and test results and process measurements used for the emission calculations shall be retained.

10. Emission rates of PM, PM10 and PM2.5 shall be calculated using the measured TDS and the ratio or correlation of TDS to conductivity measurements, the design drift rate and the daily maximum and average actual cooling water circulation rate for the short term and annual average rates. Alternately, the design maximum circulation rate may be used for all calculations. Emission records shall be updated monthly.

Particulate Matter (PM) Controls

11. When in service the following conditions apply to the filter vents identified in this special condition: **(03/19)**

A. Particulate matter from the exhaust vent of a control device that uses a filter or filters shall not exceed the outlet grain loading factors of each emission source specified in the Table of Special Condition No.11A of air from any vent. There shall be no visible emissions exceeding 30 seconds in any six-minute period as determined using U.S. Environmental Protection Agency (EPA) Test Method 22.

EPN	Source Description	Outlet Grain Loading Factor (gr/dscf)		
		PM	PM ₁₀	PM _{2.5}
LBF806	Additive Feed Vent System	0.01		
LBF807	Housekeeping Clean-up Vacuum System	0.01		
LBF816	Talc Bulk Additive Silo Filter	0.01		
LB30-F-965	30-F-965 Filter	Emissions factors proposed in the confidential file of permit application with PI-1 dated September 15, 2017.		
LB30-F-900A	30-F-900A Elutriator Vent			
LB30-F-900B	30-F-900B Elutriator Vent			
LBBL980	Hopper Blower	0.01	0.01	0.0025

B. All PM control systems shall be designed to effectively capture emissions from associated equipment and prevent particulate emissions from escaping.

C. Each PM emission capture system shall be maintained free of holes, cracks, and other conditions that would reduce the collection efficiency of the emission capture system.

- D. The vents covered by this permit shall not operate unless control devices and associated equipment are maintained in good working order and operating. All vents will be inspected for visible emissions once per day and a spare-parts filter inventory will be maintained on site, or accessible within one business day. Records shall be maintained of all inspections and maintenance performed.

When there are visible emissions from any one filtered vent, the operation associated with that particular filtered vent shall be isolated and shut down in a timely and orderly manner. The isolated filter system shall be tested and inspected. Failed or damaged parts shall be repaired or replaced.

- E. The differential pressure across each filter vent shall be continuously monitored and be recorded at least once an hour. When in service, minimum and maximum pressure drops for the following vents shall be as listed in Special Condition No. 11.E:

EPN	Minimum Pressure Drop (inches water gauge)	Maximum Pressure Drop (inches water gauge)
LBF806 (Note 1)	0.2	8.3
LBF807	0.05	15
LBF816	0.05	15
LB30-F-965	0.05	15
LB30-F-900A	0.05	15
LB30-F-900B	0.05	15
LBBL980	0.05	15

Note 1: The pressure drop for EPN LBF806 shall be monitored via the pressure drops across F810, F846 and F848.

Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or at least annually, whichever is more frequent, and shall be accurate to within 0.5 inches water gauge pressure or 0.5 percent of span.

- F. Quality assured (or valid) data must be generated when each filter vent is operating except during the performance of a daily zero check. Loss of valid data due to periods of monitor breakdown, out-of-control operation (producing inaccurate data), repair, maintenance, or calibration may be exempted provided it does not exceed 5 percent of the time (in hours) that each filter vent operated over the previous rolling 12-month period. The measurements missed shall be estimated using engineering judgment and the methods used recorded.
- G. Special condition 11E shall become effective no later than 180 days after the filters are put into service. Equipment commissioning and trial(s) before initial unit start-up are not considered in-service.

12. When in service the following conditions apply to the vents identified in this special condition:

- A. Particulate matter from the exhaust vent listed below shall not exceed the outlet grain loading factors of each emission source specified in the Table of Special Condition No. 12.A of air from any vent. There shall be no visible emissions exceeding 30 seconds in any six-minute periods as determined using U.S. Environmental Protection Agency (EPA) Test Method 22. **(07/21)**.

EPN	Source Description	Outlet Grain Loading Factor (gr/dscf)		
		PM	PM ₁₀	PM _{2.5}
LBPk810	Pellet Dryer Vent	0.0024		

13. The following requirements apply to the capture systems for the EPNs LBF806, LBF807, LBF816, LB30-F-965, LB30-F-900A, and LB30-F-900B.

- A. For particulate control, complete either of the following once a year:
- (1) Inspect any fan and verify proper operation and inspect the capture system to verify there are no cracks, holes, tears, and other defects; or
 - (2) Verify there are no fugitive emissions escaping from the capture system by performing a visible emissions observation for a period of at least six minutes in accordance with 40 CFR Part 60, Appendix A, Test Method 22.
- B. The control device shall not have a bypass.

Or

If there is a bypass for the control device, comply with either of the following requirements:

- (1) Install a flow indicator that records and verifies zero flow at least once every fifteen minutes immediately downstream of each valve that if opened would allow a vent stream to bypass the control device and be emitted, either directly or indirectly, to the atmosphere; or
- (2) Once a month, inspect the valves, verifying that the position of the valves and the condition of the car seals prevent flow out the bypass.

A bypass does not include blind flanges, authorized analyzer vents, highpoint bleeder vents, low point drains, or rupture discs upstream of pressure relief valves if the pressure between the disc and relief valve is monitored and recorded at least weekly. A bypass also does not include equipment needed for safety purposes. A deviation shall be reported if the monitoring or inspections indicate bypass of the control device when it is required to be in service per this permit. **(07/22)**

- C. The date and results of each inspection performed shall be recorded. If the results of any inspection are not satisfactory, the deficiencies shall be recorded, and the permit holder shall promptly take necessary corrective action, recording each action with the date completed.

14. The total daily and annual operation hours of the following filters shall not exceed the limits as specified in this special condition. **(11/20)**

EPN	Daily Operation Hours (hrs/day)	Annual Operation Hours (hrs/yr)
LBF807	12	2190
LBF816	10	420
LB30F900A	24	5856
LB30F900B	16	5856
LBBL980	12	2190

Fugitives

Piping, Valves, Pumps, Agitators, and Compressors - Intensive Directed Maintenance – 28LAER (03/19)

15. Except as may be provided for in the Special Conditions of this permit, the following requirements apply to the above-referenced equipment:

- A. The requirements of paragraphs F and G shall not apply (1) where the VOC has an aggregate partial pressure or vapor pressure of less than 0.044 pounds per square inch, absolute (psia) at 68°F or (2) operating pressure is at least 5 kilopascals (0.725 psi) below ambient pressure. Equipment excluded from this condition shall be identified in a list or by one of the methods described below to be made readily available upon request.

The exempted components may be identified by one or more of the following methods:

- (1) piping and instrumentation diagram (PID);
 - (2) a written or electronic database or electronic file;
 - (3) color coding;
 - (4) a form of weatherproof identification; or
 - (5) designation of exempted process unit boundaries.
- B. Construction of new and reworked piping, valves, pump systems, and compressor systems shall conform to applicable American National Standards Institute (ANSI), American Petroleum Institute (API), American Society of Mechanical Engineers (ASME), or equivalent codes.
- C. New and reworked underground process pipelines shall contain no buried valves such that fugitive emission monitoring is rendered impractical. New and reworked buried connectors shall be welded.
- D. To the extent that good engineering practice will permit, new and reworked valves and piping connections shall be so located to be reasonably accessible for leak-checking during plant operation. Difficult-to-monitor and unsafe-to-monitor valves, as defined by Title 30 Texas Administrative Code Chapter 115 (30 TAC Chapter 115), shall be identified in a list to be made readily available upon request. The difficult-to-monitor and unsafe-to-monitor valves may be identified by one or more of the methods described in paragraph A above. If an

unsafe to monitor component is not considered safe to monitor within a calendar year, then it shall be monitored as soon as possible during safe to monitor times. A difficult to monitor component for which quarterly monitoring is specified may instead be monitored annually.

- E. New and reworked piping connections shall be welded or flanged. Screwed connections are permissible only on piping smaller than two-inch diameter. Gas or hydraulic testing of the new and reworked piping connections at no less than operating pressure shall be performed prior to returning the components to service or they shall be monitored for leaks using an approved gas analyzer within 15 days of the components being returned to service. Adjustments shall be made as necessary to obtain leak-free performance.

Connectors shall be inspected by visual, audible, and/or olfactory means at least weekly by operating personnel walk-through. In addition, all connectors shall be monitored by leak-checking for fugitive emissions at least quarterly using an approved gas analyzer with a directed maintenance program in accordance with items F thru J of this special condition.

In lieu of the monitoring frequency specified above, connectors may be monitored on a semiannual basis if the percent of connectors leaking for two consecutive quarterly monitoring periods is less than 0.5 percent.

Connectors may be monitored on an annual basis if the percent of connectors leaking for two consecutive semiannual monitoring periods is less than 0.5 percent.

If the percent of connectors leaking for any semiannual or annual monitoring period is 0.5 percent or greater, the facility shall revert to quarterly monitoring until the facility again qualifies for the alternative monitoring schedules previously outlined in this paragraph.

The percent of connectors leaking shall be determined using the following formula:

$$(CI + Cs) \times 100/Ct = Cp$$

Where:

CI = the number of connectors found leaking by the end of the monitoring period, either by Method 21 or sight, sound, and smell.

Cs = the number of connectors for which repair has been delayed and are listed on the facility shutdown log.

Ct = the total number of connectors in the facility subject to the monitoring requirements, as of the last day of the monitoring period, not including non-accessible and unsafe to monitor connectors.

Cp = the percentage of leaking connectors for the monitoring period.

Each open-ended valve or line shall be equipped with an appropriately sized cap, blind flange, plug, or a second valve to seal the line. Except during sampling, both valves shall be closed. If the isolation of equipment for hot work or the removal of a component for repair or replacement results in an open ended line or valve, it is exempt from the requirement to install a cap, blind flange, plug, or second valve for 72 hours. If the repair or replacement is not completed within 72 hours, the permit holder must complete either of the following actions within that time period;

- (1) a cap, blind flange, plug, or second valve must be installed on the line or valve; or
- (2) The open-ended valve or line shall be monitored once for leaks above background for a plant or unit turnaround lasting up to 45 days with an approved gas analyzer and the results recorded. For all other situations, the open-ended valve or line shall be monitored once by the end of the 72 hours period following the creation of the open ended line and monthly thereafter with an approved gas analyzer and the results recorded. For turnarounds and all other situations, leaks are indicated by readings of

500 ppmv and must be repaired within 24 hours or a cap, blind flange, plug, or second valve must be installed on the line or valve.

- F. Accessible valves shall be monitored by leak-checking for fugitive emissions at least quarterly using an approved gas analyzer with a directed maintenance program. Non accessible valves shall be monitored by leak-checking for fugitive emissions at least annually using an approved gas analyzer with a directed maintenance program. Sealless/leakless valves (including, but not limited to, welded bonnet bellows and diaphragm valves) and relief valves equipped with a rupture disc upstream or venting to a control device are not required to be monitored. For valves equipped with rupture discs, a pressure-sensing device shall be installed between the relief valve and rupture disc to monitor disc integrity. All leaking discs shall be replaced at the earliest opportunity but no later than the next process shutdown. A check of the reading of the pressure-sensing device to verify disc integrity shall be performed at least quarterly and recorded in the unit log or equivalent. Pressure-sensing devices that are continuously monitored with alarms are exempt from recordkeeping requirements specified in this paragraph.

The gas analyzer shall conform to requirements listed in Method 21 of 40 CFR part 60, appendix A. The gas analyzer shall be calibrated with methane. In addition, the response factor of the instrument for a specific VOC of interest shall be determined and meet the requirements of Section 8 of Method 21. If a mixture of VOCs is being monitored, the response factor shall be calculated for the average composition of the process fluid. A calculated average is not required when all of the compounds in the mixture have a response factor less than 10 using methane. If a response factor less than 10 cannot be achieved using methane, then the instrument may be calibrated with one of the VOC to be measured or any other VOC so long as the instrument has a response factor of less than 10 for each of the VOC to be measured.

A directed maintenance program shall consist of the repair and maintenance of components assisted simultaneously by the use of an approved gas analyzer such that a minimum concentration of leaking VOC is obtained for each component being maintained. Replaced components shall be re-monitored within 15 days of being placed back into VOC service.

- G. All new and replacement pumps, compressors, and agitators shall be equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal. These seal systems need not be monitored and may include (but are not limited to) dual pump seals with barrier fluid at higher pressure than process pressure, seals degassing to vent control systems kept in good working order, or seals equipped with an automatic seal failure detection and alarm system. Submerged pumps or sealless pumps (including, but not limited to, diaphragm, canned, or magnetic-driven pumps) may be used to satisfy the requirements of this condition and need not be monitored.

All other pump, compressor, and agitator seals shall be monitored with an approved gas analyzer at least quarterly.

- H. Damaged or leaking valves, connectors, compressor seals, pump seals, and agitator seals found to be emitting VOC in excess of 500 parts per million by volume (ppmv) or found by visual inspection to be leaking (e.g., dripping process fluids) shall be tagged and replaced or repaired. A first attempt to repair the leak must be made within 5 days. Records of the first attempt to repair shall be maintained. A leaking component shall be repaired as soon as practicable, but no later than 15 days after the leak is found. If the repair of a component would require a unit shutdown that would create more emissions than the repair would eliminate, the repair may be delayed until the next scheduled shutdown. All leaking components which cannot be repaired until a scheduled shutdown shall be identified for such repair by tagging. A listing of all components that qualify for delay of repair shall be maintained on a delay of repair list. The cumulative daily emissions from all components on

the delay of repair list shall be estimated by multiplying by 24 the mass emission rate for each component calculated in accordance with the instructions in 30 TAC 115.782 (c)(1)(B)(i)(II). The calculations of the cumulative daily emissions from all components on the delay of repair list shall be updated within ten days of when the latest leaking component is added to the delay of repair list. When the cumulative daily emission rate of all components on the delay of repair list times the number of days until the next scheduled unit shutdown is equal to or exceeds the total emissions from a unit shutdown as calculated in accordance with 30 TAC 115.782 (c)(1)(B)(i)(I), the TCEQ Regional Manager and any local programs shall be notified and may require early unit shutdown or other appropriate action based on the number and severity of tagged leaks awaiting shutdown. This notification shall be made within 15 days of making this determination.

- I. Records of repairs shall include date of repairs, repair results, justification for delay of repairs, and corrective actions taken for all components. Records of instrument monitoring shall indicate dates, times, test methods, and instrument readings. The instrument monitoring record shall include the time that monitoring took place for no less than 95% of the instrument readings recorded. Records of physical inspections shall be noted in the operator's log or equivalent.
- J. Compliance with the requirements of this condition does not assure compliance with requirements of 30 TAC Chapter 115, an applicable New Source Performance Standard (NSPS), or an applicable National Emission Standard for Hazardous Air Pollutants (NESHAPS), and does not constitute approval of alternative standards for these regulations.
- K. In lieu of the monitoring frequency specified in paragraph F, valves in gas and light liquid service may be monitored on a semiannual basis if the percent of valves leaking for two consecutive quarterly monitoring periods is less than 0.5 percent.

Valves in gas and light liquid service may be monitored on an annual basis if the percent of valves leaking for two consecutive semiannual monitoring periods is less than 0.5 percent.

If the percent of valves leaking for any semiannual or annual monitoring period is 0.5 percent or greater, the facility shall revert to quarterly monitoring until the facility again qualifies for the alternative monitoring schedules previously outlined in this paragraph.

- L. The percent of valves leaking used in paragraph K shall be determined using the following formula:

$$(V_I + V_S) \times 100/V_T = V_P$$

Where:

- V_I = the number of valves found leaking by the end of the monitoring period, either by Method 21 or sight, sound, and smell.
- V_S = the number of valves for which repair has been delayed and are listed on the facility shutdown log.
- V_T = the total number of valves in the facility subject to the monitoring requirements, as of the last day of the monitoring period, not including non-accessible and unsafe to monitor valves.
- V_P = the percentage of leaking valves for the monitoring period.

- M. Any component found to be leaking by physical inspection (i.e., sight, sound, or smell) shall be repaired or monitored with an approved gas analyzer within 15 days to determine whether the component is leaking in excess of 500 ppmv of VOC. If the component is found to be leaking in excess of 500 ppmv of VOC, it shall be subject to the repair and replacement requirements contained in this special condition.

- N. The requirements of this Special Condition do not apply to components used solely for the following services: utility air, nitrogen, steam condensate, storm water, fire water, boiler feed water, cooling water, wastewater containing less than 1% VOC by weight, process hydrogen, and purchased natural gas.

Physical Inspections of Piping, Valves, Pumps and Compressors in Heavy Liquid and Natural Gas Service— 28PI (03/19)

16. Except as may be provided for in the special conditions of this permit, the following requirements apply to the above-referenced equipment:
- A. Construction of new and reworked piping, valves, pump systems, and compressor systems shall conform to applicable American National Standards Institute (ANSI), American Petroleum Institute (API), American Society of Mechanical Engineers (ASME), or equivalent codes.
 - B. New and reworked underground process pipelines shall contain no buried valves such that fugitive emission monitoring is rendered impractical.
 - C. To the extent that good engineering practice will permit, new and reworked valves and piping connections shall be so located to be reasonably accessible for leak-checking during plant operation. Non-accessible valves, as defined in Title 30 Texas Administrative Code (30 TAC) Chapter 115, shall be identified in a list to be made available upon request.
 - D. New and reworked piping connections shall be welded or flanged. Screwed connections are permissible only on piping smaller than two-inch diameter.
 - E. Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve. Except during sampling, the second valve shall be closed.
 - F. All piping components shall be inspected by visual, audible, and/or olfactory means at least weekly by operating personnel walk-through.
 - G. Damaged or leaking valves, connectors, compressor seals, and pump seals found by visual inspection to be leaking (e.g., dripping process fluids) shall be tagged and replaced or repaired. A leaking component shall be repaired as soon as practicable, but no later than 15 days after the leak is found. If the repair of a component would require a unit shutdown, the repair may be delayed until the next scheduled shutdown. All leaking components which cannot be repaired until a scheduled shutdown shall be identified for such repair by tagging. At the discretion of the TCEQ Executive Director or designated representative, early unit shutdown or other appropriate action may be required based on the number and severity of tagged leaks awaiting shutdown.
 - H. Date and time of each inspection shall be noted in the operator's log or equivalent. Records shall be maintained at the plant site of all repairs and replacements made due to leaks. These records shall be made available to representatives of the Texas Commission on Environmental Quality (TCEQ) upon request.

Storage

17. Propane, butene, and hexene shall be unloaded and stored in vessels (LBPROPTK, LBBUTTK, LBHEXTK), which shall be controlled by the LB-1 flare (EPN LBFLARE) or otherwise authorized. **(03/19)**

Ethylene shall only be provided to the site through pipeline. **(03/19)**

18. Catalysts and co-catalysts shall be stored in inert-padded vessels. **(03/19)**

Loading

19. Polyethylene loading shall demonstrate compliance with the following requirements: **(03/19)**

- A. The product loading elutriators shall be controlled by baghouse filters, EPNs LB30-F-900A and LB30-F-900B at all times during operation.
- B. Whenever in operation, the hopper car reclaim system shall be controlled by filters, EPNs LB30-F-965 and LBBL980.
- C. All lines and connectors shall be visually inspected for any defects prior to loading. Lines and connectors that are visibly damaged shall be removed from service until they are repaired.

Wastewater

20. The wastewater emissions (EPN LBWW) authorized in this permit only include the emissions from the flare (EPN LBFLARE) seal drum water. **(03/19)**

Stack Sampling

21. The holder of this permit shall perform stack sampling and other testing as required to establish the actual pattern and quantities of air contaminants being emitted into the atmosphere from filters (EPNs: LB30-F-965, LB30-F-900A, LB30-F-900B, LBBL980) and Pellet Dryer Vent (EPN: LBPK810) listed in Special Condition No. 11 and 12 and MAERT. The holder of this permit is responsible for providing sampling and testing facilities and conducting the sampling and testing operations at his expense. Sampling shall be conducted in accordance with the appropriate procedures of the Texas Commission on Environmental Quality (TCEQ) Sampling Procedures Manual and the U.S. Environmental Protection Agency (EPA) Reference Methods or approved EPA Alternative Test Methods unless otherwise exempted by this special condition. **(03/19)**
- A. The appropriate TCEQ Houston Regional Office in the region where the source is located shall be contacted as soon as testing is scheduled, but not less than 45 days prior to sampling to schedule a pretest meeting.

The notice shall include:

- (1) Date for pretest meeting.
- (2) Date sampling will occur.
- (3) Name of firm conducting sampling.
- (4) Type of sampling equipment to be used.
- (5) Method or procedure to be used in sampling.
- (6) Description of any proposed deviation from the sampling procedures specified in this permit or TCEQ/EPA sampling procedures.
- (7) Procedure/parameters to be used to determine worst case emissions during the sampling period.

The purpose of the pretest meeting is to review the necessary sampling and testing procedures, to provide the proper data forms for recording pertinent data, and to review the format procedures for submitting the test reports.

A written proposed description of any deviation from sampling procedures specified in permit conditions or the TCEQ or EPA sampling procedures shall be made available to the TCEQ prior to the pretest meeting. The TCEQ Houston Regional Director shall approve or disapprove of any deviation from specified sampling procedures.

Requests to waive testing for any pollutant specified in B of this condition shall be submitted to the TCEQ Office of Air, Air Permits Division in Austin. Test waivers and alternate or equivalent procedure proposals for NSPS testing which must have the EPA approval shall be submitted to the TCEQ Regional Office.

- B. Air contaminants emitted from the vents identified in this Special Condition to be tested for include (but are not limited to) those shown in the table below. EPA Reference Method 5 and TCEQ Laboratory Method 23 shall be used in the tests as required in this special condition. If the total tested PM exceeds the allowable PM₁₀ and/or PM_{2.5}, an alternative test method that speciates or measures PM₁₀ and PM_{2.5} may be used with approval of the appropriate TCEQ Regional Office within a schedule specified by the TCEQ Regional Office. **(11/20)**

Source (EPN)	Pollutants	EPA Reference Method
LB30-F-965	PM, PM ₁₀ /PM _{2.5} assumed to equal PM	5
LB30-F-900A or LB30-F-900B	PM, PM ₁₀ /PM _{2.5} assumed to equal PM	5
LBBL980	PM, PM ₁₀ /PM _{2.5} assumed to equal PM	5
LBPK810	PM	5

- C. Sampling shall occur within 60 days after achieving the maximum operating rate, but no later than 180 days after initial unit start-up and at such other times as may be required by the TCEQ Executive Director. Requests for additional time to perform sampling shall be submitted to the appropriate regional office. Equipment commissioning and trial runs are not considered part of initial unit startup. Startup notification(s) as required in General Condition 4 will be made to the local regional office for equipment commissioning and trial(s). A separate notification will be made to the local regional office for initial unit startup.
- D. Sampling the filter (EPN LB30-F-900A) is representative of the filter (EPN LB30-F-900B).
- E. The plant shall be operated to provide maximum load on the filters during sampling.
- F. Two copies of the final sampling report shall be forwarded to the offices below within 60 days after sampling is completed. Sampling reports shall comply with the attached provisions entitled "Chapter 14, Contents of Sampling Reports" of the TCEQ Sampling Procedures Manual. The reports shall be distributed as follows:

One copy to the appropriate TCEQ Regional Office.

One copy to each local air pollution control program.

Planned Maintenance, Startup and Shutdown

22. This permit authorizes emissions from maintenance startup and shutdown (MSS) activities identified in Attachments A, B, and C, and from temporary facilities used to support those activities.

Temporary facilities used to support planned MSS activities at permanent site facilities may include frac tanks and vacuum trucks. Emissions from temporary facilities are authorized provided the temporary facility does not remain on the plant site for more than 12 consecutive months, is used solely to support planned MSS activities at the permanent site facilities and does not operate as a replacement for an existing authorized facility.

Attachment A identifies inherently low emitting MSS activities that may be performed at the plant. Emissions from activities identified in Attachment A shall be equal to the potential to emit represented in the permit application. The estimated emissions from the activities listed in Attachment A must be revalidated annually. This revalidation shall consist of the estimated emissions for each type of activity and the basis for that emission estimate.

Attachment B identifies routine maintenance activities that may be tracked through work orders or equivalent. Emissions from activities identified in Attachment B shall be calculated using the number of work orders or equivalent that month and the emissions associated with that activity identified in the permit application.

Attachment C is an MSS Activity Summary and identifies all MSS activities performed at the unit including Attachment A and B activities. Planned MSS activities not identified in Attachments A or B shall be identified in Attachment C and include at least the following information:

- A. The process unit at which emissions from the MSS activity occurred, including the emission point number and common name of the process unit;
- B. The type of planned MSS activity and the reason for the planned activity;
- C. The common name and the facility identification number, if applicable, of the facilities at which the MSS activity and emissions occurred;
- D. The date and time of the MSS activity and its duration;
- E. The estimated quantity of each air contaminant, or mixture of air contaminants, emitted with the data and methods used to determine it. The emissions shall be estimated using the methods identified in the permit application, consistent with good engineering practice.

All MSS emissions shall be summed monthly and the rolling 12-month emissions shall be updated on a monthly basis.

23. Process units and facilities, with the exception of those identified in Special Conditions 25 and Attachment A shall be depressurized, emptied, degassed, and placed in service in accordance with the following requirements.

- A. The process equipment shall be depressurized to a control device or a controlled recovery system prior to venting to atmosphere, degassing, or draining liquid. Equipment that only contains material that is liquid with VOC partial pressure less than 0.50 psi at the normal process temperature and 95°F may be opened to atmosphere and drained in accordance with paragraph C of this special condition. The vapor pressure at 95°F may be used if the actual temperature of the liquid is verified to be less than 95°F and the temperature is recorded.
- B. If mixed phase materials must be removed from process equipment, the cleared material shall be routed to a knockout drum or equivalent to allow for managed initial phase separation. If the VOC partial pressure is greater than 0.50 psi at either the normal process temperature or 95°F, any vents in the system must be routed to a control device or a controlled recovery system. The vapor pressure at 95°F may be used if the actual temperature of the liquid is verified to be less than 95°F and the temperature is recorded. Control must remain in place until degassing has been completed or the system is no longer vented to atmosphere.
- C. All liquids from process equipment or storage vessels must be removed to the maximum extent practical prior to opening equipment to commence degassing and/or maintenance. Liquids must be drained into a closed vessel or closed liquid recovery system unless prevented by the physical configuration of the equipment. If it is necessary to drain liquid into an open pan or sump, the liquid must be covered or transferred to a covered vessel within one hour of being drained.
- D. If the VOC partial pressure is greater than 0.50 psi at the normal process temperature or 95°F, facilities shall be degassed using good engineering practice to ensure air contaminants are removed from the system through the control device or controlled recovery system to the extent allowed by process equipment or storage vessel design. The vapor pressure at 95°F may be used if the actual temperature of the liquid is verified to be less than 95°F and the temperature is recorded. The facilities to be degassed shall not be vented directly to atmosphere, except as necessary to establish isolation of the work area or to monitor VOC concentration following controlled depressurization. The venting shall be minimized to the maximum extent practicable and actions taken recorded. The control device or recovery system utilized shall be recorded with the estimated emissions from controlled and uncontrolled degassing calculated using the methods that were used to determine allowable emissions for the permit application.
 - (1) For MSS activities identified in Attachment B, the following option may be used in lieu of (2) below. The facilities being prepared for maintenance shall not be vented directly to atmosphere until the VOC concentration has been verified to be less than 10 percent of the lower explosive limit (LEL) per the site safety procedures.
 - (2) The locations and/or identifiers where the purge gas or steam enters the process equipment or storage vessel and the exit points for the exhaust gases shall be recorded (process flow diagrams [PFDs] or piping and instrumentation diagrams [P&IDs] may be used to demonstrate compliance with the requirement). If the process equipment is purged with a gas, two system volumes of purge gas must have passed through the control device or controlled recovery system before the vent stream may be sampled to verify acceptable VOC concentration prior to uncontrolled venting. The VOC sampling and analysis shall be performed using an instrument meeting the requirements of Special Condition 15. The sampling point shall be upstream of the inlet to the control device or controlled recovery system. The sample ports and the collection system must be designed and operated such that there is no air leakage into the sample probe or the

collection system downstream of the process equipment or vessel being purged. If there is not a connection (such as a sample, vent, or drain valve) available from which a representative sample may be obtained, a sample may be taken upon entry into the system after degassing has been completed. The sample shall be taken from inside the vessel so as to minimize any air or dilution from the entry point. The facilities shall be degassed to a control device or controlled recovery system until the VOC concentration is less than 10,000 ppmv or 10 percent of the LEL. Documented site procedures used to de-inventory equipment to a control device for safety purposes (i.e., hot work or vessel entry procedures) that achieve at least the same level of purging may be used in lieu of the above.

- E. Gases and vapors with VOC partial pressure greater than 0.50 psi may be vented directly to atmosphere if all the following criteria are met:

- (1) It is not technically practicable to depressurize or degas, as applicable, into the process.
- (2) There is not an available connection to a plant control system (flare).
- (3) There is no more than 50 lb of air contaminant to be vented to atmosphere during shutdown or startup, as applicable.

All instances of venting directly to atmosphere per Special Condition 14E must be documented when occurring as part of any MSS activity. The emissions associated with venting without control must be included in the work order or equivalent for those planned MSS activities identified in Attachment B.

24. Air contaminant concentration shall be measured using an instrument/detector meeting one set of requirements specified below.

- A. VOC concentration shall be measured using an instrument meeting all the requirements specified in EPA Method 21 (40 CFR 60, Appendix A) with the following exceptions:

- (1) The instrument shall be calibrated within 24 hours of use with a calibration gas such that the response factor (RF) of the VOC (or mixture of VOCs) to be monitored shall be less than 2.0. The calibration gas and the gas to be measured, and its approximate (RF) shall be recorded. If the RF of the VOC (or mixture of VOCs) to be monitored is greater than 2.0, the VOC concentration shall be determined as follows:

VOC Concentration = Concentration as read from the instrument*RF

In no case should a calibration gas be used such that the RF of the VOC (mixture of VOCs) to be monitored is greater than 5.0.

- (2) Sampling shall be performed as directed by this permit in lieu of section 8.3 of Method 21. During sampling, data recording shall not begin until after two times the instrument response time. The date and time shall be recorded, and VOC concentration shall be monitored for at least 5 minutes, recording VOC concentration each minute. As an alternative the VOC concentration may be monitored over a five-minute period with an instrument designed to continuously measure concentration and record the highest concentration read. The highest measured VOC concentration shall be recorded and shall not exceed the specified VOC concentration limit prior to uncontrolled venting.

- B. Colorimetric gas detector tubes may be used to determine air contaminant concentrations if they are used in accordance with the following requirements.

- (1) The air contaminant concentration measured as defined in (3) is less than 80 percent of the range of the tube and is at least 20 percent of the maximum range of the tube.
- (2) The tube is used in accordance with the manufacturer's guidelines.
- (3) At least 2 samples taken at least 5 minutes apart must satisfy the following prior to uncontrolled venting:

measured contaminant

concentration (ppmv) < release concentration.

Where the release concentration is:

The sum of 10,000 and the mole fraction of the total air contaminants present that can be detected by the tube.

The mole fraction may be estimated based on process knowledge. The release concentration and basis for its determination shall be recorded.

Records shall be maintained of the tube type, range, measured concentrations, and time the samples were taken.

- C. Lower explosive limit measured with a lower explosive limit detector.

- (1) The detector shall be calibrated within 30 days of use with a certified pentane gas standard at 25% of the lower explosive limit (LEL) for pentane. Records of the calibration date/time and calibration result (pass/fail) shall be maintained.
- (2) A functionality test shall be performed on each detector within 24 hours of use with a certified gas standard at 25% of the LEL for pentane. The LEL monitor shall read no lower than 90% of the calibration gas certified value. Records, including the date/time and test results, shall be maintained.
- (3) A certified methane gas standard equivalent to 25% of the LEL for pentane may be used for calibration and functionality tests provided that the LEL response is within 95% of that for pentane.

25. The following requirements apply to frac, or temporary, tanks and vessels used in support of MSS activities.

- A. The exterior surfaces of these tanks/vessels that are exposed to the sun shall be white or aluminum. This requirement does not apply to tanks/vessels that only vent to atmosphere when being filled, sampled, gauged, or when removing material.
- B. These tanks/vessels must be covered and equipped with fill pipes that discharge within 6 inches of the tank/vessel bottom.

- C. These requirements do not apply to vessels storing less than 450 gallons of liquid that are closed such that the vessel does not vent to atmosphere except when filling, sampling, gauging, or when removing material.
 - D. The permit holder shall maintain an emissions record which includes calculated emissions of VOC from all frac tanks during the previous calendar month and the past consecutive 12-month period. This record must be updated by the last day of the month following. The record shall include tank identification number, dates put into and removed from service, control method used, tank capacity and volume of liquid stored in gallons, name of the material stored, VOC molecular weight, and VOC partial pressure at the estimated monthly average material temperature in psia. Filling emissions for tanks shall be calculated using the TCEQ publication titled "Technical Guidance Package for Chemical Sources – Loading Operations" and standing emissions determined using: the TCEQ publication titled "Technical Guidance Package for Chemical Sources - Storage Tanks."
 - E. If the tank/vessel is used to store liquid with VOC partial pressure less than 0.10 psi at 95°F, records may be limited to the days the tank is in service and the liquid stored. Emissions may be estimated based upon the potential to emit as identified in the permit application.
26. Additional occurrences of MSS activities authorized by this permit and identified in Attachment A, B, and C may be authorized under permit by rule only if conducted in compliance with this permit's procedures, emission controls, monitoring, and recordkeeping requirements applicable to the activity.
27. Control devices required by this permit for the control of emissions from planned MSS activities are limited to the LB-1 Flare, EPN LBFLARE. The LB-1 Flare shall comply with Special Condition 7 and Attachment D. **(03/23)**
28. All permanent facilities must comply with all operating requirements, limits, and representations in the permit during planned startup and shutdown unless alternate requirements and limits are identified in this permit.

Recordkeeping

29. All records required under any Special Condition of this permit, or under General Condition No. 7 of this permit, shall be retained on site for a period of no less than five years. **(03/19)**

Offsets

30. This Nonattainment New Source Review (NNSR) permit is issued/approved based on the requirement that the permit holder offset the project emission increase for facilities authorized by this permit prior to the commencement of operation, through participation in the TCEQ Emission Banking and Trading (EBT) Program in accordance with the rules in 30 TAC Chapter 101, Subchapter H. **(11/20)**
- A. The permit holder shall use 110.4 tons per year (tpy) of VOC credits to offset the 84.92 tpy VOC project emission increase for the facilities authorized by this permit at a ratio of 1.3 to 1.0.
 - (1) The permit holder shall use 103.0 tpy of VOC emission credits (ECs) from TCEQ credit certificate numbers 2898, 2899, 2900, 2929, 3412, and 3414.

- (2) The permit holder shall use an additional 7.4 tpy of VOC credits to offset the 5.69 tpy VOC project emission increase for the facilities authorized by this permit at a ratio of 1.3 to 1.0.
 - B. The permit holder shall obtain and use 21.0 tons per year (tpy) of NOX credits to offset the 16.13 tpy NOX project emission increase for the facilities authorized by this permit at a ratio of 1.3 to 1.0.
 - C. The permit holder shall obtain and use 10.3 tons per year (tpy) of NOX credits to offset the 8.52 tpy NOX project emission increase for the facilities authorized by this permit at a ratio of 1.2 to 1.0.
31. Prior to the commencement of operation, the permit holder shall obtain approval from the TCEQ EBT Program for the credits being used and then submit a permit alteration or amendment request to the TCEQ Air Permits Division (and copy the TCEQ Regional Office) to identify approved credits by TCEQ credit certificate number.

Date: March 24, 2023

Attachment A

Permit 114809

Inherently Low VOC Emitting Activities

Water Washing Empty Containers

Calibration of Analytical Equipment

Cleaning Sight Glasses

Management of Sludge from Pits, Ponds, Water Conveyances

Use of greases and lubricants

Temporarily opening hatch covers and other access points on a normally enclosed system as necessary to accommodate the performance of an inspection or sample collection activity while the enclosed facility is operating.

Date: February 19, 2016

Attachment B

Permit Numbers 114809

Routine Maintenance Activities

Pump repair/replacement

Fugitive component (valve, pipe, flange) repair/replacement

Vessel repair/replacement

Date: February 19, 2016

Attachment C

Permit Numbers 114809

MSS Activity Summary

Facilities	Description	Emissions Activity	EPN
Process Equipment	Vessel Purging	Nitrogen purging to the flare or boiler	MSS-LBFLARE and Boilers
Q1 Equipment to LBFLARE*	Flaring of MSS Waste Gases	Emissions from stationary flare	MSS-LBFLARE
Vessel Clearing	Clearing of process vessels after purging to less than 10,000 ppm VOC.	LB-1 MSS Vessel Clearing Emissions	MSS-LB1-VC
Fugitive Components	Opening	Vent to atmosphere	MSS-LB1RM
Attachment A Activities	See Attachment A	Vent to atmosphere	MSS-LB1RMA
Attachment B Activities	See Attachment B	Nitrogen purging to the flare and vent to atmosphere after clearing to less than 10,000 ppm VOC	MSS-LBFLARE, MSS-LB1RM

Date: March 26, 2019

Permit 114809 and N190M1

Attachment D

Flare Special Requirements

Instrumentation and Monitoring Systems

1. Installation and Operation of Monitoring and Control Systems on the LB-1 Flare (EPN LBFLARE).
 - A. Equistar Chemicals, LP (Equistar) must install and commence operation of the instrumentation, controls, and monitoring systems set forth in this attachment at the LB-1 Flare (EPN: LBFLARE) except the following flares: Newly Installed Covered Flares and Portable Flares. For the purposes of this Attachment, a "Newly Installed Covered Flare" means any Air-Assisted Flare or Steam-Assisted Flare that is permanently installed, receives Waste Gas that has been redirected to it from the LB-1 Flare (EPN: LBFLARE); and a "Portable Flare" means a Steam-Assisted Flare or Air-Assisted Flare that is not permanently installed and that receives Waste Gas that has been redirected to it from the LB-1 Flare (EPN: LBFLARE).
 - B. By no later than the date that any Newly Installed Covered Flare or Portable Flare is In Operation and Capable of Receiving Waste, Supplemental, and/or Sweep Gas, Equistar must complete installation and commence operation of the instrumentation, controls, and monitoring systems set forth in this attachment. Equistar must operate the instrumentation, controls, and monitoring systems for each replacement of an existing flare and Portable Flare in accordance this attachment.
2. Vent Gas and Assist Steam Monitoring Systems.
 - A. Equistar must install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the volumetric flow rate of Vent Gas in the header or headers feeding LBFLARE. This system must also be able to continuously analyze pressure and temperature at each point of Vent Gas flow measurement. Different flow monitoring methods may be used to measure different gaseous streams that make up the Vent Gas provided that the flow rates of all gas streams that contribute to the Vent Gas are determined. Flow must be calculated in scfm and pounds per hour.
 - B. Equistar must install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the volumetric flow rate of Assist Steam used with LBFLARE. This system must also be able to continuously analyze the pressure and temperature of Assist Steam at a representative point of steam flow measurement. Flow must be calculated in scfm and pounds per hour.
 - C. Each flow rate monitoring system must be able to correct for the temperature and pressure of the system and output parameters in Standard Conditions. For the purposes of this attachment, "Standard Conditions" means a temperature of 68 degrees Fahrenheit and a pressure of 1 atmosphere. Unless otherwise expressly set forth in this attachment, Standard Conditions apply.
 - D. In lieu of a monitoring system that directly measures volumetric flow rate, Equistar may choose from the following additional options for monitoring any gas stream:

- (1) Mass flow monitors may be used for determining the volumetric flow rate of assist steam provided that Equistar converts the mass flow rates to volumetric flow rates pursuant to the methodology in Step 2 of Appendix 1.2 [included below];
 - (2) Mass flow monitors may be used for determining the volumetric flow rate of Vent Gas, provided Equistar determines the molecular weight of such Vent Gas using compositional analysis data collected pursuant to the monitoring methodology specified in Paragraph 5.a and in Step 2 of Appendix 1.2 and provided that Equistar converts the mass flow rates to volumetric flow rates pursuant to the methodology in Step 2 of Appendix 1.2 [included below]; and
 - (3) Continuous pressure/temperature monitoring system(s) and appropriate engineering calculations may be used in lieu of a continuous volumetric flow monitoring system provided the molecular weight of the gas is known and provided Equistar complies with the methodology in Step 2 of Appendix 1.2 [included below] for calculating volumetric flow rates. For Vent Gas, Equistar must determine molecular weight using compositional analysis data collected pursuant to the monitoring method specified in Paragraph 5.a.
3. Assist Steam Control Equipment. Equistar must install and commence operation of equipment, including, as necessary, main and trim control valves and piping which enables Equistar to control Assist Steam flow to the flare in a manner sufficient to ensure compliance with this attachment.
4. Video Camera. Equistar must install and commence operation of a video camera that is capable of monitoring and recording, in digital format, the flame of and any Smoke Emissions from LBFLARE. It is not a permit violation, however, if flare video equipment cannot discern the flare combustion zone and/or any Smoke Emissions at LBFLARE due to weather conditions such as fog or snow, provided that recordings are created and retained.
5. Vent Gas Compositional Monitoring or Direct Monitoring of Net Heating Value of Vent Gas. Equistar must either determine the concentration of individual components in the Vent Gas or directly monitor the Net Heating Value of the Vent Gas (NHV_{vg}) in compliance with one of the methods specified in this Paragraph. Equistar may elect to use different monitoring methods (of the methods provided in this Paragraph) for different gaseous streams that make up the Vent Gas, provided the composition or Net Heating Value of all gas streams that contribute to the Vent Gas are determined. Equistar must:
 - A. Install, operate, calibrate, and maintain a monitoring system capable of continuously measuring (*i.e.*, at least once every 15 minutes), calculating, and recording the individual component concentrations present in the Vent Gas; or
 - B. Install, operate, calibrate, and maintain a calorimeter capable of continuously measuring (*i.e.*, at least once every 15 minutes), calculating, and recording the NHV_{vg} at Standard Conditions. If Equistar elects this method, Equistar may install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the hydrogen concentration in the Vent Gas. The sample extraction point of the calorimeter may be located upstream of the introduction of Supplemental Gas or Sweep Gas or Purge Gas if the composition and flow rate of such gas is known, and if this known value then is used in the calculation of the Net Heating Value of the Vent Gas.
 - C. If Equistar elects the method in Paragraph 5.b, and the Net Heating Value of the Vent Gas exceeds the upper calibrated span of the calorimeter on the flare, then Equistar must use the value of the upper calibrated span of that calorimeter for calculating the NHV_{vg} at Standard Conditions until the Net Heating Value of the Vent Gas returns to within the measured

calibrated span. Use of this method will not constitute instrument system downtime for the period of time that the Net Heating Value of the Vent Gas exceeds the upper calibrated span of the calorimeter.

Direct compositional or Net Heating Value monitoring is not required for purchased ("pipeline quality") natural gas streams. The Net Heating Value of purchased natural gas streams may be determined using annual or more frequent grab sampling at any one representative location. Alternatively, the Net Heating Value of any purchased natural gas stream can be assumed to be 920 BTU/scf.

6. Instrumentation and Monitoring Systems: Optional Equipment. To continuously measure and calculate flow of all Pilot Gas to LBFLARE in scfm and pounds per hour, Equistar, at its option, may either: a) install (if not already installed) an instrument, or b) use a restriction orifice and pressure measurements. Equistar may use the data generated by this instrument or restriction orifice as part of calculating the Net Heating Value of the Combustion Zone Gas.

Specifications, Calibration, Quality Control, and Maintenance/Recording and Averaging Times/Operation

7. Instrumentation and Monitoring Systems: Specifications, Calibration, Quality Control, and Maintenance.
 - A. The instrumentation and monitoring systems identified in Paragraphs 2 and 5 must:
 - (1) Meet or exceed all applicable minimum accuracy, calibration, and quality control requirements specified in Table 13 of 40 C.F.R. Part 63, Subpart CC;
 - (2) Have an associated readout (*i.e.*, a visual display or record) or other indication of the monitored operating parameter that is readily accessible onsite for operational control or inspection by Equistar;
 - (3) Be capable of measuring the appropriate parameter over the range of values expected for that measurement location; and
 - (4) Have an associated data recording system with a resolution that is equal to or better than the required instrumentation/system accuracy.
 - B. Equistar must operate, maintain, and calibrate each instrument and monitoring system identified in Paragraphs 2 and 5 according to a monitoring plan that contains the information listed in 40 C.F.R. § 63.671(b)(1)-(5). However, if Equistar is determining NHV_{vg} using a process mass spectrometer, Equistar must use the methods established for determining NHV_{vg} as outlined in the February 5, 2018 letter to representatives of Extrel CMS, LLC and AMETEK, Energy and Process Division from Steffan M. Johnson, Group Leader, Measurement Technology Group, Office of Air Quality Planning and Standards (the "Johnson Letter," [a copy of the letter shall be attached to these special conditions at the site]) in lieu of complying with 40 C.F.R. § 63.671(b)(1)-(5)'s requirements for determining NHV_{vg} using a Gas Chromatograph.
 - C. All Gas Chromatograph monitoring systems used to comply with Paragraph 5.a must also meet the requirements of 40 C.F.R. § 63.671(e)(1) through (3) (Additional Requirements for Gas Chromatographs). All process mass spectrometers used to estimate Waste Gas composition in order to calculate NHV_{vg} must comply with: i) 40 C.F.R. § 63.671(e)(1) and (2) and ii) 40 C.F.R. § 63.671(e)(3) as specified and modified by the Johnson Letter attached to these special conditions at the site.

- D. For each instrumentation and monitoring system required by Paragraphs 2 and 5 (or installed pursuant to Paragraph 6), Equistar must comply with the out-of-control procedures described in 40 C.F.R. § 63.671(c)(1) and (2), and with the data reduction requirements specified in 40 C.F.R. § 63.671(d)(1) through (3).
- E. The language in 40 C.F.R. § 63.671, Table 13 of 40 C.F.R. Part 63, Subpart CC, or in any regulatory provision cross-referenced in 40 C.F.R. § 63.671 or Table 13 of 40 C.F.R. Part 63, Subpart CC, that limits the applicability of these regulatory requirements to periods when “regulated material” (as defined in 40 C.F.R. § 63.641) is routed to the LBFLARE, is not applicable for purposes of this attachment. In addition, for purposes of this attachment, the language in 40 C.F.R. § 63.671, Table 13 of 40 C.F.R. Part 63, Subpart CC, or in any regulatory provision cross-referenced in 40 C.F.R. § 63.671 or Table 13 of 40 C.F.R. Part 63, Subpart CC, that refers to a continuous parametric monitoring system will instead be read to refer to the instrumentation and monitoring systems required by this attachment.
- F. Equistar may elect to utilize the exceptions set forth in 40 C.F.R. § 63.1103(e)(4)(i)-(ix) when complying with this Paragraph.

8. Instrumentation and Monitoring Systems:

Recording and Averaging Times. The instrumentation and monitoring systems identified in this attachment must be able to produce and record data measurements and calculations for each parameter at the following time intervals:

<u>Instrumentation and Monitoring System</u>	<u>Recording and Averaging Times</u>
Vent gas, Assist steam Flow Monitoring Systems, and (if installed) Pilot Gas Flow	Measure continuously and record 15-minute block averages
Vent gas Compositional Monitoring (If using the methodology in Paragraph 5.a.)	Measure no less than once every 15 minutes and record that value
Vent Gas Net Heating Value Analyzer (if using the methodology in Paragraph 5.b.)	Measure continuously and record 15-minute block averages
Video Camera	Record at a rate of no less than 4 frames per minute

The term “continuously” in this Paragraph means to make a measurement as often as the manufacturer’s stated design capabilities of the flow monitors (for Vent Gas, Assist Steam, Assist Air, and if installed, Pilot Gas) and the Vent Gas Net Heating Value analyzers during each fifteen (15) minute block period, but in no case shall the flow monitors or Vent Gas Net Heating Value analyzers make less than one measurement in each fifteen (15) minute block period. The measurement results are then averaged and recorded to represent each fifteen (15) minute block period. Nothing in this Paragraph prohibits Equistar from setting up process control logic that uses

different averaging times from those in this table, provided that the recording and averaging times in this table are available and used for determining compliance with this attachment.

9. Instrumentation and Monitoring Systems: Operation. Equistar must operate each of the instruments and monitoring systems required by Paragraph 2 and 5 and collect data on a continuous basis when the flare that the instrument and/or monitoring system is associated with is In Operation and Capable of Receiving Sweep, Supplemental, and/or Waste Gas, except for the periods of Instrument Downtime specified in sub-Paragraphs 15(a)-(d).

Flaring Efficiency Standards

10. General Emission Standards Applicable to LBFLARE. Equistar must comply with the requirements set forth in this Paragraph at all times when LBFLARE is In Operation.
 - A. Operation During Emissions Venting. Equistar must operate LBFLARE at all times when emissions may be vented to it.
 - B. No Visible Emissions. Equistar must specify the smokeless design capacity of LBFLARE and operate with no Visible Emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when LBFLARE is In Operation and the Vent Gas flow is less than the smokeless design capacity. For purposes of this attachment, Visible Emissions may be determined by a person trained in accordance with Section 2.3 of Method 22 or documented by a video camera. Equistar must monitor for Visible Emissions from LBFLARE while it is In Operation as specified below in sub-Paragraphs 10.b.1 or 2. An initial Visible Emissions demonstration must be conducted using an observation period of 2 hours using Method 22 at 40 C.F.R. Part 60, Appendix A–7. Subsequent Visible Emissions observations must be conducted using either method listed below. Equistar must record and report any instances where Visible Emissions are observed for more than 5 minutes during any 2 consecutive hours as specified in 40 C.F.R. § 63.655(g)(11)(ii).
 - (1) At least once per Day, Equistar must conduct Visible Emissions observations using an observation period of 5 minutes using Method 22 at 40 C.F.R. Part 60, Appendix A–7. If at any time Equistar sees Visible Emissions, even if the minimum required daily Visible Emission monitoring has already been performed, Equistar must immediately begin an observation period of 5 minutes using Method 22 at 40 C.F.R. Part 60, Appendix A–7. If Visible Emissions are observed for more than one continuous minute during any 5-minute observation period, the observation period using Method 22 at 40 C.F.R. Part 60, Appendix A–7 must be extended to 2 hours or until 5 minutes of Visible Emissions are observed.
 - (2) Alternatively, Equistar may use a video surveillance camera to continuously record (at least one frame every 15 seconds with time and date stamps) images of the flare flame at a reasonable distance above the flare flame, and at an angle suitable for Visible Emissions observations. Equistar must provide real-time video surveillance camera output to the control room or other continuously staffed location where the camera images may be viewed at any time.
 - C. Pilot Flame Presence. Equistar must operate LBFLARE with a pilot flame present at all times. Equistar must continuously monitor the presence of the pilot flame(s) using a device (including, but not limited to, a thermocouple, ultraviolet beam sensor, or infrared sensor) capable of detecting that the pilot flame is present.

- D. Monitoring According to Applicable Provisions. Equistar must comply with all applicable Subparts of 40 C.F.R. Parts 60, 61, or 63 that state how a particular flare must be monitored.
 - E. Good Air Pollution Control Practices. At all times, including during periods of startup, shutdown, and/or Malfunction, Equistar must implement good air pollution control practices to minimize emissions from LBFLARE. Nothing in this section requires Equistar to install or maintain Flare monitoring equipment in addition to or different from the equipment required by this attachment.
11. Flare Tip Velocity or V_{tip} . Equistar must operate LBFLARE in compliance with either option below, provided that the appropriate monitoring systems are in place, whenever the Vent Gas flow rate is less than the smokeless design capacity of the flare.
- A. The actual Flare Tip Velocity (V_{tip}) must be less than 60 feet per second. Equistar must monitor V_{tip} using the procedures specified in Appendix 1.2 [included below], or
 - B. V_{tip} must be less than 400 feet per second and also less than the maximum allowed Flare Tip Velocity (V_{max}) as calculated according to Equation 11 in Appendix 1.2 [included below]. Equistar must monitor V_{tip} and gas composition, and must determine NHV_{vg} using the procedures specified in Appendix 1.2 [included below]. The Unobstructed Cross Sectional Area of the Flare Tip must be calculated consistent with Appendix 1.3 [included below].

Operation According to Design

12. Operation According to Design. Equistar must operate and maintain LBFLARE in accordance with its design and the requirements of this attachment.

NHV_{cz} Standards

13. Net Heating Value of Combustion Zone Gas (NHV_{cz}). At any time LBFLARE, is In Operation, Equistar must operate that Flare so as to maintain the NHV_{cz} at or above 270 BTU/scf determined on a 15-minute block period basis when Waste Gas is routed to LBFLARE for at least 15 minutes. Equistar must monitor and calculate NHV_{cz} in accordance with Appendix 1.2 [included below].

98% CE

14. 98% Combustion Efficiency. Equistar must operate LBFLARE with a minimum of a 98% Combustion Efficiency at all times when Waste Gas is vented to it. To demonstrate continuous compliance with the 98% Combustion Efficiency, Equistar must operate LBFLARE in compliance with the applicable requirements in Paragraph 13.

Standard During Instrument Downtime

15. Standard During Instrument Downtime. If one or more of the following conditions (collectively referred to as "Instrument Downtime") is present and renders Equistar incapable of operating LBFLARE in accordance with the applicable NHV standards above, Equistar must operate LBFLARE in accordance with good air pollution control practices so as to minimize emissions and ensure good Combustion Efficiency at the LBFLARE:
- A. Malfunction of an instrument needed to meet the requirement(s);

- B. Repairs following Malfunction of an instrument needed to meet the requirement(s);
- C. Recommended scheduled maintenance of an instrument in accordance with the manufacturer's recommended schedule, for an instrument needed to meet the requirement(s); and/or
- D. Quality Assurance/Quality Control activities on an instrument needed to meet the requirement(s).

Instrument Downtime must be calculated in accordance with 40 C.F.R. § 60.13(h)(2). In no event shall Instrument Downtime exceed 5% of the time in each Semi-Annual Period that the flare affected by the Instrument Downtime is In Operation. For purposes of calculating the percentage of Instrument Downtime allowed by this Paragraph, the time used for NHV Analyzer, mass spectrometer, or gas chromatograph calibration and validation activities may be excluded.

Recordkeeping

- 16. Recordkeeping for LBFLARE: Timing and Substance. Equistar must comply with the following recordkeeping requirements:
 - A. Equistar must calculate and record each of the following parameters:
 - (1) Volumetric flow rates of all gas streams that contribute to the Vent Gas volumetric flow rate (in scfm) (in 15-minute block averages and in accordance with any calculation requirements of Paragraph 2, 8, and Step 2 of Appendix 1.2 [included below];
 - (2) Assist steam volumetric flow rate (in scfm) (in 15-minute block averages and in accordance with any calculation requirements Paragraphs 2, 8, and Step 2 of Appendix 1.2) (for Steam-Assisted Flares) [included below];
 - (3) NHV_{vg} (in BTU/scf) (in 15-minute block averages in accordance with Step 1 of Appendix 1.2 [included below]; and
 - (4) NHV_{cz} (in BTU/scf) (in 15-minute block averages in accordance with Step 3 of Appendix 1.2 [included below].
 - B. Equistar must record the duration of all periods of Instrument Downtime for LBFLARE that exceed 5% of the time in a Semi-Annual Period that LBFLARE is In Operation. Equistar must record which instrument(s) experienced the downtime, which flare was affected by the downtime, an explanation of the cause(s) of the deviation, and a description of the corrective action(s) that Equistar took.
 - C. At any time that Equistar deviates from the emissions standards in Paragraphs 13-15 at the LBFLARE, Equistar must record the duration of the deviation, an explanation of the cause(s) of the deviation, and a description of the corrective action(s) that Equistar took.

Date: March 24, 2023

Permit 114809 and N190M1

Referenced Appendix 1.2

Flare Special Requirements

Calculating Combustion Efficiency, Net Heating Value of the Combustion Zone Gas (NHV_{cz}), the Net Heating Value Dilution Parameter (NHV_{dil}), and Flare Tip Velocity

All abbreviations, constants, and variables are defined in the Key included in this Appendix.

Combustion Efficiency Equation:

$$CE = [CO_2] / ([CO_2] + [CO] + [OC])$$

where:

[CO₂] = Concentration in volume percent or ppm-meters of carbon dioxide in the combusted gas immediately above the Combustion Zone

[CO] = Concentration in volume percent or ppm-meters of carbon monoxide in the combusted gas immediately above the Combustion Zone

[OC] = Concentration in volume percent or ppm-meters of the sum of all organic carbon compounds in the combusted gas immediately above the Combustion Zone, counting each carbon molecule separately where the concentration of each individual compound is multiplied by the number of carbon atoms it contains before summing (e.g., 0.1 volume percent ethane shall count as 0.2 percent OC because ethane has two carbon atoms)

For purposes of using the CE equation, the unit of measurement for CO₂, CO, and OC must be the same; that is, if “volume percent” is used for one compound, it must be used for all compounds. “Volume percent” cannot be used for one or more compounds and “ppm-meters” for the remainder.

Step 1: Determine the Net Heating Value of the Vent Gas (NHV_{vg})

Equistar shall determine the Net Heating Value of the Vent Gas (NHV_{vg}) based on composition monitoring data on a 15-minute block average basis according to the following requirements. If Equistar monitors separate gas streams that combine to comprise the total Vent Gas flow to the LBFLARE, the 15-minute block average Net Heating Value shall be determined separately for each measurement location according to the following requirements and a flow-weighted average of the gas stream Net Heating Values shall be used to determine the 15-minute block average Net Heating Value of the cumulative Vent Gas. The NHV_{vg} 15-minute block averages shall be calculated for set 15-minute time periods starting at 12 midnight to 12:15 AM, 12:15 AM to 12:30 AM and so on, concluding at 11:45 PM to midnight.

Step 1a: Equation or Output to be Used to Determine NHV_{vg} at a Measurement Location

For any gas stream for which Equistar complies with Paragraph 5 of Attachment D, by collecting compositional analysis data in accordance with the method set forth in 5.a: Equation 1 shall be used to determine the NHV_{vg} of a specific sample by summing the Net Heating Value for each individual component by individual component volume fractions. Individual component Net Heating Values are listed in Table 1 of this Appendix.

$$NHV_{vg} = \sum_{i=1}^n (x_i \cdot NHV_i) \quad \text{Equation 1}$$

For any gas stream for which Equistar complies with Paragraph 5 of Attachment D by collecting direct Net Heating Value monitoring data in accordance with the method set forth in 5.b but for which a Hydrogen Concentration Monitor is not used: Use the direct output (measured value) of the monitoring system(s) (in BTU/scf) to determine the NHV_{vg} for the sample.

For any gas stream for which Equistar complies with Paragraph 5 of Attachment D by collecting direct Net Heating Value monitoring data in accordance with the method set forth in 5.b and for which a Hydrogen Concentration Monitor is also used: Equation 2 shall be used to determine the NHV_{vg} for each sample measured via the Net Heating Value monitoring system. Where hydrogen concentration data is collected, Equation 2 performs a net correction for the measured heating value of hydrogen since the theoretical Net Heating Value for hydrogen is 274 Btu/scf, but for the purposes of this Attachment, a Net Heating Value of 1,212 Btu/scf may be used ($1,212 - 274 = 938$ BTU/scf).

$$NHV_{vg} = NHV_{measured} + 938x_{H_2} \quad \text{Equation 2}$$

Step 1b: Calculation Method to be Used in Applying Equation/Output to Determine NHV_{vg}

For any flare for which Equistar complies with Paragraph 5 of Attachment D by using a continuous monitoring system in accordance with the method set forth in 5.a or 5.b: Equistar may elect to determine the 15-minute block average NHV_{vg} using either the Feed-Forward Calculation Method or the Direct Calculation Method (both described below). Equistar needs not elect to use the same methodology at all flares with a continuous monitoring system; however, for each such flare, Equistar must elect one calculation method that will apply at all times, and use that method for all continuously monitored flare vent streams associated with that flare. If Equistar intends to change the calculation method that applies to a flare, Equistar must notify the EPA 30 days in advance of such a change.

Feed-Forward Calculation Method. When calculating NHV_{vg} for a specific 15-minute block:

1. Use the results from the first sample collected during an event (for periodic Vent Gas flow events) for the first 15-minute block associated with that event.
2. If the results from the first sample collected during an event (for periodic Vent Gas flow events) are not available until after the second 15-minute block starts, use the results from the first sample collected during an event for the second 15-minute block associated with that event.
3. For all other cases, use the results that are available from the most recent sample prior to the 15-minute block period for that 15-minute block period for all Vent Gas streams. For the purpose of this requirement, use the time that the results become available rather than the time the sample was collected. For example, if a sample is collected at 12:25 AM and the analysis is completed at 12:38 AM, the results are available at 12:38 AM and these results would be used to determine compliance during the 15-minute block period from 12:45 AM to 1:00 AM.

Direct Calculation Method. When calculating NHV_{vg} for a specific 15-minute block:

1. If the results from the first sample collected during an event (for periodic Vent Gas flow events) are not available until after the second 15-minute block starts, use the results from the first sample collected during an event for the first 15-minute block associated with that event.
2. For all other cases, use the arithmetic average of all NHV_{vg} measurement data results that become available during a 15-minute block to calculate the 15-minute block average for that period. For the purpose of this requirement, use the time that the results become available rather

than the time the sample was collected. For example, if a sample is collected at 12:25 AM and the analysis is completed at 12:38 AM, the results are available at 12:38 AM and these results would be used to determine compliance during the 15-minute block period from 12:30 AM to 12:45 AM.

Step 2: Determine Volumetric Flow Rates of Gas Streams

Equistar shall determine the volumetric flow rate in standard cubic feet (scf) of Vent Gas, along with the volumetric flow rates (in scf) of any Supplemental Gas, Assist Steam, and Premix Assist Air, over a 15-minute block average basis. The 15-minute block average volumetric flow rates shall be calculated for set 15-minute time periods starting at 12 midnight to 12:15 AM, 12:15 AM to 12:30 AM and so on, concluding at 11:45 PM to midnight.

For any gas streams for which Equistar complies with Paragraph 2 of Attachment D by using a monitoring system that directly records volumetric flow rate: Use the direct output (measured value) of the monitoring system(s) (in scf), as corrected for the temperature and pressure of the system to Standard Conditions (i.e., a temperature of 20 °C (68 °F) and a pressure of 1 atmosphere) to then calculate the average volumetric flow rate of that gas stream for the 15- minute block period.

For Vent Gas, Assist Steam, or Premix Assist Air gas streams for which Equistar complies with Paragraph 2 of Attachment D by using a mass flow monitor to determine volumetric flow rate: Equation 3 shall be used to determine the volumetric flow rate of Vent Gas, Assist Air, or Assist Steam by converting mass flow rate to volumetric flow at Standard Conditions (i.e., a temperature of 20 °C (68 °F) and a pressure of 1 atmosphere). Equation 3 uses the molecular weight of the gas stream as an input to the equation; therefore, if Equistar elects to use a mass flow monitor to determine volumetric flow rate of Vent Gas, Equistar must collect compositional analysis data for such Vent Gas in accordance with the method set forth in 5.a of Attachment D. For Assist Steam, use a molecular weight of 18 pounds per pound-mole. For Assist Air, use a molecular weight of 29 pounds per pound-mole. The converted volumetric flow rates at Standard Conditions from Equation 3 shall then be used to calculate the average volumetric flow rate of that gas stream for the 15-minute block period.

$$Q_{vol} = \frac{Q_{mass} * 385.3}{MW_t} \quad \text{Equation 3}$$

For gas streams for which the molecular weight of the gas is known and for which Equistar complies with Paragraph 2 by using continuous pressure/temperature monitoring system(s): Use appropriate engineering calculations to determine the average volumetric flow rate of that gas stream for the 15-minute block period. For Assist Steam, use a molecular weight of 18 pounds per pound-mole. For Assist Air, use a molecular weight of 29 pounds per pound-mole. For Vent Gas, molecular weight must be determined by collecting compositional analysis data for such Vent Gas in accordance with the method set forth in 5a.

Step 3: Calculate the Net Heating Value of the Combustion Zone Gas (NHVcz)

For any flare at which: 1) the Feed-Forward Calculation Method is used; 2) gas composition or Net Heating Value monitoring is performed in a location representative of the cumulative Vent Gas stream; and 3) Supplemental Gas flow additions to the flare are directly monitored: Equation 4 shall be used to determine the 15-minute block average NHV_{cz} based on the 15-minute block average Vent Gas, Supplemental Gas, and Assist Gas flow rates.

$$NHV_{cz} = \frac{(Q_{vg} - Q_{NG2} + Q_{NG1}) * NHV_{vg} + (Q_{NG2} - Q_{NG1}) * NHV_{NG}}{Q_{vg} + Q_s + Q_{a,premix}} \quad \text{Equation 4}$$

For the first 15-minute block period of an event, Q_{NG1} shall use the volumetric flow value for the current 15-minute block period (i.e. $Q_{NG1} = Q_{NG2}$). NHV_{NG} shall be determined using one of the following methods: 1) direct compositional or Net Heating Value monitoring of the natural gas stream in accordance with Step 1; or 2) for purchased ("pipeline quality") natural gas streams, Equistar may elect to either: a) use annual or more frequent grab sampling at any one representative location, or b) assume a Net Heating Value of 920 BTU/scf.

For all other Flares: Equation 5 shall be used to determine the 15-minute block average NHV_{cz} based on the 15-minute block average Vent Gas and assist gas flow rates. For periods when there is no Assist Steam flow or Premix Assist Air flow, $NHV_{cz} = NHV_{vg}$.

$$NHV_{cz} = \frac{(Q_{vg}) * NHV_{vg}}{Q_{vg} + Q_s + Q_{a,premix}} \quad \text{Equation 5}$$

Step 4: Calculate the Net Heating Value Dilution Parameter (NHV_{dil})

For any flare at which: 1) the Feed-Forward Calculation Method is used; 2) gas composition or Net Heating Value monitoring is performed in a location representative of the cumulative Vent Gas stream; and 3) Supplemental Gas flow additions to the flare are directly monitored: Equation 6 shall be used to determine the 15-minute block average NHV_{dil} only during periods when Perimeter Assist Air is used. For 15-minute block periods when there is no cumulative volumetric flow of Perimeter Assist Air, the 15-minute block average NHV_{dil} parameter does not need to be calculated.

$$NHV_{dil} = \frac{[(Q_{vg} - Q_{NG2} + Q_{NG1}) * NHV_{vg} + (Q_{NG2} - Q_{NG1}) * NHV_{NG}] * Diam}{(Q_{vg} + Q_s + Q_{a,premix} + Q_{a,perimeter})} \quad \text{Equation 6}$$

For the first 15-minute block period of an event, Q_{NG1} shall use the volumetric flow value for the current 15-minute block period (i.e. $Q_{NG1} = Q_{NG2}$). NHV_{NG} shall be determined using one of the following methods: 1) direct compositional or Net Heating Value monitoring of the natural gas stream in accordance with Step 1; or 2) for purchased ("pipeline quality") natural gas streams, Equistar may elect to either: a) use annual or more frequent grab sampling at any one representative location, or b) assume a Net Heating Value of 920 BTU/scf.

For all other Flares: Equation 7 shall be used to determine the 15-minute block average NHV_{dil} based on the 15-minute block average Vent gas and Perimeter Assist Air flow rates, only during periods when Perimeter Assist Air is used. For 15-minute block periods when there is no cumulative volumetric flow of Perimeter Assist Air, the 15-minute block average NHV_{dil} parameter does not need to be calculated.

$$NHV_{dil} = \frac{Q_{vg} * Diam * NHV_{vg}}{(Q_{vg} + Q_s + Q_{a,premix} + Q_{a,perimeter})} \quad \text{Equation 7}$$

Step 5: Ensure that during flare operation, $NHV_{cz} \geq 270$ BTU/scf

The flare must be operated to ensure that NHV_{cz} is equal to or above 270 BTU/scf, as determined for each 15-minute block period when Supplemental, Sweep, and/or Waste Gas is routed to a flare for at least 15-minutes. Equation 8 shows this relationship.

$$NHV_{cz} \geq 270 \text{ BTU/scf} \quad \text{Equation 8}$$

Step 6: Ensure that during flare operation, $NHV_{dil} \geq 22 \text{ BTU/ft}^2$

A flare actively receiving Perimeter Assist Air must be operated to ensure that NHV_{dil} is equal to or above 22 BTU/ft², as determined for each 15-minute block period when Supplemental, Sweep, and/or Waste Gas is routed to flare for at least 15-minutes. Equation 9 shows this relationship.

$$NHV_{dil} \geq 22 \text{ BTU/ft}^2 \quad \text{Equation 9}$$

Calculation Method for Determining Compliance with V_{tip} Operating Limits.

Equistar shall determine V_{tip} on a 15-minute block average basis according to the following requirements:

- D. Equistar shall use design and engineering principles and the guidance in Appendix 1.3 to determine the Unobstructed Cross Sectional Area of the Flare Tip. The Unobstructed Cross Sectional Area of the Flare Tip is the total tip area that Vent Gas can pass through. This area does not include any stability tabs, stability rings, and Upper Steam or air tubes because Vent Gas does not exit through them.
- E. Equistar shall determine the cumulative volumetric flow of Vent Gas for each 15-minute block average period using the data from the continuous flow monitoring system according to the requirements in Step 2 above.
- F. The 15-minute block average V_{tip} shall be calculated using Equation 10.

$$V_{tip} = \frac{Q_{cum}}{Area_x 900} \quad \text{Equation 10}$$

- G. If Equistar chooses to comply Paragraph 11.b of Attachment D, Equistar shall also determine the NHV_{vg} using Step 1 above and calculate V_{max} using Equation 11 in order to compare V_{tip} to V_{max} on a 15-minute Block average basis.

$$\log_{10}(V_{max}) = \frac{NHV_{vg} + 1,212}{850} \quad \text{Equation 11}$$

Key to the Abbreviations:

385.3= Conversion Factor (scf/lb-mol)

850 = Constant

900 = Conversion Factor (seconds/ 15-minute block average)

1,212 = Constant

Area = The Unobstructed Cross Sectional Area of the Flare Tip is the total tip area that Vent Gas can pass through, in ft². This area does not include any stability tabs, stability rings, and upper steam or air tubes because Vent Gas does not exit through them. Use design and engineering principles to determine the Unobstructed Cross Sectional Area of the Flare Tip.

Diam = Effective diameter of the unobstructed area of the Flare Tip for Vent Gas flow, in ft. Determine the diameter as $Diam = 2 * \sqrt{Area \div \pi}$

i = individual component in Vent Gas (unitless)

MWt = molecular weight of the gas at the flow monitoring location (lb/lb-mol)

n = number of components in Vent Gas (unitless)

NHV_{cz} = Net Heating Value of Combustion Zone Gas (BTU/scf)

NHV_i = Net Heating Value of component I according to Table 1 (BTU/scf)

NHV_{measured} = Net Heating Value of Vent Gas stream as measured by monitoring system (BTU/scf)

NHV_{NG} = Net Heating Value of Supplemental Gas to flare during the 15-minute block period (BTU/scf)

NHV_{vg} = Net Heating Value of Vent Gas (BTU/scf)

Q_{a,perimeter} = cumulative volumetric flow of perimeter Assist Air during the 15-minute block period (scf)

Q_{a,premix} = cumulative volumetric flow of premix Assist Air during the 15-minute block period (scf)

Q_{cum} = cumulative volumetric flow over 15-minute block average period (scf)

Q_{mass} = mass flow rate (pounds per second)

Q_{NG1} = cumulative vol flow of Supplemental Gas to flare during previous 15-minute block period (scf)

Q_{NG2} = cumulative vol flow of Supplemental Gas to flare during the 15-minute block period (scf)

Q_s = cumulative volumetric flow of Total Steam during the 15-minute block period (scf)

Q_{vg} = cumulative vol flow of Vent Gas during the 15-minute block period (scf)

Q_{vol} = volumetric flow rate (scf per second)

V_{max} = Maximum allowed Flare Tip Velocity (feet per second)

V_{tip} = Flare Tip Velocity (feet per second)

x_i = concentration of component I in Vent Gas (vol fraction)

x_{H2} = concentration of H2 in Vent Gas at time sample was input into NHV monitoring system (vol fraction)

Table 1: Individual Component Properties

Component	Molecular Formula	MW _i (pounds per pound-mole)	CMNi (mole per mole)	NHV _i (British thermal units per standard cubic foot)	LFL _i (volume)
Acetylene	C ₂ H ₂	26.04	2	1,404	2.5
Benzene	C ₆ H ₆	78.11	6	3,591	1.3
1,2-Butadiene	C ₄ H ₆	54.09	4	2,794	2.0
1,3-Butadiene	C ₄ H ₆	54.09	4	2,690	2.0
iso-Butane	C ₄ H ₁₀	58.12	4	2,957	1.8
n-Butane	C ₄ H ₁₀	58.12	4	2,968	1.8
cis-Butene	C ₄ H ₈	56.11	4	2,830	1.6
iso-Butene	C ₄ H ₈	56.11	4	2,928	1.8
trans-Butene	C ₄ H ₈	56.11	4	2,826	1.7
Carbon Dioxide	CO ₂	44.01	1	0	∞
Carbon Monoxide	CO	28.01	1	316	12.5
Cyclopropane	C ₃ H ₆	42.08	3	2,185	2.4
Ethane	C ₂ H ₆	30.07	2	1,595	3.0
Ethylene	C ₂ H ₄	28.05	2	1,477	2.7
Hydrogen	H ₂	2.02	0	1,212 ^A	4.0
Hydrogen Sulfide	H ₂ S	34.08	0	587	4.0
Methane	CH ₄	16.04	1	896	5.0
Methyl-Acetylene	C ₃ H ₄	40.06	3	2,088	1.7
Nitrogen	N ₂	28.01	0	0	∞
Oxygen	O ₂	32.00	0	0	∞
Pentane+ (C5+)	C ₅ H ₁₂	72.15	5	3,655	1.4
Propadiene	C ₃ H ₄	40.06	3	2,066	2.16
Propane	C ₃ H ₈	44.10	3	2,281	2.1
Propylene	C ₃ H ₆	42.08	3	2,150	2.4
Water	H ₂ O	18.02	0	0	∞

^A The theoretical Net Heating Value for hydrogen is 274 Btu/scf, but for the purposes of this appendix, a Net Heating Value of 1,212 Btu/scf shall be used.

Note: If a component is not specified in this Table 1, the heats of combustion may be determined using any published values where the net enthalpy per mole of offgas is based on combustion at 25 °C and 1 atmosphere (or constant pressure) with offgas water in the gaseous state, but the standard temperature for determining the volume corresponding to one mole of Vent Gas is 20°C.

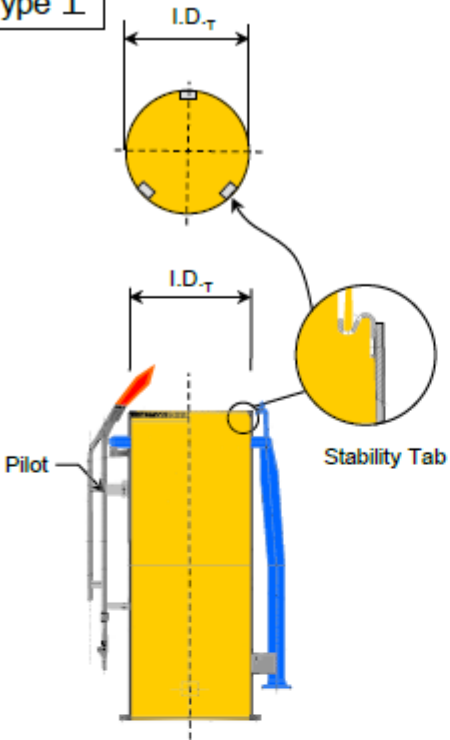
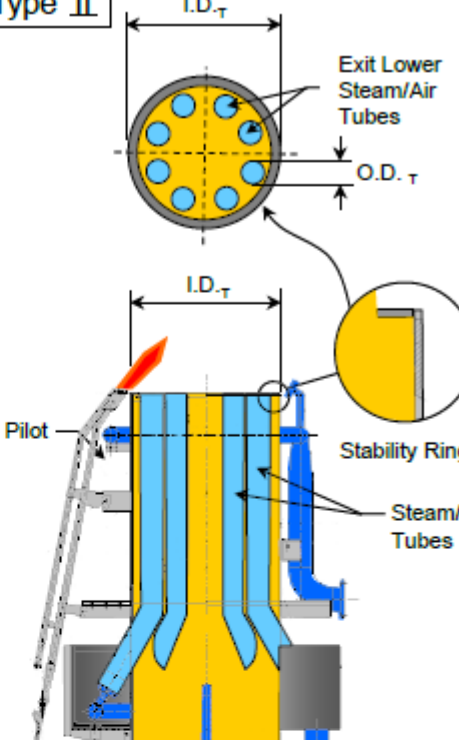
Date: March 24, 2023

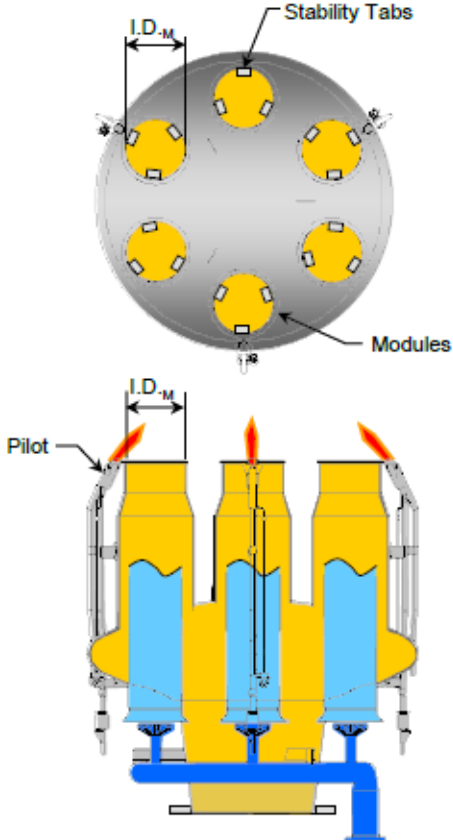
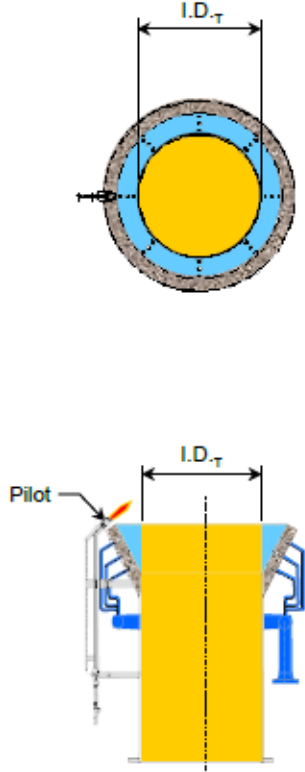
Permit 114809 and N190M1

Referenced Appendix 1.3

Flare Special Requirements

Calculating the Unobstructed Cross Sectional Area of Various Types of Flares

<p>Type I</p>  $A_{tip-unob} = \pi(I.D.T)^2/4 - (X_T * A_{ST})$	<p>Type II</p>  $A_{tip-unob} = \pi(I.D.T)^2/4 - A_{ST} - N_T * \pi(O.D.T)^2/4$
<p>Where:</p> <ul style="list-style-type: none"> $A_{tip-unob}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D.T$ = Inside Diameter Flare Tip X_T = Number of Stability Tabs A_{ST} = Area of a Stability Tab 	<p>Where:</p> <ul style="list-style-type: none"> $A_{tip-unob}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D.T$ = Inside Diameter Flare Tip A_{ST} = Area of Stability Ring $O.D.T$ = Outside Diameter of Steam/Air Tubes N_T = Number of Steam/Air Tubes
<p>Example: $I.D.T = 41.5$ inches $X_T = 3$ $A_{ST} = 3$ Sq. inches</p>	<p>Example: $I.D.T = 47.5$ inches $A_{ST} = 100$ Sq. inches $O.D.T = 6.5$ inches $N_T = 8$</p>
<p>$A_{tip-unob} = \pi(41.5)^2/4 - (3 * 3)$ $A_{tip-unob} = 1344$ Sq. inches</p>	<p>$A_{tip-unob} = \pi(47.5)^2/4 - 100 - 8 * \pi(6.5)^2/4$ $A_{tip-unob} = 1322$ Sq. inches</p>

Type III	Type IV
 $A_{tip-unob} = N_M * (\pi * (I.D._M)^2 / 4 - X_T * A_{ST})$	 $A_{tip-unob} = \pi (I.D._T)^2 / 4$
<p>Where:</p> <ul style="list-style-type: none"> $A_{tip-unob}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D._M$ = Inside Diameter of One Tip Module N_M = Number of Modules X_T = Number of Stability Tabs per Module A_{ST} = Area of a Stability Tab 	<p>Where:</p> <ul style="list-style-type: none"> $A_{tip-unob}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D._T$ = Inside Diameter of Flare Tip
<p>Example: $I.D._M = 17$ inches $N_M = 6$ $X_T = 3$ $A_{ST} = 3$ Sq. inches</p>	<p>Example: $I.D._T = 41.5$ inches</p>
$A_{tip-unob} = 6 * (\pi * (17)^2 / 4 - 3 * 3)$ $A_{tip-unob} = 1308 \text{ Sq. inches}$	$A_{tip-unob} = \pi (41.5)^2 / 4$ $A_{tip-unob} = 1353 \text{ Sq. inches}$

Emission Sources - Maximum Allowable Emission Rates
Permit Number 114809 & N190M1

This table lists the maximum allowable emission rates and all sources of air contaminants on the applicant's property covered by this permit. The emission rates shown are those derived from information submitted as part of the application for permit and are the maximum rates allowed for these facilities, sources, and related activities. Any proposed increase in emission rates may require an application for a modification of the facilities covered by this permit.

Air Contaminants Data

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
LBCT	LB-1 Cooling Tower	PM	0.40	1.55
		PM ₁₀	0.25	0.98
		PM _{2.5}	<0.01	<0.01
LBFUG	LB-1 Process Fugitives (5)	VOC	2.26	9.90
LBRVE	Residual VOC Emissions (6)	VOC	9.24	20.25
LBFLARE	LB-1 Flare	CO	327.55	86.56
		NO _x	69.59	17.21
		SO ₂	345.84	4.67
		VOC	530.14	39.88
	MSS Flaring	CO	458.95	37.95
		NO _x	91.37	7.43
		SO ₂	2.08	1.24
		VOC	543.82	14.06
LBWW	LB-1 Wastewater Flow	VOC	0.52	0.38
LBANALYZ	LB-1 Analyzers	VOC	0.02	0.01
MSS-LB1RM	LB-1 Routine Maintenance	VOC	2.63	<0.01
MSS-LB1RMA	LB1 MSS - Attachment A	VOC	1.25	0.01
		Tetrachloroethylene	1.26	0.04
MSS-LB1-VC	LB-1 Vessel Clearing	VOC	31.64	0.58
		CO	0.04	<0.01
LBV603	Alkyls Seal Oil Pot Vent	VOC	<0.01	<0.01
LBD108	Mineral Oil Storage Drum	VOC	0.01	0.01

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
LBF806	Additive Feed Vent System	PM	0.07	0.30
		PM ₁₀	0.07	0.30
		PM _{2.5}	0.07	0.30
LBF807	Housekeeping Clean-up Vacuum System	PM	0.08	0.09
		PM ₁₀	0.08	0.09
		PM _{2.5}	0.08	0.09
LBF816	Bulk Additive Silo Filter (Talc)	PM	0.10	0.02
		PM ₁₀	0.10	0.02
		PM _{2.5}	0.10	0.02
LBOHG	LB-1 Oil Hydraulic Guard D114	VOC	<0.01	<0.01
LBD817	TNPP Additive Drum Vent	VOC	<0.01	<0.01
LB30F965	30-F-965 Filter	PM	0.40	1.63
		PM ₁₀	0.40	1.63
		PM _{2.5}	0.10	0.41
LB30F900A	30-F-900A Elutriator Vent	PM	0.14	0.46
		PM ₁₀	0.14	0.46
		PM _{2.5}	0.04	0.11
LB30F900B	30-F-900B Elutriator Vent	PM	0.14	0.46
		PM ₁₀	0.14	0.46
		PM _{2.5}	0.04	0.11
LBBL980	Hopper Blower	PM	0.14	0.15
		PM ₁₀	0.14	0.15
		PM _{2.5}	0.03	0.04
LBPK810	Pellet Dryer Vent	PM	0.09	0.39
		PM ₁₀	0.09	0.39
		PM _{2.5}	0.09	0.39

Emission Sources - Maximum Allowable Emission Rates

- (1) Emission point identification - either specific equipment designation or emission point number from plot plan.
- (2) Specific point source name. For fugitive sources, use area name or fugitive source name.
- (3) VOC - volatile organic compounds as defined in Title 30 Texas Administrative Code § 101.1
NO_x - total oxides of nitrogen
SO₂ - sulfur dioxide
PM - total particulate matter, suspended in the atmosphere, including PM₁₀ and PM_{2.5}, as represented
PM₁₀ - total particulate matter equal to or less than 10 microns in diameter, including PM_{2.5}, as represented
PM_{2.5} - particulate matter equal to or less than 2.5 microns in diameter
CO - carbon monoxide
- (4) Compliance with annual emission limits (tons per year) is based on a 12-month rolling period.
- (5) Emission rate is an estimate and is enforceable through compliance with the applicable special condition(s) and permit application representations.
- (6) VOC emissions shown at this point represent the total allowable VOC emission rates for all emission points in the process downstream of the buffer flushing silo.

Date: July 30, 2021



Texas Commission on Environmental Quality Air Quality Permit

A Permit Is Hereby Issued To
Equistar Chemicals, LP
Authorizing the Construction and Operation of
Equistar Chemicals La Porte Complex
Located at La Porte, Harris County, Texas
Latitude 29.718055 Longitude -95.068888

Permits: 18978, N162M1 and PSDTX752M5

Amendment Date: June 30, 2023

Expiration Date: October 29, 2029



For the Commission

1. **Facilities** covered by this permit shall be constructed and operated as specified in the application for the permit. All representations regarding construction plans and operation procedures contained in the permit application shall be conditions upon which the permit is issued. Variations from these representations shall be unlawful unless the permit holder first makes application to the Texas Commission on Environmental Quality (commission) Executive Director to amend this permit in that regard and such amendment is approved. [Title 30 Texas Administrative Code (TAC) Section 116.116 (30 TAC § 116.116)]¹
2. **Voiding of Permit.** A permit or permit amendment is automatically void if the holder fails to begin construction within 18 months of the date of issuance, discontinues construction for more than 18 months prior to completion, or fails to complete construction within a reasonable time. Upon request, the executive director may grant an 18-month extension. Before the extension is granted the permit may be subject to revision based on best available control technology, lowest achievable emission rate, and netting or offsets as applicable. One additional extension of up to 18 months may be granted if the permit holder demonstrates that emissions from the facility will comply with all rules and regulations of the commission, the intent of the Texas Clean Air Act (TCAA), including protection of the public's health and physical property; and (b)(1) the permit holder is a party to litigation not of the permit holder's initiation regarding the issuance of the permit; or (b)(2) the permit holder has spent, or committed to spend, at least 10 percent of the estimated total cost of the project up to a maximum of \$5 million. A permit holder granted an extension under subsection (b)(1) of this section may receive one subsequent extension if the permit holder meets the conditions of subsection (b)(2) of this section. [30 TAC § 116.120]
3. **Construction Progress.** Start of construction, construction interruptions exceeding 45 days, and completion of construction shall be reported to the appropriate regional office of the commission not later than 15 working days after occurrence of the event. [30 TAC § 116.115(b)(2)(A)]
4. **Start-up Notification.** The appropriate air program regional office shall be notified prior to the commencement of operations of the facilities authorized by the permit in such a manner that a representative of the commission may be present. The permit holder shall provide a separate notification for the commencement of operations for each unit of phased construction, which may involve a series of units commencing operations at different times. Prior to operation of the facilities authorized by the permit, the permit holder shall identify the source or sources of allowances to be utilized for compliance with Chapter 101, Subchapter H, Division 3 of this title (relating to Mass Emissions Cap and Trade Program). [30 TAC § 116.115(b)(2)(B)]
5. **Sampling Requirements.** If sampling is required, the permit holder shall contact the commission's Office of Compliance and Enforcement prior to sampling to obtain the proper data forms and procedures. All sampling and testing procedures must be approved by the executive director and coordinated with the regional representatives of the commission. The permit holder is also responsible for providing sampling facilities and conducting the sampling operations or contracting with an independent sampling consultant. [30 TAC § 116.115(b)(2)(C)]
6. **Equivalency of Methods.** The permit holder must demonstrate or otherwise justify the equivalency of emission control methods, sampling or other emission testing methods, and monitoring methods proposed as alternatives to methods indicated in the conditions of the permit. Alternative methods shall be applied for in writing and must be reviewed and approved by the executive director prior to their use in fulfilling any requirements of the permit. [30 TAC § 116.115(b)(2)(D)]
7. **Recordkeeping.** The permit holder shall maintain a copy of the permit along with records containing the information and data sufficient to demonstrate compliance with the permit, including production records and

operating hours; keep all required records in a file at the plant site. If, however, the facility normally operates unattended, records shall be maintained at the nearest staffed location within Texas specified in the application; make the records available at the request of personnel from the commission or any air pollution control program having jurisdiction in a timely manner; comply with any additional recordkeeping requirements specified in special conditions in the permit; and retain information in the file for at least two years following the date that the information or data is obtained. [30 TAC § 116.115(b)(2)(E)]

8. **Maximum Allowable Emission Rates.** The total emissions of air contaminants from any of the sources of emissions must not exceed the values stated on the table attached to the permit entitled "Emission Sources-- Maximum Allowable Emission Rates." [30 TAC § 116.115(b)(2)(F)] ¹
9. **Maintenance of Emission Control.** The permitted facilities shall not be operated unless all air pollution emission capture and abatement equipment is maintained in good working order and operating properly during normal facility operations. The permit holder shall provide notification in accordance with 30 TAC §101.201, 101.211, and 101.221 of this title (relating to Emissions Event Reporting and Recordkeeping Requirements; Scheduled Maintenance, Startup, and Shutdown Reporting and Recordkeeping Requirements; and Operational Requirements). [30 TAC§ 116.115(b)(2)(G)]
10. **Compliance with Rules.** Acceptance of a permit by an applicant constitutes an acknowledgment and agreement that the permit holder will comply with all rules and orders of the commission issued in conformity with the TCAA and the conditions precedent to the granting of the permit. If more than one state or federal rule or regulation or permit condition is applicable, the most stringent limit or condition shall govern and be the standard by which compliance shall be demonstrated. Acceptance includes consent to the entrance of commission employees and agents into the permitted premises at reasonable times to investigate conditions relating to the emission or concentration of air contaminants, including compliance with the permit. [30 TAC § 116.115(b)(2)(H)]
11. **This** permit may not be transferred, assigned, or conveyed by the holder except as provided by rule. [30 TAC § 116.110(e)]
12. **There** may be additional special conditions attached to a permit upon issuance or modification of the permit. Such conditions in a permit may be more restrictive than the requirements of Title 30 of the Texas Administrative Code. [30 TAC § 116.115(c)]
13. **Emissions** from this facility must not cause or contribute to "air pollution" as defined in Texas Health and Safety Code (THSC) §382.003(3) or violate THSC § 382.085. If the executive director determines that such a condition or violation occurs, the holder shall implement additional abatement measures as necessary to control or prevent the condition or violation.
14. **The** permit holder shall comply with all the requirements of this permit. Emissions that exceed the limits of this permit are not authorized and are violations of this permit. ¹

¹ Please be advised that the requirements of this provision of the general conditions may not be applicable to greenhouse gas emissions.

Common Acronyms in Air Permits

°C = Temperature in degrees Celsius	GLCmax = maximum (predicted) ground-level concentration
°F = Temperature in degrees Fahrenheit	gpm = gallon per minute
°K = Temperature in degrees Kelvin	gr/1000scf = grain per 1000 standard cubic feet
µg = microgram	gr/dscf = grain per dry standard cubic feet
µg/m ³ = microgram per cubic meter	H ₂ CO = formaldehyde
acfm = actual cubic feet per minute	H ₂ S = hydrogen sulfide
AMOC = alternate means of control	H ₂ SO ₄ = sulfuric acid
AOS = alternative operating scenario	HAP = hazardous air pollutant as listed in § 112(b) of the Federal Clean Air Act or Title 40 Code of Federal Regulations Part 63, Subpart C
AP-42 = Air Pollutant Emission Factors, 5th edition	HC = hydrocarbons
APD = Air Permits Division	HCl = hydrochloric acid, hydrogen chloride
API = American Petroleum Institute	Hg = mercury
APWL = air pollutant watch list	HGB = Houston/Galveston/Brazoria
BPA = Beaumont/ Port Arthur	hp = horsepower
BACT = best available control technology	hr = hour
BAE = baseline actual emissions	IFR = internal floating roof tank
bbl = barrel	in H ₂ O = inches of water
bbl/day = barrel per day	in Hg = inches of mercury
bhp = brake horsepower	IR = infrared
BMP = best management practices	ISC3 = Industrial Source Complex, a dispersion model
Btu = British thermal unit	ISCST3 = Industrial Source Complex Short-Term, a dispersion model
Btu/scf = British thermal unit per standard cubic foot or feet	K = Kelvin; extension of the degree Celsius scaled-down to absolute zero
CAA = Clean Air Act	LACT = lease automatic custody transfer
CAM = compliance-assurance monitoring	LAER = lowest achievable emission rate
CEMS = continuous emissions monitoring systems	lb = pound
cfm = cubic feet (per) minute	lb/day = pound per day
CFR = Code of Federal Regulations	lb/hr = pound per hour
CN = customer ID number	lb/MMBtu = pound per million British thermal units
CNG = compressed natural gas	LDAR = Leak Detection and Repair (Requirements)
CO = carbon monoxide	LNG = liquefied natural gas
COMS = continuous opacity monitoring system	LPG = liquefied petroleum gas
CPMS = continuous parametric monitoring system	LT/D = long ton per day
DFW = Dallas/ Fort Worth (Metroplex)	m = meter
DE = destruction efficiency	m ³ = cubic meter
DRE = destruction and removal efficiency	m/sec = meters per second
dscf = dry standard cubic foot or feet	MACT = maximum achievable control technology
dscfm = dry standard cubic foot or feet per minute	MAERT = Maximum Allowable Emission Rate Table
ED = (TCEQ) Executive Director	MERA = Modeling and Effects Review Applicability
EF = emissions factor	mg = milligram
EFR = external floating roof tank	mg/g = milligram per gram
EGU = electric generating unit	mL = milliliter
EI = Emissions Inventory	MMBtu = million British thermal units
ELP = El Paso	MMBtu/hr = million British thermal units per hour
EPA = (United States) Environmental Protection Agency	MSDS = material safety data sheet
EPN = emission point number	MSS = maintenance, startup, and shutdown
ESL = effects screening level	MW = megawatt
ESP = electrostatic precipitator	NAAQS = National Ambient Air Quality Standards
FCAA = Federal Clean Air Act	NESHAP = National Emission Standards for Hazardous Air Pollutants
FCCU = fluid catalytic cracking unit	NGL = natural gas liquids
FID = flame ionization detector	NNSR = nonattainment new source review
FIN = facility identification number	NO _x = total oxides of nitrogen
ft = foot or feet	NSPS = New Source Performance Standards
ft/sec = foot or feet per second	
g = gram	
gal/wk = gallon per week	
gal/yr = gallon per year	
GLC = ground level concentration	

PAL = plant-wide applicability limit
 PBR = Permit(s) by Rule
 PCP = pollution control project
 PEMS = predictive emission monitoring system
 PID = photo ionization detector
 PM = periodic monitoring
 PM = total particulate matter, suspended in the atmosphere, including PM₁₀ and PM_{2.5}, as represented
 PM_{2.5} = particulate matter equal to or less than 2.5 microns in diameter
 PM₁₀ = total particulate matter equal to or less than 10 microns in diameter, including PM_{2.5}, as represented
 POC = products of combustion
 ppb = parts per billion
 ppm = parts per million
 ppmv = parts per million (by) volume
 psia = pounds (per) square inch, absolute
 psig = pounds (per) square inch, gage
 PTE = potential to emit
 RA = relative accuracy
 RATA = relative accuracy test audit
 RM = reference method
 RVP = Reid vapor pressure
 scf = standard cubic foot or feet
 scfm = standard cubic foot or feet (per) minute
 SCR = selective catalytic reduction
 SIL = significant impact levels
 SNCR = selective non-catalytic reduction
 SO₂ = sulfur dioxide
 SOCM = synthetic organic chemical manufacturing industry
 SRU = sulfur recovery unit
 TAC = Texas Administrative Code
 TCAA = Texas Clean Air Act
 TCEQ = Texas Commission on Environmental Quality
 TD = Toxicology Division
 TLV = threshold limit value
 TMDL = total maximum daily load
 tpd = tons per day
 tpy = tons per year
 TVP = true vapor pressure
 VOC = volatile organic compounds as defined in Title 30 Texas Administrative Code § 101.1
 VRU = vapor recovery unit or system

Special Conditions

Permit Numbers 18978, PSDTX752M5, N162M1

1. This permit covers only those sources of emissions listed in the attached table entitled "Emission Sources - Maximum Allowable Emission Rates" (MAERT), and those sources are limited to the emission limits and other conditions specified in that table.
2. Non-fugitive emissions from relief valves, safety valves, or rupture discs of gases containing volatile organic compounds (VOC) at a concentration of greater than 1 percent are not authorized by this permit unless authorized on the MAERT. Any releases directly to atmosphere from relief valves, safety valves, or rupture discs of gases containing VOC at a concentration greater than 1 weight percent are not consistent with good practice for minimizing emissions.

Federal Applicability

3. These facilities shall comply with all applicable requirements of the U.S. Environmental Protection Agency (EPA) regulations on Standards of Performance for New Stationary Sources promulgated in Title 40 Code of Federal Regulations Part 60 (40 CFR Part 60):
 - A. Subpart A, General Provisions.
 - B. Subpart Db, Standards of Performance for Industrial-Commercial-Institutional Steam Generating Units.
 - C. Subpart Kb, Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984.
 - D. Subpart VV, Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for which Construction, Reconstruction, or Modification Commenced After January 5, 1981, and on or Before November 7, 2006.
 - E. Subpart VVa, Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006
 - F. Subpart NNN, Standards of Performance for Volatile Organic Compound (VOC) Emissions from Synthetic Organic Chemical Manufacturing Industry (SOCMI) Distillation Operations.
 - G. Subpart RRR, Standards of Performance for Volatile Organic Compound Emissions from Synthetic Organic Chemical Manufacturing Industry (SOCMI) Reactor Processes.

Alternatively, compliance with the provisions of 40 CFR part 63, Subpart H, constitutes compliance with the requirements of Subpart VV and VVa provided the recordkeeping requirements of Subpart VV are maintained.
4. These facilities shall comply with all applicable requirements of the U.S. EPA regulations on National Emission Standards for Hazardous Air Pollutants in 40 CFR Part 61:
 - A. Subpart A, General Provisions.
 - B. Subpart J, National Emission Standard for Equipment Leaks (Fugitive Emission Sources) of Benzene.
 - C. Subpart V, National Emission Standard for Equipment Leaks (Fugitive Emission Sources).

- D. Subpart BB, National Emission Standard for Benzene Emissions from Benzene Transfer Operations.
 - E. Subpart FF National Emission Standard for Benzene Waste Operations.
5. These facilities shall comply with all applicable requirements of the U.S. EPA regulations on National Emission Standards for Hazardous Air Pollutants for Source Categories in 40 CFR Part 63:
- A. Subpart A, General Provisions.
 - B. Subpart UU, National Emission Standards for Equipment Leaks - Control Level 2 Standards.
 - C. Subpart XX and National Emission Standards for Ethylene Manufacturing Process Units: Heat Exchange Systems and Waste Operations.
 - D. Subpart YY, National Emission Standards for Hazardous Air Pollutants for Source Categories: Generic Maximum Achievable Control Technology Standards.

Emission Standards

6. Nitrogen oxides (NO_x) and Ammonia (NH₃) emissions:
- A. During the decoking, hot standby periods, periods where there is no hydrocarbon feed to the furnaces, and periods where the boilers are not in the steam header, the heat specific NO_x emissions rate (pound [lb]-NO_x/MMBtu) shall not apply. Decoking is defined as a period when the furnace is taken off-line to remove carbon deposits that have formed internally in the radiant and quench tubing during the operational cycle. Hot standby periods are defined as the period when the furnace is not cracking hydrocarbons or being decoked but is standing by to be placed on-line. In all cases the maximum allowable emission rates as shown on the MAERT shall not be exceeded.
 - B. The NO_x emissions from the Boilers (Emission Point Numbers [EPNs] QE5802UA and QE5802UB) shall not exceed 0.10 lb/MMBtu of heat input, averaged hourly. The NO_x emissions from the Pyrolysis Furnaces (EPNs QE1001B through QE1009B) shall not exceed 0.10 lb/MMBtu of heat input, averaged annually. The NO_x emissions from the Pyrolysis Furnaces (EPNs QE1010B and QE1011B) shall not exceed 0.01 lb/MMBtu of heat input, averaged annually. **(PSD)**
 - C. The NO_x emissions from the Pyrolysis Furnaces (EPNs QE1010B and QE1011B) shall not exceed the following limits on an hourly average: 0.015 lb/MMBtu (during normal operation), 0.28 lb/MMBtu (during MSS, when the SCR is down for maintenance), and 0.06 lb/MMBtu (during decoking and hot standby periods).
 - D. The pyrolysis furnaces (EPNs QE1010B and QE1011B) maintenance, start up, and shutdown (MSS, when the SCR is down for maintenance) operations shall not occur at the same time.
 - E. The NH₃ slip from the SCR-equipped Pyrolysis Furnaces (EPN QE1010B and QE1011B) shall not exceed 10 ppmv corrected to 3 vol.% oxygen on an hourly average. **(PSD)**
7. Carbon monoxide (CO) emissions:

- A. During the decoking, hot standby periods, periods where there is no hydrocarbon feed to the furnaces, and periods where the boilers are not in the steam header, the heat specific CO emission rate (lb-CO/MMBtu) shall not apply. Decoking is defined as a period when the furnace is taken off-line to remove carbon deposits that have formed internally in the radiant and quench tubing during the operational cycle. Hot standby periods are defined as the period when the furnace is not cracking hydrocarbons or being decoked but is standing by to be placed on-line. In all cases, the maximum allowable emission rates as shown on the MAERT shall not be exceeded.
 - B. The CO emissions from the Pyrolysis Furnaces (EPNs QE1001B through QE1008B) shall not exceed 0.085 lb/MMBtu of heat input, averaged hourly. The CO emissions from the Pyrolysis Furnace, EPN QE1009B, shall not exceed 0.106 lb/MMBtu of heat input, averaged hourly. The CO emissions from the Boilers (EPNs QE5802UA and QE5802UB) shall not exceed 0.079 lb/MMBtu of heat input, averaged hourly. The CO emissions from the Pyrolysis Furnaces (EPNs QE1001B through QE1009B) and the Boilers (EPNs QE5802UA and QE5802UB) shall not exceed 0.027 lb/MMBtu of heat input on an annual average. The CO emissions from the Pyrolysis Furnaces (EPNs QE1010B and QE1011B) shall not exceed 0.034 lb/MMBtu of heat input on an annual average. **(PSD)**
8. There shall be no visible emissions for periods exceeding five minutes aggregated over any two-hour period from the Furnace Stacks, the Boiler Stacks, or the Decoking Drums (EPNs QE1416F and QE1423F). **(PSD) (2/21)**

Non-Routine Emissions

9. This permit authorizes emissions from the ARU and Elevated Flares (EPNs QE3050MAINT and QE8050MAINT) for the following planned maintenance, start-up, and shutdown activities: **(PSD)**

Acetylene product and/or fuel gas compressor maintenance shutdowns

Meter proving

Annual demethanizer stripper and debutanizer reboiler maintenance

Routine depropanizer reboiler maintenance

De-inventory of MAPD reactor and pumps for routine maintenance

Pump purging and process instrumentation maintenance

Recycle Blower Maintenance

The following operations are also authorized:

Routine maintenance of fugitive components and process filters after thorough purging.

These emissions are subject to the maximum allowable emission rates indicated on the MAERT. These events shall be recorded, and the emissions estimated and recorded at least once a month and shall be added to the rolling 12-month total. The emissions estimates shall be made using engineering and process knowledge, consistent with the methods used in the permit amendment

application, PI-1 dated September 30, 2005, or emission monitoring data. Any maintenance, start-up, and shutdown activities not in the above list are not authorized by this permit.

The MSS emissions and activities attributable to the QE-1 Unit's expansion project (application submitted March 26, 2012) are authorized in Permit No. 83822, reflected at the following EPN as listed on that permit's MAERT:

EPN	Source Name
QE3050	ARU Flare
QE8050	Elevated Flare
MSS-QE-1W-RM	QE-1 West Routine System
MSS-QE1-VC	QE-1 Vessel Clearing

Decoking Drums

10. The emissions from the Decoking Drums (EPN QE1416F and QE1423F) shall be based on the number of decokes for each furnace. The cumulative total number of decokes for Furnaces 1-8 shall not exceed 210 per year, and the cumulative number of decokes for Furnace 9 shall not exceed 25 per year. The cumulative total number of annual decokes for twin-cell Furnaces 10 and 11 shall not exceed 48 per year. The number of decokes for each furnace shall be updated monthly and the total emissions in tons per year shall be kept on a rolling 12-month period and shall be updated when requested by the Texas Commission on Environmental Quality (TCEQ) to demonstrate compliance with the emission limits in the MAERT. The Methyl Acetylene Propadiene Conversion Unit Decoke Pot (EPN QE3418F) shall be limited to a total of 36 regens per year. The holder of this permit shall keep records of the number of regens for this unit. These records shall be maintained for a period of two years and shall be made available to the TCEQ Executive Director, the local air pollution control program, or the EPA upon request. **(PSD) (04/19)**

Storage Tanks

11. Storage tanks are subject to the following requirements: The control requirements specified in parts A-C of this condition shall not apply (1) where the VOC has an aggregate partial pressure of less than 0.50 psia at the maximum feed temperature or 95°F, whichever is greater, or (2) to storage tanks smaller than 25,000 gallons.
- A. The tank emissions must be controlled as specified in one of the paragraphs below:
- (1) An internal floating deck or "roof" shall be installed. A domed external floating roof tank is equivalent to an internal floating roof tank. The floating roof shall be equipped with one of the following closure devices between the wall of the storage vessel and the edge of the floating roof: (1) a liquid-mounted seal, (2) two continuous seals mounted one above the other, or (3) a mechanical shoe seal.
 - (2) An open-top tank shall contain a floating roof (external floating roof tank) which uses double seal or secondary seal technology provided the primary seal consists of either a mechanical shoe seal or a liquid-mounted seal and the secondary seal is rim-mounted. A weathershield is not approvable as a secondary seal unless specifically reviewed and determined to be vapor-tight.

- (3) All vents from fixed roof tanks storing materials with a vapor pressure greater than 0.50 psia shall be controlled
- B. For any tank equipped with a floating roof, the permit holder shall perform the visual inspections and any seal gap measurements specified in 40 CFR § 60.113b Testing and Procedures (as amended at 54 FR 32973, Aug. 11, 1989) to verify fitting and seal integrity. Records shall be maintained of the dates inspection was performed, any measurements made, results of inspections and measurements made (including raw data), and actions taken to correct any deficiencies noted.
- C. The floating roof design shall incorporate sufficient flotation to conform to the requirements of API Code 650 dated November 1, 1998 except that an internal floating cover need not be designed to meet rainfall support requirements and the materials of construction may be steel or other materials.
- D. Tanks shall be constructed or equipped with a connection to a vapor recovery system that routes vapors from the vapor space under the landed roof to a control device.
- E. Except for labels, logos, etc. not to exceed 15 percent of the tank total surface area, uninsulated tank exterior surfaces exposed to the sun shall be white or unpainted aluminum. Storage tanks must be equipped with permanent submerged fill pipes.
- F. The permit holder shall maintain an emissions record which includes calculated emissions of VOC from all storage tanks during the previous calendar month and the past consecutive 12-month period. The record shall include tank identification number, control method used, tank capacity in gallons, name of the material stored, VOC molecular weight, VOC monthly average temperature in degrees Fahrenheit, VOC vapor pressure at the monthly average material temperature in psia, VOC throughput for the previous month and year-to-date. Records of VOC monthly average temperature are not required to be kept for unheated tanks which receive liquids that are at or below ambient temperatures.

Emissions from tanks shall be calculated using the methods that were used to determine the MAERT limits in the permit renewal-amendment application (received June 14, 2017). Sample calculations from the application shall be attached to a copy of this permit at the plant site.

Loading Operations

- 12. All loading shall be submerged. The permit holder shall maintain and update a monthly emissions record which includes calculated emissions of VOC from all loading operations over the previous rolling 12-month period. The record shall include the loading spot, control method used, quantity loaded in gallons, name of the liquid loaded, vapor molecular weight, liquid temperature in degrees Fahrenheit, liquid vapor pressure at the liquid temperature in psia, liquid throughput for the previous month and rolling 12 months to date. Records of VOC temperature are not required to be kept for liquids loaded from unheated tanks which receive liquids that are at or below ambient temperatures. Emissions shall be calculated using the TCEQ publication titled "Technical Guidance Package for Chemical Sources - Loading Operations".
- 13. All lines and connectors shall be visually inspected for any defects prior to hookup. Lines and connectors that are visibly damaged shall be removed from service. Operations shall cease immediately upon detection of any liquid leaking from the lines or connections.

14. Barge loading of pyrolysis gasoline shall be vented to the thermal oxidizer (EPN QEUNIT).
15. Waste loading (EPN QELOAD) emissions shall be controlled by the Flare QE8050B. Each tank truck shall be leak checked and certified annually in accordance with Title 40 Code of Federal Regulations Part 60 (40 CFR 60), Subpart XX. The permit holder shall not allow a tank truck to be filled unless it has passed a leak-tight test within the past year as evidenced by a certificate which shows the date the tank truck last passed the leak-tight test required by this condition and the identification number of the tank truck. **(01/22)**

Ammonia Unloading

16. All ammonia vapors generated during clearing of piping from unloading of ammonia shall be captured and directed to the ammonia scrubber (EPN QENH3SC). The number of ammonia trucks unloaded shall not exceed 26 trucks a year and be tracked monthly. The scrubber will use water as the scrubbing fluid. The scrubber shall meet the following requirements while unloading ammonia from tank trucks and clearing of the piping used during unloading of ammonia: **(06/23)**
 - A. The scrubber (EPN QENH3SC) shall operate with no less than 99 percent removal efficiency for ammonia on an hourly average.
 - B. The minimum liquid flow to the absorber during clearing of the piping shall be 10 gpm. The scrubber shall be operating prior to the unloading of ammonia. The circulation rate shall be monitored and recorded at least once an hour when operating for more than one hour.

The flow monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications, or at least annually, whichever is more frequent, and shall be accurate to within 2 percent of span or 5 percent of the design value. The permit holder has four months from the issuance of the alteration application, PI-1 dated August 27, 2019 (TCEQ NSR Project 306149) to comply with the calibration requirement.
 - C. The maximum absorber liquid temperature of the scrubber in the bottom liquid level of the scrubber shall not exceed 100°F during clearing of the piping. The holder of this permit shall install and maintain a continuous temperature monitor for the liquid temperature of the scrubber. The starting and ending temperatures for each unloading event shall be recorded. Unloading events exceeding two hours shall have temperature readings recorded at least every 90 minutes. The absorber is a once pass through absorber and the scrubbing fluid shall be treated by the wastewater system (EPN QE8001A). Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications, or at least annually, whichever is more frequent, and shall be accurate to within 2 percent of the reading or 2.5 degrees Celsius.
 - D. Quality assured data must be generated for all monitoring devices associated with the scrubber when controlling emissions except during the performance of a daily zero and span check. Loss of valid data due to periods of monitor break down, out-of-control operation (producing inaccurate data), repair, maintenance, or calibration may be exempted provided it does not exceed 5 percent of the time (in hours) during the clearing of piping over the previous rolling 12-month period. The measurements missed shall be estimated using engineering judgment and the methods used recorded.

Flares

17. Flares (EPNs QEH2FLARE, QE3050B, QE3050MAINT, QE8050B and QE8050BMAINT) shall be designed and operated in accordance with the following requirements: **(09/20)**

- A. The flare systems shall be designed such that the combined assist natural gas and waste stream to each flare meets the 40 CFR § 60.18 specifications of minimum heating value and maximum tip velocity at all times when emissions may be vented to them.

The heating value and velocity requirements shall be satisfied during operations authorized by this permit. Flare testing per 40 CFR § 60.18(f) may be requested by the appropriate regional office to demonstrate compliance with these requirements.

- B. The flare shall be operated with a flame present at all times and/or have a constant pilot flame. The pilot flame shall be continuously monitored by a device (including, but not limited to, a thermocouple, ultraviolet beam sensor, or an infrared sensor) capable of detecting that the pilot flame(s) is present. The time, date, and duration of any loss of pilot flame shall be recorded. Each monitoring device shall be accurate to and shall be calibrated at a frequency in accordance with, the manufacturer's specifications or the plant preventative maintenance schedule, which ever results in a more accurate device.

- C. The flare shall be operated with no visible emissions except periods not to exceed a total of five minutes during any two consecutive hours. This shall be ensured by the use of steam assist to flare EPNs QE3050B, QE3050BMAINT, QE8050B and QE8050BMAINT. **(01/22)**

- D. The permit holder shall install a continuous flow monitor and composition analyzer that provides a record of the vent stream flow and composition to the hydrogen flare (EPN QEH2FLARE). The flow monitor sensor and analyzer sample points shall be installed in the vent stream as near as possible to the flare inlet such that the total vent stream to the flare is measured and analyzed. Readings shall be taken at least once every 15 minutes and the average hourly values of the flow and composition shall be recorded each hour.

The monitors shall be calibrated or have a calibration check performed on an annual basis to meet the following accuracy specifications: the flow monitor that directly provides the mass flow rate shall be $\pm 5.0\%$. **(01/22)**

Calibration of the gas chromatograph analyzer shall follow the procedures and requirements of Section 10.0 of 40 CFR Part 60, Appendix B, Performance Specification 9, as amended through October 17, 2000 (65 FR 61744), except that the multi-point calibration procedure in Section 10.1 of Performance Specification 9 shall be performed at least every 6 months instead of once every month, and the mid-level calibration check procedure in Section 10.2 of Performance Specification 9 shall be performed at least once every month instead of once every 24 hours. The calibration gases used for calibration procedures shall be in accordance with Section 7.1 of Performance Specification 9. Net heating value of the gas combusted in the flare shall be calculated according to the equation given in 40 CFR §60.18(f)(3) as amended through October 17, 2000 (65 FR 61744).

The monitor and analyzer shall operate as required by this section at least 95% of the time when the flare is operational, averaged over a rolling 12-month period. Flared gas net heating value and actual exit velocity shall be determined in accordance with 40 CFR §§60.18(f)(3) and 60.18(f)(4) shall be recorded at least once every hour.

- E. The Elevated flare (EPNs QE8050B and QE8050MAINT), and the ARU flare (EPNs QE3050B and QE3050MAINT) shall operate with a destruction efficiency of at least 99.5 percent for VOC and shall meet the applicable monitoring and testing requirements of 30 TAC §§ 115.725(d).

- F. The Hydrogen flare (EPN QEH2FLARE) shall operate with a destruction efficiency of at least 99 percent for VOC with or less than three carbon compounds.
- G. The Elevated flare (EPNs QE8050B and QE8050MAINT), and the ARU flare (EPNs QE3050B and QE3050MAINT) shall operate in accordance with Attachment A of these permit Special Conditions and Alternative Method of Compliance (AMOC) No. 162. Compliance with the requirements of this paragraph shall be achieved by the earliest of the AMOC compliance schedule or Attachment A or an applicable Consent Decree issued by the U.S. Attachment A includes the requirements established in the Consent Decree issued by the U.S. EPA filed on October 13, 2021, in Civil Action No. 4:21-cv-03359. If there is a conflict in compliance with Attachment A, AMOC No. 162, and the Consent Decree, the requirements in the Consent Decree shall be complied with for meeting this paragraph. Prior to the compliance requirements and schedule of this paragraph, Special Condition Nos. 17.A through 17.F shall apply. Compliance requirements in this paragraph were met and are effective as of January 19, 2022. **(03/23)**
18. All waste gases associated with the barge loading of pyrolysis gasoline shall be collected and routed to the Thermal Oxidizer (EPN QEUNIT), which is owned and operated by Equistar Acetyls, LLC and is authorized under TCEQ Air Permit Number 4751. The thermal oxidizer shall operate with no less than 98 percent destruction efficiency in disposing of waste gases captured by the collection system. If the thermal oxidizer stops operating during loading of pyrolysis gasoline, the loading operation shall be ceased. The loading operation shall not resume until the thermal oxidizer returns to operating mode.
- The thermal oxidizer (QEUNIT) shall comply with temperature monitoring requirements as in Permit 4751.
19. The decoking drums (EPN QE1416F and QE1423F) shall not operate unless the attached cyclones and associated equipment are maintained in good working order and operating. All vents will be inspected for visible emissions once per day. Records shall be maintained of all inspections and maintenance performed.
20. The total mass flow of air and steam to each cyclone of the decoking drums (EPN QE1416F and QE1423F) shall be continuously monitored and be recorded at least once an hour during decoking mode. Only full operational clock hours of each decoking drum during decoking mode shall be included in the recorded hourly averages. The mass flow shall be within the range of the following table: **(06/23)**

Cyclone of	Minimum Mass Flow	Maximum Mass Flow
Decoking drum (EPN QE1416F)	16,410 lb/hr	221,000 lb/hr
Decoking drum (EPN QE1423F)	11,657 lb/hr	283,600 lb/hr

Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or at least annually, whichever is more frequent, and shall be accurate to within 10%.

Quality assured (or valid) data must be generated when the decoking drums (EPN QE1416F and QE1423F) is operating. Loss of valid data due to periods of monitor breakdown, out-of-control operation (producing inaccurate data), repair, maintenance, or calibration may be exempted provided it does not exceed 5 percent of the time (in hours) that the decoking drums (EPN QE1416F and QE1423F) operated over the previous rolling 12-month period. The measurements missed shall be estimated using engineering judgment and the methods used recorded.

Fugitive Emissions Monitoring

Piping, Valves, Connectors, Pumps, and Compressors in VOC Service - 28VHP

21. The following requirements apply to piping, valves, connectors, pumps, agitators, and compressors containing or in contact with fluids that could reasonably be expected to contain greater than or equal to 10 weight percent VOC at any time.

- A. The requirements of paragraphs F and G shall not apply (1) where the VOC has an aggregate partial pressure or vapor pressure of less than 0.044 pounds per square inch, absolute (psia) at 68°F or (2) operating pressure is at least 5 kilopascals (0.725 psi) below ambient pressure. Equipment excluded from this condition shall be identified in a list or by one of the methods described below to be made readily available upon request.

The exempted components may be identified by one or more of the following methods:

- piping and instrumentation diagram (PID);
 - a written or electronic database or electronic file;
 - color coding;
 - a form of weatherproof identification; or
 - designation of exempted process unit boundaries.
- B. Construction of new and reworked piping, valves, pump systems, and compressor systems shall conform to applicable American National Standards Institute (ANSI), American Petroleum Institute (API), American Society of Mechanical Engineers (ASME), or equivalent codes.
- C. New and reworked underground process pipelines shall contain no buried valves such that fugitive emission monitoring is rendered impractical. New and reworked buried connectors shall be welded.
- D. To the extent that good engineering practice will permit, new and reworked valves and piping connections shall be so located to be reasonably accessible for leak-checking during plant operation. Difficult-to-monitor and unsafe-to-monitor valves, as defined by Title 30 Texas Administrative Code Chapter 115 (30 TAC Chapter 115), shall be identified in a list to be made readily available upon request. The difficult-to-monitor and unsafe-to-monitor valves may be identified by one or more of the methods described in subparagraph A above. If an unsafe to monitor component is not considered safe to monitor within a calendar year, then it shall be monitored as soon as possible during safe to monitor times. A difficult to monitor component for which quarterly monitoring is specified may instead be monitored annually.
- E. New and reworked piping connections shall be welded or flanged. Screwed connections are permissible only on piping smaller than two-inch diameter. Gas or hydraulic testing of the

new and reworked piping connections at no less than operating pressure shall be performed prior to returning the components to service or they shall be monitored for leaks using an approved gas analyzer within 15 days of the components being returned to service. Adjustments shall be made as necessary to obtain leak-free performance. Connectors shall be inspected by visual, audible, and/or olfactory means at least weekly by operating personnel walk-through. **(2/21)**

Each open-ended valve or line shall be equipped with an appropriately sized cap, blind flange, plug, or a second valve to seal the line. Except during sampling, both valves shall be closed. If the isolation of equipment for hot work or the removal of a component for repair or replacement results in an open-ended line or valve, it is exempt from the requirement to install a cap, blind flange, plug, or second valve for 72 hours. If the repair or replacement is not completed within 72 hours, the permit holder must complete either of the following actions within that time period;

- (1) a cap, blind flange, plug, or second valve must be installed on the line or valve;
or
- (2) the open-ended valve or line shall be monitored once for leaks above background for a plant or unit turnaround lasting up to 45 days with an approved gas analyzer and the results recorded. For all other situations, the open-ended valve or line shall be monitored once within the 72-hour period following the creation of the open-ended line and monthly thereafter with an approved gas analyzer and the results recorded. For turnarounds and all other situations, leaks are indicated by readings of 500 ppmv and must be repaired within 24 hours or a cap, blind flange, plug, or second valve must be installed on the line or valve.

- F. Accessible valves shall be monitored by leak checking for fugitive emissions at least quarterly using an approved gas analyzer. Sealless/leakless valves (including, but not limited to, welded bonnet bellows and diaphragm valves) and relief valves equipped with a rupture disc upstream or venting to a control device are not required to be monitored. If a relief valve is equipped with rupture disc, a pressure-sensing device shall be installed between the relief valve and rupture disc to monitor disc integrity.

A check of the reading of the pressure-sensing device to verify disc integrity shall be performed at least quarterly and recorded in the unit log or equivalent. Pressure-sensing devices that are continuously monitored with alarms are exempt from recordkeeping requirements specified in this paragraph. All leaking discs shall be replaced at the earliest opportunity but no later than the next process shutdown.

The gas analyzer shall conform to requirements listed in Method 21 of 40 CFR part 60, appendix A. The gas analyzer shall be calibrated with methane. In addition, the response factor of the instrument for a specific VOC of interest shall be determined and meet the requirements of Section 8 of Method 21. If a mixture of VOCs is being monitored, the response factor shall be calculated for the average composition of the process fluid. A calculated average is not required when all of the compounds in the mixture have a response factor less than 10 using methane. If a response factor less than 10 cannot be achieved using methane, then the instrument may be calibrated with one of the VOC to be measured or any other VOC so long as the instrument has a response factor of less than 10 for each of the VOC to be measured.

Replacements for leaking components shall be re-monitored within 15 days of being placed back into VOC service.

- G. Except as may be provided for in the special conditions of this permit, all pump, compressor, and agitator seals shall be monitored with an approved gas analyzer at least quarterly or be equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal. Seal systems designed and operated to prevent emissions or seals equipped with an automatic seal failure detection and alarm system need not be monitored. These seal systems may include (but are not limited to) dual pump seals with barrier fluid at higher pressure than process pressure, seals degassing to vent control systems kept in good working order, or seals equipped with an automatic seal failure detection and alarm system. Submerged pumps or sealless pumps (including, but not limited to, diaphragm, canned, or magnetic-driven pumps) may be used to satisfy the requirements of this condition and need not be monitored.
- H. Damaged or leaking valves or connectors found to be emitting VOC in excess of 500 parts per million by volume (ppmv) or found by visual inspection to be leaking (e.g., dripping process fluids) shall be tagged and replaced or repaired. Damaged or leaking pump, compressor, and agitator seals found to be emitting VOC in excess of 2,000 ppmv or found by visual inspection to be leaking (e.g., dripping process fluids) shall be tagged and replaced or repaired. A first attempt to repair the leak must be made within 5 days and a record of the attempt shall be maintained.
- I. A leaking component shall be repaired as soon as practicable, but no later than 15 days after the leak is found. If the repair of a component would require a unit shutdown that would create more emissions than the repair would eliminate, the repair may be delayed until the next scheduled shutdown. All leaking components which cannot be repaired until a scheduled shutdown shall be identified for such repair by tagging within 15 days of the detection of the leak. A listing of all components that qualify for delay of repair shall be maintained on a delay of repair list. The cumulative daily emissions from all components on the delay of repair list shall be estimated by multiplying by 24 the mass emission rate for each component calculated in accordance with the instructions in 30 TAC 115.782 (c)(1)(B)(i)(II). The calculations of the cumulative daily emissions from all components on the delay of repair list shall be updated within ten days of when the latest leaking component is added to the delay of repair list. When the cumulative daily emission rate of all components on the delay of repair list times the number of days until the next scheduled unit shutdown is equal to or exceeds the total emissions from a unit shutdown as calculated in accordance with 30 TAC 115.782 (c)(1)(B)(i)(I) or 500 pounds, whichever is greater, the TCEQ Regional Manager and any local programs shall be notified and the TCEQ Executive Director may require early unit shutdown or other appropriate action based on the number and severity of tagged leaks awaiting shutdown. This notification shall be made within 15 days of making this determination.
- J. Records of repairs shall include date of repairs, repair results, justification for delay of repairs, and corrective actions taken for all components. Records of instrument monitoring shall indicate dates and times, test methods, and instrument readings. The instrument monitoring record shall include the time that monitoring took place for no less than 95% of the instrument readings recorded. Records of physical inspections (OVA) shall be noted in the operator's log or equivalent.
- K. Alternative monitoring frequency schedules of 30 TAC " 115.352 - 115.359 or National Emission Standards for Organic Hazardous Air Pollutants, 40 CFR Part 63, Subpart H, may be used in lieu of Items F through G of this condition.

- L. Compliance with the requirements of this condition does not assure compliance with requirements of 30 TAC Chapter 115, an applicable New Source Performance Standard (NSPS), or an applicable National Emission Standard for Hazardous Air Pollutants (NESHAPS) and does not constitute approval of alternative standards for these regulations.
22. In addition to the weekly physical inspection (AVO) required by Item E of Special Condition No. 21 all connectors in gas/vapor and light liquid service shall be monitored annually with an approved gas analyzer in accordance with Items F through J of Special Condition No. 21. Alternative monitoring frequency schedules of 40 CFR Part 63, Subpart H, National Emission Standards for Organic Hazardous Air Pollutants for Equipment Leaks, may be used in lieu of the monitoring frequency required by this permit condition. Compliance with this condition does not assure compliance with requirements of applicable state or federal regulation and does not constitute approval of alternative standards for these regulations.

Piping, Valves, Pumps, and Compressors in Contact with Ammonia – AVO

23. Except as may be provided for in the Special Conditions of this permit, the following requirements apply to the above-referenced equipment:
- A. Audio, olfactory, and visual checks for leaks within the operating area shall be made once per shift.
 - B. Immediately, but no later than one hour upon detection of a leak, plant personnel shall take at least one of the following actions:
 - (1) Isolate the leak.
 - (2) Commence repair or replacement of the leaking component.
 - (3) Use a leak collection/containment system to prevent the leak until repair or replacement can be made if immediate repair is not possible.

Date and time of each inspection shall be noted in the operator's log or equivalent. Records shall be maintained at the plant site of all repairs and replacements made due to leaks. These records shall be made available to representatives of the TCEQ upon request.

Sampling and Monitoring Requirements

24. The holder of this permit shall perform stack sampling and other testing as required to establish the actual pattern and quantities of emissions from the Pyrolysis Furnaces (EPNs QE1001B through QE1011B), and Boilers (EPNs QE5802UA and QE5802UB). The holder of this permit is responsible for providing sampling and testing facilities and conducting the sampling and testing operations at his expense.
- A. The appropriate TCEQ Regional Office in the region where the source is located shall be contacted as soon as testing is scheduled but not less than 45 days prior to sampling to schedule a pretest meeting.

The notice shall include:

 - (1) Date for pretest meeting.
 - (2) Date sampling will occur.

- (3) Name of firm conducting sampling.
- (4) Type of sampling equipment to be used.
- (5) Method or procedure to be used in sampling.

The purpose of the pretest meeting is to review the necessary sampling and testing procedures, to provide the proper data forms for recording pertinent data, and to review the format procedures for submitting the test reports.

A written proposed description of any deviation from sampling procedures specified in permit conditions or the TCEQ or the EPA sampling procedures shall be made available to the TCEQ at or prior to the pretest meeting. The TCEQ Regional Director shall approve or disapprove of any deviation from specified sampling procedures. Requests to waive testing for any pollutant specified in B of this condition shall be submitted to the TCEQ Office of Air, Air Permitting Division and the EPA. Test waivers and alternate/equivalent procedure proposals for NSPS testing which must have the EPA approval shall be submitted to the TCEQ Office of Air, Air Permitting Division.

- B. Air contaminants emitted from the furnaces and boilers to be tested for include (but are not limited to) NO_x, CO, NH₃, and particulate matter less than ten microns in size (PM₁₀). Air contaminants emitted from the Dock Thermal Oxidizer to be tested for include (but are not limited to) NO_x, CO, VOC, and benzene. Sampling shall be performed using EPA Reference Method 7 or 7E for NO_x, Reference Method 10 for CO, Reference Method 5 for PM₁₀, Reference Method 25A or 25B for VOC, and Reference Method 18 for benzene. These methods are contained in 40 CFR Part 60, Appendix A. Opacity readings for the pyrolysis furnaces and boilers shall be made using the method specified in 40 CFR § 60.11(b).
- C. Sampling and continuous emission monitoring system (CEMS) certification shall occur within 60 days after initial start-up or modification of the facility and at such other times as may be required by the TCEQ Executive Director or the Director of the Air, Pesticides, and Toxics Division of the EPA. Requests for additional time to perform sampling shall be submitted to the TCEQ Regional Office. Additional time to comply with the applicable requirements of 40 CFR Part 60 and 40 CFR Part 61 requires the EPA approval, and requests shall be submitted to the TCEQ Office of Air, Air Permitting Division.

The plant shall operate at maximum production rates during stack emission testing. Primary operating parameters that enable determination of production rates shall be monitored and recorded during the stack test. These parameters are to be determined at the pretest meeting. If the plant is unable to operate at maximum rates during testing, then additional stack testing may be required if production rates are increased more than 10 percent above the rate at which testing was performed.

- D. Four copies of the final sampling report shall be forwarded to the TCEQ within 60 days after sampling is completed. Sampling reports shall comply with the attached conditions of Chapter 14 of the TCEQ Sampling Procedures Manual. The reports shall be distributed as follows:

One copy to the appropriate TCEQ Regional Office.

One copy to the appropriate local air pollution control program.

- 25. The holder of this permit shall install, calibrate, and maintain a CEMS to measure and record the in-stack concentration of NO_x, CO, NH₃, and oxygen from the Pyrolysis Furnace Stacks (EPNs QE1001B through QE1011B) and the Boiler Stacks (EPNs QE5802UA and QE5802UB).

- A. The NH₃ CEMS doesn't have an applicable performance specification that specifies the methodologies and procedures to calibrate, maintain, and operate NH₃ CEMS. The NH₃ CEMS shall be installed, operated, and maintained according to the manufacturer's specifications. The NH₃ CEMS shall conduct at a minimum daily (automatic) quality assurance and calibration checks. Equistar performed an initial RATA within 60 days of the installation of the analyzer, utilizing the appropriate methodology (e.g. CTM-027 or EPA Method 320. Subpart B, C, and D of this section don't apply to the NH₃ CEMS.
- B. The CEMS shall meet the design and performance specifications, pass the field tests, and meet the installation requirements and the data analysis and reporting requirements specified in the applicable Performance Specification Nos. 1 through 9, 40 CFR Part 60, Appendix B. If there are no applicable performance specifications in 40 CFR Part 60, Appendix B, contact the TCEQ Office of Air, Air Permits Division for requirements to be met.
- C. Section 1 below applies to sources subject to the quality-assurance requirements of 40 CFR Part 60, Appendix F; section 2 applies to all other sources:
 - (1) The permit holder shall assure that the CEMS meets the applicable quality-assurance requirements specified in 40 CFR Part 60, Appendix F, Procedure 1. Relative accuracy exceedances, as specified in 40 CFR Part 60, Appendix F, § 5.2.3 and any CEMS downtime shall be reported to the appropriate TCEQ Regional Manager, and necessary corrective action shall be taken. Supplemental stack concentration measurements may be required at the discretion of the appropriate TCEQ Regional Manager.
 - (2) The system shall be zeroed and spanned daily, and corrective action taken when the 24-hour span drift exceeds two times the amounts specified in the applicable Performance Specification Nos. 1 through 9, 40 CFR Part 60, Appendix B, or as specified by the TCEQ if not specified in Appendix B. Zero and span is not required on weekends and plant holidays if instrument technicians are not normally scheduled on those days.

Each monitor shall be quality-assured at least quarterly using Cylinder Gas Audits (CGA) in accordance with 40 CFR Part 60, Appendix F, Procedure 1, Section 5.1.2, with the following exception: a relative accuracy test audit (RATA) is not required once every four quarters (i.e., four successive quarterly CGA may be conducted). An equivalent quality-assurance method approved by the TCEQ may also be used. Successive quarterly audits shall occur no closer than two months.

All CGA exceedances of +15 percent accuracy indicate that the CEMS is out of control.
- D. The monitoring data shall be reduced to hourly average concentrations at least once every day using a minimum of four equally-spaced data points over each one-hour period. The individual average concentrations shall be reduced to units of the permit allowable emission rates in pounds per hour and lb/MMBtu (hourly average) at least once every week.
- E. All monitoring data and quality-assurance data shall be maintained by the source. The data from the CEMS may, at the discretion of the TCEQ, be used to determine compliance with the conditions of this permit.
- F. The appropriate TCEQ Regional Office shall be notified at least 30 days prior to any required RATA in order to provide them the opportunity to observe the testing.
- G. Quality-assured (or valid) data must be generated when the furnace or boiler is operating except during the performance of a daily zero and span check. Loss of valid data due to

periods of monitor break down, out-of-control operation (producing inaccurate data), repair, maintenance, or calibration may be exempted provided it does not exceed 5 percent of the time (in minutes) that the furnace or boiler operated over the previous rolling 12-month period. The measurements missed shall be estimated using engineering judgment and the methods used recorded. Options to increase system reliability to an acceptable value, including a redundant CEMS, may be required by the TCEQ Regional Manager. (PSD)

26. The emergency engines associated with EPNs PW7605JB, PW7605JC, and PW7614JA shall be routinely tested only between 12:00 p.m. and 6:00 a.m. The EPNs PW7605JB and PW7605JC shall not be tested concurrently.

Cooling Tower

27. The cooling tower (EPN QE7801U) shall be operated and monitored in accordance with the following:
- A. The cooling tower water shall be monitored monthly for VOC leakage from heat exchangers in accordance with the requirements of the TCEQ Sampling Procedures Manual, Appendix P (dated January 2003 or a later edition) or another air stripping method approved by the TCEQ Executive Director.
 - B. Cooling tower water VOC concentrations above 0.08 ppmw indicate faulty equipment. Equipment shall be maintained so as to minimize VOC emissions into the cooling water. Faulty equipment shall be repaired at the earliest opportunity but no later than the next scheduled shutdown of the process unit in which the leak occurs.
 - C. Emissions from the cooling tower are not authorized if the VOC concentration of the water returning to the cooling tower exceeds 0.8 ppmw. The VOC concentrations above 0.8 ppmw are not subject to extensions for delay of repair under this permit condition. The results of the monitoring and maintenance efforts shall be recorded.
28. The cooling tower (EPN QE7801U) shall be operated and monitored in accordance with the following:
- A. Cooling towers shall each be equipped with drift eliminators having manufacturer's design assurance of 0.001% drift or less for the 10 older cells, and 0.0005% or less for the two newest cells. Drift eliminators shall be maintained and inspected at least annually. The permit holder shall maintain records of all inspections and repairs.
 - B. Total Dissolved Solids (TDS) shall not exceed 3100 ppmw. Dissolved solids in the cooling water drift are considered to be emitted as PM, PM₁₀, and PM_{2.5}, as represented in the permit application calculations.
 - C. Cooling towers shall be analyzed for particulate emissions using one of the following methods:
 - (1) Cooling water shall be sampled at least once per day for TDS and analyzed using ASTM D1125-95A and SM 2510B [SA – 19th edition of Standard Methods for Examination of Water]; or
 - (2) Cooling water shall be monitored continuously for conductivity; or

- (3) TDS monitoring may be reduced to weekly if conductivity is monitored daily and TDS is calculated using a ratio of TDS-to-conductivity (in ppmw per $\mu\text{mho}/\text{cm}$ or ppmw/siemens). The ratio of TDS-to-conductivity shall be determined by concurrently monitoring TDS and conductivity on a weekly basis. The permit holder may use the average of two consecutive TDS-to-conductivity ratios to calculate daily TDS; or
 - (4) TDS monitoring may be reduced to quarterly if conductivity is monitored daily and TDS is calculated using a correlation factor established for each cooling tower. The correlation factor shall be the average of nine consecutive weekly TDS-to-conductivity ratios determined using Subpart C of this condition, provided the highest ratio is not more than 10% larger than the smallest ratio.
 - (5) The permit holder shall validate the TDS-to-conductivity correlation factor once each calendar quarter. If the ratio of concurrently sampled TDS and conductivity is more than 10% higher or lower than the established factor, the permit holder shall increase TDS monitoring to weekly until a new correlation factor can be established.
- D. Cooling water sampling shall be representative of the cooling tower feed water and shall be conducted using approved methods.
 - (1) The analysis method for TDS shall be EPA Method 160.1, ASTM D5907, or SM2540 C [SM-19th edition of Standard Methods for Examination of Water]. Water samples should be capped upon collection, and transferred to a laboratory area for analysis.
 - (2) The analysis method for conductivity shall be either ASTM D1125-95A (field or routine laboratory testing) or ASTM D1125-95B (continuous monitor). The analysis may be conducted at the sample site or with a calibrated process conductivity meter. If a conductivity meter is used, it shall be calibrated at least annually. Documentation of the method and any associated calibration records shall be maintained. The permit holder has four months from the issuance of the alteration application, PI-1 dated August 27, 2019 (TCEQ New Source Review Project 306149) to comply with the calibration requirement. **(12/19)**
 - (3) Alternate sampling and analysis methods may be used to comply with D(1) and D(2) with written approval from the TCEQ Regional Director.
 - (4) Records of all instrument calibrations and test results and process measurements used for the emission calculations shall be retained.
- E. Emission rates of PM, PM₁₀, and PM_{2.5} shall be calculated using the measured TDS or the ratio or correlation of TDS to conductivity measurements, the design drift rate and the daily maximum and average actual cooling water circulation rate for the short term and annual average rates. Alternatively, the design maximum circulation rate may be used for all calculations. Emission records shall be updated monthly.
- F. Quality-assured (or valid) data must be generated when the cooling tower is operating except during the performance of a daily zero check. Loss of valid data due to periods of monitor breakdown, out-of-control operation (producing inaccurate data), repair, maintenance, or calibration may be exempted provided the total data loss period does not exceed 5 percent of the time (in hours) that the cooling tower operated over the previous rolling 12 month period. The measurements missed shall be estimated using engineering judgment and the methods used recorded.

- G. The TDS and conductivity data shall result from sampling or monitoring the cooling tower return stream (i.e., water stream routed to the tower for cooling), and represent the water being cooled in the tower. (PSD)

Compliance Assurance Monitoring

29. The following requirements apply to capture systems for EPNs QE3050B, QE8050B, and QE2FLARE

- (1) Conduct a once a month visual, audible, and/or olfactory inspection of the capture system to verify there are no leaking components in the capture system; or
- (2) Once a year, verify the capture system is leak-free by inspecting in accordance with 40 CFR Part 60, Appendix A, Test Method 21. Leaks shall be indicated by an instrument reading greater than or equal to 500 ppmv above background.

- B. The control device shall not have a bypass.

Or

If there is a bypass for the control device, comply with either of the following requirements:

- (1) Install a flow indicator that records and verifies zero flow at least once every fifteen minutes immediately downstream of each valve that if opened would allow a vent stream to bypass the control device and be emitted, either directly or indirectly, to the atmosphere; or
- (2) Once a month, inspect the valves, verifying that the position of the valves and the condition of the car seals prevent flow out the bypass.

A bypass does not include authorized analyzer vents, highpoint bleeder vents, low point drains, or rupture discs upstream of pressure relief valves if the pressure between the disc and relief valve is monitored and recorded at least weekly. A bypass also does not include equipment needed for safety purposes such as pressure relief devices. A deviation shall be reported if the monitoring or inspections indicate bypass of the control device when it is required to be in service.

- C. Records of the inspections required shall be maintained and if the results of any of the above inspections are not satisfactory, the permit holder shall promptly take necessary corrective action.

Netting & Offsets

30. This Prevention of Significant Deterioration (PSD) permit (PSDTX752M5, 60.98 tpy NO_x project increase) is conditioned on the completion of a total NO_x reduction of 63.63 tpy as represented in the permit application (PI-1 dated March 26, 2012) as follows: **(PSD)**

Table 2N: (July 2009 – September 2011) – 61.47 tpy

Table 2N: (March 2009 – March 2012) – 2.16tpy

- A. These reductions shall occur prior to the start of operation of the facilities and activities authorized by the indicated PSD permit. The permit holder shall maintain records of these emission reductions.
 - B. Construction of the authorized facilities must begin as defined in 40 CFR § 52.21(b)(9), no later than five years after all the emission reductions identified in the NO_x netting analysis are actually accomplished. If construction does not begin as specified, the netting reductions will no longer be creditable.
 - C. This Nonattainment New Source Review (NNSR) permit is issued/approved based on the requirement that the permit holder offset the project emission increase for facilities authorized by this permit prior to the commencement of operation, through participation in the TCEQ Emission Banking and Trading (EBT) Program in accordance with the rules in 30 TAC Chapter 101, Subchapter H. **(06/21)**
 - D. The permit holder shall use 79.3 tons per year (tpy) of NO_x credits to offset the 61.0 tpy NO_x project emission increase for the facilities authorized by this permit at a ratio of 1.3 to 1.0. The permit holder must satisfy the 1 to 1 portion of the NO_x emissions offset through participation in the Mass Emission Cap and Trade (MECT) program in the HGB nonattainment area. The permit holder must hold or obtain NO_x MECT allowances equal to 61.0 tpy at the beginning of each MECT compliance period. **(NNSR) (06/21)**
 - E. In place of satisfying the NO_x emissions offsets with MECT allowances as described in Condition 30(D), the permit holder may use up to 42.6 tpy of NO_x credits from ERC Certificates 3698 and 3699 to satisfy a portion of the 1 to 1 NO_x emissions offset requirement. Upon use of ERC certificates 3698 and 3699, the requirement to hold or obtain NO_x MECT allowances at the beginning of each MECT compliance period is reduced to 18.4 tpy to offset the NO_x project emission increase for the following MECT facilities: **(06/21)**
 - (1) FIN QE1010B/EPN QE1010B
 - (2) FIN QE1011B/EPN QE1011B
31. This Nonattainment New Source Review (NNSR) permit is issued/approved based on the requirement that the permit holder offset the project emission increase for facilities authorized by this permit prior to the commencement of operation, through participation in the TCEQ Emission Banking and Trading (EBT) Program in accordance with the rules in 30 TAC Chapter 101, Subchapter H. **(09/20)**
- A. The permit holder shall use 25.0 tpy of NO_x credits to offset the 20.8 tpy NO_x project emission increase for the facilities authorized by this permit at a ratio of 1.2 to 1.0
 - B. Prior to the commencement of operation, the permit holder shall obtain approval from the TCEQ EBT Program for the credits being used and then submit a permit alteration or amendment request to the TCEQ Air Permits Division (and copy the TCEQ Regional Office) to identify approved credits by TCEQ credit certificate number.
 - C. On January 7, 2021, the permit holder obtained approval to use 25 tpy of NO_x emission reduction credits from certificate 3619 to offset the 20.8 tpy NO_x project emission increase (TCEQ Project No. 309847). **(12/21)**

Permit by Rule

32. The following sources and/or activities are authorized under a Permit by Rule (PBR) by 30 TAC Chapter 106. These lists are not intended to be all inclusive and can be altered without modifications to this permit. **(01/22)**

Authorization	Source or Activity
PBR No. 155981 (effective 05/02/2019)	Authorizes new feed
PBR No. 165070	Authorizes emissions from hose disconnects from existing truck unloading (EPN QELOAD), and DMF sump filling emissions controlled by the ARU Flare (EPN 3050B).
Unregistered PBR 106.472	Authorizes organic tote emissions (EPN QESTORE)

Date: June 30, 2023

Permit 18978

Attachment A

Flare Special Requirements

Instrumentation and Monitoring Systems

- A. Installation and Operation of Monitoring and Control Systems on the the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B). Equistar Chemicals, LP (Equistar) must install and commence operation of the instrumentation, controls, and monitoring systems set forth in this attachment at the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B) except the following flares: Newly Installed Covered Flares and Portable Flares. For the purposes of this Attachment, a "Newly Installed Covered Flare" means any Air-Assisted Flare or Steam-Assisted Flare that is permanently installed, receives Waste Gas that has been redirected to it from the Elevated Flare (EPN: QE8050B) or the ARU flare (EPN: QE3050B). and a "Portable Flare" means a Steam-Assisted Flare or Air-Assisted Flare that is not permanently installed and that receives Waste Gas that has been redirected to it from the Elevated Flare (EPN: QE8050B) or the ARU flare (EPN: QE3050B).
 - B. By no later than the date that any Newly Installed Covered Flare or Portable Flare is In Operation and Capable of Receiving Waste, Supplemental, and/or Sweep Gas, Equistar must complete installation and commence operation of the instrumentation, controls, and monitoring systems set forth in this attachment. Equistar must operate the instrumentation, controls, and monitoring systems for each replacement of an existing flare and Portable Flare in accordance this attachment.
2. Vent Gas and Assist Steam Monitoring Systems.
- A. Equistar must install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the volumetric flow rate of Vent Gas in the header or headers feeding Flare QE8050B or Flare QE3050B. This system must also be able to continuously analyze pressure and temperature at each point of Vent Gas flow measurement. Different flow monitoring methods may be used to measure different gaseous streams that make up the Vent Gas provided that the flow rates of all gas streams that contribute to the Vent Gas are determined. Flow must be calculated in scfm and pounds per hour.
 - B. Equistar must install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the volumetric flow rate of Assist Steam used with the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B). This system must also be able to continuously analyze the pressure and temperature of Assist Steam at a representative point of steam flow measurement. Flow must be calculated in scfm and pounds per hour.
 - C. Each flow rate monitoring system must be able to correct for the temperature and pressure of the system and output parameters in Standard Conditions. For the purposes of this attachment, "Standard Conditions" means a temperature of 68 degrees Fahrenheit and a pressure of 1 atmosphere. Unless otherwise expressly set forth in this attachment, Standard Conditions apply.
 - D. In lieu of a monitoring system that directly measures volumetric flow rate, Equistar may choose from the following additional options for monitoring any gas stream:

- (1) Mass flow monitors may be used for determining the volumetric flow rate of Assist Steam provided that Equistar converts the mass flow rates to volumetric flow rates pursuant to the methodology in Step 2 of Appendix 1.2 [included below];
 - (2) Mass flow monitors may be used for determining the volumetric flow rate of Vent Gas, provided Equistar determines the molecular weight of such Vent Gas using compositional analysis data collected pursuant to the monitoring methodology in Step 2 of Appendix 1.2 and provided that Equistar converts the mass flow rates to volumetric flow rates pursuant to the methodology in Step 2 of Appendix 1.2 [included below]; and
 - (3) Continuous pressure/temperature monitoring system(s) and appropriate engineering calculations may be used in lieu of a continuous volumetric flow monitoring system provided the molecular weight of the gas is known and provided Equistar complies with the methodology in Step 2 of Appendix 1.2 [included below] for calculating volumetric flow rates. For Vent Gas, Equistar must determine molecular weight using compositional analysis data collected pursuant to the monitoring method specified in Paragraph 5.a.
3. Assist Steam Control Equipment. Equistar must install and commence operation of equipment, including, as necessary, main and trim control valves and piping which enables Equistar to control Assist Steam flow to the flare in a manner sufficient to ensure compliance with this attachment.
4. Video Camera. Equistar must install and commence operation of a video camera that is capable of monitoring and recording, in digital format, the flame of and any Smoke Emissions from the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B).. It is not a permit violation, however, if flare video equipment cannot discern the flare combustion zone and/or any Smoke Emissions at the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B) due to weather conditions such as fog or snow, provided that recordings are created and retained.
5. Vent Gas Compositional Monitoring or Direct Monitoring of Net Heating Value of Vent Gas. Equistar must either determine the concentration of individual components in the Vent Gas or directly monitor the Net Heating Value of the Vent Gas (NHV_{vg}) in compliance with one of the methods specified in this Paragraph. Equistar may elect to use different monitoring methods (of the methods provided in this Paragraph) for different gaseous streams that make up the Vent Gas, provided the composition or Net Heating Value of all gas streams that contribute to the Vent Gas are determined. Equistar must:
 - A. Install, operate, calibrate, and maintain a monitoring system capable of continuously measuring (*i.e.*, at least once every 15 minutes), calculating, and recording the individual component concentrations present in the Vent Gas; or
 - B. Install, operate, calibrate, and maintain a calorimeter capable of continuously measuring (*i.e.*, at least once every 15 minutes), calculating, and recording the NHV_{vg} at Standard Conditions. If Equistar elects this method, Equistar may install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the hydrogen concentration in the Vent Gas. The sample extraction point of the calorimeter may be located upstream of the introduction of Supplemental Gas or Sweep Gas or Purge Gas if the composition and flow rate of such gas is known, and if this known value then is used in the calculation of the Net Heating Value of the Vent Gas.
 - C. If Equistar elects the method in Paragraph 5.b, and the Net Heating Value of the Vent Gas exceeds the upper calibrated span of the calorimeter on the flare, then Equistar must use the value of the upper calibrated span of that calorimeter for calculating the NHV_{vg} at Standard

Conditions until the Net Heating Value of the Vent Gas returns to within the measured calibrated span. Use of this method will not constitute instrument system downtime for the period of time that the Net Heating Value of the Vent Gas exceeds the upper calibrated span of the calorimeter.

Direct compositional or Net Heating Value monitoring is not required for purchased ("pipeline quality") natural gas streams. The Net Heating Value of purchased natural gas streams may be determined using annual or more frequent grab sampling at any one representative location. Alternatively, the Net Heating Value of any purchased natural gas stream can be assumed to be 920 BTU/scf.

6. Instrumentation and Monitoring Systems: Optional Equipment. To continuously measure and calculate flow of all Pilot Gas to the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B) in scfm and pounds per hour, Equistar, at its option, may either: a) install (if not already installed) an instrument, or b) use a restriction orifice and pressure measurements. Equistar may use the data generated by this instrument or restriction orifice as part of calculating the Net Heating Value of the Combustion Zone Gas.

Specifications, Calibration, Quality Control, and Maintenance/Recording and Averaging Times/Operation

7. Instrumentation and Monitoring Systems: Specifications, Calibration, Quality Control, and Maintenance.
 - A. The instrumentation and monitoring systems identified in Paragraphs 2 and 5 must:
 - (1) Meet or exceed all applicable minimum accuracy, calibration, and quality control requirements specified in Table 13 of 40 C.F.R. Part 63, Subpart CC;
 - (2) Have an associated readout (*i.e.*, a visual display or record) or other indication of the monitored operating parameter that is readily accessible onsite for operational control or inspection by Equistar;
 - (3) Be capable of measuring the appropriate parameter over the range of values expected for that measurement location; and
 - (4) Have an associated data recording system with a resolution that is equal to or better than the required instrumentation/system accuracy.
 - B. Equistar must operate, maintain, and calibrate each instrument and monitoring system identified in Paragraphs 2 and 5 according to a monitoring plan that contains the information listed in 40 C.F.R. § 63.671(b)(1)-(5). However, if Equistar is determining NHV_{vg} using a process mass spectrometer, Equistar must use the methods established for determining NHV_{vg} as outlined in the February 5, 2018 letter to representatives of Extrel CMS, LLC and AMETEK, Energy and Process Division from Steffan M. Johnson, Group Leader, Measurement Technology Group, Office of Air Quality Planning and Standards (the "Johnson Letter," [a copy of the letter shall be attached to these special conditions at the site]) in lieu of complying with 40 C.F.R. § 63.671(b)(1)-(5)'s requirements for determining NHV_{vg} using a Gas Chromatograph.
 - C. All Gas Chromatograph monitoring systems used to comply with Paragraph 5.a must also meet the requirements of 40 C.F.R. § 63.671(e)(1) through (3) (Additional Requirements for Gas Chromatographs). All process mass spectrometers used to estimate Waste Gas

composition in order to calculate NH_{Vg} must comply with: i) 40 C.F.R. § 63.671(e)(1) and (2) and ii) 40 C.F.R. § 63.671(e)(3) as specified and modified by the Johnson Letter attached to these special conditions at the site.

- D. For each instrumentation and monitoring system required by Paragraphs 2 and 5 (or installed pursuant to Paragraph 6), Equistar must comply with the out-of-control procedures described in 40 C.F.R. § 63.671(c)(1) and (2), and with the data reduction requirements specified in 40 C.F.R. § 63.671(d)(1) through (3).
 - E. The language in 40 C.F.R. § 63.671, Table 13 of 40 C.F.R. Part 63, Subpart CC, or in any regulatory provision cross-referenced in 40 C.F.R. § 63.671 or Table 13 of 40 C.F.R. Part 63, Subpart CC, that limits the applicability of these regulatory requirements to periods when “regulated material” (as defined in 40 C.F.R. § 63.641) is routed to QE8050B and QE3050B, is not applicable for purposes of this attachment. In addition, for purposes of this attachment, the language in 40 C.F.R. § 63.671, Table 13 of 40 C.F.R. Part 63, Subpart CC, or in any regulatory provision cross-referenced in 40 C.F.R. § 63.671 or Table 13 of 40 C.F.R. Part 63, Subpart CC, that refers to a continuous parametric monitoring system will instead be read to refer to the instrumentation and monitoring systems required by this attachment.
 - F. Equistar may elect to utilize the exceptions set forth in 40 C.F.R. § 63.1103(e)(4)(i)-(ix) when complying with this Paragraph.
8. Instrumentation and Monitoring Systems: Recording and Averaging Times. The instrumentation and monitoring systems identified in this attachment must be able to produce and record data measurements and calculations for each parameter at the following time intervals:

<u>Instrumentation and Monitoring System</u>	<u>Recording and Averaging Times</u>
Vent gas, Assist steam Flow Monitoring Systems, and (if installed) Pilot Gas Flow	Measure continuously and record 15-minute block averages
Vent gas Compositional Monitoring (If using the methodology in Paragraph 5a)	Measure no less than once every 15 minutes and record that value
Vent Gas Net Heating Value Analyzer (if using the methodology in Paragraph 5.b.)	Measure continuously and record 15-minute block averages
Video Camera	Record at a rate of no less than 4 frames per minute

The term “continuously” in this Paragraph means to make a measurement as often as the manufacturer’s stated design capabilities of the flow monitors (for Vent Gas, Assist Steam, Assist

Air, and if installed, Pilot Gas) and the Vent Gas Net Heating Value analyzers during each fifteen (15) minute block period, but in no case shall the flow monitors or Vent Gas Net Heating Value analyzers make less than one measurement in each fifteen (15) minute block period. The measurement results are then averaged and recorded to represent each fifteen (15) minute block period. Nothing in this Paragraph prohibits Equistar from setting up process control logic that uses different averaging times from those in this table, provided that the recording and averaging times in this table are available and used for determining compliance with this attachment.

9. Instrumentation and Monitoring Systems: Operation. Equistar must operate each of the instruments and monitoring systems required by Paragraph 2 and 5 and collect data on a continuous basis when the flare that the instrument and/or monitoring system is associated with is In Operation and Capable of Receiving Sweep, Supplemental, and/or Waste Gas, except for the periods of Instrument Downtime specified in sub-Paragraphs 17(a)-(d).
10. For Flare QE8050B, which has a water seal, if all of the following conditions are met, then the Flare is not receiving Potentially Recoverable Gas flow:
 - a. For the water seal drum associated with the respective flare, the pressure difference between the inlet pressure and the outlet pressure is less than the water seal pressure as set by the static head of water between the opening of the dip tube in the drum and the water level in the drum;
 - b. For the water seal drum associated with the respective flare, the water level in the drum is: (i) at the level of the weir or (ii) if the water level in the drum is measured, the measurement indicates that the water seal is present; and
 - c. Downstream of the seal drum, there is no flow of Supplemental Gas directed to the flare.
11. FGRS and Waste Gas Minimizing Equipment: Operation and Availability Requirements.
 - A. General. Equistar must operate the Flare Gas Recovery System (FGRS) on the Elevated Flare QE8050B and in a manner to minimize Waste Gas to the flare while ensuring safe chemical plant operations. Equistar also must operate the FGRS consistent with good engineering and maintenance practices and in accordance with its design and the manufacturer's specifications. Nothing in this Paragraph 11 will require Equistar to recover Regeneration Waste Gas Streams in an FGRS. For the purposes of this Attachment Regeneration Waste Gas Streams means Waste Gas streams produced during the regeneration and subsequent clearing of the dryers, reactors, and other vessels. Regeneration Waste Gas Streams are high in nitrogen (typically approximately 90%) and thus cannot be returned to the process
 - B. Requirements Related to FGRS and Waste Gas Minimizing Equipment Operating Time. Equistar must comply with the following requirements for the FGRS when Potentially Recoverable Gas (means the Sweep Gas, Supplemental Gas, and/or Waste Gas (including hydrogen, nitrogen, oxygen, carbon dioxide, carbon monoxide, and/or water) directed to a Covered Flare's or group of Covered Flares' FGRS, except that Regeneration Waste Gas Streams are not included in the definition of "Potentially Recoverable Gas.") is being generated:

- i. **La Porte Plant FGRS Operation and Availability.** The La Porte Equistar Plant FGRS must have an Eductor Available for Operation or In Operation 98% of the time. The periods provided for in sub-Paragraphs 11.c. and 11.d. below may be included in the amount of time that an Eductor is Available for Operation when determining compliance with the requirement to have an Eductor Available for Operation or In Operation.
- C. Maintenance of FGRS. Periods of maintenance on and subsequent restart of the Eductor(s) may be included in the amount of time that an Eductor is Available for Operation when determining compliance with the requirement to have an Eductor Available for Operation or In Operation; provided however, these periods of maintenance and subsequent restart must not exceed 1,344 hours per Eductor in a five-year rolling sum period, rolled daily. Equistar must use best efforts to schedule maintenance activities during a Turnaround of the process units venting to Flare QE8050B. To the extent it is not practicable to undertake these maintenance activities during a Turnaround of these units, Equistar must use best efforts to minimize the generation of Waste Gas during such periods.
- D. Averaging Periods. For purposes of calculating compliance with the period of time that an Eductor must be available for operation and/or In Operation, as required by sub-Paragraph 11.b.i, the period to be used must be an 8,760-hour rolling sum, rolled hourly, using only hours when Potentially Recoverable Gas was generated during all or part of the hour but excluding hours for flows that could not have been prevented through reasonable planning and were in anticipation of or caused by a natural disaster, act of war or terrorism, or External Utility Loss. When no Potentially Recoverable Gas was generated during an entire hour, then that hour must not be used in computing the 8,760-hour rolling sum. The rolling sum must include only the previous 8,760 1-hour periods when Potentially Recoverable Gas was generated during all or part of the hour, provided that the Potentially Recoverable Gas was not generated by flows that could not have been prevented through reasonable planning and were in anticipation of or caused by a natural disaster, act of war or terrorism, or External Utility Loss.

Flaring Efficiency Standards

12. General Emission Standards Applicable to the Elevated Flare (EPN: QE8050B) and the ARU Flare (EPN: QE3050B)

Equistar must comply with the requirements set forth in this Paragraph at all times when the Elevated Flare (EPN: QE8050B) or the ARU flare (EPN: QE3050B) is In Operation.

- A. Operation During Emissions Venting. Equistar must operate the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B) at all times when emissions may be vented to them.
- B. No Visible Emissions. Equistar must specify the smokeless design capacity of the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B) and operate with no Visible Emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive

hours, when the Elevated Flare (EPN: QE8050B) or the ARU flare (EPN: QE3050B) is in Operation and the Vent Gas flow is less than the smokeless design capacity. For purposes of this attachment, Visible Emissions may be determined by a person trained in accordance with Section 2.3 of Method 22 or documented by a video camera. Equistar must monitor for Visible Emissions from the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B) while they are In Operation as specified below in sub-Paragraphs 12.b.1 or 2. An initial Visible Emissions demonstration must be conducted using an observation period of 2 hours using Method 22 at 40 C.F.R. Part 60, Appendix A-7. Subsequent Visible Emissions observations must be conducted using either method listed below. Equistar must record and report any instances where Visible Emissions are observed for more than 5 minutes during any 2 consecutive hours as specified in 40 C.F.R. § 63.655(g)(11)(ii).

- (1) At least once per Day, Equistar must conduct Visible Emissions observations using an observation period of 5 minutes using Method 22 at 40 C.F.R. Part 60, Appendix A-7. If at any time Equistar sees Visible Emissions, even if the minimum required daily Visible Emission monitoring has already been performed, Equistar must immediately begin an observation period of 5 minutes using Method 22 at 40 C.F.R. Part 60, Appendix A-7. If Visible Emissions are observed for more than one continuous minute during any 5-minute observation period, the observation period using Method 22 at 40 C.F.R. Part 60, Appendix A-7 must be extended to 2 hours or until 5 minutes of Visible Emissions are observed.
 - (2) Alternatively, Equistar may use a video surveillance camera to continuously record (at least one frame every 15 seconds with time and date stamps) images of the flare flame at a reasonable distance above the flare flame, and at an angle suitable for Visible Emissions observations. Equistar must provide real-time video surveillance camera output to the control room or other continuously staffed location where the camera images may be viewed at any time.
 - C. Pilot Flame Presence. Equistar must operate the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B) with pilot flames present at all times. Equistar must continuously monitor the presence of the pilot flames using a device (including, but not limited to, a thermocouple, ultraviolet beam sensor, or infrared sensor) capable of detecting that the pilot flame is present.
 - D. Monitoring According to Applicable Provisions. Equistar must comply with all applicable Subparts of 40 C.F.R. Parts 60, 61, or 63 that state how a particular flare must be monitored.
 - E. Good Air Pollution Control Practices. At all times, including during periods of startup, shutdown, and/or Malfunction, Equistar must implement good air pollution control practices to minimize emissions from the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B). Nothing in this section requires Equistar to install or maintain Flare monitoring equipment in addition to or different from the equipment required by this attachment.
13. Flare Tip Velocity or V_{tip} . Equistar must operate the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B) in compliance with either option below, provided that the appropriate monitoring systems are in place, whenever the Vent gas flow rate is less than the smokeless design capacity of the flare.
- A. The actual Flare Tip Velocity (V_{tip}) must be less than 60 feet per second. Equistar must monitor V_{tip} using the procedures specified in Appendix 1.2.2 [included below], or

- B. V_{tip} must be less than 400 feet per second and also less than the maximum allowed Flare Tip Velocity (V_{max}) as calculated according to Equation 11 in Appendix 1.2 [included below]. Equistar must monitor V_{tip} and gas composition and must determine NHV_{vg} using the procedures specified in Appendix 1.2 [included below]. The Unobstructed Cross Sectional Area of the Flare Tip must be calculated consistent with Appendix 1.3 [included below].

Operation According to Design

14. Operation According to Design. Equistar must operate and maintain the Elevated Flare (EPN: QE8050B) and the ARU flare (EPN: QE3050B) in accordance with its design and the requirements of this attachment.

NHV_{cz} Standards

15. Net Heating Value of Combustion Zone Gas (NHV_{cz}). At any time the Elevated Flare (EPN: QE8050B) or the ARU flare (EPN: QE3050B) are in Operation, Equistar must operate them so as to maintain the NHV_{cz} at or above 270 BTU/scf determined on a 15-minute block period basis when Waste Gas is routed to QE8050B or QE3050B for at least 15 minutes. Equistar must monitor and calculate NHV_{cz} in accordance with Appendix 1.2 [included below].
16. 98% Combustion Efficiency. Equistar must operate QE8050B and QE3050B with a minimum of a 98% Combustion Efficiency at all times when Waste Gas is vented to it. To demonstrate continuous compliance with the 98% Combustion Efficiency, Equistar must operate QE8050B and QE3050B in compliance with the applicable requirements in Paragraph 15.

Standard During Instrument Downtime

17. Standard During Instrument Downtime. If one or more of the following conditions (collectively referred to as "Instrument Downtime") is present and renders Equistar incapable of operating QE8050B and QE3050B in accordance with the applicable NHV standards above, Equistar must operate QE8050B and QE3050B in accordance with good air pollution control practices so as to minimize emissions and ensure good Combustion Efficiency:
- A. Malfunction of an instrument needed to meet the requirement(s);
 - B. Repairs following Malfunction of an instrument needed to meet the requirement(s);
 - C. Recommended scheduled maintenance of an instrument in accordance with the manufacturer's recommended schedule, for an instrument needed to meet the requirement(s); and/or
 - D. Quality Assurance/Quality Control activities on an instrument needed to meet the requirement(s).

Instrument Downtime must be calculated in accordance with 40 C.F.R. § 60.13(h)(2). In no event shall Instrument Downtime exceed 5% of the time in each Semi-Annual Period that the flare affected by the Instrument Downtime is In Operation. For purposes of calculating the percentage of Instrument Downtime allowed by this Paragraph, the time used for NHV Analyzer, mass spectrometer, or gas chromatograph calibration and validation activities may be excluded.

Recordkeeping

18. Recordkeeping for QE8050B and QE3050B: Timing and Substance. Equistar must comply with the following recordkeeping requirements:

- A. Equistar must calculate and record each of the following parameters:
 - (1) Volumetric flow rates of all gas streams that contribute to the Vent Gas volumetric flow rate (in scfm) (in 15-minute block averages and in accordance with any calculation requirements of Paragraph 2, 8, and Step 2 of Appendix 1.2 [included below];
 - (2) Assist Steam volumetric flow rate (in scfm) (in 15-minute block averages and in accordance with any calculation requirements Paragraphs 2, 8, and Step 2 of Appendix 1.2) (for Steam-Assisted Flares) [included below];
 - (3) NHV_{vg} (in BTU/scf) (in 15-minute block averages in accordance with Step 1 of Appendix 1.2 [included below]; and
 - (4) NHV_{cz} (in BTU/scf) (in 15-minute block averages in accordance with Step 3 of Appendix 1.2 [included below].
- B. Equistar must record the duration of all periods of Instrument Downtime for QE8050B and QE3050B that exceed 5% of the time in a Semi-Annual Period that QE8050B and QE3050B are In Operation. Equistar must record which instrument(s) experienced the downtime, which flare was affected by the downtime, an explanation of the cause(s) of the deviation, and a description of the corrective action(s) that Equistar took.
- C. Equistar must record the dates and times of any periods that Equistar deviates from the standards in Paragraph 11.b. Equistar must also record the duration of the deviation, an explanation of the cause(s) of the deviation, and a description of the corrective action(s) that Equistar took.
- D. At any time that Equistar deviates from the emissions standards in Paragraphs 15-17 at the QE8050B and QE3050B, Equistar must record the duration of the deviation, an explanation of the cause(s) of the deviation, and a description of the corrective action(s) that Equistar took.

Fenceline Monitoring Project

19. Equistar must maintain and operate a Fenceline Monitoring Project in accordance with Appendix 2.2 [included below].

Attachment A
Permit Number 18978
Page 10

Date: March 31, 2023

Permit 18978

Referenced Appendix 1.2

Flare Special Requirements

Calculating Combustion Efficiency, Net Heating Value of the Combustion Zone Gas (NHV_{cz}), the Net Heating Value Dilution Parameter (NHV_{dil}), and Flare Tip Velocity

All abbreviations, constants, and variables are defined in the Key included in this Appendix.

Combustion Efficiency Equation:

$$CE = [CO_2]/([CO_2] + [CO] + [OC])$$

where:

[CO₂] = Concentration in volume percent or ppm-meters of carbon dioxide in the combusted gas immediately above the Combustion Zone

[CO] = Concentration in volume percent or ppm-meters of carbon monoxide in the combusted gas immediately above the Combustion Zone

[OC] = Concentration in volume percent or ppm-meters of the sum of all organic carbon compounds in the combusted gas immediately above the Combustion Zone, counting each carbon molecule separately where the concentration of each individual compound is multiplied by the number of carbon atoms it contains before summing (e.g., 0.1 volume percent ethane shall count as 0.2 percent OC because ethane has two carbon atoms)

For purposes of using the CE equation, the unit of measurement for CO₂, CO, and OC must be the same; that is, if “volume percent” is used for one compound, it must be used for all compounds. “Volume percent” cannot be used for one or more compounds and “ppm-meters” for the remainder.

Step 1: Determine the Net Heating Value of the Vent Gas (NHV_{vg})

Equistar shall determine the Net Heating Value of the Vent Gas (NHV_{vg}) based on composition monitoring data on a 15-minute block average basis according to the following requirements. If Equistar monitors separate gas streams that combine to comprise the total Vent Gas flow to the QE8050B or QE3050B, the 15-minute block average Net Heating Value shall be determined separately for each measurement location according to the following requirements and a flow-weighted average of the gas stream Net Heating Values shall be used to determine the 15-minute block average Net Heating Value of the cumulative Vent Gas. The NHV_{vg} 15-minute block averages shall be calculated for set 15-minute time periods starting at 12 midnight to 12:15 AM, 12:15 AM to 12:30 AM and so on, concluding at 11:45 PM to midnight.

Step 1a: Equation or Output to be Used to Determine NHV_{vg} at a Measurement Location

For any gas stream for which Equistar complies with Paragraph 5 of Attachment A. by collecting compositional analysis data in accordance with the method set forth in 5.a: Equation 1 shall be used to determine the NHV_{vg} of a specific sample by summing the Net Heating Value for each individual component by individual component volume fractions. Individual component Net Heating Values are listed in Table 1 of this Appendix.

$$NHV_{vg} = \sum_{i=1}^n (x_i \cdot NHV_i) \quad \text{Equation 1}$$

For any gas stream for which Equistar complies with Paragraph 5 of Attachment A by collecting direct Net Heating Value monitoring data in accordance with the method set forth in 5.b but for which a Hydrogen Concentration Monitor is not used: Use the direct output (measured value) of the monitoring system(s) (in BTU/scf) to determine the NHV_{vg} for the sample.

For any gas stream for which Equistar complies with Paragraph 5 of Attachment A by collecting direct Net Heating Value monitoring data in accordance with the method set forth in 5.b and for which a Hydrogen Concentration Monitor is also used: Equation 2 shall be used to determine the NHV_{vg} for each sample measured via the Net Heating Value monitoring system. Where hydrogen concentration data is collected, Equation 2 performs a net correction for the measured heating value of hydrogen since the theoretical Net Heating Value for hydrogen is 274 Btu/scf, but for the purposes of this Attachment, a Net Heating Value of 1,212 Btu/scf may be used ($1,212 - 274 = 938$ BTU/scf).

$$NHV_{vg} = NHV_{measured} + 938x_{H_2} \quad \text{Equation 2}$$

Step 1b: Calculation Method to be Used in Applying Equation/Output to Determine NHV_{vg}

For any flare for which Equistar complies with Paragraph 5 of Attachment A by using a continuous monitoring system in accordance with the method set forth in 5.a or 5.b: Equistar may elect to determine the 15-minute block average NHV_{vg} using either the Feed-Forward Calculation Method or the Direct Calculation Method (both described below). Equistar needs not elect to use the same methodology at all flares with a continuous monitoring system; however, for each such flare, Equistar must elect one calculation method that will apply at all times, and use that method for all continuously monitored flare vent streams associated with that flare. If Equistar intends to change the calculation method that applies to a flare, Equistar must notify the EPA 30 days in advance of such a change.

Feed-Forward Calculation Method. When calculating NHV_{vg} for a specific 15-minute block:

1. Use the results from the first sample collected during an event (for periodic Vent Gas flow events) for the first 15-minute block associated with that event.
2. If the results from the first sample collected during an event (for periodic Vent Gas flow events) are not available until after the second 15-minute block starts, use the results from the first sample collected during an event for the second 15-minute block associated with that event.
3. For all other cases, use the results that are available from the most recent sample prior to the 15-minute block period for that 15-minute block period for all Vent Gas streams. For the purpose of this requirement, use the time that the results become available rather than the time the sample was collected. For example, if a sample is collected at 12:25 AM and the analysis is completed at 12:38 AM, the results are available at 12:38 AM and these results would be used to determine compliance during the 15-minute block period from 12:45 AM to 1:00 AM.

Direct Calculation Method. When calculating NHV_{vg} for a specific 15-minute block:

1. If the results from the first sample collected during an event (for periodic Vent Gas flow events) are not available until after the second 15-minute block starts, use the results from the first sample collected during an event for the first 15-minute block associated with that event.

2. For all other cases, use the arithmetic average of all NHV_{vg} measurement data results that become available during a 15-minute block to calculate the 15-minute block average for that period. For the purpose of this requirement, use the time that the results become available rather than the time the sample was collected. For example, if a sample is collected at 12:25 AM and the analysis is completed at 12:38 AM, the results are available at 12:38 AM and these results would be used to determine compliance during the 15-minute block period from 12:30 AM to 12:45 AM.

Step 2: Determine Volumetric Flow Rates of Gas Streams

Equistar shall determine the volumetric flow rate in standard cubic feet (scf) of Vent Gas, along with the volumetric flow rates (in scf) of any Supplemental Gas, Assist Steam, and Premix Assist Air, over a 15-minute block average basis. The 15-minute block average volumetric flow rates shall be calculated for set 15-minute time periods starting at 12 midnight to 12:15 AM, 12:15 AM to 12:30 AM and so on, concluding at 11:45 PM to midnight.

For any gas streams for which Equistar complies with Paragraph 2 of Attachment A by using a monitoring system that directly records volumetric flow rate: Use the direct output (measured value) of the monitoring system(s) (in scf), as corrected for the temperature and pressure of the system to Standard Conditions (i.e., a temperature of 20 °C (68 °F) and a pressure of 1 atmosphere) to then calculate the average volumetric flow rate of that gas stream for the 15- minute block period.

For Vent Gas, Assist Steam, or Premix Assist Air gas streams for which Equistar complies with Paragraph 2 of Attachment A by using a mass flow monitor to determine volumetric flow rate: Equation 3 shall be used to determine the volumetric flow rate of Vent Gas, Assist Air, or Assist Steam by converting mass flow rate to volumetric flow at Standard Conditions (i.e., a temperature of 20 °C (68 °F) and a pressure of 1 atmosphere). Equation 3 uses the molecular weight of the gas stream as an input to the equation; therefore, if Equistar elects to use a mass flow monitor to determine volumetric flow rate of Vent Gas, Equistar must collect compositional analysis data for such Vent Gas in accordance with the method set forth in 5.a of Attachment A. For Assist Steam, use a molecular weight of 18 pounds per pound-mole. For Assist Air, use a molecular weight of 29 pounds per pound-mole. The converted volumetric flow rates at Standard Conditions from Equation 3 shall then be used to calculate the average volumetric flow rate of that gas stream for the 15-minute block period.

$$Q_{vol} = \frac{Q_{mass} * 385.3}{MW_t} \quad \text{Equation 3}$$

For gas streams for which the molecular weight of the gas is known and for which Equistar complies with Paragraph 2 by using continuous pressure/temperature monitoring system(s): Use appropriate engineering calculations to determine the average volumetric flow rate of that gas stream for the 15-minute block period. For Assist Steam, use a molecular weight of 18 pounds per pound-mole. For Assist Air, use a molecular weight of 29 pounds per pound-mole. For Vent Gas, molecular weight must be determined by collecting compositional analysis data for such Vent Gas in accordance with the method set forth in 5a.

Step 3: Calculate the Net Heating Value of the Combustion Zone Gas (NHV_{cz})

For any flare at which: 1) the Feed-Forward Calculation Method is used; 2) gas composition or Net Heating Value monitoring is performed in a location representative of the cumulative Vent Gas stream; and 3) Supplemental Gas flow additions to the flare are directly monitored: Equation 4 shall be used to determine the 15-minute block average NHV_{cz} based on the 15-minute block average Vent Gas, Supplemental Gas, and Assist Gas flow rates.

$$NHV_{cz} = \frac{(Q_{vg} - Q_{NG2} + Q_{NG1}) * NHV_{vg} + (Q_{NG2} - Q_{NG1}) * NHV_{NG}}{Q_{vg} + Q_s + Q_{a,premix}} \quad \text{Equation 4}$$

For the first 15-minute block period of an event, Q_{NG1} shall use the volumetric flow value for the current 15-minute block period (i.e. $Q_{NG1} = Q_{NG2}$). NHV_{NG} shall be determined using one of the following methods: 1) direct compositional or Net Heating Value monitoring of the natural gas stream in accordance with Step 1; or 2) for purchased ("pipeline quality") natural gas streams, Equistar may elect to either: a) use annual or more frequent grab sampling at any one representative location, or b) assume a Net Heating Value of 920 BTU/scf.

For all other Flares: Equation 5 shall be used to determine the 15-minute block average NHV_{cz} based on the 15-minute block average Vent Gas and assist gas flow rates. For periods when there is no Assist Steam flow or Premix Assist Air flow, $NHV_{cz} = NHV_{vg}$.

$$NHV_{cz} = \frac{(Q_{vg}) * NHV_{vg}}{Q_{vg} + Q_s + Q_{a,premix}} \quad \text{Equation 5}$$

Step 4: Calculate the Net Heating Value Dilution Parameter (NHV_{dil})

For any flare at which: 1) the Feed-Forward Calculation Method is used; 2) gas composition or Net Heating Value monitoring is performed in a location representative of the cumulative Vent Gas stream; and 3) Supplemental Gas flow additions to the flare are directly monitored: Equation 6 shall be used to determine the 15-minute block average NHV_{dil} only during periods when Perimeter Assist Air is used. For 15-minute block periods when there is no cumulative volumetric flow of Perimeter Assist Air, the 15-minute block average NHV_{dil} parameter does not need to be calculated.

$$NHV_{dil} = \frac{[(Q_{vg} - Q_{NG2} + Q_{NG1}) * NHV_{vg} + (Q_{NG2} - Q_{NG1}) * NHV_{NG}] * Diam}{(Q_{vg} + Q_s + Q_{a,premix} + Q_{a,perimeter})} \quad \text{Equation 6}$$

For the first 15-minute block period of an event, Q_{NG1} shall use the volumetric flow value for the current 15-minute block period (i.e. $Q_{NG1} = Q_{NG2}$). NHV_{NG} shall be determined using one of the following methods: 1) direct compositional or Net Heating Value monitoring of the natural gas stream in accordance with Step 1; or 2) for purchased ("pipeline quality") natural gas streams, Equistar may elect to either: a) use annual or more frequent grab sampling at any one representative location, or b) assume a Net Heating Value of 920 BTU/scf.

For all other Flares: Equation 7 shall be used to determine the 15-minute block average NHV_{dil} based on the 15-minute block average Vent gas and Perimeter Assist Air flow rates, only during periods when Perimeter Assist Air is used. For 15-minute block periods when there is no cumulative volumetric flow of Perimeter Assist Air, the 15-minute block average NHV_{dil} parameter does not need to be calculated.

$$NHV_{dil} = \frac{Q_{vg} * Diam * NHV_{vg}}{(Q_{vg} + Q_s + Q_{a,premix} + Q_{a,perimeter})} \quad \text{Equation 7}$$

Step 5: Ensure that during flare operation, $NHV_{cz} \geq 270$ BTU/scf

The flare must be operated to ensure that NHV_{cz} is equal to or above 270 BTU/scf, as determined for each 15-minute block period when Supplemental, Sweep, and/or Waste Gas is routed to QE8050B or QE3050B for at least 15-minutes. Equation 8 shows this relationship.

$$NHV_{cz} \geq 270 \text{ BTU/scf} \quad \text{Equation 8}$$

Step 6: Ensure that during flare operation, $NHV_{dil} \geq 22 \text{ BTU/ft}^2$

A flare actively receiving Perimeter Assist Air must be operated to ensure that NHV_{dil} is equal to or above 22 BTU/ft², as determined for each 15-minute block period when Supplemental, Sweep, and/or Waste Gas is routed to QE8050B or QE3050B for at least 15-minutes. Equation 9 shows this relationship.

$$NHV_{dil} \geq 22 \text{ BTU/ft}^2 \quad \text{Equation 9}$$

Calculation Method for Determining Compliance with V_{tip} Operating Limits.

Equistar shall determine V_{tip} on a 15-minute block average basis according to the following requirements:

- E. Equistar shall use design and engineering principles and the guidance in Appendix 1.3 to determine the Unobstructed Cross Sectional Area of the Flare Tip. The Unobstructed Cross Sectional Area of the Flare Tip is the total tip area that Vent Gas can pass through. This area does not include any stability tabs, stability rings, and Upper Steam or air tubes because Vent Gas does not exit through them.
- F. Equistar shall determine the cumulative volumetric flow of Vent Gas for each 15-minute block average period using the data from the continuous flow monitoring system according to the requirements in Step 2 above.
- G. The 15-minute block average V_{tip} shall be calculated using Equation 10.

$$V_{tip} = \frac{Q_{cum}}{Area_x 900} \quad \text{Equation 10}$$

- H. If Equistar chooses to comply Paragraph 13.b of Attachment A, Equistar shall also determine the NHV_{vg} using Step 1 above and calculate V_{max} using Equation 11 in order to compare V_{tip} to V_{max} on a 15-minute Block average basis.

$$\log_{10}(V_{max}) = \frac{NHV_{vg} + 1,212}{850} \quad \text{Equation 11}$$

Key to the Abbreviations:

385.3= Conversion Factor (scf/lb-mol)

850 = Constant

900 = Conversion Factor (seconds/ 15-minute block average)

1,212 = Constant

Area = The Unobstructed Cross Sectional Area of the Flare Tip is the total tip area that Vent Gas can pass through, in ft². This area does not include any stability tabs, stability rings, and upper steam or air tubes because Vent Gas does not exit through them. Use design and engineering principles to determine the Unobstructed Cross Sectional Area of the Flare Tip.

Diam = Effective diameter of the unobstructed area of the Flare Tip for Vent Gas flow, in ft. Determine the diameter as $Diam = 2 * \sqrt{Area \div \pi}$

i = individual component in Vent Gas (unitless)

MWt = molecular weight of the gas at the flow monitoring location (lb/lb-mol)

n = number of components in Vent Gas (unitless)

NHV_{cz} = Net Heating Value of Combustion Zone Gas (BTU/scf)

NHV_i = Net Heating Value of component I according to Table 1 (BTU/scf)

NHV_{measured} = Net Heating Value of Vent Gas stream as measured by monitoring system (BTU/scf)

NHV_{NG} = Net Heating Value of Supplemental Gas to flare during the 15-minute block period (BTU/scf)

NHV_{vg} = Net Heating Value of Vent Gas (BTU/scf)

Q_{a,perimeter} = cumulative volumetric flow of perimeter Assist Air during the 15-minute block period (scf)

Q_{a,premix} = cumulative volumetric flow of premix Assist Air during the 15-minute block period (scf)

Q_{cum} = cumulative volumetric flow over 15-minute block average period (scf)

Q_{mass} = mass flow rate (pounds per second)

Q_{NG1} = cumulative vol flow of Supplemental Gas to flare during previous 15-minute block period (scf)

Q_{NG2} = cumulative vol flow of Supplemental Gas to flare during the 15-minute block period (scf)

Q_s = cumulative volumetric flow of Total Steam during the 15-minute block period (scf)

Q_{vg} = cumulative vol flow of Vent Gas during the 15-minute block period (scf)

Q_{vol} = volumetric flow rate (scf per second)

V_{max} = Maximum allowed Flare Tip Velocity (feet per second)

V_{tip} = Flare Tip Velocity (feet per second)

x_i = concentration of component I in Vent Gas (vol fraction)

x_{H2} = concentration of H2 in Vent Gas at time sample was input into NHV monitoring system (vol fraction)

Table 1: Individual Component Properties

Component	Molecular Formula	MW _i (pounds per pound-mole)	CMNi (mole per mole)	NHV _i (British thermal units per standard cubic foot)	LFL _i (volume)
Acetylene	C ₂ H ₂	26.04	2	1,404	2.5
Benzene	C ₆ H ₆	78.11	6	3,591	1.3
1,2-Butadiene	C ₄ H ₆	54.09	4	2,794	2.0
1,3-Butadiene	C ₄ H ₆	54.09	4	2,690	2.0
iso-Butane	C ₄ H ₁₀	58.12	4	2,957	1.8
n-Butane	C ₄ H ₁₀	58.12	4	2,968	1.8
cis-Butene	C ₄ H ₈	56.11	4	2,830	1.6
iso-Butene	C ₄ H ₈	56.11	4	2,928	1.8
trans-Butene	C ₄ H ₈	56.11	4	2,826	1.7
Carbon Dioxide	CO ₂	44.01	1	0	∞
Carbon Monoxide	CO	28.01	1	316	12.5
Cyclopropane	C ₃ H ₆	42.08	3	2,185	2.4
Ethane	C ₂ H ₆	30.07	2	1,595	3.0
Ethylene	C ₂ H ₄	28.05	2	1,477	2.7
Hydrogen	H ₂	2.02	0	1,212 ^A	4.0
Hydrogen Sulfide	H ₂ S	34.08	0	587	4.0
Methane	CH ₄	16.04	1	896	5.0
Methyl-Acetylene	C ₃ H ₄	40.06	3	2,088	1.7
Nitrogen	N ₂	28.01	0	0	∞
Oxygen	O ₂	32.00	0	0	∞
Pentane+ (C5+)	C ₅ H ₁₂	72.15	5	3,655	1.4
Propadiene	C ₃ H ₄	40.06	3	2,066	2.16
Propane	C ₃ H ₈	44.10	3	2,281	2.1
Propylene	C ₃ H ₆	42.08	3	2,150	2.4
Water	H ₂ O	18.02	0	0	∞

^A The theoretical Net Heating Value for hydrogen is 274 Btu/scf, but for the purposes of this appendix, a Net Heating Value of 1,212 Btu/scf shall be used.

Note: If a component is not specified in this Table 1, the heats of combustion may be determined using any published values where the net enthalpy per mole of offgas is based on combustion at 25 °C and 1 atmosphere (or constant pressure) with offgas water in the gaseous state, but the standard temperature for determining the volume corresponding to one mole of Vent Gas is 20°C.

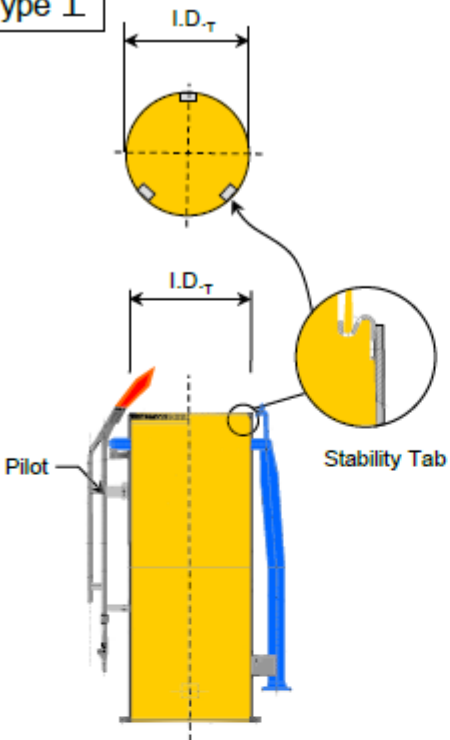
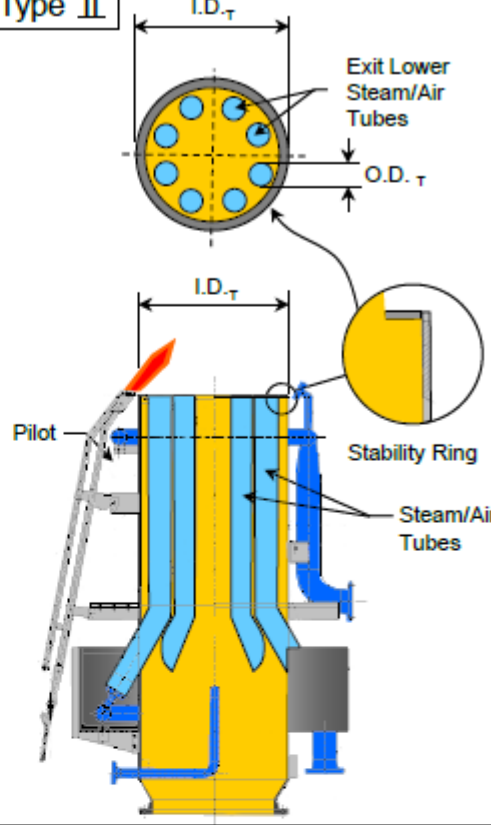
Date: March 31, 2023

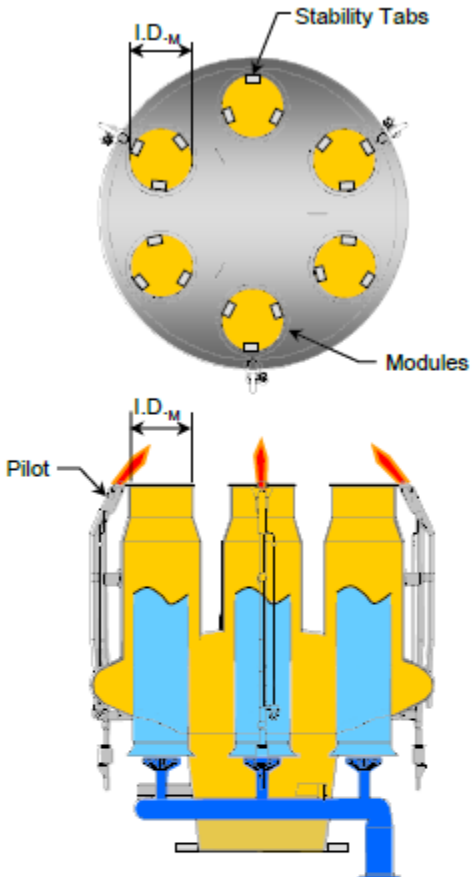
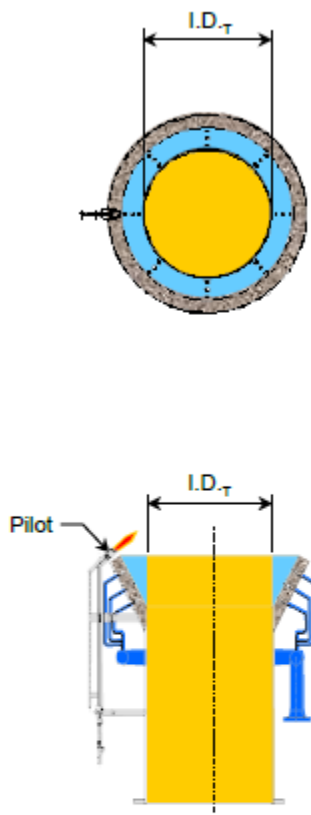
Permit 18978

Referenced Appendix 1.3

Flare Special Requirements

Calculating the Unobstructed Cross Sectional Area of Various Types of Flares

<p>Type I</p>  $A_{tip-unob} = \pi(I.D._T)^2/4 - (X_T * A_{ST})$	<p>Type II</p>  $A_{tip-unob} = \pi(I.D._T)^2/4 - A_{ST} - N_T * \pi * (O.D._T)^2/4$
<p>Where:</p> <ul style="list-style-type: none"> $A_{tip-unob}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D._T$ = Inside Diameter Flare Tip X_T = Number of Stability Tabs A_{ST} = Area of a Stability Tab 	<p>Where:</p> <ul style="list-style-type: none"> $A_{tip-unob}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D._T$ = Inside Diameter Flare Tip A_{ST} = Area of Stability Ring $O.D._T$ = Outside Diameter of Steam/Air Tubes N_T = Number of Steam/Air Tubes
<p>Example: $I.D._T$ = 41.5 inches X_T = 3 A_{ST} = 3 Sq. inches</p>	<p>Example: $I.D._T$ = 47.5 inches A_{ST} = 100 Sq. inches $O.D._T$ = 6.5 inches N_T = 8</p>
<p>$A_{tip-unob} = \pi(41.5)^2/4 - (3 * 3)$ $A_{tip-unob} = 1344$ Sq. inches</p>	<p>$A_{tip-unob} = \pi(47.5)^2/4 - 100 - 8 * \pi * (6.5)^2/4$ $A_{tip-unob} = 1322$ Sq. inches</p>

Type III	Type IV
 $A_{tip-unob} = N_M * (\pi * (I.D._M)^2 / 4 - X_T * A_{ST})$	 $A_{tip-unob} = \pi (I.D._T)^2 / 4$
<p>Where: $A_{tip-unob}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D._M$ = Inside Diameter of One Tip Module N_M = Number of Modules X_T = Number of Stability Tabs per Module A_{ST} = Area of a Stability Tab</p>	<p>Where: $A_{tip-unob}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D._T$ = Inside Diameter of Flare Tip</p>
<p>Example: $I.D._M$ = 17 inches N_M = 6 X_T = 3 A_{ST} = 3 Sq. inches</p>	<p>Example: $I.D._T$ = 41.5 inches</p>
<p>$A_{tip-unob} = 6 * (\pi * (17)^2 / 4 - 3 * 3)$ $A_{tip-unob} = 1308$ Sq. inches</p>	<p>$A_{tip-unob} = \pi (41.5)^2 / 4$ $A_{tip-unob} = 1353$ Sq. inches</p>

Referenced Appendix 2.2:

SCOPE OF WORK FOR THE FENCELINE MONITORING PROJECT

1. **Applicability.** The requirements of this Fenceline Monitoring Project applies to Equistar' La Porte Complex
2. **Public Transparency.**

Equistar must post to a publicly available website each individual sample result for each monitor, each biweekly annual average concentration difference value (once annual averages are available), and any corrective action plan submitted to EPA pursuant to Paragraph 3(h)(corrective action plans posted to the website may be redacted to protect confidential business information). Equistar must post each individual sample result for each monitor within 30 Days of the end of the biweekly sampling period or within 30 Days of sampling collected pursuant to the "alternative sampling frequency for burden reduction" requirements set forth in Paragraph 3(f)(3) below. Equistar must post each annual average difference value within 45 Days of the sampling period that allows the creation of a new annual average difference value. The data must be presented in a tabular format.
3. **Monitoring Requirements.**
 - A. Equistar must commence sampling along the property boundary. Equistar must collect and analyze the samples in accordance with Methods 325A and 325B of Appendix A to 40 C.F.R. Part 63 (Test Methods – Pollutant Measurement Methods From Various Waste Media) (hereafter "Rule Appendix A"), and subparagraphs 3(b) through 3(g).
 - B. The target analyte for the Fenceline Monitoring System is benzene.
 - C. Siting of monitors. Equistar must determine the passive monitor locations comprising each Fenceline Monitoring System in accordance with Section 8.2 of Method 325A of Rule Appendix A, with the exception of the number of duplicates and blanks, which will be determined pursuant to 40 C.F.R. § 63.658(c)(3).
 - (1) As it pertains to this Fenceline Monitoring Project, known sources of VOCs, as used in Section 8.2.1.3 in Method 325A of Rule Appendix A for siting passive monitors, means a wastewater treatment unit, process unit, or any emission source requiring HAP control according to the requirements of any state or federal air permit applicable to the facility, including marine vessel loading operations. For marine loading operations that are located offshore, one passive monitor should be sited on the shoreline adjacent to the dock. For purposes of this Appendix, an additional monitor is not required if the only emission sources within 50 meters of the monitoring boundary are equipment leak sources satisfying all of the requirements in 40 CFR § 63.658(c)(1)(i) through (iv).
 - (2) If there are 19 or fewer monitoring locations, Equistar shall collect at least one co-located duplicate sample per sampling period and at least one field blank per sampling period. If there are 20 or more monitoring locations, Equistar shall collect at least two co-located duplicate samples per sampling period and at least one field blank per sampling period, as described in 40 C.F.R. § 63.658(c)(3). The co-located duplicates may be collected at any one of the perimeter sampling locations.
 - (3) Equistar must follow the procedure in Section 9.6 of Method 325B of Rule Appendix A to determine the detection limit of benzene for each sampler used to collect samples and co-located samples and blanks. Each monitor used to conduct sampling in accordance with this Appendix must have a detection limit that is at least an order of magnitude lower than the benzene action level.

(4) Equistar may install additional monitors.

D. **Collection of meteorological data.** Equistar must collect and record meteorological data according to the applicable requirements in sub-Paragraphs 3(D)(1) and 3(D)(2).

- (1) Equistar must collect and record the average temperature and barometric pressure during each sampling period using either an on-site meteorological station in accordance with Section 8.3 of Method 325A of Rule Appendix A or, alternatively, using data from a United States Weather Service (USWS) meteorological station provided the USWS meteorological station is within 40 kilometers (25 miles) of the applicable facility.
- (2) If an on-site meteorological station is used, Equistar must follow the calibration and standardization procedures for meteorological measurements in EPA-454/B-08-002.

http://www3.epa.gov/ttnamti1/files/ambient/met/Volume_IV_Meteorological_Measurements.pdf.

E. **Sampling Frequency.** Equistar must use a sampling period and sampling frequency as specified in this sub-Paragraph 3(E).

- (1) **Sampling period.** A 14-Day sampling period must be used, unless a shorter sampling period is determined to be necessary under Paragraph 3(G). A sampling period is defined as the period during which a sampling tube is deployed at a specific sampling location with the diffusive sampling end cap in-place. The sampling period does not include the time required to analyze the sample. For the purpose of this sub-Paragraph, a 14-Day sampling period may be no shorter than 13 calendar days and no longer than 15 calendar days, but the routine sampling period must be 14 calendar days.
- (2) **Base sampling frequency.** Except as provided in Paragraph 3(E)(3), the frequency of sample collection must be once each contiguous 14-Day sampling period, such that the next 14-Day sampling period begins immediately upon the completion of the previous 14-Day sampling period.
- (3) **Alternative sampling frequency for burden reduction.** When an individual monitor consistently, as defined in sub-Paragraph 3(E)(3)(a) through (e), yields results at or below $0.9 \mu\text{g}/\text{m}^3$, Equistar may elect to use the applicable minimum sampling frequency specified in Paragraph 3(E)(3)(a) through (e) for that individual monitoring site.

When calculating Δc (as defined in Paragraph 3(F)) for the monitoring period when using this alternative for burden reduction, zero must be substituted for the sample result for the monitoring site for any period where a sample is not taken.

- (a) If every sample at an individual monitoring site is at or below $0.9 \mu\text{g}/\text{m}^3$ for 2 years (52 consecutive samples), every other sampling period can be skipped for that individual monitoring site, i.e., sampling can occur approximately once per month.
- (b) If every sample at an individual monitoring site that is monitored at the frequency specified in Paragraph 3(E)(3)(a) is at or below $0.9 \mu\text{g}/\text{m}^3$ for 2 years (i.e., 26 consecutive "monthly" samples), five 14-Day sampling periods can be skipped for that individual monitoring site following each period of sampling, i.e., sampling will occur approximately once per quarter.

- (c) If every sample at an individual monitoring site that is monitored at the frequency specified in Paragraph 3(E)(3)(b) is at or below $0.9 \mu\text{g}/\text{m}^3$ for 2 years (i.e., 8 consecutive quarterly samples), twelve 14-Day sampling periods can be skipped for that individual monitoring site following each period of sampling, i.e., sampling will occur twice a year.
 - (d) If every sample at an individual monitoring site that is monitored at the frequency specified in Paragraph 3(E)(3)(c) is at or below $0.9 \mu\text{g}/\text{m}^3$ for 2 years (i.e., 4 consecutive semi-annual samples), only one sample per year is required for that individual monitoring site. For yearly sampling, samples must occur at least 10 months but no more than 14 months apart.
 - (e) If at any time a sample for an individual monitoring site that is monitored at the frequency specified in Paragraphs 3(E)(3)(a) through (d) returns a result that is above $0.9 \mu\text{g}/\text{m}^3$, that sampling site must return to the original sampling requirements of contiguous 14-Day sampling periods with no skip periods for one quarter (six 14-Day sampling periods). If every sample collected during this quarter is at or below $0.9 \mu\text{g}/\text{m}^3$, Equistar may revert back to the reduced monitoring frequency applicable for that individual monitoring site immediately prior to the sample reading exceeding $0.9 \mu\text{g}/\text{m}^3$. If any sample collected during this quarter is above $0.9 \mu\text{g}/\text{m}^3$, that individual monitoring site must return to the original sampling requirements of contiguous 14-Day sampling periods with no skip periods for a minimum of two years. The burden reduction requirements can be used again for that monitoring site once the requirements of Paragraph 3E(3)(a) are met again, i.e., after 52 contiguous 14-Day samples with no results above $0.9 \mu\text{g}/\text{m}^3$.
- F. Action Level. Within 45 Days of completion of each sampling period, Equistar must determine whether the results are above or below the action level as follows:
- (1) Calculation of the Δc . Equistar must determine the benzene difference concentration (Δc) for each 14-Day sampling period by determining the highest and lowest sample results for benzene concentrations from the sample pool and calculating the Δc as the difference in these concentrations. Equistar must adhere to the following procedures when one or more samples for the sampling period are below the method detection limit for benzene:
 - (a) If the lowest detected value of benzene is below detection, Equistar must use zero as the lowest sample result when calculating Δc .
 - (b) If all sample results are below the method detection limit, Equistar must use the method detection limit as the highest sample result.
 - (2) Equistar must calculate the annual average Δc based on the average of the 26 most recent 14-Day sampling periods. Equistar must update this annual average value after receiving the results of each subsequent 14-Day sampling period (i.e., on a "rolling" basis).
 - (3) The action level for benzene is 9 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$) on an annual average basis. If the annual average Δc value for benzene is less than or equal to $9 \mu\text{g}/\text{m}^3$, the concentration is below the action level. If the annual average Δc value for benzene is greater than $9 \mu\text{g}/\text{m}^3$, the concentration is above the action level, and Equistar must conduct a root cause analysis and corrective action in accordance with Paragraph 3(G).

- G. Root Cause Analysis and Corrective Action. Within 5 Days of determining that the action level has been exceeded for any annual average Δc and no longer than 50 Days after completion of the sampling period, Equistar must initiate a root cause analysis to determine the cause of such exceedance and to determine appropriate corrective action, such as those described in Paragraphs 3(G)(1) through (4). The root cause analysis and initial corrective action analysis must be completed and initial corrective actions taken no later than 45 Days after determining there is an exceedance. Root cause analysis and corrective action may include, but is not limited to:
- (1) Leak inspection using Method 21 of 40 C.F.R. Part 60, Appendix A-7 and repairing any leaks found.
 - (2) Leak inspection using optical gas imaging and repairing any leaks found.
 - (3) Visual inspection to determine the cause of the high benzene emissions and implementing repairs to reduce the level of emissions.
 - (4) Employing progressively more frequent sampling, analysis and meteorology (e.g., using shorter sampling periods for Methods 325A and 325B of Appendix A of 40 C.F.R. Part 63, or using active sampling techniques).
- H. If, after completing the corrective action analysis and corrective actions such as those described in Paragraph 3(H), the Δc value for the next 14-Day sampling period for which the sampling start time begins after the completion of the corrective actions is greater than 9 $\mu\text{g}/\text{m}^3$ or if all corrective action measures identified require more than 45 Days to implement, Equistar must develop a corrective action plan that describes the corrective action(s) completed to date, additional measures that Equistar proposes to employ to reduce benzene concentrations at the fenceline location in question below the action level, and a schedule for completion of these measures. Equistar must submit the corrective action plan to EPA within 60 Days after receiving the analytical results indicating that the Δc value for the 14-Day sampling period following the completion of the initial corrective action is greater than 9 $\mu\text{g}/\text{m}^3$ or, if no initial corrective actions were identified, no later than 60 Days following the completion of the corrective action analysis required in Paragraph 3(G).

Alternative Test Method. Equistar may submit for review and approval pursuant to this appendix a request to use an alternative test method as provided in 40 C.F.R. § 63.658(k)

Date: March 31, 2023

Emission Sources - Maximum Allowable Emission Rates

Permit Number 18978, PSDTX752M5, N162M1

This table lists the maximum allowable emission rates and all sources of air contaminants on the applicant's property covered by this permit. The emission rates shown are those derived from information submitted as part of the application for permit and are the maximum rates allowed for these facilities, sources, and related activities. Any proposed increase in emission rates may require an application for a modification of the facilities covered by this permit.

Air Contaminants Data

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
QE1001B	Furnace 1	NO _x	30.30	121.26
		CO	24.71	31.34
		SO ₂	0.30	1.31
		VOC	0.30	0.75
		PM	1.00	3.50
		PM ₁₀	1.00	3.50
		PM _{2.5}	1.00	3.50
QE1002B	Furnace 2	NO _x	30.30	121.26
		CO	24.71	31.34
		SO ₂	0.30	1.31
		VOC	0.30	0.75
		PM	1.00	3.50
		PM ₁₀	1.00	3.50
		PM _{2.5}	1.00	3.50
QE1003B	Furnace 3	NO _x	30.30	121.26
		CO	24.71	31.34
		SO ₂	0.30	1.31
		VOC	0.30	0.75
		PM	1.00	3.50
		PM ₁₀	1.00	3.50
		PM _{2.5}	1.00	3.50

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
QE1004B	Furnace 4	NO _x	30.30	121.26
		CO	24.71	31.34
		SO ₂	0.30	1.31
		VOC	0.30	0.75
		PM	1.00	3.50
		PM ₁₀	1.00	3.50
		PM _{2.5}	1.00	3.50
QE1005B	Furnace 5	NO _x	30.30	121.26
		CO	24.71	31.34
		SO ₂	0.30	1.31
		VOC	0.30	0.75
		PM	1.00	3.50
		PM ₁₀	1.00	3.50
		PM _{2.5}	1.00	3.50
QE1006B	Furnace 6	NO _x	30.30	121.26
		CO	24.71	31.34
		SO ₂	0.30	1.31
		VOC	0.30	0.75
		PM	1.00	3.50
		PM ₁₀	1.00	3.50
		PM _{2.5}	1.00	3.50

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
QE1007B	Furnace 7	NO _x	30.30	121.26
		CO	24.71	31.34
		SO ₂	0.30	1.31
		VOC	0.30	0.75
		PM	1.00	3.50
		PM ₁₀	1.00	3.50
		PM _{2.5}	1.00	3.50
QE1008B	Furnace 8	NO _x	30.30	121.26
		CO	24.71	31.34
		SO ₂	0.30	1.31
		VOC	0.30	0.75
		PM	1.00	3.50
		PM ₁₀	1.00	3.50
		PM _{2.5}	1.00	3.50
QE1009B	Furnace 9	NO _x	31.75	126.58
		CO	33.92	34.45
		SO ₂	0.36	1.56
		VOC	0.30	0.75
		PM	2.10	6.57
		PM ₁₀	2.10	6.57
		PM _{2.5}	2.10	6.57

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
QE1010B	Furnace 10	NO _x (Routine)	9.00	24.09
		NO _x (Decoke / Hot stand by)	12.50	
		NO _x (MSS)	14.00	
		CO	20.36	81.76
		SO ₂	0.35	1.42
		VOC	0.61	1.50
		PM	4.30	17.25
		PM ₁₀	4.30	17.25
		PM _{2.5}	4.30	17.25
		NH ₃	3.11	13.62
QE1011B	Furnace 11	NO _x (Routine)	9.00	24.09
		NO _x (Decoke / Hot stand by)	12.50	
		NO _x (MSS)	14.00	
		CO	20.36	81.76
		SO ₂	0.35	1.42
		VOC	0.61	1.50
		PM	4.30	17.25
		PM ₁₀	4.30	17.25
		PM _{2.5}	4.30	17.25
		NH ₃	3.11	13.62
QE5802UA	Boiler A	NO _x	22.50	89.70
		CO	20.14	30.27
		SO ₂	0.14	0.61
		VOC	1.43	1.91
		PM	0.34	1.49
		PM ₁₀	0.34	1.49
		PM _{2.5}	0.34	1.49

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
QE5802UB	Boiler B	NO _x	22.50	89.70
		CO	20.14	30.27
		SO ₂	0.14	0.61
		VOC	1.43	1.91
		PM	0.34	1.49
		PM ₁₀	0.34	1.49
		PM _{2.5}	0.34	1.49
QE6410F	Pyrolysis Gasoline IFR Tank	VOC	2.12	5.95
QE2410F	Wash Oil Drum	VOC	0.52	0.02
QE1416F	Decoking Drum	CO (8)	877.90	—
		PM	33.41	—
		PM ₁₀ (8)	33.41	—
		PM _{2.5} (8)	16.37	—
		VOC	2.05	—
QE1423F	Decoking Drum	CO	877.90	—
		PM	33.41	—
		PM ₁₀	33.41	—
		PM _{2.5}	16.37	—
		VOC	2.05	—
QE1416F and QE1423F	QE1416F and QE1423F	CO	—	388.47
		PM	—	13.43
		PM ₁₀	—	13.43
		PM _{2.5}	—	6.51
		VOC	—	3.78

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
QE7801U	Cooling Tower (5)	VOC	7.88	5.34
		PM	2.67	11.69
		PM ₁₀	1.31	5.73
		PM _{2.5}	0.01	0.02
QE3418F	MAPD Decoke Pot	CO	17.30	0.31
QE3050B	ARU Flare	CO (PSD)	21.00	8.98
		NO _x (PSD)	4.04	1.73
		SO ₂	0.10	0.10
		VOC	15.02	1.38
QE3050MAINT	ARU Flare Maintenance	CO	50.65	1.27
		NO _x	9.74	0.24
		SO ₂	0.10	0.10
		VOC	78.63	1.97
QE8050B	Elevated Flare	CO (PSD)	266.80	87.66
		NO _x (PSD)	85.21	30.11
		SO ₂	81.32	4.25
		VOC	50.83	11.89
QE8050MAINT	Elevated Flare Maintenance	CO	82.50	0.30
		NO _x	16.16	0.10
		SO ₂	101.78	0.06
		VOC	58.18	0.15
QEH2FLARE	Hydrogen Flare	CO	93.84	56.31
		NO _x	32.87	19.72
		VOC	5.99	3.59
		SO ₂	0.01	0.01
QE7412F	Wash Oil Tank	VOC	0.70	0.08
QELOAD	Organic Loading	VOC	0.16	0.03

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
QESTORE	Organic Storage	VOC	1.33	1.01
QE8001A	Wastewater System	VOC	0.35	1.55
QELAB	Sampling	VOC	7.04	2.25
QEFUG	Process Fugitives (6)	VOC	19.76	86.45
		NH ₃	0.12	0.54
		Chlorine	0.04	0.17
QEANALYZ5	Main Flare Analyzer	VOC	<0.01	<0.01
QEANALYZ2	Main Flare HRVOC Analyzer	NO _x	0.01	0.01
		CO	0.01	0.01
		VOC	0.01	0.01
QE1ANLYZR4	Furnace 10-11 Analyzers	NO _x	0.01	0.01
		CO	0.01	0.01
		VOC	0.04	0.17
QEUNIT	Dock Thermal Oxidizer (7)	NO _x (PSD)	14.68	4.70
		CO (PSD)	17.73	6.25
		VOC	23.77	7.22
		PM	0.01	0.02
		PM ₁₀	0.01	0.02
		PM _{2.5}	0.01	0.02
PW7614JA	Emergency Engine	NO _x	15.10	1.70
		CO	3.25	0.37
		VOC	1.22	0.14
		SO ₂	1.00	0.11
		PM	1.07	0.12
		PM ₁₀	1.07	0.12
		PM _{2.5}	1.07	0.12

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
PW7605JB	Emergency Engine	NO _x	15.84	6.94
		CO	3.63	1.59
		VOC	0.47	0.20
		SO ₂	5.34	2.34
		PM	0.46	0.20
		PM ₁₀	0.46	0.20
		PM _{2.5}	0.46	0.20
PW7605JC	Emergency Engine	NO _x	15.84	6.94
		CO	3.63	1.59
		VOC	0.47	0.20
		SO ₂	5.34	2.34
		PM	0.46	0.20
		PM ₁₀	0.46	0.20
		PM _{2.5}	0.46	0.20
7407F	Sulfuric Acid Tank	H ₂ SO ₄	0.01	0.01
7701LL3F	Sulfuric Acid Tank	H ₂ SO ₄	0.01	0.01
QEPGCIN	PGC Seal Oil/Lube Oil	VOC	0.32	1.38
QENH3SC	Ammonia Clearing	NH ₃	1.00	0.01

- (1) Emission point identification - either specific equipment designation or emission point number from plot plan.
(2) Specific point source name. For fugitive sources, use area name or fugitive source name.
(3) VOC - volatile organic compounds as defined in Title 30 Texas Administrative Code § 101.1
NO_x - total oxides of nitrogen
SO₂ - sulfur dioxide
PM - total particulate matter, suspended in the atmosphere, including PM₁₀ and PM_{2.5}, as represented
PM₁₀ - total particulate matter equal to or less than 10 microns in diameter, including PM_{2.5}, as represented
PM_{2.5} - particulate matter equal to or less than 2.5 microns in diameter
CO - carbon monoxide
NH₃ - ammonia
H₂SO₄ - sulfuric acid
(4) Compliance with annual emission limits (tons per year) is based on a 12 month rolling period.
(5) Emission rate is an estimate only and is enforceable through compliance with the permit Special Conditions applicable to the cooling tower and with cooling water circulation flow rates represented in the permit application.
(6) Emission rate is an estimate only and is enforceable through compliance with the permit Special Conditions applicable to fugitives and with representations in the permit application.

Emission Sources - Maximum Allowable Emission Rates

- (7) The dock thermal oxidizer is owned and operated by LyondellBasell Acetyls, LLC, under Permit Number 4751.
- (8) The Decoking Drum (EPN QE1416F) CO, PM₁₀, and PM_{2.5} emissions were subject to PSD review in TCEQ NSR Projects 77035, 77466, 160526, and 166225.

Date: June 30, 2023



Texas Commission on Environmental Quality Air Quality Permit

A Permit Is Hereby Issued To
Equistar Chemicals, LP
Authorizing the Continued Operation of
Equistar Chemicals La Porte Complex
Located at La Porte, Harris County, Texas
Latitude 29° 42' 39" Longitude -95° 3' 45"

Permit: GHGPSDTX12

Issuance Date: April 26, 2019



For the Commission

1. **Facilities** covered by this permit shall be constructed and operated as specified in the application for the permit. All representations regarding construction plans and operation procedures contained in the permit application shall be conditions upon which the permit is issued. Variations from these representations shall be unlawful unless the permit holder first makes application to the Texas Commission on Environmental Quality (commission) Executive Director to amend this permit in that regard and such amendment is approved. [Title 30 Texas Administrative Code (TAC) Section 116.116 (30 TAC § 116.116)]¹
2. **Voiding of Permit.** A permit or permit amendment is automatically void if the holder fails to begin construction within 18 months of the date of issuance, discontinues construction for more than 18 months prior to completion, or fails to complete construction within a reasonable time. Upon request, the executive director may grant an 18-month extension. Before the extension is granted the permit may be subject to revision based on best available control technology, lowest achievable emission rate, and netting or offsets as applicable. One additional extension of up to 18 months may be granted if the permit holder demonstrates that emissions from the facility will comply with all rules and regulations of the commission, the intent of the Texas Clean Air Act (TCAA), including protection of the public's health and physical property; and (b)(1) the permit holder is a party to litigation not of the permit holder's initiation regarding the issuance of the permit; or (b)(2) the permit holder has spent, or committed to spend, at least 10 percent of the estimated total cost of the project up to a maximum of \$5 million. A permit holder granted an extension under subsection (b)(1) of this section may receive one subsequent extension if the permit holder meets the conditions of subsection (b)(2) of this section. [30 TAC § 116.120]
3. **Construction Progress.** Start of construction, construction interruptions exceeding 45 days, and completion of construction shall be reported to the appropriate regional office of the commission not later than 15 working days after occurrence of the event. [30 TAC § 116.115(b)(2)(A)]
4. **Start-up Notification.** The appropriate air program regional office shall be notified prior to the commencement of operations of the facilities authorized by the permit in such a manner that a representative of the commission may be present. The permit holder shall provide a separate notification for the commencement of operations for each unit of phased construction, which may involve a series of units commencing operations at different times. Prior to operation of the facilities authorized by the permit, the permit holder shall identify the source or sources of allowances to be utilized for compliance with Chapter 101, Subchapter H, Division 3 of this title (relating to Mass Emissions Cap and Trade Program). [30 TAC § 116.115(b)(2)(B)]
5. **Sampling Requirements.** If sampling is required, the permit holder shall contact the commission's Office of Compliance and Enforcement prior to sampling to obtain the proper data forms and procedures. All sampling and testing procedures must be approved by the executive director and coordinated with the regional representatives of the commission. The permit holder is also responsible for providing sampling facilities and conducting the sampling operations or contracting with an independent sampling consultant. [30 TAC § 116.115(b)(2)(C)]
6. **Equivalency of Methods.** The permit holder must demonstrate or otherwise justify the equivalency of emission control methods, sampling or other emission testing methods, and monitoring methods proposed as alternatives to methods indicated in the conditions of the permit. Alternative methods shall be applied for in writing and must be reviewed and approved by the executive director prior to their use in fulfilling any requirements of the permit. [30 TAC § 116.115(b)(2)(D)]
7. **Recordkeeping.** The permit holder shall maintain a copy of the permit along with records containing the information and data sufficient to demonstrate compliance with the permit, including production records and

operating hours; keep all required records in a file at the plant site. If, however, the facility normally operates unattended, records shall be maintained at the nearest staffed location within Texas specified in the application; make the records available at the request of personnel from the commission or any air pollution control program having jurisdiction in a timely manner; comply with any additional recordkeeping requirements specified in special conditions in the permit; and retain information in the file for at least two years following the date that the information or data is obtained. [30 TAC § 116.115(b)(2)(E)]

8. **Maximum Allowable Emission Rates.** The total emissions of air contaminants from any of the sources of emissions must not exceed the values stated on the table attached to the permit entitled "Emission Sources-- Maximum Allowable Emission Rates." [30 TAC § 116.115(b)(2)(F)] ¹
9. **Maintenance of Emission Control.** The permitted facilities shall not be operated unless all air pollution emission capture and abatement equipment is maintained in good working order and operating properly during normal facility operations. The permit holder shall provide notification in accordance with 30 TAC §101.201, 101.211, and 101.221 of this title (relating to Emissions Event Reporting and Recordkeeping Requirements; Scheduled Maintenance, Startup, and Shutdown Reporting and Recordkeeping Requirements; and Operational Requirements). [30 TAC§ 116.115(b)(2)(G)]
10. **Compliance with Rules.** Acceptance of a permit by an applicant constitutes an acknowledgment and agreement that the permit holder will comply with all rules and orders of the commission issued in conformity with the TCAA and the conditions precedent to the granting of the permit. If more than one state or federal rule or regulation or permit condition is applicable, the most stringent limit or condition shall govern and be the standard by which compliance shall be demonstrated. Acceptance includes consent to the entrance of commission employees and agents into the permitted premises at reasonable times to investigate conditions relating to the emission or concentration of air contaminants, including compliance with the permit. [30 TAC § 116.115(b)(2)(H)]
11. **This** permit may not be transferred, assigned, or conveyed by the holder except as provided by rule. [30 TAC § 116.110(e)]
12. **There** may be additional special conditions attached to a permit upon issuance or modification of the permit. Such conditions in a permit may be more restrictive than the requirements of Title 30 of the Texas Administrative Code. [30 TAC § 116.115(c)]
13. **Emissions** from this facility must not cause or contribute to "air pollution" as defined in Texas Health and Safety Code (THSC) §382.003(3) or violate THSC § 382.085. If the executive director determines that such a condition or violation occurs, the holder shall implement additional abatement measures as necessary to control or prevent the condition or violation.
14. **The** permit holder shall comply with all the requirements of this permit. Emissions that exceed the limits of this permit are not authorized and are violations of this permit. ¹

¹ Please be advised that the requirements of this provision of the general conditions may not be applicable to greenhouse gas emissions.

**PREVENTION OF SIGNIFICANT DETERIORATION PERMIT
FOR GREENHOUSE GAS EMISSIONS
ISSUED PURSUANT TO THE REQUIREMENTS AT 40 CFR § 52.21**

U.S. ENVIRONMENTAL PROTECTION AGENCY, REGION 6

PSD PERMIT NUMBER: PSD-TX-752-GHG

PERMITTEE: Equistar Chemicals, LP
P.O. Drawer D
Deer Park, TX 77536

FACILITY NAME: Equistar Chemicals, LP
La Porte Complex

FACILITY LOCATION: 1515 Miller Cut-Off Road
La Porte, TX 77571

Pursuant to the provisions of the Clean Air Act (CAA), Subchapter I, Part C (42 U.S.C. Section 7470, *et. Seq.*), and the Code of Federal Regulations (CFR) Title 40, Section 52.21, and the Federal Implementation Plan at 40 CFR § 52.2305 (effective May 1, 2011 and published at 76 FR 25178), the U.S. Environmental Protection Agency, Region 6 is issuing a *Prevention of Significant Deterioration* (PSD) permit to Equistar Chemicals, LP for Greenhouse Gas (GHG) emissions. The Permit applies to the addition of two new cracking furnaces and supporting equipment at their Olefins unit (QE-1) at the La Porte Complex located in La Porte, Texas.

Equistar is authorized to construct additional equipment at the QE-1 Olefins unit as described herein, in accordance with the permit application (and plans submitted with the permit application), the federal PSD regulations at 40 CFR § 52.21, and other terms and conditions set forth in this PSD permit in conjunction with the corresponding Texas Commission on Environmental Quality (TCEQ) PSD permit No. PSD-TX-752M5. Failure to comply with any condition or term set forth in this PSD Permit may result in enforcement action pursuant to Section 113 of the Clean Air Act (CAA). This PSD Permit does not relieve Equistar of the responsibility to comply with any other applicable provisions of the CAA (including applicable implementing regulations in 40 CFR Parts 51, 52, 60, 61, 72 through 75, and 98) or other federal and state requirements (including the state PSD program that remains under approval at 40 CFR § 52.2303).

In accordance with 40 CFR §124.15(b)(3), this PSD Permit becomes effective immediately upon issuance of this final decision.


David F. Garcia, Acting Director
Multimedia Planning and Permitting Division

3/14/13
Date

Equistar Chemical Company LP (PSD-TX-752-GHG)
Prevention of Significant Deterioration Permit
For Greenhouse Gas Emissions
Final Permit Conditions

PROJECT DESCRIPTION

The proposed modification will add two new cracking furnaces and associated equipment to the existing Olefin unit (QE-1) at the La Porte Complex in La Porte, Texas. The Olefins unit (QE-1) receives hydrocarbon feedstock where it is fed into pyrolysis furnaces. The pyrolysis furnaces, which are fired on natural gas and/or process gas, heat the feedstock to a high temperature where it cracks and reforms as alkenes or olefins. The proposed GHG PSD permit allows Equistar to expand their Olefins unit (QE-1) by constructing two new cracking furnaces and supporting equipment at the existing facility at the La Porte Complex located in La Porte, Harris County, Texas. The modification increases the plant nominal ethylene production capacity from 875,000 tpy to 1,280,000 tpy. This equates to approximately 405,000 tons per year nominal capacity to produce ethylene. The plant also produces other products at varying capacities, but ethylene is the predominant product.

The process effluent from the furnaces is quenched and scrubbed with water. Pyrolysis gasoline is removed as a product during water scrubbing. The quenched gases are compressed, dried, and cooled prior to beginning a series of purification/distillation steps. A hydrogen rich stream from the final chilling step is further purified in a pressure swing absorber to produce hydrogen product.

The purification section consists of a demethanizer, deethanizer, acetylene recovery unit (ARU), depropanizer, methyl acetylene propadiene conversion unit (MAPD), debutanizer, C3 splitter, and C2 splitter. This equipment separates the process gas stream into acetylene, ethylene, propylene, mixed C4 hydrocarbons, and pyrolysis gasoline (pygas) products. Ethane and propane recovered during distillation and separation are recycled as feedstock into the pyrolysis furnaces.

Periodically, coke (primarily carbon) deposited in the furnace tubes must be removed. This decoking operation consists of two steps, of which only the second produces GHG emissions:

- An initial steam purge which moves hydrocarbons and coke particles further into the process, then
- A burn step which produces CO and CO₂, and routes the vent stream including coke particles to a cyclone separator.

EQUIPMENT LIST

The following devices are subject to this GHG PSD permit.

FIN	EPN	Description
QE1010B QE1011B	QE1010B QE1011B	Two Cracking Furnaces (Combustion Units). Each furnace has a maximum rated capacity of 600 MMBtu/hr, and will be equipped with a Selective Catalytic Reduction (SCR) system.
QE1416FB	QE1416FB	Decoking Drum (Combustion Unit Vent).
QE3050B	QE3050B	Acetylene Recovery Unit (ARU) Flare (Combustion Units).
QE8050B	QE8050B	Elevated Flare (Combustion Unit).
QEFUG	QEFUG	Process Fugitives

I. GENERAL PERMIT CONDITIONS

A. PERMIT EXPIRATION

As provided in 40 CFR §52.21(r), this PSD Permit shall become invalid if construction:

1. is not commenced (as defined in 40 CFR §52.21(b)(9)) within 18 months after the approval takes effect; or
2. is discontinued for a period of 18 months or more; or
3. is not completed within a reasonable time.

Pursuant to 40 CFR §52.21(r), EPA may extend the 18-month period upon a written satisfactory showing that an extension is justified.

B. PERMIT NOTIFICATION REQUIREMENTS

Permittee shall notify EPA Region 6 in writing or by electronic mail of the:

1. date construction is commenced, postmarked within 30 days of such date;
2. actual date of initial startup, as defined in 40 CFR §60.2, postmarked within 15 days of such date; and
3. date upon which initial performance tests will commence, in accordance with the provisions of Section V, postmarked not less than 30 days prior to such date. Notification may be provided with the submittal of the performance test protocol required pursuant to Condition V.B.

C. FACILITY OPERATION

At all times, including periods of startup, shutdown, and maintenance, Permittee shall, to the extent practicable, maintain and operate the facility including associated air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the EPA, which may include, but is not limited to, monitoring results, review of operating maintenance procedures and inspection of the facility.

D. MALFUNCTION REPORTING

1. Permittee shall notify EPA by mail within 48 hours following the discovery of any failure of air pollution control equipment, process equipment, or of a process to operate in a normal manner, which results in an increase in GHG emissions above the allowable emission limits stated in Section II and III of this permit.

2. Within 10 days of the restoration of normal operations after any failure described in I.D.1., Permittee shall provide a written supplement to the initial notification that includes a description of the malfunctioning equipment or abnormal operation, the date of the initial malfunction, the period of time over which emissions were increased due to the failure, the cause of the failure, the estimated resultant emissions in excess of those allowed in Section II and III, and the methods utilized to mitigate emissions and restore normal operations.
3. Compliance with this malfunction notification provision shall not excuse or otherwise constitute a defense to any violation of this permit or any law or regulation such malfunction may cause.

E. RIGHT OF ENTRY

EPA authorized representatives, upon the presentation of credentials, shall be permitted:

1. to enter the premises where the facility is located or where any records are required to be kept under the terms and conditions of this PSD Permit;
2. during normal business hours, to have access to and to copy any records required to be kept under the terms and conditions of this PSD Permit;
3. to inspect any equipment, operation, or method subject to requirements in this PSD Permit; and,
4. to sample materials and emissions from the source(s).

F. TRANSFER OF OWNERSHIP

In the event of any changes in control or ownership of the facilities to be constructed, this PSD Permit shall be binding on all subsequent owners and operators. Permittee shall notify the succeeding owner and/or operator of the existence of the PSD Permit and its conditions by letter; a copy of the letter shall be forwarded to EPA Region 6 within thirty days of the letter signature.

G. SEVERABILITY

The provisions of this PSD Permit are severable, and, if any provision of the PSD Permit is held invalid, the remainder of this PSD Permit shall not be affected.

H. ADHERENCE TO APPLICATION AND COMPLIANCE WITH OTHER ENVIRONMENTAL LAWS

Permittee shall construct this project in compliance with this PSD Permit, the application on which this permit is based, the TCEQ PSD Permit PSD-TX-752M5 (when issued) and all other applicable federal, state, and local air quality regulations. This PSD permit does not release the Permittee from any liability for compliance with other applicable federal, state and local environmental laws and regulations, including the Clean Air Act.

I. ACRONYMS AND ABBREVIATIONS

ARU	Acetylene Recovery Unit
AVO	Auditory, Visual, and Olfactory
BACT	Best Available Control Technology
C ₃ +	Hydrocarbon with Three or More Carbon Atoms
CAA	Clean Air Act
CC	Carbon Content
CCS	Carbon Capture and Sequestration
CEMS	Continuous Emissions Monitoring System
CFR	Code of Federal Regulations
CH ₄	Methane
CO ₂	Carbon Dioxide
CO ₂ e	Carbon Dioxide Equivalent
dscf	Dry Standard Cubic Foot
EF	Emission Factor
EPN	Emission Point Number
FIN	Facility Identification Number
FR	Federal Register
GCV	Gross Calorific Value
GHG	Greenhouse Gas
gr	Grains
GWP	Global Warming Potential
HHV	High Heating Value
hr	Hour
HRSG	Heat Recovery Steam Generating
LAER	Lowest Achievable Emission Rate
lb	Pound
LDAR	Leak Detection and Repair
MAPD	Methyl Acetylene Propadiene
MMBtu	Million British Thermal Units
MSS	Maintenance, Start-up and Shutdown
NAAQS	National Ambient Air Quality Standards
NNSR	Nonattainment New Source Review
N ₂ O	Nitrous Oxides
NSPS	New Source Performance Standards
PSD	Prevention of Significant Deterioration
QA/QC	Quality Assurance and/or Quality Control
SCFH	Standard Cubic Feet per Hour
SCR	Selective Catalytic Reduction
TAC	Texas Administrative Code
TCEQ	Texas Commission on Environmental Quality
TOC	Total Organic Carbon
TPY	Tons per Year
USC	United States Code
VDU	Vapor Destruction Unit
VHP	Very High Pressure
VOC	Volatile Organic Compound

II. Annual Emission Limits

Annual emissions, in tons per year (TPY) on a 12-month, rolling average, shall not exceed the following:

Table 1. Annual Emission Limits

FIN	EPN	Description	GHG Mass Basis		TPY CO ₂ e ^{1,2}	BACT Requirements
				TPY ¹		
QE1010B	QE1010B	Cracking Furnace	CO ₂	281,506	281,766	Furnace Gas Exhaust Temperature ≤ 302 °F. Maintain Thermal Efficiency of 91%. See permit condition III.A.1.n. through p.
			CH ₄	5		
			N ₂ O	0.5		
QE1011B	QE1011B	Cracking Furnace	CO ₂	281,506	281,766	Furnace Gas Exhaust Temperature ≤ 302 °F. Maintain Thermal Efficiency of 91%. See permit condition III.A.1.n. through p.
			CH ₄	5		
			N ₂ O	0.5		
QE3050B	QE3050B	ARU Flare	CO ₂	6,037	6,121	Good Combustion Practices. See permit condition III.A.2.
			CH ₄	4		
			N ₂ O	Negligible ³		
QE8050B	QE8050B	Elevated Flare	CO ₂	32,563	33,025	Good Combustion Practices. See permit condition III.A.2.
			CH ₄	22		
			N ₂ O	Negligible ³		
QE1416FB	QE1416FB	Decoking Drum	CO ₂	1,047	1,047	Good Combustion Practices. See permit condition III.A.1.q. and r.
QEFUG	QEFUG	Fugitive Process Emissions	CH ₄	Not Applicable	Not Applicable	Implementation of LDAR program. See permit condition III.A.3.
Totals⁴			CO ₂	602,659	CO₂e 603,872	
			CH ₄	43		
			N ₂ O	1.0		

1. The TPY emission limits specified in this table are not to be exceeded for this facility and include emissions from the facility during all operations and include MSS activities.
2. Global Warming Potentials (GWP): CH₄ = 21, N₂O = 310
3. All values indicated as negligible are less than 0.01 TPY with appropriate rounding.
4. Total emissions include the PTE for fugitive emissions. Totals are given for informational purposes only and do not constitute emission limits.

III. SPECIAL PERMIT CONDITIONS

A. Emission Unit Work Practice Standards, Operational Requirements, and Monitoring

1. Cracking Furnaces (QE1010B and QE1011B) and Decoking Drum (QE1416FB)

- a. The cracking furnaces shall combust pipeline quality natural gas and/or plant tail gas (fuel gas).
- b. All fuel combustion units identified in this permit shall have fuel metering for each fuel, and Permittee shall:
 - i. Measure and record the fuel flow rate using an operational non-resettable elapsed flow meter or by recording the flow rate data in an electronic format with individual flow measurements being taken no less frequently than once every 15 minutes. Electronic data may be reduced to hourly averages for recordkeeping purposes.
 - ii. Record the total fuel combusted for each fuel monthly.
 - iii. The fuel gross calorific value (GCV) [high heat value (HHV)], carbon content and, if applicable, molecular weight, shall be determined, at a minimum, hourly using an online chromatograph, or by the procedures contained in 40 CFR Part 98.34(b)(3). Records of the fuel GCV shall be maintained for a minimum period of five years. Upon request, Permittee shall provide a sample and/or analysis of the fuel that is fired in any unit covered by this permit at the time of the request, or shall allow a sample to be taken by EPA for analysis.
 - iv. The fuel flow of the fuel fired in the cracking furnaces (QE1010B and QE1011B) shall be continuously monitored and recorded.
- c. Permittee shall calibrate and perform preventative maintenance check of the fuel gas flow meters and document annually.
- d. Permittee shall install, operate, and maintain an O₂ analyzer on the furnace flue gas at a location downstream of the radiant sections of the furnaces, (QE1010B and QE1011B).
- e. Oxygen analyzers shall continuously monitor and record the excess oxygen concentration in the combustion gases. The monitoring data shall be reduced to hourly average concentrations at least once every day using a minimum of four equally spaced data points over each one-hour period. The individual average concentration shall be reduced to units of the permit allowable emission rates in pounds per hour and lb/MMBtu (hourly average) at least once every week.
- f. Permittee shall perform preventative maintenance check of oxygen control analyzers and document quarterly.
- g. The oxygen analyzers shall be quality-assured at least once per quarter using cylinder gas audits (CGAs) in accordance with 40 CFR Part 60, Appendix F, Procedure 1, § 5.1.2, with the following exception: a relative accuracy test audit is not required once every four quarters (i.e., two successive semiannual CGAs may be conducted).
- h. The Permittee will validate oxygen analyzers with zero and span gas at least weekly to maintain 1% accuracy.
- i. All analyzers identified in this section III.A.1. shall achieve 95 percent on-stream time or greater.

- j. Permittee shall utilize insulation materials where feasible to reduce heat loss.
- k. The cracking furnaces shall not exceed the one-hour maximum firing rate of 600 MMBtu/hr (HHV).
- l. The cracking furnaces shall not exceed an annual average firing rate of 550 MMBtu (HHV) per hour per furnace.
- m. A rolling 12 month average and the one-hour maximum firing rates shall be calculated daily to demonstrate compliance with the firing rate conditions in III.A.1.k. and III.A.1.l.
- n. Permittee shall continuously monitor and record the furnace gas exhaust temperature and flow rate hourly and limit the exhaust temperature to less than or equal to 302 °F on a 365-day rolling average basis. This stack temperature is for normal operations and does not include commissioning, startup, shutdown, and decoking operations.
- o. The Permittee shall maintain a minimum overall thermal efficiency of 91% on a 12-month rolling average basis, calculated monthly, for the furnaces (QE1010B and QE1011B) excluding periods of start-up, shutdown, malfunction, and decoking.
- p. The furnaces (QE1010B and QE1011B) will be continuously monitored for exhaust temperature, input fuel temperature, and stack oxygen. Thermal efficiency for furnaces will be calculated monthly from these parameters using equation G-1 from American Petroleum Institute (API) methods 560 (4th ed.) Annex G.
- q. The cracking furnace cell shall be decoked no more than 20 times per year per furnace. Records must be maintained of all decokes including the date and duration.
- r. CO₂ emissions from the decoking drum shall be limited to 1,047 tpy for both furnaces combined.
- s. Permittee shall calculate, on a monthly basis, the amount of CO₂ emitted from combustion in tons/yr using equation C-5 in 40 CFR Part 98 Subpart C, converted to short tons. Compliance shall be based on a 12-month rolling basis to be updated by the last day of the following month.
- t. Permittee shall calculate the CH₄ and N₂O emissions on a 12-month rolling basis to be updated by the last day of the following month. Permittee shall determine compliance with the CH₄ and N₂O emissions limits contained in this section using the default CH₄ and N₂O emission factors contained in Table C-2 and equation C-8 of 40 CFR Part 98 and the measured actual heat input (HHV), converted to short tons.
- u. Permittee shall calculate the CO₂e emissions on a 12-month rolling basis, based on the procedures and Global Warming Potentials (GWP) contained in Greenhouse Gas Regulations, 40 CFR Part 98, Subpart A, Table A-1, as published on October 30, 2009 (74 FR 56395). The record shall be updated by the last day of the following month.

2. Flares (QE3050B and QE8050B)

- a. The flares shall be designed to achieve a minimum destruction and removal efficiency (DRE) of 99.5% based on flowrate and gas composition measurements.
- b. GHG emissions shall be calculated as specified in 40 CFR Part 98 Subpart X § 98.253(b)(1) through (b)(3).
- c. The flares are continuous use flares. The flares are designed for control of routine venting, during maintenance, startup, and shutdown (MSS) activities, and upset conditions.

- d. The flares shall only combust pipeline natural gas in the pilots as a continuous stream.
- e. The flares are steam-assisted.
- f. Each flare shall be equipped with a flow meter which will determine the flow at least once each 15 minutes, and block one hour records will be maintained.
- g. Each flare shall be equipped with a gas composition analyzer which will provide the gas composition at least once each hour. The analyzer will be calibrated daily. Records of gas composition will be maintained.
- h. Permittee must record the time, date, fuel heat input (HHV) in MMBtu/hr and duration of each MSS event. The records must include hourly CH₄ emission levels as measured by the in-line gas analyzer (Gas chromatograph or equivalent with volumetric stack gas flowrate) and the calculations based on the actual heat input for the CO₂, N₂O, and CH₄ emissions during each MSS event. These records must be kept for five years following the date of each event.
- i. The flare shall be designed and operated in accordance with 40 CFR 60.18 specifications of minimum heating value of the waste gas, maximum tip velocity, and pilot flame monitoring. An infrared monitor is considered equivalent to a thermocouple for flame monitoring purposes.

3. Piping Fugitives (QEFUG)

- a. The Permittee shall implement the TCEQ 28LAER leak detection and repair (LDAR) program for fugitive emissions of methane.
- b. The Permittee shall implement an as-observed AVO program to monitor for fugitive emissions between instrumented monitoring as required in III.A.3.a above.
- c. The Permittee shall use high quality components and materials of construction that is compatible with the service in which they are employed.
- d. As an alternative to III.A.3.b., the Permittee may conduct remote sensing for detection of leaks in fuel gas and natural gas piping components that are in methane service in addition to instrumented detection under the TCEQ 28LAER LDAR program.

B. Continuous Emissions Monitoring Systems (CEMS)

- 1. As an alternative to Special Condition III.A.1.u., Permittee may install a CO₂ CEMS and volumetric stack gas flow monitoring system with an automated data acquisition and handling system for measuring and recording CO₂ emissions discharged to the atmosphere, and use these values to show compliance with the annual emission limit in Table 1.
- 2. Permittee shall ensure that all required CO₂ monitoring system/equipment are installed and all certification tests are completed on or before the earlier of 90 unit operating days or 180 calendar days after the date the unit commences operation.
- 3. Permittee shall ensure compliance with the specifications and test procedures for CO₂ emission monitoring system at stationary sources, 40 CFR Part 75, or 40 CFR Part 60, Appendix B, Performance Specification numbers 1 through 9, as applicable.

IV. Recordkeeping and Reporting

A. Records

1. In order to demonstrate compliance with the GHG emission limits in Table 1, the Permittee will monitor the following parameters and summarize the data on a calendar month basis.
 - a. Operating hours for all air emission sources;
 - b. Records of the fuel consumed by each source
 - c. The fuel usage for all combustion sources, using continuous fuel flow monitors (a group of equipment can utilize a common fuel flow meter, as long as actual fuel usage is allocated to the individual equipment based upon actual operating hours and maximum firing rate);
 - d. Semi-annual fuel sampling for natural gas, daily fuel sampling of plant tail gas, or other frequencies as allowed by 40 CFR Part 98 Subpart C §98.34(b)(3);
 - e. The hourly ethylene processing rate; and
 - f. Records of decoking cycle times in hours and frequency.
2. Permittee shall maintain a file of all records, data, measurements, reports, and documents related to the operation of the facility, including, but not limited to, the following: all records or reports pertaining to significant maintenance performed on any system or device at the facility; duration of startup, shutdown; the initial startup period for the emission units; pollution control units; malfunctions; all records relating to performance tests, calibrations, checks, and monitoring of combustion equipment; duration of an inoperative monitoring device and emission units with the required corresponding emission data; and all other information required by this permit recorded in a permanent form suitable for inspection. The file must be retained for not less than five years following the date of such measurements, maintenance, reports, and/or records.
3. Permittee shall maintain records of all GHG emission units and CO₂ emission certification tests and monitoring and compliance information required by this permit.
4. Permittee shall maintain records and submit a written report of all excess emissions to EPA semi-annually except when, more frequent reporting is specifically required by an applicable subpart or the Administrator or authorized representative, on a case-by-case basis, determines that more frequent reporting is necessary to accurately assess the compliance status of the source. The report is due on the 30th day following the end of each semi-annual period and shall include the following:
 - a. Time intervals, data and magnitude of the excess emissions, the nature and cause (if known), corrective actions taken and preventive measures adopted;
 - b. Applicable time and date of each period during which the monitoring equipment was inoperative (monitoring down-time);
 - c. A statement in the report of a negative declaration; that is; a statement when no excess emissions occurred or when the monitoring equipment has not been inoperative, repaired or adjusted;

- d. Any failure to conduct any required source testing, monitoring, or other compliance activities; and
 - e. Any violation of limitations on operation, including but not limited to restrictions on hours of operation of the emergency generator or fire pump.
5. Excess emissions shall be defined as any period in which the facility emissions exceed an emission limit set forth in this permit or a malfunction occurs causing such an emissions exceedance.
 6. Excess emissions indicated by GHG emission source certification testing or compliance monitoring shall be considered violations of the applicable emission limit for the purpose of this permit.
 7. Instruments and monitoring systems required by this PSD permit shall have a 95% on-stream time on an annual basis.
 8. All records required by this PSD Permit shall be retained for not less than 5 years following the date of such measurements, maintenance, and reporting.

V. Initial Performance Testing Requirements:

- A. The Permittee shall perform stack sampling and other testing to establish the actual pattern and quantities of air contaminants being emitted into the atmosphere from the stacks of the Cracking Furnaces (QE1010B and QE1011B) to determine the initial compliance with the CO₂ emission limits established in this permit. Sampling shall be conducted in accordance with 40 CFR § 60.8 and EPA Method 3a or 3b for the concentration of CO₂.
 1. Multiply the CO₂ hourly average emission rate determined under maximum operating test conditions by 8,760 hours.
 2. If the above calculated CO₂ emission total does not exceed the tons per year (TPY) specified on Table 1, no compliance strategy needs to be developed.
 3. If the above calculated CO₂ emission total exceeds the tons per year (TPY) specified in Table 1, the facility shall:
 - a. Document the potential to exceed in the test report; and
 - b. Explain within the report how the facility will assure compliance with the CO₂ emission limit listed in Table 1.
- B. No later than 180 days after initial startup, or restart after modification of the facility, performance tests(s) must be conducted and a written report of the performance testing results furnished to the EPA within 60 days after the testing is completed. Additional sampling may be required by TCEQ or EPA.
- C. Permittee shall submit a performance test protocol to afford the EPA the opportunity to have an observer present and/or to attend a pre-test meeting. If there is a delay in the original test date, the facility must provide at least 7 days prior notice of the rescheduled date of the performance test. The performance test shall be conducted in accordance with the submitted protocol, and any changes required by EPA.
- D. The cracking furnaces (QE1010B and QE1011B) shall operate at maximum production rates during stack emission testing.

- E. Performance tests must be conducted under such conditions to ensure representative performance of the affected facility. The owner or operator must make available to the EPA such records as may be necessary to determine the conditions of the performance tests.
- F. The owner or operator shall provide, or cause to be provided, performance testing facilities as follows:
 - 1. Sampling ports adequate for test methods applicable to this facility,
 - 2. Safe sampling platform(s),
 - 3. Safe access to sampling platform(s), and
 - 4. Utilities for sampling and testing equipment.
- G. Unless otherwise specified, each performance test shall consist of three separate runs using the applicable test method. Each run shall be conducted for the time and under the conditions specified in the applicable standard. For purposes of determining compliance with an applicable standard, the arithmetic mean of the results of the three runs shall apply.
- H. Emissions testing, as outlined above, shall be performed every five years, plus or minus 6 months, after the previous performance test was performed, or within 180 days after the issuance of a permit renewal, whichever comes later to verify continued performance at the permitted emission limits.

VI. Agency Notifications

Permittee shall submit GHG permit applications, permit amendments, and other applicable permit information to:

Multi Media Planning and Permitting Division
EPA Region 6
1445 Ross Avenue (6 PD-R)
Dallas, TX 75202
Email: Group R6AirPermits@EPA.gov

Permittee shall submit a copy of all compliance and enforcement correspondence as required by this Approval to Construct to:

Compliance and Enforcement Division
EPA Region 6
1445 Ross Avenue (6EN)
Dallas, TX 75202

Attachment A
Voluntary Update
Permit No. GHGPSDTX12

The following permit requirements are being changed in response to a request by letter received from Equistar Chemicals, LP on December 12, 2018. These requirements replace Table 1 in Section II, special conditions III.A.1.q and III.A.1.r for decoking drum (EPN QE1416FB) and its replacement decoking drum (EPN QE1423F) in permit PSD-TX-752-GHG dated March 14, 2013.

This attachment will not take effect until the decoking drum (EPN QE1423F) is in operation. The permittee shall show compliance of the permit PSD-TX-752-GHG dated March 14, 2013, and this attachment immediately when the decoking drum (EPN QE1423F) starts operation.

II. Annual Emission Limits

Annual emission, in tons per year (TPY) on a 12-month, rolling total, shall not exceed the following for the decoking drums (EPNs QE1416FB and QE1423F):

Table 1. Annual Emission Limits

FIN	EPN	Description	GHG Mass Basis		TPY CO ₂ e ^{1,2} [Note 1]	BACT Requirements
				TPY ¹		
QE1416FB	QE1416FB	Decoking Drum	CO ₂	-	-	NA
QE1423F	QE1423F	Decoking Drum	CO ₂ ⁵	3,805	3,805	Good Combustion Practices. See permit condition III.A.1.q and r.
Totals ⁴ [Note1]			CO ₂	605,417	CO ₂ e 606,483	
			CH ₄	43		
			N ₂ O	1.0		

1. The TPY emission limits specified in this table are not to be exceeded for this facility and include emissions from the facility during all operations and include MSS activities.
2. Global Warming Potentials (GWP): CO₂ = 1.
5. Emissions updated to be consistent with the records required by Title 30 Texas Administrative Code (30 TAC) section (§)116.164(b).

[Note 1]: The footnotes in Table 1 of this attachment supplement, but not overwrite the original footnotes in the permit PSD-TX-752-GHG dated March 14, 2013. Therefore, the footnote numbering is not consecutive in this attachment.

III. SPECIAL PERMIT CONDITIONS

A. Emission Unit Work Practice Standards, Operational Requirements, and Monitoring

1. Cracking Furnaces (QE1010B and QE1011B) and Decoking Drum (QE1423F):

- q. The cumulative total number of annual decokes for twin-cell Furnaces 10 and 11 shall not exceed 48 times per year. Records must be maintained of all decokes including the date and duration.
- r. CO₂ emissions from the decoking drum shall be limited to 3,805 tpy for all furnaces.

IV. Recordkeeping and Reporting

A. Records

9. Permit holders must keep records sufficient to demonstrate compliance with 30 Texas Administrative Code §116.164. Records shall be sufficient to demonstrate the amount of

emissions of GHGs from the source as a result of construction, a physical change or a change in method of operation does not require authorization under 30 TAC §116.164(a). Allowable emission rates and special conditions are updated to be consistent with records required by 30 TAC §116.164.

Date: April 26, 2019