NTRD Program Disclaimers

1. Disclaimer of Endorsement:

The posting herein of progress reports and final reports provided to TCEQ by its NTRD Grant Agreement recipients does not necessarily constitute or imply an endorsement, recommendation, or favoring by TCEQ or the State of Texas. The views and opinions expressed in said reports do not necessarily state or reflect those of TCEQ or the State of Texas, and shall not be used for advertising or product endorsement purposes.

2. Disclaimer of Liability:

The posting herein of progress reports and final reports provided to TCEQ by its NTRD Grant Agreement recipients does not constitute by TCEQ or the State of Texas the making of any warranty, express or implied, including the warranties of merchantability and fitness for a particular purpose, and such entities do not assume any legal liability or responsibility for the accuracy, completeness, or usefulness of any information,apparatus, product, or process disclosed, or represent that its use would not infringe privately owned rights.

New Technology Research & Development Program
Grant Contract 582-5-65591-0010

Tasks 4 & 5 Deliverable Report
Final Report

The preparation of this report is based on work funded in part
by the State of Texas through a Grant from the
Texas Commission on Environmental Quality.

Summary Report on Eaton Corporation's Hydraulic Launch Assist™ (HLA®) System

TCEQ Contract Number: 582-5-65591-0010

The preparation of this report is based on work funded in part
by the State of Texas
through a grant from the Texas Commission on Environmental Quality.

Vincent Duray
Eaton Corporation
April 18, 2007

Contents

Introduction 3
Background 3
HLA system concept and design intent 3
Previous design 4
Updated Design 5
End User Data Collection 5
System Sizing 6
Packaging 7
Open System 8
Charge Pump 8
Reservoir 9
Pump/Motor 9
Transfer Case 9
Filter Manifold 9
Sensors 9
Noise 9
Software 10
User Interface 10
Product Assurance 11
Design Summary 12
Hardware Procurement 12
Assembly 12
Testing 12
Procurement, Assembly and Test Summary 13
System Testing on Chassis Dynamometer 13
Table 1 ..... **Error! Bookmark not defined.**
Table 2 ..... **Error! Bookmark not defined.**
Table 3 ..... **Error! Bookmark not defined.**
Chassis Dynamometer Test Summary 18
Conclusion 19

Introduction

This report summarizes work funded in part by the State of Texas, through a grant from the Texas Commission on Environmental Quality. The activities and results discussed in the report include the design, hardware procurement, prototype assembly, component testing, and system dynamometer testing completed as a part of the Eaton Hydraulic Launch Assist™ (HLA®) system development as required by the aforementioned grant.

Background

An Eaton Hydraulic Launch Assist (HLA) system comprised of concept hardware has been previously installed in a class 8 refuse truck and tested. The concept hardware was not originally designed for use on heavy-duty trucks and therefore was not a commercially viable design. This report covers the upgrades made to the HLA system to make it more suitable for a refuse truck application.

The HLA system accomplishes its function by utilizing hydraulic components. Because of the high power density of hydraulic machines, they are well suited for application on heavy-duty vehicles. The frequent start and stop nature of refuse truck drive cycle makes it an ideal application for the HLA system.

HLA system concept and design intent

The HLA system can be used to improve the fuel economy, emissions, and/or performance of vehicles. The HLA system performs a process known as regenerative braking. The HLA system stores energy captured during braking and returns, or regenerates, that energy to assist in vehicle acceleration.

A vehicle in motion has a certain level of kinetic energy because of its mass (weight) and it's velocity. It may also have significant potential energy due to its elevation, e.g. after having climbed a high hill. Whenever a vehicle is brought to a stop, or descends a long hill, it is necessary to diminish its kinetic and potential energy in some way. The vehicle service brake performs that function. Typically, as the main braking system on a vehicle, the service brake consists of a number of friction pads that rub on a metallic drum or rotor at each wheel. When the service brake is applied, these brake pads are pushed against the drums or rotors with very high force. The resulting rubbing action, or friction, converts the vehicle's kinetic energy into heat. Hence, typical vehicle service brakes are only capable of “wasting” energy. The HLA system offers an energy efficient alternative.

The HLA system is designed to work in parallel with a vehicle's normal service brakes, not to replace them. Rather than wasting all a vehicle's kinetic and potential energy during a stop, the HLA system allows a portion of a vehicle's energy to be converted and stored as pressurized gas. During acceleration, the HLA system returns that stored energy to the vehicle by providing torque to the driveline to accelerate the vehicle. This process of temporarily storing braking energy and then returning it to the vehicle is commonly referred to as regenerative braking.

Through regenerative braking, the HLA system reduces the load on the vehicle's engine during acceleration. Engines have high fuel consumption and emissions generation during heavy acceleration. Reducing the engine's load during this mode significantly reduces fuel consumption and emissions. Consequently, the HLA system can provide a dramatic improvement in fuel economy and reduce exhaust emissions, especially when used in stop-and-go driving conditions. If used to improve vehicle performance, the HLA system adds torque to the driveline without significantly modifying engine operation. An additional benefit of the HLA system is increased brake life.

Previous design

The HLA system concept hardware consisted of a 250 cc/rev pump/motor connected to the vehicle driveline through a transfer case with a gear ratio that increased the pump/motor torque output. The pump/motor and transfer case were mounted to the truck separately. They were connected with an intermediate shaft containing a universal joint. The transfer case contained a dog clutch that could be engaged with the vehicle at a slow creep or disengaged at any speed.

The pump/motor had two fluid ports: one for low-pressure and the other for high-pressure. From the low-pressure connection, a hose assembly branched out to a pair of 40-liter low-pressure accumulators. Filter manifold assemblies were plumbed in line in each branch from the pump/motor to the low-pressure accumulators. Likewise, from the high pressure connection on the pump/motor a hose assembly branched out to a pair of 40-liter high-pressure accumulators (no filter manifold assemblies). This system architecture was a closed system, meaning that the hydraulic fluid was never at atmospheric pressure.

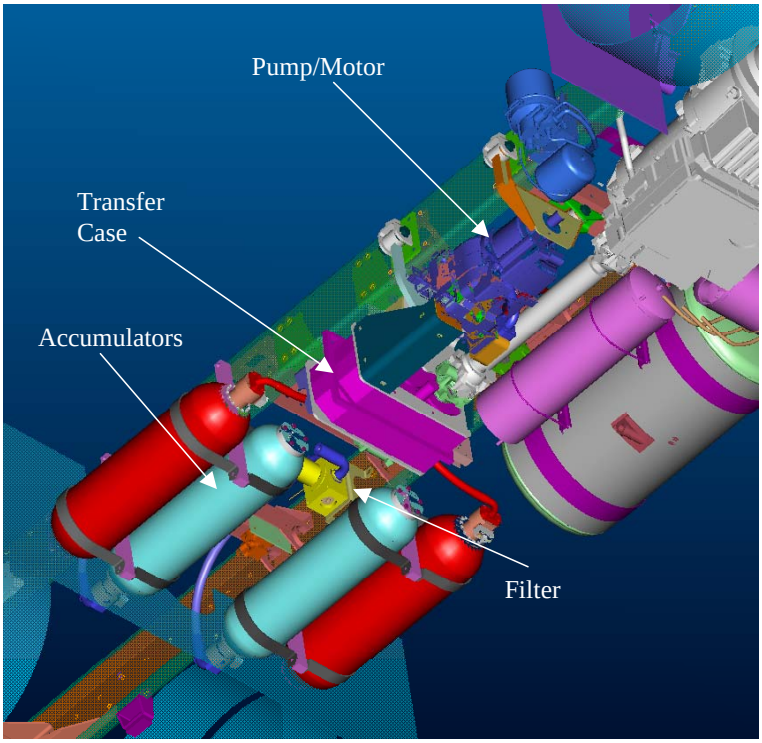

Figure 1: Concept prototype system before design improvements.

Updated Design

The design of the HLA system was updated to improve the system performance, manufacturability, serviceability, and vehicle packaging. Changes were made at the component, system, and vehicle level.

End User Data Collection

Vehicle driving behavior has a large influence on a vehicle's fuel consumption and emissions, and the ability of the HLA system to improve those metrics. In order to make the appropriate design decisions, information on real vehicle driving was needed.

Data acquisition equipment was placed on refuse trucks at a number of locations. Duty cycle data was recorded on a variety of routes and truck types during actual trash collection. This data was analyzed and the results used to help determine the optimum values for system parameters such as accumulator size, pressure ranges, and transfer case ratio.

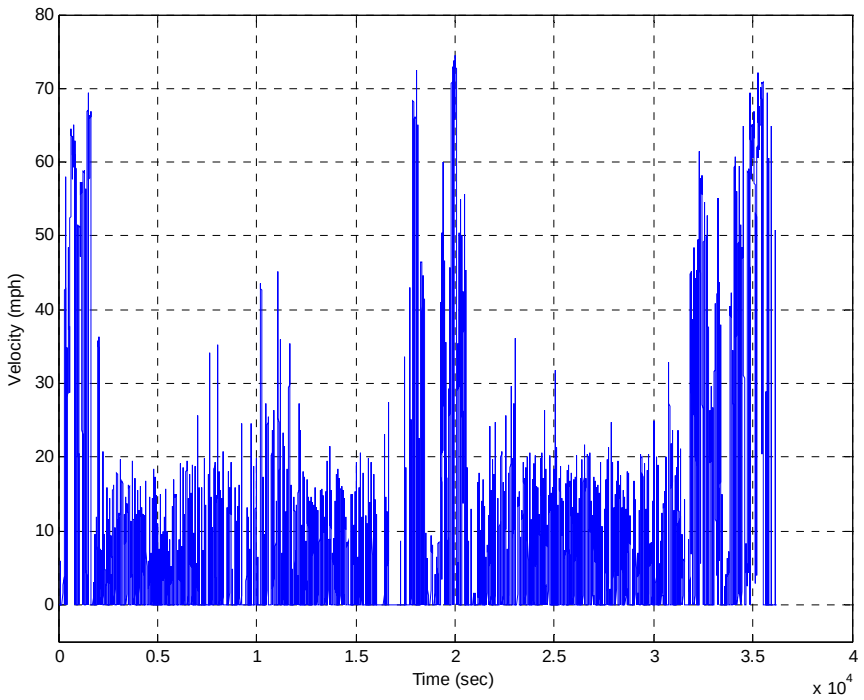

Figure 2: Example of end user drive cycle data.

System Sizing

An optimization procedure was created that uses the "real world" drive cycle data, knowledge of HLA system operation, and assumptions on the HLA system value to end-users. This procedure indicated that one 52-liter high-pressure accumulator was better than two 40-liter accumulators; there were slight improvements in performance with the second accumulator, but the benefits were not justified by the cost. The optimization also showed that in general, a lower transfer case ratio was better than a higher one; therefore, the transfer case ratio was changed.

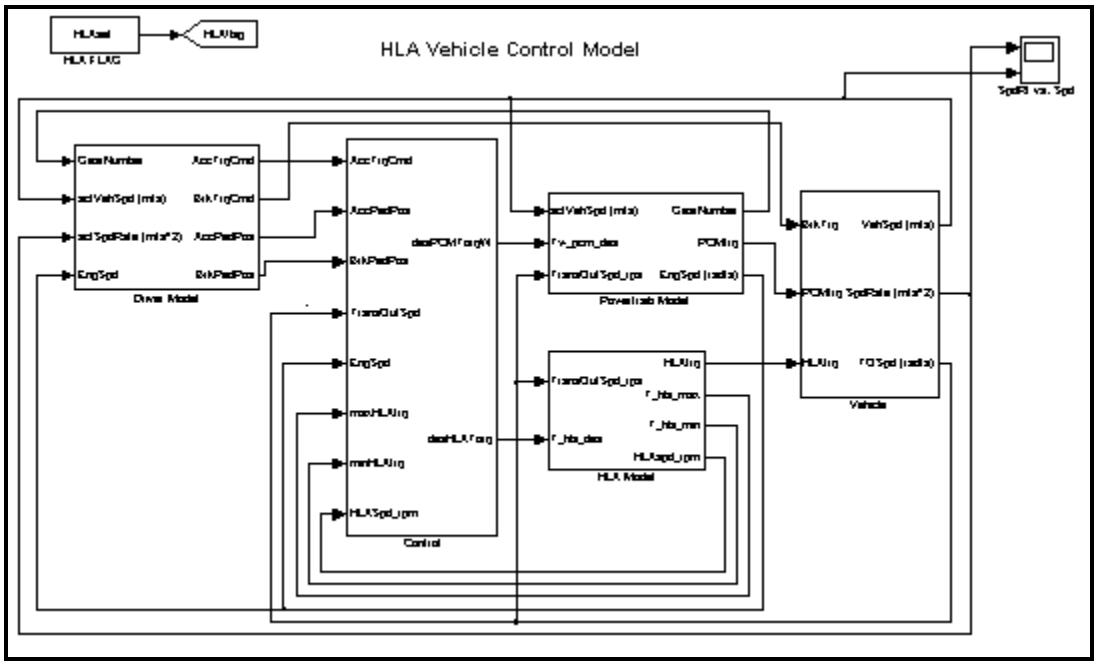

Figure 3: HLA system / vehicle model used to optimize the HLA system.

Packaging

Significant improvements were made to the packaging of the HLA system in the vehicle. The improvements can be summarized in the following points:

- The transfer case housing was redesigned to allow the pump/motor to mount directly to it, thereby eliminating the separate mounting brackets, extra shaft, alignment issues, and reducing the overall assembly length.
- The transfer case / pump/motor assembly was oriented vertically above the driveline placing the pump/motor between the truck frame rails. This leaves more external frame rail area available for the mounting of other necessary equipment, such as the refuse body and associated apparatus. It also puts the pump/motor in a protected position and more effectively blocks noise coming from the pump/motor.
- The fluid conveyance was reduced from 24 ft. of hose and dozens of connections on the concept prototype, to 9 feet of hose and 6 connection points. This improvement was possible because of the reduced number of accumulators and improved placement of components.
- The system oil filter was reduced from two separately mounted filters to one filter manifold integrated with the pump.
- The high-pressure accumulator was moved to a position behind the fuel tank, thereby sharing that space on the frame rail.

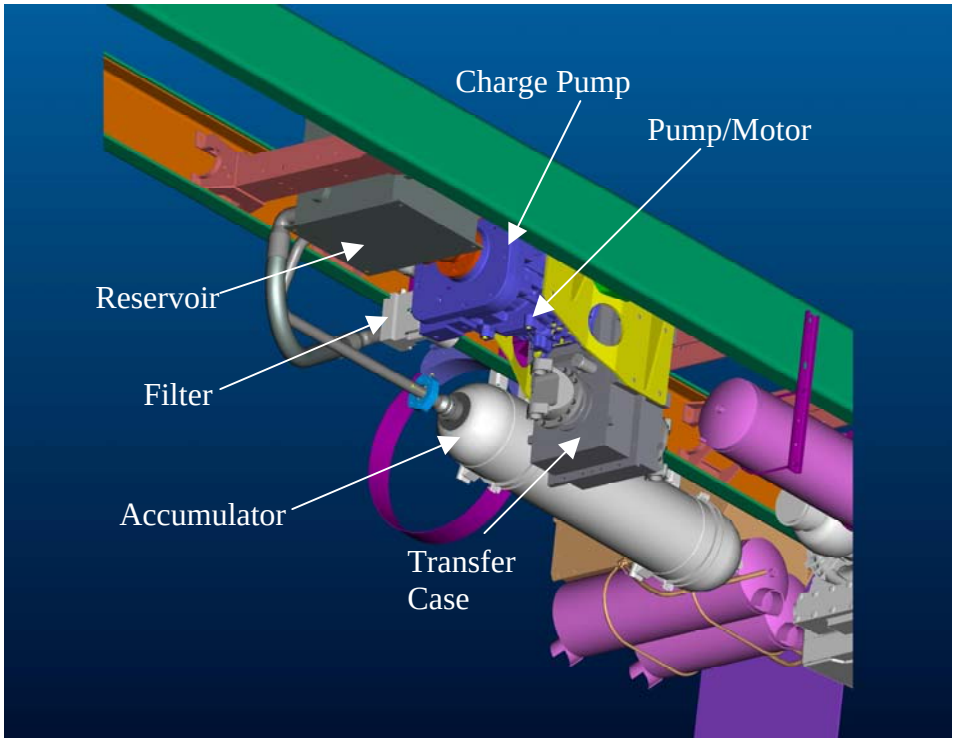

Figure 4: Updated HLA system design installed in a truck.

Open System

The HLA system targeted for refuse trucks was changed to an "open system" design, which includes an oil reservoir open to atmospheric pressure. An open system allows the system to be serviced safely without the need for special tools. The open system also reduces cost and space requirements by eliminating the need for low-pressure accumulators.

Charge Pump

The open system design requires an additional component called a charge pump to supercharge the main pump/motor. An impeller style pump concept was chosen for the charge pump design because its pressure and flow characteristics matched the fill requirements of the piston pump in an acceptable size envelope.

Since Eaton has limited expertise in centrifugal pump design, this design was outsourced to a company specializing in turbo machinery design. The vendor designed impeller and volute geometry to meet Eaton's requirements for the HLA system. Eaton subsequently designed this geometry into the HLA system so that the charge pump became an integral part of the pump/motor. This integration improves the efficiency and packaging space requirements of the HLA system.

Reservoir

Another component that was added as part of the open system design is the reservoir. The reservoir has rigid design constraints, primarily small size and high flow rates. Computer modeling and lab testing was performed to verify the design of internal reservoir parts would meet the flow requirements.

Pump/Motor

The pump/motor design was improved in several ways. The new pump housing made of aluminum was designed to replace the concept cast iron housing. The new housing is lower cost and about 70 lbs lighter. The designs of several internal parts, such as shift pistons, barrel, and a sensor connection were changed to increase their performance and reliability and reduce manufacturing costs.

Transfer Case

The main upgrade to the transfer case was the addition of direct pump mounting capability. This eliminates the need for the expensive and space-consuming separate mounting that was used on the concept prototype. As was already mentioned, the transfer case gear ratio was changed as part of the overall system optimization.

The transfer case contains an internal clutch. The clutch design was improved so that clutch engagements and disengagements are repeatable and robust. The transfer case bearings were also upgraded to provide longer life and reliability.

Filter Manifold

The concept filter manifolds were mounted in-line with the hoses. This created the need for extra hose assemblies, space and leak points. A new filter manifold was designed, which is integrated with the pump. This design eliminates the need for an entire hose assembly. The new filter manifold includes a pressure regulating valve which was specifically tuned to balance the trade off of pressure drop and filtration capability.

Sensors

There are multiple sensors used in the HLA system. Most of the sensors were upgraded to models with lower costs or higher reliability. A few new sensors were added to improve system fault diagnosis.

Noise

The current US EPA drive-by noise regulation requires that a truck's overall noise level does not exceed 80 dBA at a distance of 50 ft. In order to help a vehicle meet that requirement, the HLA system needs to emit much less noise than the truck so that the product is a 'non-contributor'.

The main sources of noise in the HLA system come from the pump/motor and transfer case. Significant analysis and design work went into reducing noise emissions coming from the pump/motor. Stiffening the new aluminum housing in key areas and modifying internal pumping parts have helped to control the noise produced by the pump.

Design improvements were also included in the transfer case design. Proper gear profile tolerances were chosen that are expected to keep the transfer case noise within acceptable limits.

Software

Numerous improvements were made to the diagnostic and control functionality of the system software. The most significant changes are listed below.

- The overall structure of the software was simplified and streamlined. Redundant tests were removed while making sure all the known causes of faults are addressed and each fault is unique. More test conditions were added, but the overall size and complexity went down.
- The transfer case control logic was modified to improve fault detection and safety.
- Auto-calibration and temperature compensation algorithms were added to maximize the HLA system's performance across varied operating conditions.
- Electronic and controls integration with the vehicle has been improved resulting in smoother operation and better braking feel.
- A retarder function was added to the braking function.

User Interface

HLA system specific switches and displays were designed and integrated into the control system. This interface will be located on the dashboard and will work on the vehicle's existing data bus. They allow user control and configuration of the HLA system's operating modes. Depending on end user feedback, this interface may or may not be included in production vehicles.

Figure 5: HLA user interface

Product Assurance

The HLA team has performed many activities that fall under the category of "product assurance." Product assurance is any activity that works to the goal of demonstrating the confidence the product will perform as expected in the field. Tools used for the HLA system include:

- System function failure mode and effects analysis (FMEA)
- Use/misuse FMEA
- Hazard analysis
- Component design failure mode and effects analysis (DFMEA).

The system function FMEA is a systematic tool for analyzing how each of the system functions of the HLA system could potentially fail. A risk priority is assigned to every failure mode. One of the primary functions of the HLA system is to provide torque when the driver commands vehicle acceleration. The system function FMEA asks the question "how can this function fail." One failure mode for this case is that the HLA system would be unable to provide torque. All the possible root causes for this failure would be listed. Each failure is rated on severity, occurrence and detection scales. These rates are combined mathematically to determine risk. Actions are taken for any items that may be safety related or have been identified as high risk. In actuality, any failure mode that can be reasonably avoided or mitigated is addressed.

The use/misuse FMEA is similar to the system function FMEA. This FMEA focuses on the everyday uses and misuses of the product by the end-user. Examples would be driving habits, typical maintenance procedures, end-of-life procedures, vandalism, acts of nature, etc. This analysis forces the designers to consider everyday events. This analysis brings a new perspective to the design requirements.

The hazard analysis reviews the design to determine what hazards that the HLA system may present given an outside trigger event. For example, in a collision, what hazards could the HLA system create? The hazard analysis focuses on safety related items. All safety items are reviewed to determine how they can be avoided or mitigated.

Finally, component DFMEAs have been performed on all the subsystems of the HLA system. This is the very common design tool. At this level, every part is examined for function and how it can fail. From this analysis actions are identified to eliminate the failure modes if possible. Also, this analysis gives insight to the tests that should be performed to validate the design. Because failure modes are identified, the test for stressing those failure modes can be created.

The HLA program team has been very rigorous in the application product assurance activities.

Design Summary

The HLA system has been redesigned and optimized for application in heavy-duty refuse collection vehicles. The new design includes many improvements over the concept design. These improvements include:

- Better packaging in the vehicle resulting in easier installation and more efficient use of space.
- Increased reliability and safety.
- Improved vehicle performance and driving feel.
- Better serviceability.

Hardware Procurement

To build an HLA system, more than 220 parts had to be ordered. The parts were supplied by a combination of Eaton manufacturing plan and Eaton vendors. The vendors were evaluated with respect to their manufacturing capabilities for the particular parts they were to supply in order to insure that the parts would be made properly.

Many of the parts have parameters that are critical to the part's function. These critical parameters were inspected to verify they were correct. Part manufacturers inspected most of the critical parameters prior to shipment. Eaton measured any critical dimensions after receiving the parts that were not measured by the manufacturers.

Assembly

The first step of the assembly process was to assemble subcomponents. These included valves, accumulator, pumps and fluid reservoir. After testing of the subcomponents, they were assembled into the main system.

Testing

Each subcomponent was tested separately to verify proper function and performance before assembling and testing the complete system. This process enabled more accurate measurements and easy adjustments than if the whole assembly would have been tested for the first time together. The picture below shows the HLA pump/motor being tested on a pump test stand.

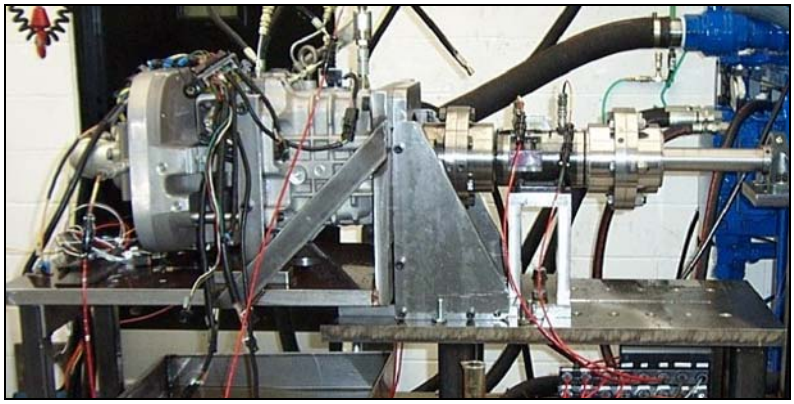

Figure 6: HLA Performance Test Setup

The tests verified that all the components functioned properly. The performance results compared favorably with analysis predictions.

The complete system was tested on a test stand that simulates many aspects of a vehicle. The HLA system was tested on this stand in all major operating modes. During the system test, the sensors were calibrated and the system software was tuned and improved. The picture below shows the HLA system being tested on the system stand.

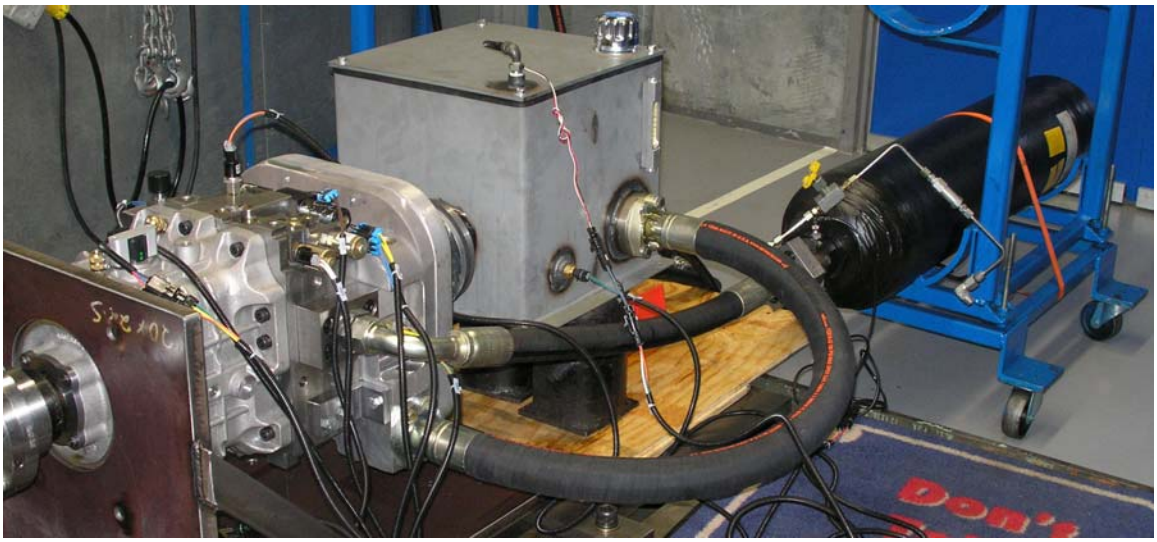

Figure 7: HLA System Test Setup

Hardware Procurement, Assembly and Test Summary

All the parts necessary to build the updated HLA system were ordered and received. These parts were properly assembled and tested on test stands at both the component and system level. The testing was successful by verifying the proper function and performance of the HLA system.

System Testing on Chassis Dynamometer

The vehicle was taken to the Southwest Research Institute (SwRI) in San Antonio, Texas for emissions and performance testing on a chassis dynamometer. Coast down tests were conducted to verify that the dynamometer properly simulated the dynamics of the test vehicle loaded to 45,000 lb. Figure 8 shows the test truck on the chassis dynamometer. The test vehicle is a Peterbilt 320 truck equipped with the Eaton HLA® system.

Figure 8: Dynamometer Test Setup at Southwest Research Institute

To better understand the performance of the HLA system, three driving cycles and three operating modes were tested. The driving cycles represent different operating conditions that an HLA equipped vehicle may encounter. The three operating modes are different ways that HLA can be used: baseline (without HLA active), economy, and performance. The economy mode of operation is intended to produce the best fuel economy improvements; the performance mode of operation is intended to produce the highest productivity. The following 25 tests listed in Table 1 were completed between January 10, 2007 and January 19, 2007.

Test Number	Mode of operation	Route	Date
1	Baseline	Urban	1/10/2007
2	Baseline	Urban	1/10/2007
3	Baseline	Urban	1/10/2007
1	Baseline	Suburban	1/10/2007
2	Baseline	Suburban	1/10/2007
3	Baseline	Suburban	1/10/2007
1	Economy	Urban	1/11/2007
2	Economy	Urban	1/11/2007
3	Economy	Urban	1/11/2007
1	Economy	Suburban	1/11/2007
2	Economy	Suburban	1/11/2007
3	Economy	Suburban	1/11/2007
1	Performance	Suburban	1/11/2007
2	Performance	Suburban	1/11/2007
3	Performance	Suburban	1/11/2007
1	Baseline	EPA	1/18/2007
2	Baseline	EPA	1/18/2007
3	Baseline	EPA	1/18/2007
1	Economy	EPA	1/18/2007
2	Economy	EPA	1/18/2007
3	Economy	EPA	1/18/2007
4	Economy	EPA	1/18/2007
1	Performance	EPA	1/19/2007
2	Performance	EPA	1/19/2007
3	Performance	EPA	1/19/2007

Table 1: Testing Completed at SwRI

Emissions data was taken from a constant velocity dilution sampling system. The total particulate matter (PM), total hydrocarbon (HC), oxides of nitrogen (NO_x), carbon dioxide (CO_2), carbon monoxide (CO), fuel usage, and overall distance were measured and recorded. The fuel economy is calculated from the fuel usage and the distance traveled. Once the data was recorded, SwRI prepared the data and reported the results to Eaton.

Emissions and Performance Results

The tests were analyzed and have been compiled into Table 2 showing the baseline measurements and improvements. The tests have been averaged into one set of readings per route and mode of operation. The percentage values in Table 2 show reductions in emissions and improvements in fuel economy in black, an increase in emissions and reduction in distance is shown in red. The values in Table 3 are the standard deviation for each data point normalized respective to each specific mean data value, otherwise known as the coefficient of variance.

Summary									
		PM	*HC*	*NOx*	*CO*	*CO2*	*Fuel*	*Fuel Economy*	*Distance*
		mg/mi	g/mi	g/mi	g/mi	g/mi	kg	MPG	miles
Urban	Baseline	1806.4	6.19	83.7	16.4	10710.1	2.49	0.96	0.73
	HLA-Economy	0.2%	2.0%	0.2%	5.6%	8.8%	8.4%	9.7%	0.5%
	HLA-Performance	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Suburb	Baseline	901.7	2.78	32.2	6.4	5516.5	3.42	1.87	1.96
	HLA-Economy	8.8%	1.2%	0.7%	6.2%	3.9%	4.7%	4.1%	0.9%
	HLA-Performance	13.7%	3.8%	0.8%	6.8%	4.5%	5.3%	4.6%	0.9%
EPA	Baseline	426.3	1.57	17.8	3.7	3642.9	6.58	2.83	5.71
	HLA-Economy	3.9%	0.2%	4.2%	11.9%	8.2%	7.9%	9.0%	0.3%
	HLA-Performance	N/A	1.3%	5.1%	17.2%	7.3%	6.5%	8.5%	0.8%

Table 2: Emissions Results from Dynamometer Testing

Coefficient of Variance in Measurements									
		PM	*HC*	*NOx*	*CO*	*CO2*	*Fuel*	*Fuel Economy*	*Distance*
Urban	Baseline	5.2%	5.1%	1.8%	7.8%	1.2%	0.8%	1.0%	1.6%
	HLA-Economy	2.4%	1.9%	0.7%	2.3%	0.5%	0.6%	0.5%	0.8%
	HLA-Performance	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Suburb	Baseline	11.1%	4.0%	2.1%	3.7%	2.6%	1.4%	2.7%	1.3%
	HLA-Economy	2.4%	0.4%	2.3%	3.6%	1.8%	2.0%	1.9%	0.3%
	HLA-Performance	2.7%	1.2%	1.1%	3.5%	0.5%	0.4%	0.3%	0.3%
EPA	Baseline	3.0%	1.1%	0.6%	2.1%	0.4%	0.7%	0.4%	0.3%
	HLA-Economy	4.4%	1.3%	2.4%	3.8%	1.6%	1.0%	1.7%	0.6%
	HLA-Performance	N/A	2.3%	0.7%	2.4%	0.8%	0.9%	0.9%	0.7%

Table 3: COV from Emissions Testing

NO_x

NO_x emissions show negligible improvement in the urban and suburban cycles, but considerable improvement in the EPA cycle. The HLA system shows definite improvements over the EPA cycle in regards to the NO_x emissions. The NO_x emissions reduction in economy mode suggests considerable improvement, but the data variation is significant with respect to the magnitude of improvement. The results from performance mode are more positive with the magnitude of improvement considerably higher than the data variance. The NO_x emissions are greatly reduced for the EPA cycle.

Fuel Economy

Table 2 shows a high fuel economy improvement in the urban cycle for the economy mode of operation. This level of performance and low level of variation is shown throughout the testing. The suburban cycle fuel economy shows the lowest improvement, only half of the EPA and urban cycles. The results show that the HLA system produces an increase in fuel economy (MPG) over the EPA cycle in economy mode of operation that is slightly less than the urban cycle. The fuel economy improvement in performance mode is slightly less than in economy mode. Eaton is continuing research to produce further improvements. These results show that the fuel economy is affected by the driving cycle, but the consistently positive results verify the benefit of the HLA system.

CO_2

The CO_2 emissions are closely tied to the fuel economy performance, the relationship is linearly proportional. As the CO_2 emissions are decreased, the fuel economy increases at a similar rate. The suburban cycle shows the lowest improvement in CO_2 emissions. The improvement is only approximately half as large as the reduction for the urban cycle and the EPA cycle.

In the urban cycle, the HLA system produced a high CO_2 emissions improvement, with an extremely low variance. The CO_2 emissions improvement for the EPA cycle is of the same magnitude as the urban cycle. Table 2 shows an improvement of 8.2% for economy mode and 7.3% for performance mode over the EPA cycle. The HLA system shows consistent improvements to the CO_2 emissions. The improvements are affected by the cycle, but the similarity of the results between the urban cycle and the EPA cycle suggest that the CO_2 emissions are less sensitive to the cycle than other emissions.

CO

The HLA system has a positive impact on the CO emissions in all modes of operation and in all cycles. The urban cycle shows the smallest improvement. The suburban cycle shows higher improvements. The EPA cycle shows the highest improvements for CO emissions. Table 2 shows a large improvement in economy mode over the EPA cycle. The results for the performance mode over the EPA cycle are the best, showing a high reduction with a respectively low data variance. These results show that the HLA system has a considerable impact on the level of CO emissions.

PM

Particulate matter emissions show reductions in nearly all cases. Table 2 shows a slight increase in the PM emissions for the urban cycle in economy mode, but Table 3 indicates that the measured increase is well within the range of error.

The particulate matter emissions reading for the EPA cycle in performance mode in Table 2 was not recorded in two of the three test runs, therefore it is impossible to verify the accuracy of the reading under those conditions. Examination of the suburban cycle shows definite PM emissions improvement from the HLA system.

HC

Hydrocarbon emissions show reductions in nearly all cases, similar to the PM emissions. There are two instances where there is a potential increase in the HC emissions. In the urban cycle for the economy-operating mode, there is a very slight increase shown in Table 2, but the magnitude is almost the same as the variance in the data. The other instance is in the EPA cycle in economy mode, a small increase with a large variances shown. The EPA cycle for the HLA system performance mode shows no measurable reduction.

The suburban cycle shows a definite improvement in HC emissions due to the HLA system. The economy mode of operation shows a reduction with a magnitude considerably higher than the data variance. In performance mode, the HC emissions are reduced at a higher magnitude. These results provide verification that the HLA system has a positive effect on HC emissions in the suburban cycle.

Fuel

The data in Table 2 shows the fuel usage improves in all cases, with data variation shown in Table 3. The fuel economy figures incorporate the fuel usage measurements, so the improvements due to the HLA system are discussed in the fuel economy section.

Distance Traveled

The mileage variation from baseline shown in Table 2 is generally very small as would be expected. In some cases the HLA test produced a slightly shorter distance, but Table 3 generally shows that there is no measurable difference between the baseline and HLA system tests.

Chassis Dynamometer Test Summary

Inspection of Table 2 shows one important trend that is only suggested by the above discussion. The baseline values for each emission species vary considerably between the drive cycles. The impact of the HLA system varies some depending on the cycle, but not on the order of magnitude that the raw values vary between drive cycles. The EPA cycle consistently shows the lowest levels of baseline emissions, with the suburban and urban cycles being orders of magnitude larger at times. This shows how the levels of emissions are affected by the cycle. It is significant to note that the HLA system impact can vary

considerably depending on the driving cycle; the driving cycle is the largest factor affecting overall emissions.

The emission testing was completed in January in coordination with SwRI. The results show that the HLA system has positive effects on emissions and fuel economy. The magnitude of improvement for the NO_x and the fuel economy was lower than expected, but this initial testing has proven extremely valuable. The data gathered by the initial chassis tests is being used to develop improved HLA system performance. This testing positively fulfills part 4 of the Scope of Work funded in part, by the State of Texas through a grant from the Texas Commission of Environmental Quality. The testing verifies the HLA system has practical potential for emissions and fuel economy improvements.

Conclusion

The Eaton Hydraulic Launch Assist (HLA) system has been redesigned for effective performance on heavy-duty truck applications. This work was completed in part through a grant from the Texas Commission on Environmental Quality. The HLA system has made significant progress toward commercial application in the refuse industry and its use will enable improved fuel economy, reduced emissions, and improved productivity of refuse vehicles. Eaton has continued engineering work to improve the HLA system's benefit in regenerating braking energy as measured through initial emission testing on a chassis dynamometer at SwRI. These efforts will further improve system performance to provide an optimum benefit in energy savings to refuse vehicles.

Future plans for the HLA system include validation of an updated design to achieve improved fuel efficiency and further reductions in vehicle emissions. The updated design will then be validated through laboratory testing, and a controlled vehicle fleet with on-board data logging equipment. The success of this fleet testing will be one of the last milestones toward a production launch.