BLCCS SITE IMPROVEMENTS

Contributing Zone Plan Modification Application

BLCCS SITE IMPROVEMENTS

Contributing Zone Plan Modification Application



PAPE-DAWSON

September 8, 2025

Ms. Monica Reyes Texas Commission on Environmental Quality (TCEQ) Region 13 14250 Judson Road San Antonio, Texas 78233-4480

Re:

BLCCS Site Improvements

Contributing Zone Plan Modification Application

Dear Ms. Reyes:

Please find included herein the BLCCS Site Improvements Contributing Zone Plan Modification. This Contributing Zone Plan Modification has been prepared to be consistent with the regulations of the Texas Commission on Environmental Quality (30 TAC 213) and current policies for development over the Edwards Aquifer Contributing Zone.

This Contributing Zone Plan Modification applies to an approximate 4.18-acre site identified as the limits of the project. Please review the plan information for the items it is intended to address, and, if acceptable, provide a written approval of the plan in order that construction may begin at the earliest opportunity.

Appropriate review fees (\$4,000) and fee application are included. If you have questions or require additional information, please do not hesitate to contact me at your earliest convenience.

Sincerely, Pape-Dawson

Brooke Lindholm, P.E.

Bus J

Vice President

Attachments

P:\88\02\85\Word\Reports\CZP\2025 - CZP MOD Cover Letter.docx

EDWARDS AQUIFER APPLICATION COVER PAGE (TCEQ-20705)

Texas Commission on Environmental Quality

Edwards Aquifer Application Cover Page

Our Review of Your Application

The Edwards Aquifer Program staff conducts an administrative and technical review of all applications. The turnaround time for administrative review can be up to 30 days as outlined in 30 TAC 213.4(e). Generally administrative completeness is determined during the intake meeting or within a few days of receipt. The turnaround time for technical review of an administratively complete Edwards Aquifer application is 90 days as outlined in 30 TAC 213.4(e). Please know that the review and approval time is directly impacted by the quality and completeness of the initial application that is received. In order to conduct a timely review, it is imperative that the information provided in an Edwards Aquifer application include final plans, be accurate, complete, and in compliance with 30 TAC 213.

Administrative Review

- Edwards Aquifer applications must be deemed administratively complete before a technical review can begin. To be considered administratively complete, the application must contain completed forms and attachments, provide the requested information, and meet all the site plan requirements. The submitted application and plan sheets should be final plans. Please submit one full-size set of plan sheets with the original application, and half-size sets with the additional copies.
 - To ensure that all applicable documents are included in the application, the program has developed tools to guide you and web pages to provide all forms, checklists, and guidance. Please visit the below website for assistance: http://www.tceq.texas.gov/field/eapp.
- 2. This Edwards Aquifer Application Cover Page form (certified by the applicant or agent) must be included in the application and brought to the administrative review meeting.
- 3. Administrative reviews are scheduled with program staff who will conduct the review. Applicants or their authorized agent should call the appropriate regional office, according to the county in which the project is located, to schedule a review. The average meeting time is one hour.
- 4. In the meeting, the application is examined for administrative completeness. Deficiencies will be noted by staff and emailed or faxed to the applicant and authorized agent at the end of the meeting, or shortly after. Administrative deficiencies will cause the application to be deemed incomplete and returned.
 - An appointment should be made to resubmit the application. The application is re-examined to ensure all deficiencies are resolved. The application will only be deemed administratively complete when all administrative deficiencies are addressed.
- 5. If an application is received by mail, courier service, or otherwise submitted without a review meeting, the administrative review will be conducted within 30 days. The applicant and agent will be contacted with the results of the administrative review. If the application is found to be administratively incomplete, it can be retrieved from the regional office or returned by regular mail. If returned by mail, the regional office may require arrangements for return shipping.
- 6. If the geologic assessment was completed before October 1, 2004 and the site contains "possibly sensitive" features, the assessment must be updated in accordance with the *Instructions to Geologists* (TCEQ-0585 Instructions).

Technical Review

- When an application is deemed administratively complete, the technical review period begins. The regional
 office will distribute copies of the application to the identified affected city, county, and groundwater
 conservation district whose jurisdiction includes the subject site. These entities and the public have 30 days
 to provide comments on the application to the regional office. All comments received are reviewed by TCEQ.
- 2. A site assessment is usually conducted as part of the technical review, to evaluate the geologic assessment and observe existing site conditions. The site must be accessible to our staff. The site boundaries should be

- clearly marked, features identified in the geologic assessment should be flagged, roadways marked and the alignment of the Sewage Collection System and manholes should be staked at the time the application is submitted. If the site is not marked the application may be returned.
- 3. We evaluate the application for technical completeness and contact the applicant and agent via Notice of Deficiency (NOD) to request additional information and identify technical deficiencies. There are two deficiency response periods available to the applicant. There are 14 days to resolve deficiencies noted in the first NOD. If a second NOD is issued, there is an additional 14 days to resolve deficiencies. If the response to the second notice is not received, is incomplete or inadequate, or provides new information that is incomplete or inadequate, the application must be withdrawn or will be denied. Please note that because the technical review is underway, whether the application is withdrawn or denied **the application fee will be forfeited**.
- 4. The program has 90 calendar days to complete the technical review of the application. If the application is technically adequate, such that it complies with the Edwards Aquifer rules, and is protective of the Edwards Aquifer during and after construction, an approval letter will be issued. Construction or other regulated activity may not begin until an approval is issued.

Mid-Review Modifications

It is important to have final site plans prior to beginning the permitting process with TCEQ to avoid delays.

Occasionally, circumstances arise where you may have significant design and/or site plan changes after your Edwards Aquifer application has been deemed administratively complete by TCEQ. This is considered a "Mid-Review Modification". Mid-Review Modifications may require redistribution of an application that includes the proposed modifications for public comment.

If you are proposing a Mid-Review Modification, two options are available:

- If the technical review has begun your application can be denied/withdrawn, your fees will be forfeited, and the plan will have to be resubmitted.
- TCEQ can continue the technical review of the application as it was submitted, and a modification application can be submitted at a later time.

If the application is denied/withdrawn, the resubmitted application will be subject to the administrative and technical review processes and will be treated as a new application. The application will be redistributed to the affected jurisdictions.

Please contact the regional office if you have questions. If your project is located in Williamson, Travis, or Hays County, contact TCEQ's Austin Regional Office at 512-339-2929. If your project is in Comal, Bexar, Medina, Uvalde, or Kinney County, contact TCEQ's San Antonio Regional Office at 210-490-3096

Please fill out all required fields below and submit with your application.

1. Regulated Entity Name:				2. Regulated Entity No.:					
3. Customer Name:				4. Customer No.:					
5. Project Type: (Please circle/check one)	New		Modification		Extension		Exception		
6. Plan Type: (Please circle/check one)	WPAP	(CZP)	SCS	UST	AST	EXP	EXT	Technical Clarification	Optional Enhanced Measures
7. Land Use: (Please circle/check one)	Reside	ntial (Non-residential		8. Sit		e (acres):		
9. Application Fee:			10. Po	ermai	nent I	BMP(s):		
11. SCS (Linear Ft.):			12. AST/UST (No		o. Tar	ıks):			
13. County:			14. W	aters	hed:				

Application Distribution

Instructions: Use the table below to determine the number of applications required. One original and one copy of the application, plus additional copies (as needed) for each affected incorporated city, county, and groundwater conservation district are required. Linear projects or large projects, which cross into multiple jurisdictions, can require additional copies. Refer to the "Texas Groundwater Conservation Districts within the EAPP Boundaries" map found at:

http://www.tceq.texas.gov/assets/public/compliance/field_ops/eapp/EAPP%20GWCD%20map.pdf

For more detailed boundaries, please contact the conservation district directly.

Austin Region						
County: Hays		Travis	Williamson			
Original (1 req.)		_				
Region (1 req.)		_	_			
County(ies)						
Groundwater Conservation District(s)	Edwards Aquifer AuthorityBarton Springs/ Edwards AquiferHays Trinity Plum Creek	Barton Springs/ Edwards Aquifer	NA			
City(ies) Jurisdiction	AustinBudaDripping SpringsKyleMountain CitySan MarcosWimberleyWoodcreek	AustinBee CavePflugervilleRollingwoodRound RockSunset ValleyWest Lake Hills	AustinCedar ParkFlorenceGeorgetownJerrellLeanderLiberty HillPflugervilleRound Rock			

San Antonio Region					
County:	Bexar	Comal	Kinney	Medina	Uvalde
Original (1 req.)					
Region (1 req.)					
County(ies)					
Groundwater Conservation District(s)	Edwards Aquifer Authority Trinity-Glen Rose	Edwards Aquifer Authority	Kinney	EAA Medina	EAA Uvalde
City(ies) Jurisdiction	Castle HillsFair Oaks RanchHelotesHill Country VillageHollywood ParkSan Antonio (SAWS)Shavano Park	Bulverde Fair Oaks Ranch Garden Ridge New Braunfels Schertz	NA	San Antonio ETJ (SAWS)	NA

I certify that to the best of my knowledge, that the application is complete and accurate. This application is hereby submitted to TCEQ for administrative review and technical review.				
D 1. 1. 1. D.T.				
Brooke Lindholm, P.E.				
Print Name of Customer/Authorized Agent				
Bule Int	9/8/2025			
Signature of Customer/Authorized Agent	Date			

FOR TCEQ INTERNAL USE ONLY				
Date(s)Reviewed:]	Date Administratively Complete:		
Received From:	(Correct Number of Copies:		
Received By:]	Distribution Date:		
EAPP File Number:	(Complex:		
Admin. Review(s) (No.):]	No. AR Rounds:		
Delinquent Fees (Y/N):]	Review Time Spent:		
Lat./Long. Verified:	;	SOS Customer Verification:		
Agent Authorization Complete/Notarized (Y/N):	-	Payable to TCEQ (Y/N):		/N):
Core Data Form Complete (Y/N):		Check:	Signed (Y/N):	
Core Data Form Incomplete Nos.:		Less than 90 days old (Y/N):		ld (Y/N):

MODIFICATION OF A PREVIOUSLY APPROVED CONTRIBUTING ZONE PLAN (TCEQ-10259)

Modification of a Previously Approved Contributing Zone Plan

Texas Commission on Environmental Quality

for Regulated Activities on the Edwards Aquifer Recharge Zone and Transition Zone and Relating to 30 TAC 213.4(j), Effective June 1, 1999

To ensure that the application is administratively complete, confirm that all fields in the form are complete, verify that all requested information is provided, consistently reference the same site and contact person in all forms in the application, and ensure forms are signed by the appropriate party.

Note: Including all the information requested in the form and attachments contributes to more streamlined technical reviews.

Signature

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. This **Modification of a Previously Approved Contributing Zone Plan** is hereby submitted for TCEQ review and executive director approval. The request was prepared by:

Print Name of Customer/Agent: Brooke Lindholm, P.E.

Date: 9/8/2025

Signature of Customer/Agent:

Project Information

1.	Current Regulated Entity Name: <u>BLCCS Site Improvements</u>
	Original Regulated Entity Name: <u>Borgfeld Lot 4</u>
	Assigned Regulated Entity Number(s) (RN):
	Edwards Aquifer Protection Program ID Number(s):
	The applicant has not changed and the Customer Number (CN) is:
	The applicant or Regulated Entity has changed. A new Core Data Form has been provided.
2.	Attachment A: Original Approval Letter and Approved Modification Letters. A copy of the original approval letter and copies of any modification approval letters are attached.
3.	A modification of a previously approved plan is requested for (check all that apply):

structure(s), including berms, silt fences, and Any change in the nate originally approved; A change that would seldwards Aquifer and here.	cional modification of any best man but not limited to temporary or pe diversionary structures; ure or character of the regulated ac ignificantly impact the ability to pre hydrologically connected surface wa and previously identified in a contril	rmanent ponds, dams, ctivity from that which was event pollution of the ater; or
plan has been modified m	odifications (select plan type being rong than once, copy the appropriat the information for each additional	e table below, as
CZP Modification	Approved Project	Proposed Modification
Summary		
Acres		
Type of Development		
Number of Residential	PLEASE SEE	
Lots	ATTACHEMENT A-CZ	P
Impervious Cover (acres)	MODIFICATION SUMMARY	
Impervious Cover (%)	——	
Permanent BMPs		
Other		
AST Modification	Approved Project	Proposed Modification
Summary		
Number of ASTs		
Other		
UST Modification	Approved Project	Proposed Modification
Summary		
Number of USTs		
Other		
	of Proposed Modification. A detailed modification is attached. It discu	· · · · · · · · · · · · · · · · · · ·

6. Attachment C: Current Site Plan of the Approved Project. A current site plan showing the existing site development (i.e., current site layout) at the time this application for modification is attached. A site plan detailing the changes proposed in the submitted modification is required elsewhere. The approved construction has not commenced. The original approval letter and any subsequent modification approval letters are included as Attachment A to document that the approval has not expired. The approved construction has commenced and has been completed. Attachment C illustrates that the site was constructed as approved. The approved construction has commenced and has been completed. Attachment C illustrates that the site was **not** constructed as approved. \bowtie The approved construction has commenced and has **not** been completed. Attachment C illustrates that, thus far, the site was constructed as approved. The approved construction has commenced and has **not** been completed. Attachment C illustrates that, thus far, the site was **not** constructed as approved. 7. Acreage has not been added to or removed from the approved plan. Acreage has been added to or removed from the approved plan and is discussed in Attachment B: Narrative of Proposed Modification. 8. Submit one (1) original and one (1) copy of the application, plus additional copies as needed for each affected incorporated city, groundwater conservation district, and county in which the project will be located. The TCEQ will distribute the additional copies to these jurisdictions. The copies must be submitted to the appropriate regional

including previous modifications, and how this proposed modification will change the

office.

approved plan.

ATTACHMENT A

PROJECT NAME

Contributing Zone Plan Modification

Attachment A - CPZ Modification Summary

CZP Modification Summary	Borgfeld Lot 4 (2024)
Acres	4.85
Type of Development	Commercial
Number of Residential Lots	N/A
Impervious Cover (acres)	1.94
Impervious Cover (%)	40
Permanent BMPs	One (1) Jellyfish filter® basin, one (1) 50' natural vegetative
	filter strip, and two (2) 15' engineered vegetative filter strips
Other	

Jon Niermann, *Chairman*Bobby Janecka, *Commissioner*Catarina R. Gonzales, *Commissioner*Kelly Keel, *Executive Director*



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

Protecting Texas by Reducing and Preventing Pollution

August 9, 2024

Lloyd A Denton, Jr. 2020 FI Borgfeld, LLC. 11 Lynn Batts Lane, Suite 100 San Antonio, Texas 78218

Re: Approval of a Contributing Zone Plan (CZP)

Borgfeld Lot 4; Located northeast of E. Borgfeld Drive and Highland Crest; ETJ of San

Antonio, Bexar County, Texas

Edwards Aquifer Protection Program ID: 13001956, Regulated Entity No. RN111996518

Dear Mr. Denton, Jr.:

The Texas Commission on Environmental Quality (TCEQ) has completed its review on the application for the above-referenced project submitted to the Edwards Aquifer Protection Program (EAPP) by Pape-Dawson Engineers, LLC. on behalf of the applicant, 2020 FI Borgfeld, LLC. on June 19, 2024.

As presented to the TCEQ, the application was prepared in general compliance with the requirements of 30 Texas Administrative Codes (TAC) Chapter §213. The permanent best management practices (BMPs) and measures represented in the application were prepared by a Texas licensed professional engineer (PE). All construction plans and design information were sealed, signed, and dated by a Texas licensed PE. Therefore, the application for the construction of the proposed project and methods to protect the Edwards Aquifer are **approved**, subject to applicable state rules and the conditions in this letter.

This approval expires two years from the date of this letter, unless, prior to the expiration date, more than 10 percent of the construction has commenced on the project or an extension of time has been officially requested. This approval or extension will expire, and no extension will be granted if more than 50 percent of the project has not been completed within ten years from the date of this letter.

The applicant or a person affected may file with the chief clerk a motion for reconsideration of the executive director's final action on this contributing zone plan or modification to a plan. A motion for reconsideration must be filed in accordance with 30 TAC §50.139.

PROJECT DESCRIPTION

The proposed commercial project will have an area of approximately 4.85-acres. The project will include clearing, grading, excavation, installation of utilities and drainage improvements for the construction of a commercial site with an associated turn lane and private drive. The impervious cover will be 1.94-acres (40 percent). Project wastewater will be disposed of by conveyance to the existing Steven M. Clouse Water Recycling Center.

PERMANENT POLLUTION ABATEMENT MEASURES

To prevent the pollution of stormwater runoff originating on-site or upgradient of the site and potentially flowing across and off the site after construction, one (1) Jellyfish, two (2) engineered vegetative filter strips and one (1) natural vegetative filter strip, designed using the TCEQ technical guidance, *RG-348*, *Complying with the Edwards Aquifer Rules: Technical Guidance on Best Management Practices*, will be constructed to treat stormwater runoff. The required total suspended solids (TSS) treatment for this project is 1,583 pounds of TSS generated from the 1.94-acres of impervious cover. The approved permanent BMPs and measures meet the required 80 percent removal of the increased load in TSS caused by the project.

The permanent BMPS shall be operational prior to occupancy or use of the proposed project. Inspection, maintenance, repair, and retrofit of the permanent BMPs shall be in accordance with the approved application.

STANDARD CONDITIONS

- 1. The plan holder (applicant) must comply with all provisions of 30 TAC Chapter §213 and all technical specifications in the approved plan. The plan holder should also acquire and comply with additional and separate approvals, permits, registrations or authorizations from other TCEQ Programs (i.e., Stormwater, Water Rights, Dam Safety, Underground Injection Control) as required based on the specifics of the plan.
- 2. In addition to the rules of the Commission, the plan holder must also comply with state and local ordinances and regulations providing for the protection of water quality as applicable.

Prior to Commencement of Construction:

- 3. The plan holder of any approved contributing zone plan must notify the EAPP and obtain approval from the executive director prior to initiating any modification to the activities described in the referenced application following the date of the approval.
- 4. The plan holder must provide written notification of intent to commence construction, replacement, or rehabilitation of the referenced project. Notification must be submitted to the EAPP no later than 48 hours prior to commencement of the regulated activity. Notification must include the date on which the regulated activity will commence, the name of the approved plan and program ID number for the regulated activity, and the name of the prime contractor with the name and telephone number of the contact person.
- 5. Temporary erosion and sedimentation (E&S) controls as described in the referenced application, must be installed prior to construction, and maintained during construction. Temporary E&S controls may be removed when vegetation is established, and the construction area is stabilized. The TCEQ may monitor stormwater discharges from the site to evaluate the adequacy of temporary E&S control measures. Additional controls may be necessary if excessive solids are being discharged from the site.

During Construction:

- 6. The application must indicate the placement of permanent aboveground storage tanks facilities for static hydrocarbons and hazardous substances with cumulative storage capacity of 500 gallons or more. Subsequent permanent storage tanks on this project site require a modification to be submitted and approved prior to installation.
- 7. If sediment escapes the construction site, the sediment must be removed at a frequency sufficient to minimize offsite impacts to water quality (e.g., fugitive sediment in street being washed into surface streams or sensitive features by the next rain). Sediment must be

Mr. Lloyd A. Denton, Jr. Page 3 August 9, 2024

removed from sediment traps or sedimentation ponds not later than when design capacity has been reduced by 50 percent. Litter, construction debris, and construction chemicals shall be prevented from becoming stormwater discharge pollutants.

- 8. Intentional discharges of sediment laden water are not allowed. If dewatering becomes necessary, the discharge must be filtered through appropriately selected BMPs.
- 9. The following records shall be maintained and made available to the executive director upon request: the dates when major grading activities occur, the dates when construction activities temporarily or permanently cease on a portion of the site, and the dates when stabilization measures are initiated.
- 10. Stabilization measures shall be initiated as soon as practicable in portions of the site where construction activities have temporarily or permanently ceased, and construction activities will not resume within 21 days. When the initiation of stabilization measures by the 14th day is precluded by weather conditions, stabilization measures shall be initiated as soon as practicable.

After Completion of Construction:

- 11. Owners of permanent BMPs and temporary measures must ensure that the BMPs and measures are constructed and function as designed. A Texas licensed PE **must certify** in writing that the permanent BMPs or measures were constructed as designed. The certification letter must be submitted to the EAPP within 30 days of site completion.
- 12. The applicant shall be responsible for maintaining the permanent BMPs after construction until such time as the maintenance obligation is either assumed in writing by another entity having ownership or control of the property or the ownership of the property is transferred to the entity. A copy of the transfer of responsibility must be filed with the executive director through the EAPP within 30 days of the transfer. TCEQ form, Change in Responsibility for Maintenance on Permanent BMPs and Measures (TCEQ-10263), may be used.

The holder of the approved contributing zone plan is responsible for compliance with Chapter §213 subchapter B and any condition of the approved plan through all phases of plan implementation. Failure to comply with any condition within this approval letter is a violation of Chapter §213 subchapter B and is subject to administrative rule or orders and penalties as provided under §213.25 of this title (relating to Enforcement). Such violations may also be subject to civil penalties and injunction. Upon legal transfer of this property, the new owner is required to comply with all terms of the approved contributing zone plan.

This action is taken as delegated by the executive director of the Texas Commission on Environmental Quality. If you have any questions or require additional information, please contact Mr. Drew Evans, P.G. of the Edwards Aquifer Protection Program at (210) 403-4053 or the regional office at 512-339-2929.

Sincerely,

Monica Reyes, Section Manager

Monica Reyes

Edwards Aquifer Protection Program

Texas Commission on Environmental Quality

MR/de

cc:

ATTACHMENT B

BLCCS SITE IMPROVEMENTS Contributing Zone Plan Modification

Attachment B - Narrative of Proposed Modification

The BLCCS Site Improvements Contributing Zone Plan Modification (CZP MOD) is a modification to

the previously approved Borgfeld Lot 4 CZP (EAPP ID 13001956), which were approved by the Texas

Commission on Environmental Quality (TCEQ) on August 9, 2024. This modification plan proposes a

warehouse and parking on an approximately 4.18-acre project site outside the city limits of San

Antonio, but within its extraterritorial jurisdiction in Bexar County, Texas. The entire site is located

over the Edwards Aquifer Contributing Zone. Since the project is located entirely over the Edwards

Contributing Zone, a Geologic Assessment was not conducted and is not required by 30 TAC 213

regulations. Therefore, no naturally occurring sensitive features are known to exist on the site.

This CZP MOD proposes clearing, and excavation for the construction of a commercial site for a

warehouse building, parking, and wet utilities. Approximately 1.37 acres of imperious cover, or

32.74% of the 4.18-acre project limits, are proposed for construction in this CZP MOD. The proposed

Permanent Best Management Practices (PBMPs) for stormwater treatment are (1) existing Jellyfish®

Filter basin, and two (2) 15' Engineered Vegetative Filter strips which are designed in accordance

with TCEQ's Technical Guidance Manual (TGM) RG-348 (2005) to remove 80% of the increase in Total

Suspended Solids (TSS) from the site.

Watershed Area "A" is being development as a parking lot space. The generated flow will be

conveyed to the existing Jellyfish® filter for treatment accounting for ultimate development at an

assumed 80% imperious cover. There are 0.08 acres of existing imperious cover contributed by a

turn lane. The existing grade does not allow for the flow to reach the Jellyfish® filter, but treatment is

provided via overtreatment. Watershed Area "B" and "C" are 0.03 and 0.20 acres of impervious

cover, respectively, are treated by 15' Engineered Vegetative Filter strips. Please see the Treatment

Summary table located in the Exhibits section with this application

Potable water service is to be provided by the San Antonio Water System (SAWS). The proposed

development will not generate any domestic wastewater flows as the improvements do not require


utility service.


PAPE-DAWSON

BLCCS SITE IMPROVEMENTS Contributing Zone Plan Modification

Wastewater will be disposed of by conveyance to the existing Steven M. Close Water Recycling Center operated by SAWS.


ATTACHMENT C

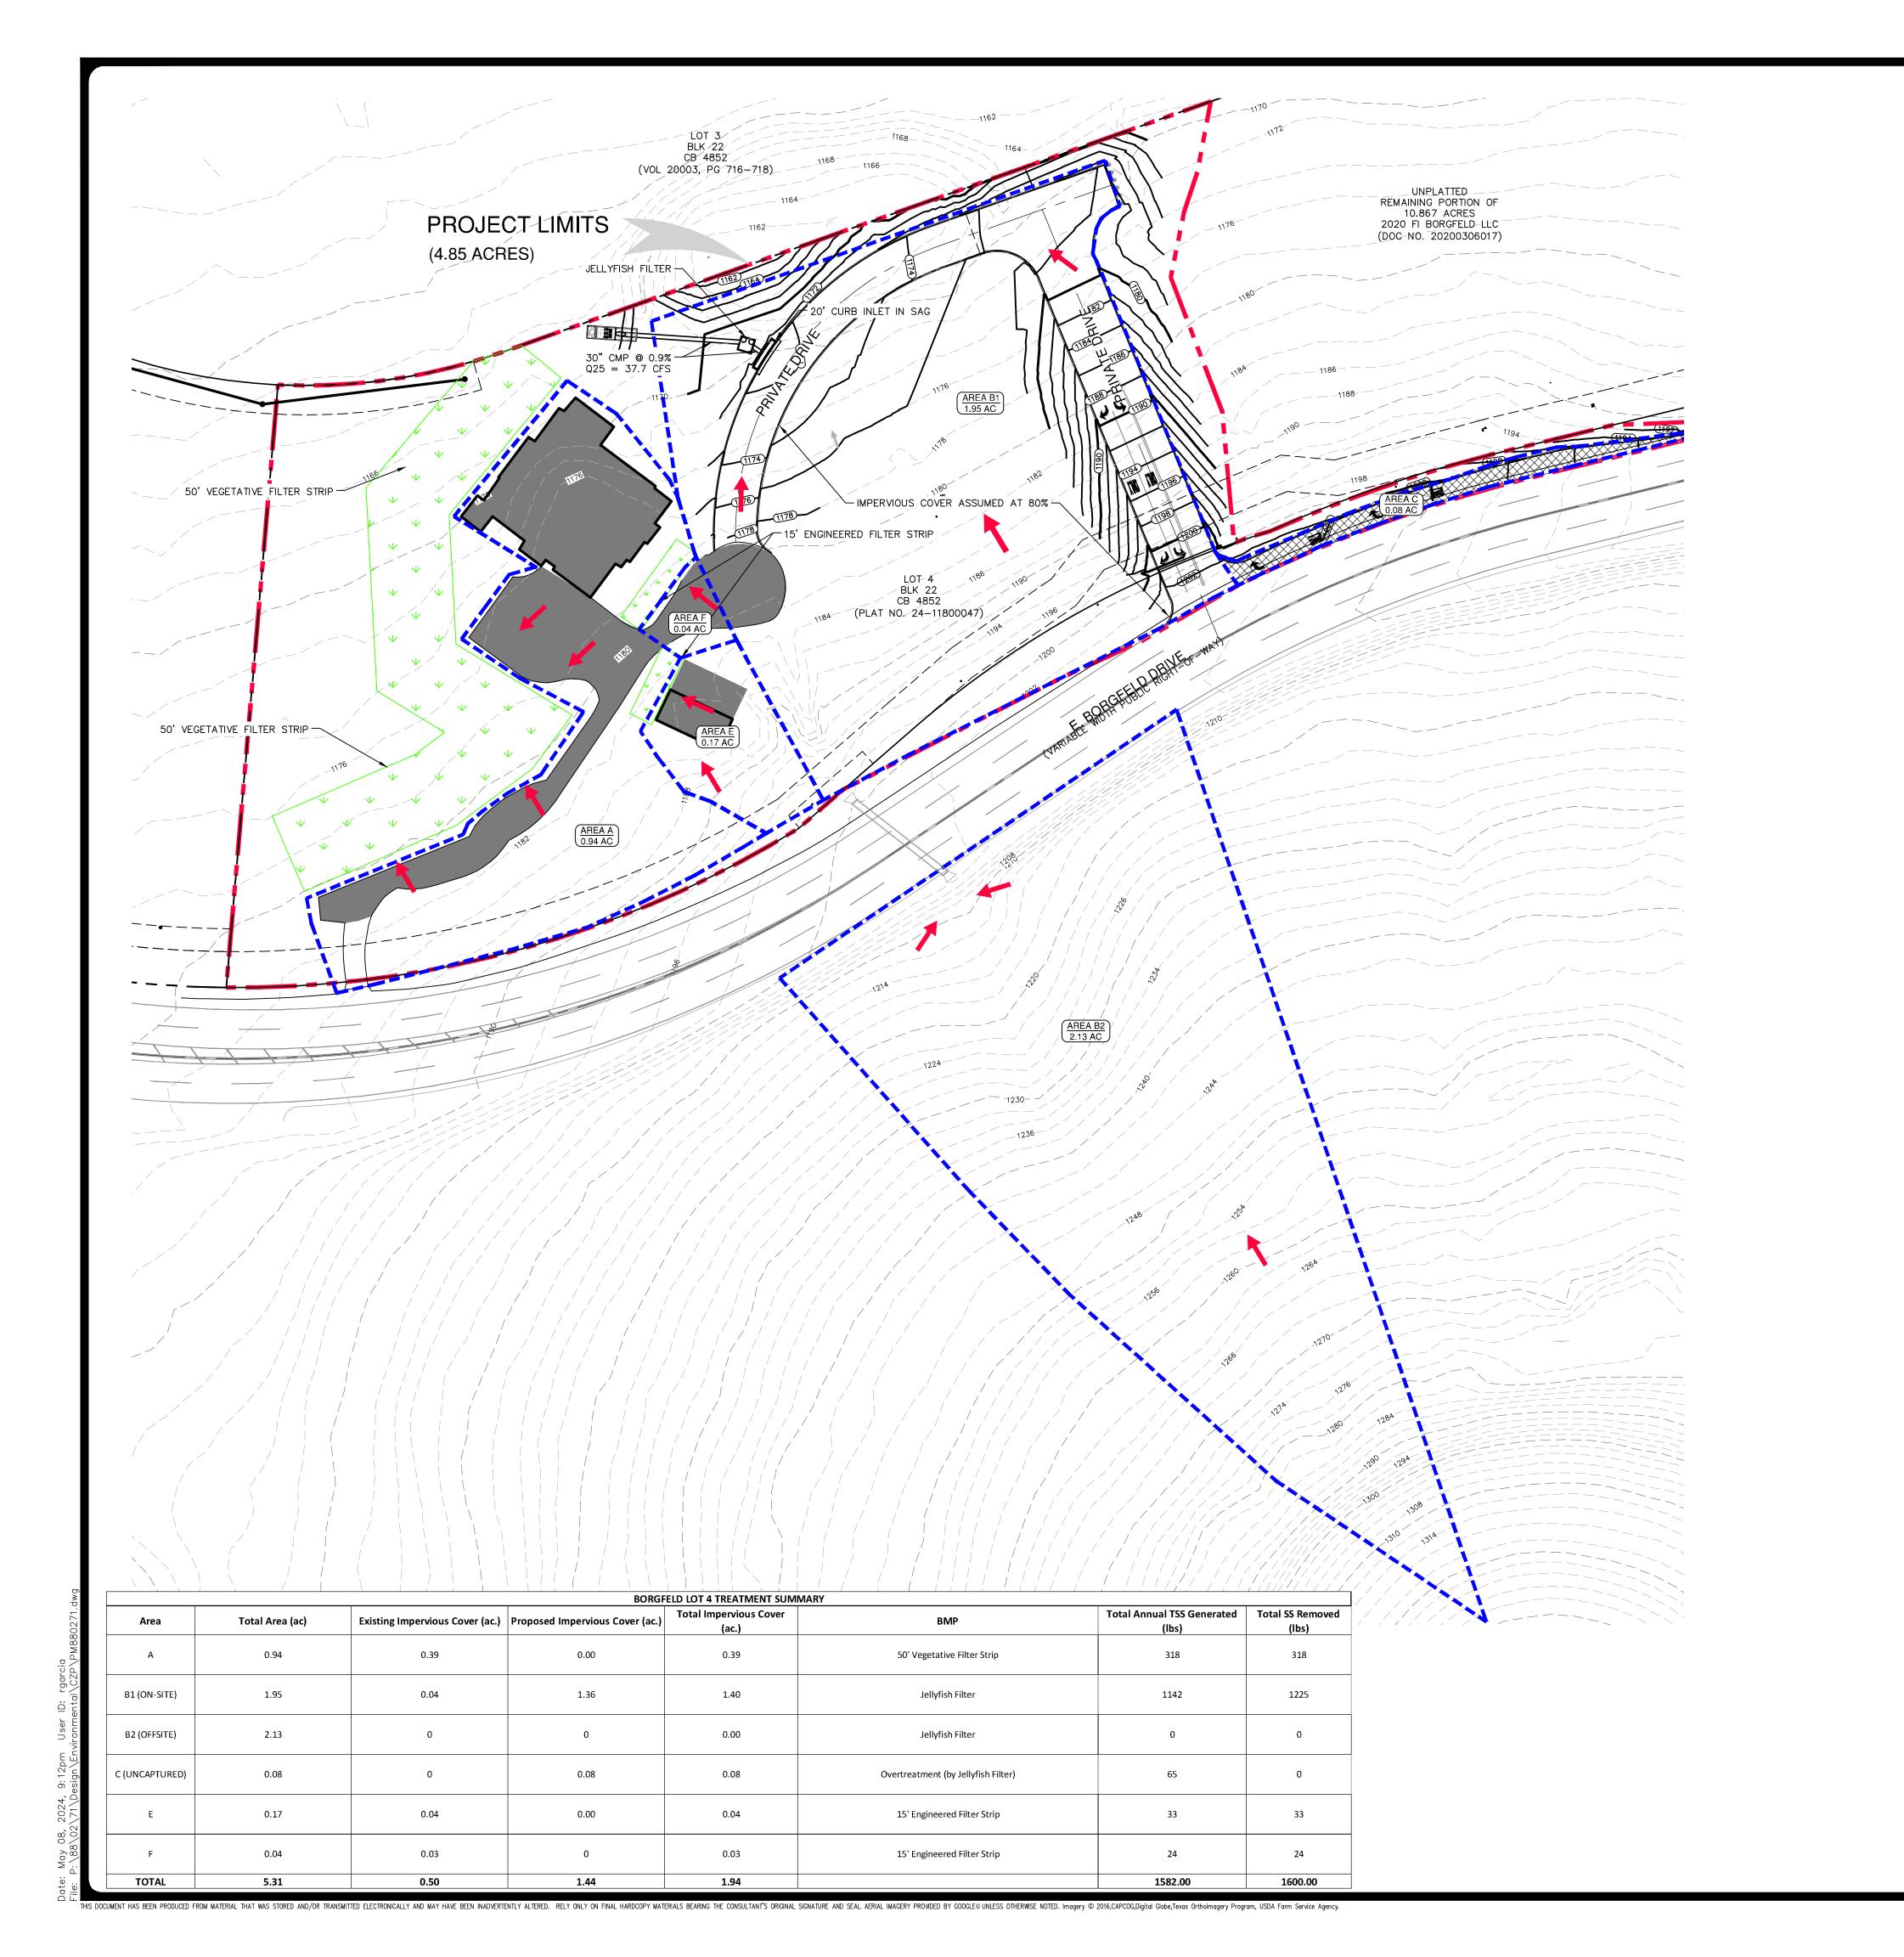

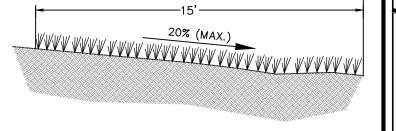


15' ENGINEERED VFS DETAIL

NTS




50' NATURAL VFS DETAIL

N.T.S.

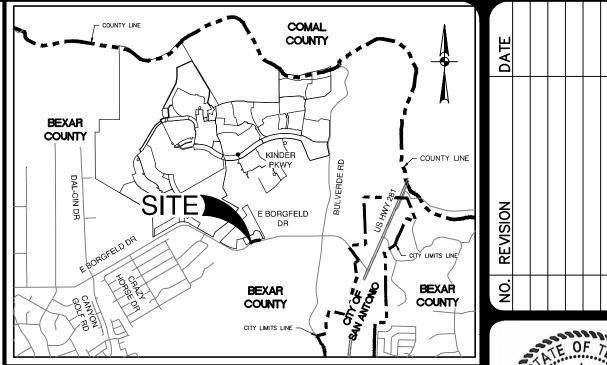


CALEB M. CHANCE

LOCATION MAP

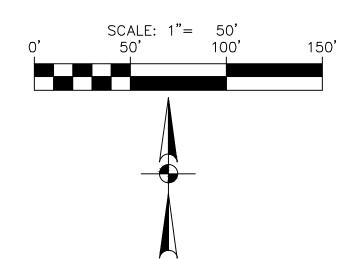

LEGEND

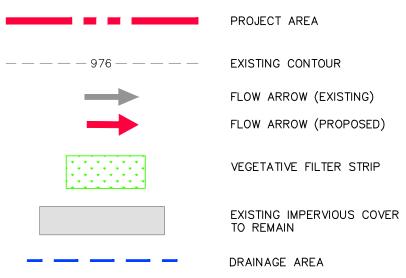

EXISTING CONTOUR FLOW ARROW (EXISTING)

FLOW ARROW (PROPOSED) VEGETATIVE FILTER STRIP

DRAINAGE AREA UNCPATURED AREA

SUMMARY OF PERMANENT POLLUTION ABATEMENT MEASURES:

1.) TEMPORARY BMP'S WILL BE MAINTAINED UNTIL THE SITE IMPROVEMENTS ARE COMPLETED AND THE SITE HAS BEEN STABILIZED, INCLUDING SUFFICIENT VEGETATION BEING ESTABLISHED.

2.) DURING CONSTRUCTION, TO THE EXTENT PRACTICAL, CONTRACTOR SHALL MINIMIZE THE AREA OF SOIL DISTURBANCE. AREAS OF DISTURBED SOIL SHALL BE REVEGETATED TO STABILIZE SOIL USING SOLID SOD IN A STAGGERED PATTERN. SEE DETAIL ON TEMPORARY POLLUTION ABATEMENT DETAIL SHEET AND REFER TO SECTION 1.3.11 IN TCEQ'S TECHNICAL GUIDANCE MANUAL RG-348 (2005). SOD SHOULD BE USED IN CHANNELS AND ON SLOPES > 15%. THE CONTRACTOR MAY SUBSTITUTE THE USE OF SOD WITH THE PLACEMENT OF TOP SOIL AND A FRIABLE SEED BED WITH A PROTECTIVE MATTING OR HYDRAULIC MULCH ALONG WITH WATERING UNTIL VEGETATION IS ESTABLISHED. APPLICATIONS AND PRODUCTS SHALL BE THOSE APPROVED BY TXDOT AS OF FEBRUARY 2001 AND IN COMPLIANCE WITH THE TGM RG-348 (2005). SEED MIXTURE AND/OR GRASS TYPE TO BE DETERMINED BY OWNER AND SHOULD BE IN COMPLIANCE WITH TGM RG-348 (2005) GUIDELINES. IRRIGATION MAY BE REQUIRED IN ORDER TO ESTABLISH SUFFICIENT VEGETATION.

3.) FOR DISTURBED AREAS WHERE INSUFFICIENT SOIL EXISTS TO ESTABLISH VEGETATION, CONTRACTOR SHALL PLACE A MINIMUM OF 6" OF TOPSOIL PRIOR TO REVEGETATION.

4.) TYPICAL SLOPES ON THIS PROJECT RANGE FROM APPROXIMATELY 1.00% TO 20.00%.

PERMANENT POLLUTION ABATEMENT MEASURES:

1.) SILT FENCING AND ROCK BERMS, WHERE APPROPRIATE, WILL BE MAINTAINED UNTIL THE DRIVEWAY AND DRAINAGE IMPROVEMENTS ARE COMPLETED.

2.) TWO (2) ENGINEERED VEGETATIVE FILTER STRIPS, ONE (1) NATURAL VEGETATED FILTER STRIP, AND ONE (1) JELLYFISH® FILTER BASIN WILL SERVE AS THE PERMANENT BEST MANAGEMENT PRACTICES (BMPs).

3.) ENERGY DISSIPATERS (TO HELP REDUCE EROSION) WILL BE PROVIDED AT POINTS OF CONCENTRATED DISCHARGE WHERE EXCESSIVE VELOCITIES MAY BE ENCOUNTERED.

NOTES:


1.) CONTRACTOR SHALL INSTALL AND ESTABLISH VEGETATION FOR SOIL STABILIZATION PRIOR TO SITE CLOSEOUT.

2.) ALL PERMANENT BMPs MUST BE CERTIFIED BY A REGISTERED PROFESSIONAL EŃGINEER.

THE ENGINEERING SEAL HAS BEEN AFFIXED TO THIS SHEET ONLY FOR THE PURPOSE OF DEMONSTRATING COMPLIANCE WITH THE POLLUTION ABATEMENT SIZING AND TREATMENT REQUIREMENTS OF THE TEXAS COMMISSION ON ENVIRONMENTAL QUALITY'S EDWARDS AQUIFER TECHNICAL GUIDANCE MANUAL

THIS SHEET HAS BEEN PREPARED FOR PURPOSES OF POLLUTION ABATEMENT ONLY. ALL OTHER CIVIL ENGINEERING RELATED INFORMATION SHOULD BE ACQUIRED FROM THE APPROPRIATE SHEET IN BE ACQUIRED FROM THE APPROPRIATE SHEET IN THE CIVIL IMPROVEMENT PLANS.

PLAT NO. 24-11800047 8802-71 MAY 2024 RG ESIGNER HECKED AS DRAWN RG

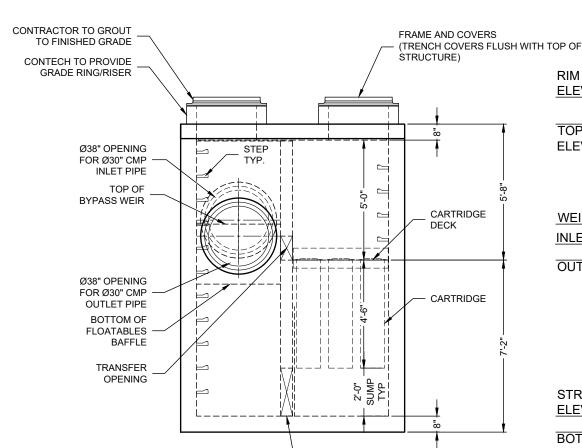

RIM ELEV. = 1171.00'

TOP OF STRUCTURE ELEV. =1171.00'

WEIR ELEV. = 1166.84'
INLET INV. ELEV. = 1165.84'

OUTLET INV. ELEV. = 1165.34'

STRUCTURE INV. ELEV. = 1158.84'

BOTTOM OF STRUCTURE ELEV. = 1158.17'

ELEVATION VIEW

TRANSFER OPENING




JELLYFISH DESIGN NOTES

JELLYFISH TREATMENT CAPACITY IS A FUNCTION OF THE CARTRIDGE LENGTH AND THE NUMBER OF CARTRIDGES. THE STANDARD PEAK DIVERSION STYLE WITH PRECAST TOP SLAB IS SHOWN. ALTERNATE OFFLINE VAULT AND/OR SHALLOW ORIENTATIONS ARE AVAILABLE. PEAK CONVEYANCE CAPACITY TO BE DETERMINED BY ENGINEER OF RECORD

CARTRIDGE SELECTION

CARTRIDGE LENGTH	54"
OUTLET INVERT TO STRUCTURE INVERT (A)	6'-6"
FLOW RATE HI-FLO / DRAINDOWN (CFS) (PER CART)	0.178 / 0.089
MAX. TREATMENT (CFS)	2.94
DECK TO INSIDE TOP (MIN) (B)	5.00



FRAME AND COVER (DIAMETER VARIES) N.T.S.

STRUCTURE ID				WQU		
WATER QUA	LITY FLO	N RATE (cfs)		2.70	
PEAK FLOW	RATE (cfs)			37.7	
RETURN PE	RIOD OF F	PEAK FLO	W (yrs)		Г	25
# OF CARTR	IDGES RE	QUIRED ((HF / DD)		14 / 3	
CARTRIDGE	LENGTH					54"
PIPE DATA:	I.E.	MAT'L	DIA	SLOPE	%	HGL
INLET #1	1165.84'	CMP	30"	*		*
INLET #2	*	*	*	*		*
OUTLET	1165.34'	CMP	30"	*		*
SEE GENERAL NOTES 6-7 FOR INLET AND OUTLET HYDRAULIC AND SIZING REQUIREMENTS.						
RIM ELEVATION 1171.00'						
THIN LLL VICTION						
ANTI-FLOTATION BALLAST WIDTH HEIGHT				EIGHT		
*				*		
NOTES/SPECIAL REQUIREMENTS:						
* PER ENGINEER OF RECORD						

SITE SPECIFIC
DATA REQUIREMENTS

GENERAL NOTES

- 1. CONTECH TO PROVIDE ALL MATERIALS UNLESS NOTED OTHERWISE.
- 2. FOR SITE SPECIFIC DRAWINGS WITH DETAILED STRUCTURE DIMENSIONS AND WEIGHT, PLEASE CONTACT YOUR CONTECH ENGINEERED SOLUTIONS REPRESENTATIVE. www.ContechES.com
- 3. JELLYFISH WATER QUALITY STRUCTURE SHALL BE IN ACCORDANCE WITH ALL DESIGN DATA AND INFORMATION CONTAINED IN THIS DRAWING. CONTRACTOR TO CONFIRM STRUCTURE MEETS REQUIREMENTS OF PROJECT.
- 4. STRUCTURE SHALL MEET AASHTO HS-20 OR PER APPROVING JURISDICTION REQUIREMENTS, WHICHEVER IS MORE STRINGENT, ASSUMING EARTH COVER OF 0' 10', AND GROUNDWATER ELEVATION AT, OR BELOW, THE OUTLET PIPE INVERT ELEVATION. ENGINEER OF RECORD TO CONFIRM ACTUAL GROUNDWATER ELEVATION. CASTINGS SHALL MEET AASHTO M306 LOAD RATING AND BE CAST WITH THE CONTECH LOGO.
- 5. STRUCTURE SHALL BE PRECAST CONCRETE CONFORMING TO ASTM C-857, ASTM C-918, AND AASHTO LOAD FACTOR DESIGN METHOD.
- 6. OUTLET PIPE INVERT IS EQUAL TO THE CARTRIDGE DECK ELEVATION.
- 7. THE OUTLET PIPE DIAMETER FOR NEW INSTALLATIONS IS RECOMMENDED TO BE ONE PIPE SIZE LARGER THAN THE INLET PIPE AT EQUAL OR GREATER SLOPE.
- 8. NO PRODUCT SUBSTITUTIONS SHALL BE ACCEPTED UNLESS SUBMITTED 10 DAYS PRIOR TO PROJECT BID DATE, OR AS DIRECTED BY THE ENGINEER OF RECORD.

INSTALLATION NOTES

- A. ANY SUB-BASE, BACKFILL DEPTH, AND/OR ANTI-FLOTATION PROVISIONS ARE SITE-SPECIFIC DESIGN CONSIDERATIONS AND SHALL BE SPECIFIED BY ENGINEER OF RECORD.
- B. CONTRACTOR TO PROVIDE EQUIPMENT WITH SUFFICIENT LIFTING AND REACH CAPACITY TO LIFT AND SET THE STRUCTURE
- C. CONTRACTOR WILL INSTALL AND LEVEL THE STRUCTURE, SEALING THE JOINTS, LINE ENTRY AND EXIT POINTS (NON-SHRINK GROUT WITH APPROVED WATERSTOP OR FLEXIBLE BOOT).
- D. CARTRIDGE INSTALLATION, BY CONTECH, SHALL OCCUR ONLY AFTER SITE HAS BEEN STABILIZED AND THE JELLYFISH UNIT IS CLEAN AND FREE OF DEBRIS. CONTACT CONTECH TO COORDINATE CARTRIDGE INSTALLATION WITH SITE STABILIZATION.



 www.ContechES.com

 9100 Centre Pointe Dr., Suite 400, West Chester, OH 45069

 800-338-1122
 513-645-7000
 513-645-7993 FAX

JELLYFISH JFPD0808 - 782925 - 010 PROJECT NAME: BORGFELD LOT 4 LOCATION: SAN ANTONIO, TX SITE DESIGNATION: WQU

CONTRIBUTING ZONE PLAN APPLICATION (TCEQ-10257)

Contributing Zone Plan Application

Texas Commission on Environmental Quality

for Regulated Activities on the Contributing Zone to the Edwards Aquifer and Relating to 30 TAC §213.24(1), Effective June 1, 1999

To ensure that the application is administratively complete, confirm that all fields in the form are complete, verify that all requested information is provided, consistently reference the same site and contact person in all forms in the application, and ensure forms are signed by the appropriate party.

Note: Including all the information requested in the form and attachments contributes to more streamlined technical reviews.

Signature

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. This **Contributing Zone Plan Application** is hereby submitted for TCEQ review and Executive Director approval. The application was prepared by:

Print Name of Customer/Agent: Brooke Lindholm, P.E.

Date: 9/8/2025

Signature of Customer/Agent:

Regulated Entity Name: BLCCS Site Improvements

Project Information

1. County: Bexar

2. Stream Basin: Cibolo Creek

3. Groundwater Conservation District (if applicable): Trinity Glen Rose

4. Customer (Applicant):

Contact Person: Shannon Mills

Entity: BLCCS

Mailing Address: 1665 E Borgfeld Dr

 City, State: San Antonio, TX
 Zip: 78260

 Telephone: (210)394-5132
 Fax: _____

Email Address: shannon@blccs.com

5.	Agent/Representative (If any):
	Contact Person: Brooke Lindholm, P.E. Entity: Pape-Dawson Engineers, Inc. Mailing Address: 2000 NW Loop 410 City, State: San Antonio, TX Telephone: (210)375-9000 Email Address: blindholm@pape-dawson.com
6.	Project Location:
	 ☐ The project site is located inside the city limits of ☐ The project site is located outside the city limits but inside the ETJ (extra-territorial jurisdiction) of <u>San Antonio</u>. ☐ The project site is not located within any city's limits or ETJ.
7.	The location of the project site is described below. Sufficient detail and clarity has been provided so that the TCEQ's Regional staff can easily locate the project and site boundaries for a field investigation.
	From TCEQ's Regional Office, head north on Judson Road approximately 2.5 miles to Loop 1604. Travel west on Loop 1604 approximately 4.9 miles to U.S. Hwy 281. Head north on U.S. Hwy 281 approximately 7.2 miles to take the Brogfeld Drive exit ramp. Head west on Brogfekd Drive approximately 1.1 miles and the site will be your right.
8.	Attachment A - Road Map. A road map showing directions to and the location of the project site is attached. The map clearly shows the boundary of the project site.
9.	Attachment B - USGS Quadrangle Map. A copy of the official 7 ½ minute USGS Quadrangle Map (Scale: 1" = 2000') is attached. The map(s) clearly show:
	☑ Project site boundaries.☑ USGS Quadrangle Name(s).
10.	Attachment C - Project Narrative. A detailed narrative description of the proposed project is attached. The project description is consistent throughout the application and contains, at a minimum, the following details:
	 Area of the site ○ Offsite areas ○ Impervious cover ○ Permanent BMP(s) ○ Proposed site use ○ Site history ○ Previous development ○ Area(s) to be demolished

11. Existing project site conditions are noted below:

Existing commercial site Existing industrial site Existing residential site Existing paved and/or unpaved roads Undeveloped (Cleared) Undeveloped (Undisturbed/Not cleared) Other:	
12. The type of project is:	
Residential: # of Lots: Residential: # of Living Unit Equivalents: Commercial Industrial Other:	
13. Total project area (size of site): 4.18 Acres	
Total disturbed area: <u>0.55</u> Acres	
14. Estimated projected population:	
15. The amount and type of impervious cover expected after below:	construction is complete is shown

Table 1 - Impervious Cover

Impervious Cover of Proposed Project	Sq. Ft.	Sq. Ft./Acre	Acres
Structures/Rooftops		÷ 43,560 =	
Parking		÷ 43,560 =	
Other paved surfaces		÷ 43,560 =	
Total Impervious Cover	59,622.12	÷ 43,560 =	1.37

Total Impervious Cover $\underline{1.37}$ ÷ Total Acreage $\underline{4.18}$ X 100 = $\underline{32.74}$ % Impervious Cover

16. Attachment D - Factors Affecting Surface W	ater Quality. A detailed description of all
factors that could affect surface water quali	ty is attached. If applicable, this includes the
location and description of any discharge as	sociated with industrial activity other than
construction.	

17. \boxtimes Only inert materials as defined by 30 TAC 330.2 will be used as fill material.

For Road Projects Only

Complete questions 18 - 23 if this application is exclusively for a road project. \bowtie N/A 18. Type of project: TXDOT road project. County road or roads built to county specifications. City thoroughfare or roads to be dedicated to a municipality. Street or road providing access to private driveways. 19. Type of pavement or road surface to be used: Concrete Asphaltic concrete pavement __ Other: 20. Right of Way (R.O.W.): Length of R.O.W.: _____ feet. Width of R.O.W.: feet. L x W = $Ft^2 \div 43,560 Ft^2/Acre = acres.$ 21. Pavement Area: Length of pavement area: _____ feet. Width of pavement area: _____ feet. L x W = _____Ft² \div 43,560 Ft²/Acre = _____ acres. Pavement area _____ acres ÷ R.O.W. area _____ acres x 100 = _____% impervious cover. 22. A rest stop will be included in this project. A rest stop will not be included in this project. 23. Maintenance and repair of existing roadways that do not require approval from the TCEQ Executive Director. Modifications to existing roadways such as widening roads/adding shoulders totaling more than one-half (1/2) the width of one (1) existing lane require prior approval from the TCEQ. Stormwater to be generated by the Proposed Project 24. Attachment E - Volume and Character of Stormwater. A detailed description of the volume (quantity) and character (quality) of the stormwater runoff which is expected to occur from the proposed project is attached. The estimates of stormwater runoff quality and quantity are based on area and type of impervious cover. Include the runoff coefficient of the site for both pre-construction and post-construction conditions.

Wastewater to be generated by the Proposed Project 25. Wastewater is to be discharged in the contributing zone. Requirements under 30 TAC §213.6(c) relating to Wastewater Treatment and Disposal Systems have been satisfied. \times N/A 26. Wastewater will be disposed of by: On-Site Sewage Facility (OSSF/Septic Tank): Attachment F - Suitability Letter from Authorized Agent. An on-site sewage facility will be used to treat and dispose of the wastewater from this site. The appropriate licensing authority's (authorized agent) written approval is attached. It states that the land is suitable for the use of private sewage facilities and will meet or exceed the requirements for on-site sewage facilities as specified under 30 TAC Chapter 285 relating to On-site Sewage Facilities. Each lot in this project/development is at least one (1) acre (43,560 square feet) in size. The system will be designed by a licensed professional engineer or registered sanitarian and installed by a licensed installer in compliance with 30 TAC Chapter 285. Sewage Collection System (Sewer Lines): The sewage collection system will convey the wastewater to the Steven M. Clouse Water Recycling Center (name) Treatment Plant. The treatment facility is: imes Existing. Proposed. N/A Permanent Aboveground Storage Tanks(ASTs) ≥ 500 Gallons Complete questions 27 - 33 if this project includes the installation of AST(s) with volume(s) greater than or equal to 500 gallons.

Table 2 - Tanks and Substance Storage

27. Tanks and substance stored:

 \square N/A

AST Number	Size (Gallons)	Substance to be Stored	Tank Material
1			
2			
3			

AST Number	Size (Gal	lons)	Stor	red	Tank	k Material
4						
5						
	1	<u> </u>		Tota	al x 1.5 =	Gallons
one-half (1 one tank sy times the co	I be placed within a 1/2) times the stora stem, the containm umulative storage c	age capacity of ent structure apacity of all	of the syst is sized to systems.	em. For fac o capture or	ilities wit ne and or	th more than ne-half (1 1/2)
for providin	t G - Alternative Se ng secondary contain for the Edwards Aqu	nment are pro	oposed. S			
	ons and capacity of		structure	(s):		
Length (L)(Ft.)	ary Containment Width(W)(Ft.)	Height (H)	(Ft.) L	x W x H = (F	t3)	Gallons
		Trengme (Tr)	(1 6.)		,	
_						
					Total:	Gallons
30. Piping:						
All piping, h Some of the structure. The piping v	oses, and dispensed e piping to dispense will be aboveground will be underground	rs or equipmo				
	ment area must be s) being stored. The				•	
_	t H - AST Containm nt structure is attach		_		Irawing o	of the
☐ Internal ☐ Tanks cle	dimensions (length drainage to a point early labeled learly labeled	•			•	

Substance to be

Dispenser clearly labeled
33. Any spills must be directed to a point convenient for collection and recovery. Spills from storage tank facilities must be removed from the controlled drainage area for disposal within 24 hours of the spill.
 In the event of a spill, any spillage will be removed from the containment structure within 24 hours of the spill and disposed of properly. In the event of a spill, any spillage will be drained from the containment structure through a drain and valve within 24 hours of the spill and disposed of properly. The drain and valve system are shown in detail on the scaled drawing.
Site Plan Requirements
Items 34 - 46 must be included on the Site Plan.
34. \square The Site Plan must have a minimum scale of 1" = 400'.
Site Plan Scale: 1" = <u>50</u> '.
35. 100-year floodplain boundaries:
 Some part(s) of the project site is located within the 100-year floodplain. The floodplain is shown and labeled. No part of the project site is located within the 100-year floodplain. The 100-year floodplain boundaries are based on the following specific (including date of material) sources(s): FEMA (Flood Insurance Rate Map for Bexar County, Texas and Incorportared Areas) Panel Number 48029C0130G, dated September 29, 2010. The layout of the development is shown with existing and finished contours at
appropriate, but not greater than ten-foot contour intervals. Lots, recreation centers, buildings, roads, etc. are shown on the site plan.
The layout of the development is shown with existing contours at appropriate, but not greater than ten-foot contour intervals. Finished topographic contours will not differ from the existing topographic configuration and are not shown. Lots, recreation centers, buildings, roads, etc. are shown on the site plan.
37. A drainage plan showing all paths of drainage from the site to surface streams.
38. The drainage patterns and approximate slopes anticipated after major grading activities
39. Areas of soil disturbance and areas which will not be disturbed.
40. \(\sum \) Locations of major structural and nonstructural controls. These are the temporary and permanent best management practices.
41. \(\sum \) Locations where soil stabilization practices are expected to occur.
42. Surface waters (including wetlands).

	⊠ N/A
43.	. Locations where stormwater discharges to surface water.
	There will be no discharges to surface water.
44.	. Temporary aboveground storage tank facilities.
	Temporary aboveground storage tank facilities will not be located on this site.
45.	. Permanent aboveground storage tank facilities.
	Permanent aboveground storage tank facilities will not be located on this site.
46.	. 🔀 Legal boundaries of the site are shown.
Pe	ermanent Best Management Practices (BMPs)
Pro	actices and measures that will be used during and after construction is completed.
47.	. Permanent BMPs and measures must be implemented to control the discharge of pollution from regulated activities after the completion of construction.
	□ N/A
48.	These practices and measures have been designed, and will be constructed, operated, and maintained to insure that 80% of the incremental increase in the annual mass loading of total suspended solids (TSS) from the site caused by the regulated activity is removed. These quantities have been calculated in accordance with technical guidance prepared or accepted by the executive director.
	 The TCEQ Technical Guidance Manual (TGM) was used to design permanent BMPs and measures for this site. A technical guidance other than the TCEQ TGM was used to design permanent BMPs and measures for this site. The complete citation for the technical guidance that was used is:
	□ N/A
49.	. Owners must insure that permanent BMPs and measures are constructed and function as designed. A Texas Licensed Professional Engineer must certify in writing that the permanent BMPs or measures were constructed as designed. The certification letter must be submitted to the appropriate regional office within 30 days of site completion.
	□ N/A
50.	. Where a site is used for low density single-family residential development and has 20 % or less impervious cover, other permanent BMPs are not required. This exemption from permanent BMPs must be recorded in the county deed records, with a notice that if the percent impervious cover increases above 20% or land use changes, the exemption for the whole site as described in the property boundaries required by 30 TAC 6213 4(g) (relating to

	notify the appropriate regional office of these changes.
	 □ The site will be used for low density single-family residential development and has 20% or less impervious cover. □ The site will be used for low density single-family residential development but has more than 20% impervious cover. □ The site will not be used for low density single-family residential development.
51.	. The executive director may waive the requirement for other permanent BMPs for multifamily residential developments, schools, or small business sites where 20% or less impervious cover is used at the site. This exemption from permanent BMPs must be recorded in the county deed records, with a notice that if the percent impervious cover increases above 20% or land use changes, the exemption for the whole site as described in the property boundaries required by 30 TAC §213.4(g) (relating to Application Processing and Approval), may no longer apply and the property owner must notify the appropriate regional office of these changes.
	 □ Attachment I - 20% or Less Impervious Cover Waiver. The site will be used for multi-family residential developments, schools, or small business sites and has 20% or less impervious cover. A request to waive the requirements for other permanent BMPs and measures is attached. □ The site will be used for multi-family residential developments, schools, or small business sites but has more than 20% impervious cover. □ The site will not be used for multi-family residential developments, schools, or small business sites.
52.	. X Attachment J - BMPs for Upgradient Stormwater.
	 A description of the BMPs and measures that will be used to prevent pollution of surface water, groundwater, or stormwater that originates upgradient from the site and flows across the site is attached. No surface water, groundwater or stormwater originates upgradient from the site and flows across the site, and an explanation is attached. Permanent BMPs or measures are not required to prevent pollution of surface water, groundwater, or stormwater that originates upgradient from the site and flows across the site, and an explanation is attached.
53.	. X Attachment K - BMPs for On-site Stormwater.
	 A description of the BMPs and measures that will be used to prevent pollution of surface water or groundwater that originates on-site or flows off the site, including pollution caused by contaminated stormwater runoff from the site is attached. Permanent BMPs or measures are not required to prevent pollution of surface water or groundwater that originates on-site or flows off the site, including pollution caused by contaminated stormwater runoff, and an explanation is attached.

	rachment L - BMPs for Surface Streams. A description of the BMPs and measures at prevent pollutants from entering surface streams is attached.
□ N/A	A
pro sup dat atta	rachment M - Construction Plans. Construction plans and design calculations for the oposed permanent BMPs and measures have been prepared by or under the direct pervision of a Texas Licensed Professional Engineer, and are signed, sealed, and seed. Construction plans for the proposed permanent BMPs and measures are ached and include: Design calculations, TCEQ Construction Notes, all proposed uctural plans and specifications, and appropriate details.
□ N/A	A
spe	achment N - Inspection, Maintenance, Repair and Retrofit Plan. A site and BMP ecific plan for the inspection, maintenance, repair, and, if necessary, retrofit of the manent BMPs and measures is attached. The plan fulfills all of the following:
	Prepared and certified by the engineer designing the permanent BMPs and measures Signed by the owner or responsible party Outlines specific procedures for documenting inspections, maintenance, repairs,
	and, if necessary, retrofit. Contains a discussion of record keeping procedures
☐ N/A	A
rec	rachment O - Pilot-Scale Field Testing Plan. Pilot studies for BMPs that are not cognized by the Executive Director require prior approval from the TCEQ. A plan for ot-scale field testing is attached.
□ N/A	A
of t and and cre by	the measures that will be used to avoid or minimize surface stream contamination. A description of changes in the way in which water enters a stream as a result of the construction of development is attached. The measures address increased stream flashing, the ation of stronger flows and in-stream velocities, and other in-stream effects caused the regulated activity, which increase erosion that result in water quality gradation.
□ N/A	A
_	nsibility for Maintenance of Permanent BMPs and res after Construction is Complete.
unt	e applicant is responsible for maintaining the permanent BMPs after construction til such time as the maintenance obligation is either assumed in writing by another tity having ownership or control of the property (such as without limitation, an 10 of 11
	10 01 11

owner's association, a new property owner or lessee, a district, or municipality) or the ownership of the property is transferred to the entity. Such entity shall then be responsible for maintenance until another entity assumes such obligations in writing or ownership is transferred.

60. A copy of the transfer of responsibility must be filed with the executive director at the appropriate regional office within 30 days of the transfer if the site is for use as a multiple single-family residential development, a multi-family residential development, or a non-residential development such as commercial, industrial, institutional, schools, and other sites where regulated activities occur.

Administrative Information

61. 🔀	Submit one (1) original and one (1) copy of the application, plus additional copies as
	needed for each affected incorporated city, groundwater conservation district, and
	county in which the project will be located. The TCEQ will distribute the additional
	copies to these jurisdictions.

62. $igwidge$ Any modification of this Contributing Zone Plan may require TCE(2 review and Executive
Director approval prior to construction, and may require submiss	ion of a revised
application, with appropriate fees.	


63.	The site description, controls, maintenance, and inspection requirements for the storm
	water pollution prevention plan (SWPPP) developed under the EPA NPDES general
	permits for stormwater discharges have been submitted to fulfill paragraphs 30 TAC
	§213.24(1-5) of the technical report. All requirements of 30 TAC §213.24(1-5) have
	been met by the SWPPP document.

١	∇	The Tempora	ary Stormwater Section	TCFO-0602) is included	with the an	nlication
ı	/ \	i ilic icilipoid	ary storiniwater section i	ICLU DOUZ	, is illiciaucu	with the ap	piication

ATTACHMENT A

BORGFELD LOT 4 Contributing Zone Plan



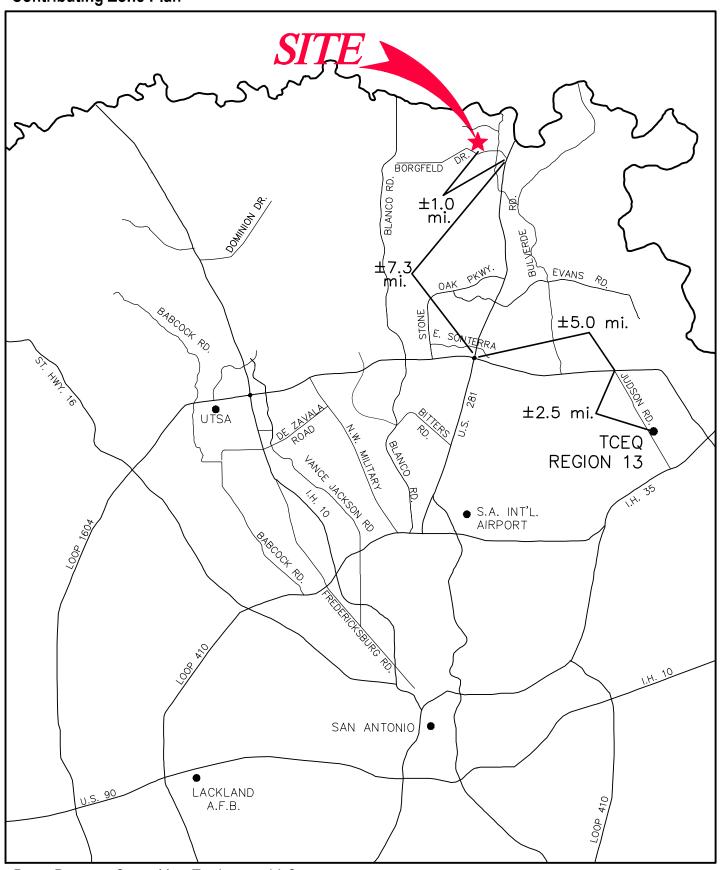


Pape-Dawson Consulting Engineers, LLC

Date: May 13, 2024, 10: 41am User ID: rgarcia
File: P: \88\02\71\Design\Environmenta\CZP\RM880271.dwg

ATTACHMENT A Road Map

ATTACHMENT B



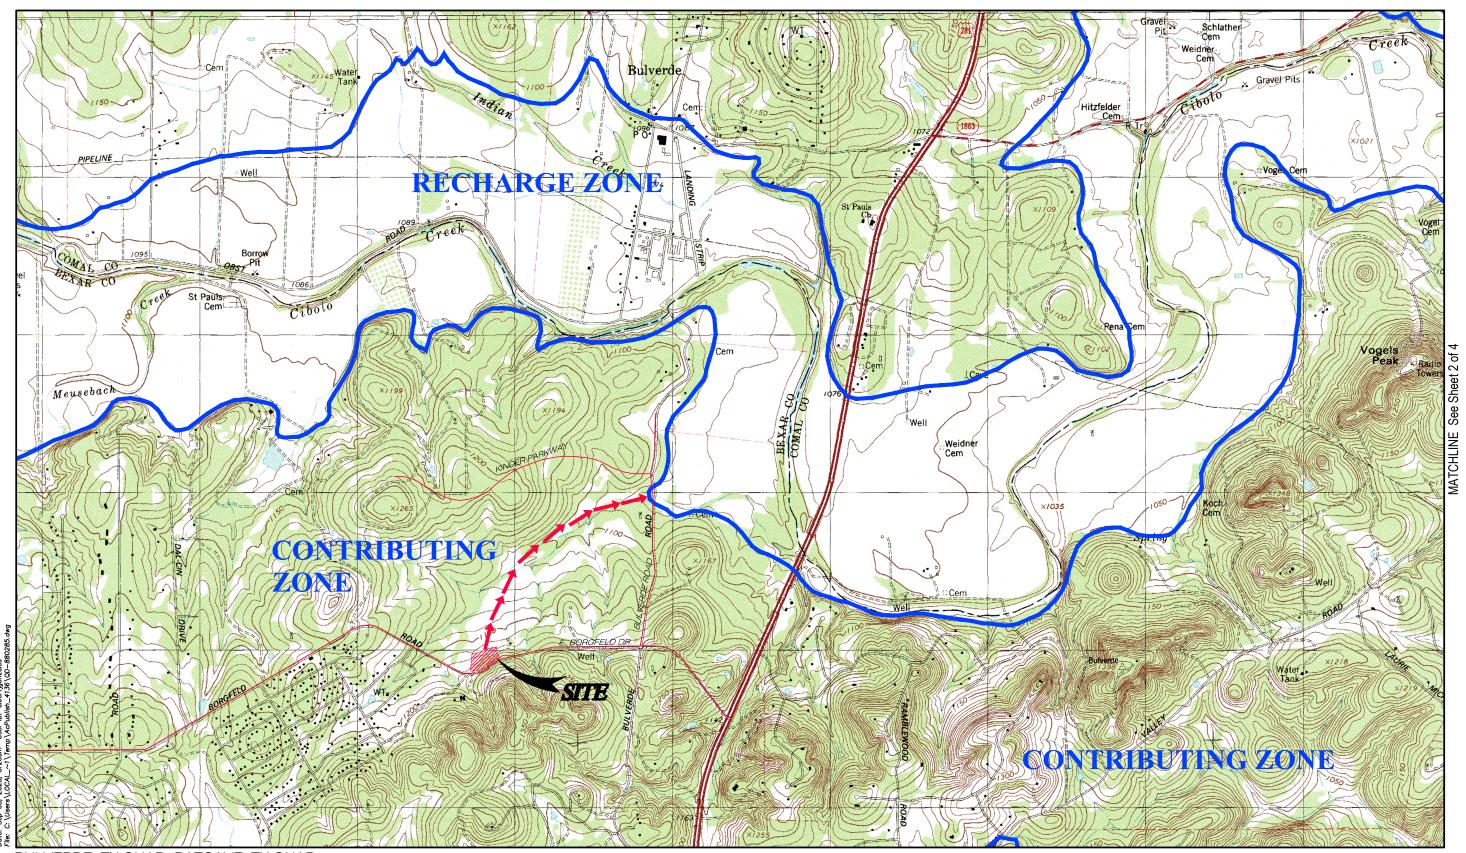


BULVERDE, TX QUAD; BATCAVE, TX QUAD; LONGHORN, TX QUAD; SCHERTZ, TX QUAD DRAINAGE FLOW

Pape—Dawson Consulting Engineers, LLC

USGS/EDWARDS RECHARGE ZONE MAP Sheet 1 Of 4 ATTACHMENT B




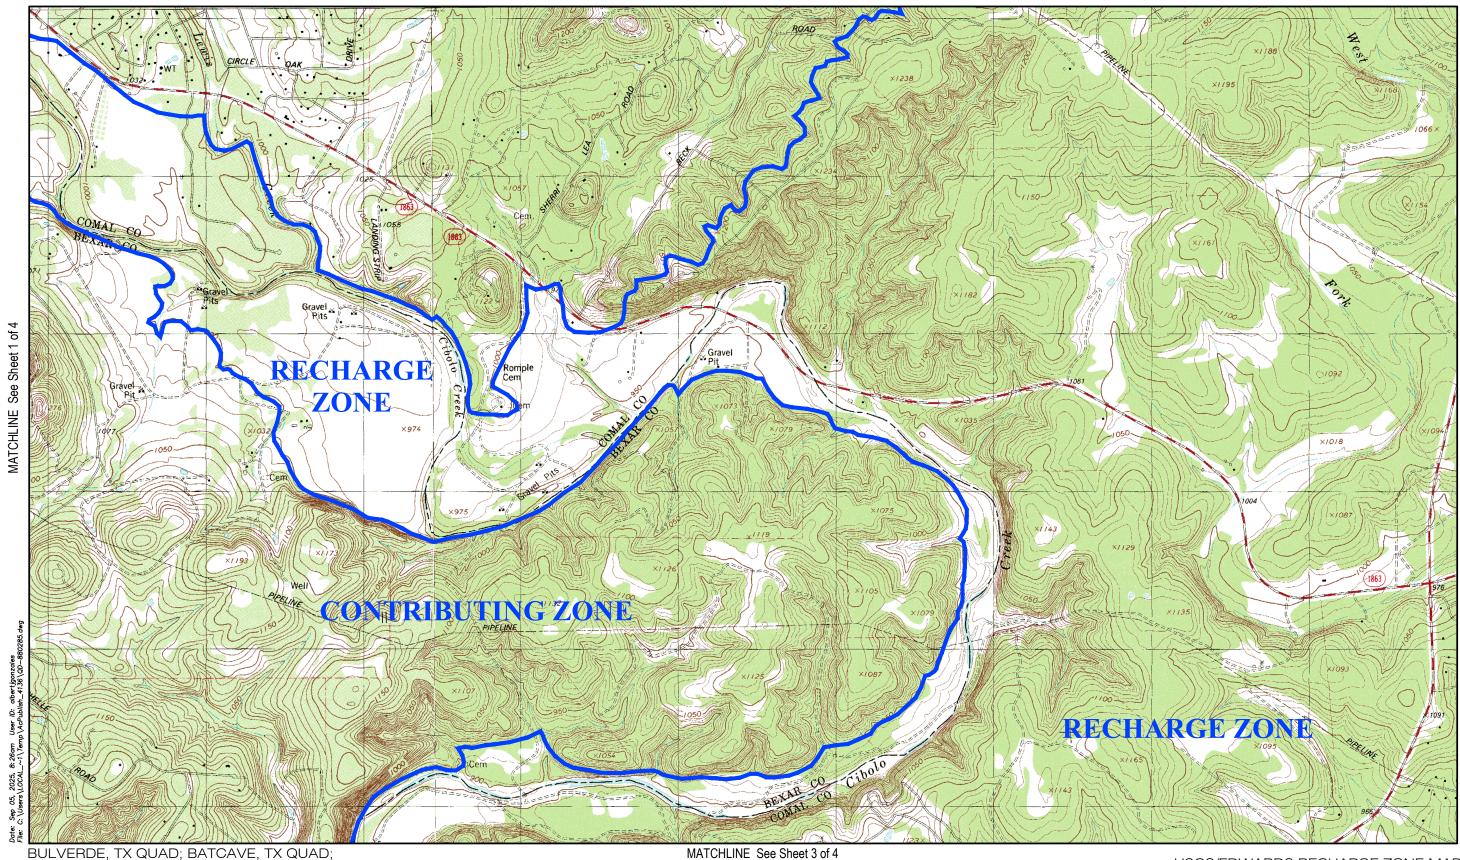

LONGHORN, TX QUAD; SCHERTZ, TX QUAD DRAINAGE FLOW ---Pape-Dawson Consulting Engineers, LLC

USGS/EDWARDS RECHARGE ZONE MAP Sheet 2 Of 4 ATTACHMENT B



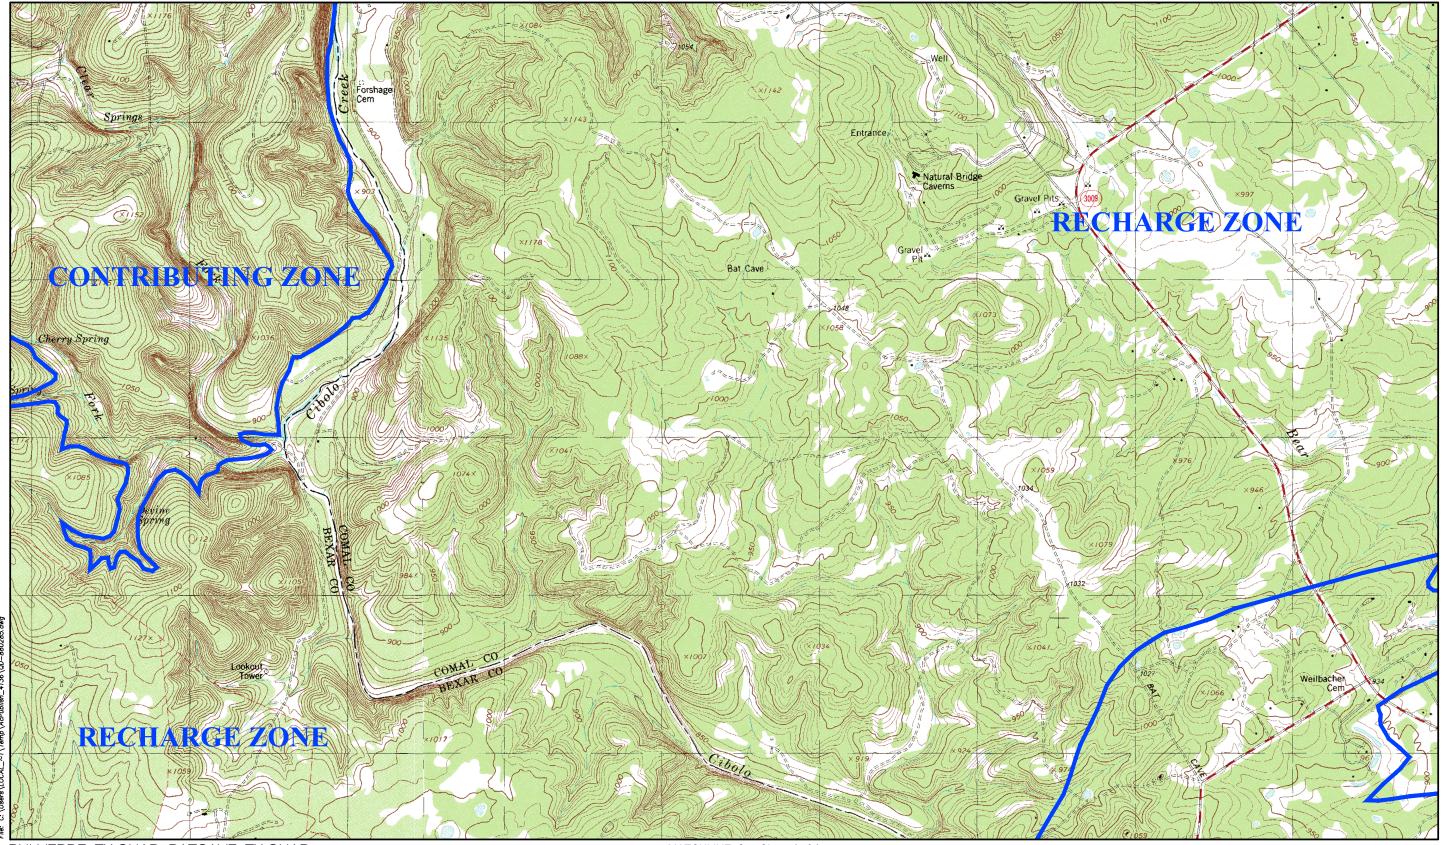


BULVERDE, TX QUAD; BATCAVE, TX QUAD; LONGHORN, TX QUAD; SCHERTZ, TX QUAD DRAINAGE FLOW

T

MATCHLINE See Sheet 4 of 4

USGS/EDWARDS RECHARGE ZONE MAP Sheet 3 Of 4 ATTACHMENT B MATCHLINE See Sheet 3 of 4 SCALE: 1" = 2000

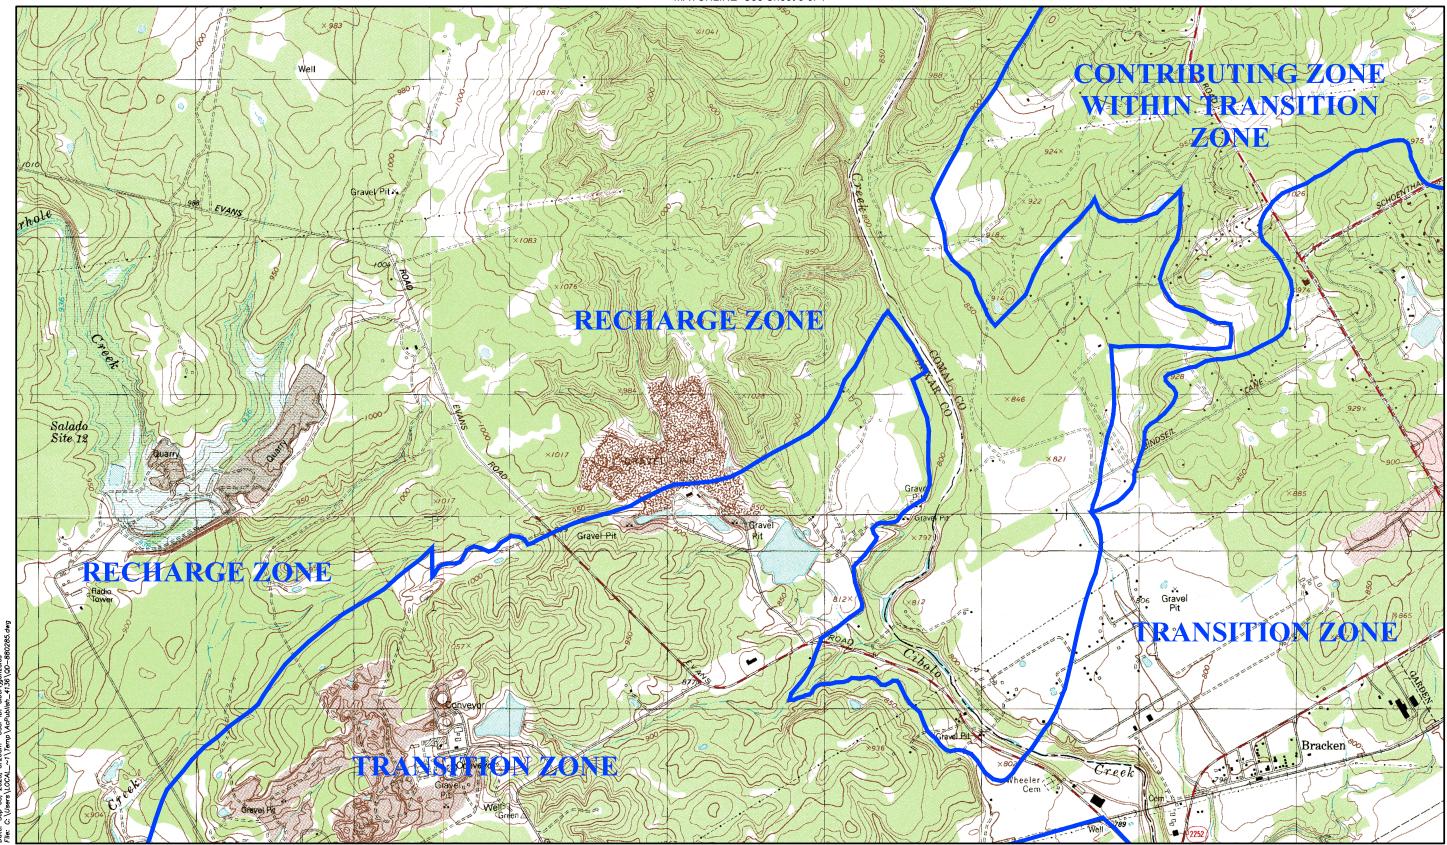

USGS/EDWARDS RECHARGE ZONE MAP Sheet 4 Of 4 ATTACHMENT B

ATTACHMENT C

Attachment C - Project Narrative

The BLCCS Site Improvements Contributing Zone Plan Modification (CZP MOD) is a modification to the previously approved Borgfeld Lot 4 CZP (EAPP ID 13001956), which were approved by the Texas Commission on Environmental Quality (TCEQ) on August 9, 2024. This modification plan proposes a warehouse and parking on an approximately 4.18-acre project site outside the city limits of San Antonio, but within its extraterritorial jurisdiction in Bexar County, Texas. The entire site is located over the Edwards Aquifer Contributing Zone. Since the project is located entirely over the Edwards Contributing Zone, a Geologic Assessment was not conducted and is not required by 30 TAC 213 regulations. Therefore, no naturally occurring sensitive features are known to exist on the site.

This CZP MOD proposes clearing, and excavation for the construction of a commercial site for a warehouse building, parking, and wet utilities. Approximately 1.37 acres of imperious cover, or 32.74% of the 4.18-acre project limits, are proposed for construction in this CZP MOD. The proposed Permanent Best Management Practices (PBMPs) for stormwater treatment are (1) existing Jellyfish® Filter basin, and two (2) 15' Engineered Vegetative Filter strips which are designed in accordance with TCEQ's Technical Guidance Manual (TGM) RG-348 (2005) to remove 80% of the increase in Total Suspended Solids (TSS) from the site.

Watershed Area "A" is being development as a parking lot space. The generated flow will be conveyed to the existing Jellyfish® filter for treatment accounting for ultimate development at an assumed 80% imperious cover. There are 0.08 acres of existing imperious cover contributed by a turn lane. The existing grade does not allow for the flow to reach the Jellyfish® filter, but treatment is provided via overtreatment. Watershed Area "B" and "C" are 0.03 and 0.20 acres of impervious cover, respectively, are treated by 15' Engineered Vegetative Filter strips. Please see the Treatment Summary table located in the Exhibits section with this application

Potable water service is to be provided by the San Antonio Water System (SAWS). The proposed development will not generate any domestic wastewater flows as the improvements do not require utility service.

Wastewater will be disposed of by conveyance to the existing Steven M. Close Water Recycling Center operated by SAWS.

ATTACHMENT D

Attachment D - Factors Affecting Surface Water Quality

Potential sources of pollution that may reasonably be expected to affect the quality of storm water discharges from the site during construction include:

- Soil erosion due to the demolition and clearing of the site;
- Oil, grease, fuel and hydraulic fluid contamination from construction equipment and vehicle drippings;
- Hydrocarbons from asphalt paving operations;
- Miscellaneous trash and litter from construction workers and material wrappings;
- Concrete truck washout.
- Potential overflow/spills from portable toilets
- Potential sources of pollution that may reasonably be expected to affect the quality of storm water discharges from the site after development include:
- Oil, grease, fuel and hydraulic fluid contamination from vehicle drippings;
- Dirt and dust which may fall off vehicles; and
- Miscellaneous trash and litter.

ATTACHMENT E

Attachment E - Volume and Character of Stormwater

Stormwater runoff will increase as a result of this development. For a 25-year storm event, the overall project will generate approximately 34 cfs. The runoff coefficient for the site will stay the same before and after development at 0.85. Values are based on the Rational Method using runoff coefficients per the City of San Antonio Unified Development Code.

ATTACHMENT J

Attachment J - BMPs for Upgradient Stormwater

The proposed Permanent Best Management Practices (PBMPs) for stormwater treatment is two (2) fifteen-foot (15') engineered vegetative filter strip which are designed in accordance with the TCEQ's Technical Guidance Manual (TGM) RG-348 (2005) to remove 80% of the increase in Total Suspended Solids (TSS) from the site.

ATTACHMENT K

Attachment K - BMPs for Onsite Stormwater

The proposed Permanent Best Management Practices (PBMPs) for stormwater treatment is two (2) Fifteen-foot (15') engineered vegetative filter strips which are designed in accordance with the TCEQ's Technical Guidance Manual (TGM) RG-348 (2005) to remove 80% of the increase in Total Suspended Solids (TSS) from the site.

ATTACHMENT L

Attachment L - BMPs for Surface Streams

No surface streams are located on or adjacent to the project site. The proposed Permanent Best Management Practices (PBMPs) for stormwater treatment is two (2) fifteen-foot (15') engineered vegetative filter strips which are designed in accordance with the TCEQ's Technical Guidance Manual (TGM) RG-348 (2005) to remove 80% of the increase in Total Suspended Solids (TSS) from the site.

ATTACHMENT M

Attachment M - Construction Plans

	Please refer to the	Exhibits Section	of this application	for the Contributing	Zone Plan Site Plans.
--	---------------------	------------------	---------------------	----------------------	-----------------------

ATTACHMENT N

Attachment N - Inspection, Maintenance, Repair and Retrofit Plan

PERMANENT POLLUTION ABATEMENT MEASURES MAINTENANCE SCHEDULE AND MAINTENANCE PROCEDURES

This document has been prepared to provide a description and schedule for the performance of maintenance on permanent pollution abatement measures. Maintenance measures to be performed will be dependent on what permanent pollution abatement measures are incorporated into the project. The project specific water pollution abatement plan should be reviewed to determine what permanent pollution abatement measures are incorporated into a project.

It should also be noted that the timing and procedures presented herein are general guidelines, adjustment to the timing and procedures may have to be made depending on project specific characteristics as well as weather related conditions.

Where a project is occupied by the owner, the owner may provide for maintenance with his own skilled forces or contract for recommended maintenance of Permanent Best Management Practices. Where a project is occupied or leased by a tenant, the owner shall require tenants to contract for such maintenance services either through a lease agreement, property owners association covenants, or other binding document.

I understand that I am responsible for maintenance of the Permanent Pollution Abatement Measures included in this project until such time as the maintenance obligation is either assumed in writing by another entity having ownership or control of the property or ownership is transferred.

I, the owner, have read and understand the requirements of the attached Maintenance Plan and Schedule.

Shannon Mills, Owner

BLCCS Investments, LLC

Date

INSPECTION AND MAINTENANCE SCHEDULE FOR PERMANENT POLLUTION ABATEMENT MEASURES

Recommended Frequency	Task to be Performed	
	1	
Annually*	√	
After Rainfall	√	

^{*}Inspections to occur quarterly during the first year of operation. $\sqrt{\text{Indicates maintenance procedure that applies to this specific site.}}$

See description of maintenance task to be performed on the following pages. Frequency of maintenance tasks may vary depending on amount of rainfall and other weather-related conditions but may not be altered without TCEQ approval. Inspection frequency in subsequent years is based on the maintenance plan developed in the first year, but must occur annually at a minimum.

A written record will be kept of inspection results and maintenance performed.

Task No. & Description	Included in this project		
Vegetated Filter Strips	Yes	Ne	

MAINTENANCE PROCEDURES FOR PERMANENT POLLUTION ABATEMENT MEASURES (Jellyfish)

Note: Additional guidance can be obtained from the TCEQ's Technical Guidance Manual (TGM) RG-348 (2005) Addendum, Section 3.2.4, as well as the Jellyfish® Filter Owner's Manual provided by Imbrium® Systems.

1. <u>Vegetated Filter Strips</u>. Once a vegetated area is well established, little additional maintenance is generally necessary. The key to establishing a viable feature is the care and maintenance it receives in the first few months after it is planted. Once established, all vegetated BMPs require some basic maintenance to insure the health of the plants. An Integrated Pest Management (IPM) Plan should be developed for vegetated areas. This plan should specify how problem insects and weeds will be controlled with minimal or no use of insecticides and herbicides.

Vegetation height for native grasses shall be limited to no more than 18-inches. When vegetation exceeds that height, the filter strips shall be cut to a height of approximately 4 inches. Turf grass shall be limited to a height of 4-inches with regular maintenance that utilizes a mulching mower. Trash and debris shall be removed from the filter strips prior to cutting. Sediment removal is not normally required in filter strips since the vegetation normally grows through it and binds it to the soil. However, sediment should be removed by hand or with flat-bottomed shovels. At any time, where there is work or disturbance whether in an easement or not, stabilization measures shall be initiated as soon as practicable in portions of the site where the work/disturbance activities have temporarily or permanently ceased. The vegetated filter strips shall be revegetated within 14 days after work has ceased in any portion where there is work or disturbance within an easement.

Check filter strips for signs of concentrated flow and erosion. Areas of filter strip showing signs of erosion shall be repaired by scarifying the eroded area, reshaping, regrading and placement of solid block sod over the affected area. Construction of a level spreader device may be necessary to reestablish shallow overland flow. Corrective maintenance, such as weeding, or replanting should be done more frequently in the first two to three years after installation to ensure stabilization. Dense vegetation may require irrigation immediately after planting, and during particularly dry periods,

particularly as the vegetation is initially established. A written record will be kept of inspection results and corrective measures taken.

Recordkeeping Produces for Inspections, Maintenance, repairs, and Retrofits:

- Written records shall be kept by the party responsible for maintenance or a designated representative.
- Written records shall be retained for a minimum of five (5) years.

ATTACHMENT P

Attachment P - Measures for Minimizing Surface Stream Contamination

Any points where discharge from the site is concentrated and erosive velocities exist will include appropriately sized energy dissipators to reduce velocities to non-erosive levels.

TEMPORARY STORMWATER SECTION (TCEQ-0602)

Temporary Stormwater Section

Texas Commission on Environmental Quality

for Regulated Activities on the Edwards Aquifer Recharge Zone and Relating to 30 TAC §213.5(b)(4)(A), (B), (D)(I) and (G); Effective June 1, 1999

To ensure that the application is administratively complete, confirm that all fields in the form are complete, verify that all requested information is provided, consistently reference the same site and contact person in all forms in the application, and ensure forms are signed by the appropriate party.

Note: Including all the information requested in the form and attachments contributes to more streamlined technical reviews.

Signature

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. This **Temporary Stormwater Section** is hereby submitted for TCEQ review and executive director approval. The application was prepared by:

Print Name of Customer/Agent: Brooke Lindolm, P.E.

Date: 9/8/2025

Signature of Customer/Agent:

Regulated Entity Name: <u>BLCCS SIte Improvements</u>

Project Information

Potential Sources of Contamination

Examples: Fuel storage and use, chemical storage and use, use of asphaltic products, construction vehicles tracking onto public roads, and existing solid waste.

- 1. Fuels for construction equipment and hazardous substances which will be used during construction:
 - The following fuels and/or hazardous substances will be stored on the site: <u>Construction</u> staging area

These fuels and/or hazardous substances will be stored in:

Aboveground storage tanks with a cumulative storage capacity of less than 250 gallons will be stored on the site for less than one (1) year.

	 Aboveground storage tanks with a cumulative storage capacity between 250 gallons and 499 gallons will be stored on the site for less than one (1) year. Aboveground storage tanks with a cumulative storage capacity of 500 gallons or more will be stored on the site. An Aboveground Storage Tank Facility Plan application must be submitted to the appropriate regional office of the TCEQ prior to moving the tanks onto the project.
	Fuels and hazardous substances will not be stored on the site.
2.	Attachment A - Spill Response Actions. A site specific description of the measures to be taken to contain any spill of hydrocarbons or hazardous substances is attached.
3.	Temporary aboveground storage tank systems of 250 gallons or more cumulative storage capacity must be located a minimum horizontal distance of 150 feet from any domestic, industrial, irrigation, or public water supply well, or other sensitive feature.
1.	Attachment B - Potential Sources of Contamination. A description of any activities or processes which may be a potential source of contamination affecting surface water quality is attached.
S	equence of Construction
5.	Attachment C - Sequence of Major Activities. A description of the sequence of major activities which will disturb soils for major portions of the site (grubbing, excavation, grading, utilities, and infrastructure installation) is attached.
	 ✓ For each activity described, an estimate (in acres) of the total area of the site to be disturbed by each activity is given. ✓ For each activity described, include a description of appropriate temporary control
	measures and the general timing (or sequence) during the construction process that the measures will be implemented.
ô.	Name the receiving water(s) at or near the site which will be disturbed or which will receive discharges from disturbed areas of the project: <u>Cibolo Creek Watershed</u>

Temporary Best Management Practices (TBMPs)

Erosion control examples: tree protection, interceptor swales, level spreaders, outlet stabilization, blankets or matting, mulch, and sod. Sediment control examples: stabilized construction exit, silt fence, filter dikes, rock berms, buffer strips, sediment traps, and sediment basins. Please refer to the Technical Guidance Manual for guidelines and specifications. All structural BMPs must be shown on the site plan.

7. Attachment D – Temporary Best Management Practices and Measures. TBMPs and measures will prevent pollution of surface water, groundwater, and stormwater. The construction-phase BMPs for erosion and sediment controls have been designed to retain sediment on site to the extent practicable. The following information is attached:

	A description of how BMPs and measures will prevent pollution of surface water, groundwater or stormwater that originates upgradient from the site and flows across the site.
	A description of how BMPs and measures will prevent pollution of surface water or groundwater that originates on-site or flows off site, including pollution caused by contaminated stormwater runoff from the site.
	A description of how BMPs and measures will prevent pollutants from entering surface streams, sensitive features, or the aquifer.
	A description of how, to the maximum extent practicable, BMPs and measures will maintain flow to naturally-occurring sensitive features identified in either the geologic assessment, TCEQ inspections, or during excavation, blasting, or construction.
8. 🔀	The temporary sealing of a naturally-occurring sensitive feature which accepts recharge to the Edwards Aquifer as a temporary pollution abatement measure during active construction should be avoided.
	Attachment E - Request to Temporarily Seal a Feature. A request to temporarily seal a feature is attached. The request includes justification as to why no reasonable and practicable alternative exists for each feature.
	There will be no temporary sealing of naturally-occurring sensitive features on the site.
9.	Attachment F - Structural Practices. A description of the structural practices that will be used to divert flows away from exposed soils, to store flows, or to otherwise limit runoff discharge of pollutants from exposed areas of the site is attached. Placement of structural practices in floodplains has been avoided.
10.	Attachment G - Drainage Area Map. A drainage area map supporting the following requirements is attached:
	For areas that will have more than 10 acres within a common drainage area disturbed at one time, a sediment basin will be provided.
	For areas that will have more than 10 acres within a common drainage area disturbed at one time, a smaller sediment basin and/or sediment trap(s) will be used.
	For areas that will have more than 10 acres within a common drainage area
	disturbed at one time, a sediment basin or other equivalent controls are not attainable, but other TBMPs and measures will be used in combination to protect down slope and side slope boundaries of the construction area.
	There are no areas greater than 10 acres within a common drainage area that will be
	disturbed at one time. A smaller sediment basin and/or sediment trap(s) will be used in combination with other erosion and sediment controls within each disturbed drainage area.

	There are no areas greater than 10 acres within a common drainage area that will be disturbed at one time. Erosion and sediment controls other than sediment basins or sediment traps within each disturbed drainage area will be used.
	Attachment H - Temporary Sediment Pond(s) Plans and Calculations. Temporary sediment pond or basin construction plans and design calculations for a proposed temporary BMP or measure have been prepared by or under the direct supervision of a Texas Licensed Professional Engineer. All construction plans and design information must be signed, sealed, and dated by the Texas Licensed Professional Engineer. Construction plans for the proposed temporary BMPs and measures are attached.
	N/A
	Attachment I - Inspection and Maintenance for BMPs. A plan for the inspection of each temporary BMP(s) and measure(s) and for their timely maintenance, repairs, and, if necessary, retrofit is attached. A description of the documentation procedures, recordkeeping practices, and inspection frequency are included in the plan and are specific to the site and/or BMP.
i	All control measures must be properly selected, installed, and maintained in accordance with the manufacturer's specifications and good engineering practices. If periodic inspections by the applicant or the executive director, or other information indicate a control has been used inappropriately, or incorrectly, the applicant must replace or modify the control for site situations.
	If sediment escapes the construction site, off-site accumulations of sediment must be removed at a frequency sufficient to minimize offsite impacts to water quality (e.g., fugitive sediment in street being washed into surface streams or sensitive features by the next rain).
	Sediment must be removed from sediment traps or sedimentation ponds not later than when design capacity has been reduced by 50%. A permanent stake will be provided that can indicate when the sediment occupies 50% of the basin volume.
	Litter, construction debris, and construction chemicals exposed to stormwater shall be prevented from becoming a pollutant source for stormwater discharges (e.g., screening outfalls, picked up daily).
Soil S	Stabilization Practices
-	es: establishment of temporary vegetation, establishment of permanent vegetation,

preservation of mature vegetation.

17. Attachment J - Schedule of Interim and Permanent Soil Stabilization Practices. A schedule of the interim and permanent soil stabilization practices for the site is attached.

- 18. Records must be kept at the site of the dates when major grading activities occur, the dates when construction activities temporarily or permanently cease on a portion of the site, and the dates when stabilization measures are initiated.
- 19. Stabilization practices must be initiated as soon as practicable where construction activities have temporarily or permanently ceased.

Administrative Information

- 20. All structural controls will be inspected and maintained according to the submitted and approved operation and maintenance plan for the project.
- 21. If any geologic or manmade features, such as caves, faults, sinkholes, etc., are discovered, all regulated activities near the feature will be immediately suspended. The appropriate TCEQ Regional Office shall be immediately notified. Regulated activities must cease and not continue until the TCEQ has reviewed and approved the methods proposed to protect the aquifer from any adverse impacts.
- 22. Silt fences, diversion berms, and other temporary erosion and sediment controls will be constructed and maintained as appropriate to prevent pollutants from entering sensitive features discovered during construction.

ATTACHMENT A

Attachment A - Spill Response Actions

In the event of an accidental leak or spill:

- Spill must be contained and cleaned up immediately.
- Spills will not be merely buried or washed with water.
- Contractor shall take action to contain spill. Contractor may use sand or other absorbent
 material stockpiled on site to absorb spill. Absorbent material should be spread over the
 spill area to absorb the spilled product.
- In the event of an uncontained discharge the contractor shall utilize onsite equipment to construct berms downgradient of the spill with sand or other absorbent material to contain and absorb the spilled product.
- Spill containment/absorbent materials along with impacted media must be collected and stored in such a way so as not to continue to affect additional media (soil/water). Once the spill has been contained, collected material should be placed on poly or plastic sheeting until removed from the site. The impacted media and cleanup materials should be covered with plastic sheeting and the edges weighed down with paving bricks or other similarly dense objects as the material is being accumulated. This will prevent the impacted media and cleanup materials from becoming airborne in windy conditions or impacting runoff during a rain event. The stockpiled materials should not be located within an area of concentrated runoff such as along a curb line or within a swale.
- Contaminated soils and cleanup materials will be sampled for waste characterization. When
 the analysis results are known the contaminated soils and cleanup materials will be removed
 from the site and disposed in a permitted landfill in accordance with applicable regulations.
- The contractor will be required to notify the owner, who will in turn contact TCEQ to notify
 them in the event of a significant hazardous/reportable quantity spill. Additional notifications
 as required by the type and amount of spill will be conducted by owner or owner's
 representative.

In the event of an accidental significant or hazardous spill:

- The contractor will be required to report significant or hazardous spills in reportable quantities to:
 - Notify the TCEQ by telephone as soon as possible and within 24 hours at 512-339-2929 (Austin) or 210-490-3096 (San Antonio) between 8 AM and 5 PM. After hours, contact the Environmental Release Hotline at 1-800-832-8224. It is the contractor's responsibility to have all emergency phone numbers at the construction site. https://www.tceq.texas.gov/response/spills/spill_rg.html
 - For spills of federal reportable quantities, in conformance with the requirements in 40 CFR parts 110,119, and 302, the contractor should notify the National Response Center at (800) 424-8802.
 - o Notification should first be made by telephone and followed up with a written report.
 - The services of a spills contractor or a Haz-Mat team should be obtained immediately. Construction personnel should not attempt to clean up until the appropriate and qualified staffs have arrived at the job site.
 - Other agencies which may need to be consulted include, but are not limited to, the
 City Police Department, County Sheriff Office, Fire Departments, etc.
 - Contaminated soils will be sampled for waste characterization. When the analysis
 results are known the contaminated soils will be removed from the site and disposed
 in a permitted landfill in accordance with applicable regulations.

Additional guidance can be obtained from TCEQ's Technical Guidance Manual (TGM) RG-348 (2005) Section 1.4.16. Contractor shall review this section.

ATTACHMENT B

Attachment B - Potential Sources of Contamination

Other potential sources of contamination during construction include:

Potential Source	Preventative Measure
Asphalt products used on this project.	After placement of asphalt, emulsion or coatings, the contractor will be responsible for immediate cleanup should an unexpected rain occur. For the duration of the asphalt product curing time, the contractor will maintain standby personnel and equipment to contain any asphalt wash-off should an unexpected rain occur. The contractor will be instructed not to place asphalt products on the ground within 48 hours of a forecasted rain.
Oil, grease, fuel, and hydraulic fluid contamination from construction equipment and vehicle dripping.	 Vehicle maintenance when possible, will be performed within the construction staging area. Construction vehicles and equipment shall be checked regularly for leaks and repaired immediately.
Accidental leaks or spills of oil, petroleum products, and substances listed under 40 CFR parts 110, 117, and 302 used or stored temporarily on site.	 Contractor to incorporate into regular safety meetings, a discussion of spill prevention and appropriate disposal procedures. Contractor's superintendent or representative overseer shall enforce proper spill prevention and control measures. Hazardous materials and wastes shall be stored in covered containers and protected from vandalism. A stockpile of spill cleanup materials shall be stored on site where it will be readily accessible.
Miscellaneous trash and litter from construction workers and material wrappings. Construction debris.	 Trash containers will be placed throughout the site to encourage proper trash disposal. Construction debris will be monitored daily by contractor. Debris will be collected weekly and placed in disposal bins. Situations requiring immediate attention will be addressed on a case-by-case basis.

Spills/Overflow of waste from portable toilets	Portable toilets	s will be placed away from
	high-traffic veh	icular areas and storm drain
	inlets.	
	Portable toilets	s will be placed on a level
	ground surface	
	Portable toilets	will be inspected regularly
	for leaks and w	ill be serviced and sanitized
	at time interval	s that will maintain sanitary
	conditions.	

ATTACHMENT C

Attachment C - Sequence of Major Activities

The sequence of major activities which disturb soil during construction on this site will be divided into two stages. The first is site preparation that will include clearing and grubbing of vegetation where applicable. This will disturb approximately 1.14 acres. The second is construction that will include construction of homes, the sedimentation/filtration basins and detention basin, construction of new pavement area, landscaping and site cleanup. This will disturb approximately 1.14 acres.

ATTACHMENT D

<u>Attachment D – Temporary Best Management Practices and Measures</u>

A. A description of how BMPs and measures will prevent pollution of surface water, groundwater or stormwater that originates upgradient from the site and flows across the site.

Upgradient water will cross the site. Upgradient water will be intercepted by the private drive and treated by the existing Best Management Practices. All TBMPs are adequate for the drainage areas they serve.

B. A description of how BMPs and measures will prevent pollution of surface water or groundwater that originates on-site or flows off site, including pollution caused by contaminated stormwater runoff from the site.

Site preparation, which is the initiation of all activity on the project, will disturb the largest amount of soil. Therefore, before any of this work can begin, the clearing and grading contractor will be responsible for the installation of all on-site control measures. The methodology for pollution prevention of on-site stormwater will include: (1) erection of silt fences along the downgradient boundary of construction activities for temporary erosion and sedimentation controls, (2) installation of rock berms with silt fencing downgradient from areas of concentrated stormwater flow for temporary erosion control, (3) Installation of gravel bags and drain inlet protection at inlets and downgradient areas of construction activities for sediment control (4) installation of stabilized construction entrance/exit(s) to reduce the dispersion of sediment from the site, and (5) installation of construction staging area(s).

Prior to the initiation of construction, all previously installed control measures will be repaired or reestablished for their designed or intended purpose. This work, which is the remainder of all activity on the project, may also disturb additional soil. The construction contractor will be responsible for the installation of all remaining on-site

BLCCS SITE IMPROVEMENTS

Contributing Zone Plan Modification

control measures that includes installation of the concrete truck washout pit(s), as

construction phasing warrants.

Temporary measures are intended to provide a method of slowing the flow of runoff from

the construction site in order to allow sediment and suspended solids to settle out of

the runoff. By containing the sediment and solids within the site, they will not enter

surface streams and/or sensitive features.

C. A description of how BMPs and measures will prevent pollutants from entering surface

streams, sensitive features, or the aquifer.

As this site is entirely over the Edwards Aquifer Contributing Zone, a Geologic

Assessment was not conducted and is not required; therefore, no sensitive features

were identified. There are no surface streams on or immediately adjacent to the site.

Temporary measures are intended to provide a method of slowing the flow of runoff from

the construction site in order to allow sediment and suspended solids to settle out of

the runoff. By containing the sediment and solids within the site, they will not enter

surface streams and/or sensitive features.

D. A description of how, to the maximum extent practicable, BMPs and measures will maintain

flow to naturally-occurring sensitive features identified in either the geologic assessment,

TCEQ inspections, or during excavation, blasting, or construction.

Since the project is located entirely over the Edwards Contributing Zone, a Geologic

Assessment was not conducted and is not required by 30 TAC 213 regulations.

Therefore, no naturally-occurring sensitive features are known to exist on the site. 30

TAC 213(f)(2) only applies to projects over the Edwards Recharge Zone.

Temporary Stormwater Section (TCEQ-0602)

ATTACHMENT F

Attachment F - Structural Practices

The following structural measures will be installed prior to the initiation of site preparation activities:

- Erection of silt fences along the downgradient boundary of construction activities and rock berms with silt fence for secondary protection, as located on Exhibit 1 and illustrated in Exhibit 2.
- Installation of gravel bags and drain inlet protection at inlets and downgradient areas of construction activities, as located on Exhibit 1 and illustrated in Exhibit 2.
- Installation of stabilized construction entrance/exit(s) and construction staging area(s), as located on Exhibit 1, and illustrated on Exhibit 2.

The following structural measures will be installed at the initiation of construction activities or as appropriate based on the construction sequencing:

 Installation of concrete truck washout pit(s), as required and located on Exhibit 1 and illustrated on Exhibit 2.

ATTACHMENT G

Attachment G - Drainage Area Map

No more than ten (10) acres will be disturbed within a common drainage area at one time with theses proposed improvements. Refer to included exhibits for additional details. All TBMPs utilized are adequate for the drainage areas served.

ATTACHMENT I

Attachment I - Inspections

Designated and qualified person(s) shall inspect Pollution Control Measures weekly and within 24 hours after a storm event. An inspection report that summarizes the scope of the inspection, names and qualifications of personnel conducting the inspection, date of the inspection, major observations, and actions taken as a result of the inspection shall be recorded and maintained as part of Storm Water TPDES data for a period of three years after the Notice of Termination (NOT) has been filed. A copy of the Inspection Report Form is provided in this Storm Water Pollution Prevention Plan.

As a minimum, the inspector shall observe: (1) significant disturbed areas for evidence of erosion, (2) storage areas for evidence of leakage from the exposed stored materials, (3) structural controls (rock berm outlets, silt fences, drainage swales, etc.) for evidence of failure or excess siltation (over 6 inches deep), (4) vehicle exit point for evidence of off-site sediment tracking, (5) vehicle storage areas for signs of leaking equipment or spills, (6) concrete truck rinse-out pit for signs of potential failure, (7) embankment, spillways, and outlet of sediment basin (where applicable) for erosion damage, and (8) sediment basins (where applicable) for evidence that basin has accumulated 50% of its volume in silt. Deficiencies noted during the inspection will be corrected and documented within seven calendar days following the inspection or before the next anticipated storm event if practicable.

Contractor shall review Sections 1.3 and 1.4 of TCEQ's Technical Guidance Manual for additional BMP inspection and maintenance requirements.

Pollution	ë j	Corrective Action Required		
Prevention	cted		Data	
Measure	nspected in Compliance	Description	Date Completed	
	Ξŏ	(use additional sheet if necessary)	Completed	
Best Management Practices				
Natural vegetation buffer strips			T	
Temporary vegetation				
Permanent vegetation				
Sediment control basin				
Silt fences				
Rock berms				
Gravel filter bags				
Drain inlet protection				
Other structural controls				
Vehicle exits (off-site tracking)				
Material storage areas (leakage)				
Equipment areas (leaks, spills)				
Concrete washout pit (leaks, failure)				
General site cleanliness				
Trash receptacles				
Evidence of Erosion				
Site preparation				
Roadway or parking lot construction				
Utility construction				
Drainage construction				
Building construction				
Major Observations	Major Observations			
Sediment discharges from site				
BMPs requiring maintenance				
BMPs requiring modification				
Additional BMPs required				
A brief statement describing the qu	ualifica	ations of the inspector is included in this SV	VP3.	
"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."				
"I further certify I am an authorized signatory in accou	dance w	ith the provisions of 30 TAC \$305.128."		
Inspector's Name	Inspecto	r's Signature Date		

PROJECT MILESTONE DATES

Date when major site grading activities begin: **Construction Activity** Date Installation of BMPs Dates when construction activities temporarily or permanently cease on all or a portion of the project: Construction Activity Date Dates when stabilization measures are initiated: **Stabilization Activity Date**

Removal of BMPs

ATTACHMENT J

Attachment J - Schedule of Interim and Permanent Soil Stabilization Practices

Interim on-site stabilization measures, which are continuous, will include minimizing soil disturbances by exposing the smallest practical area of land required for the shortest period of time and maximizing use of natural vegetation. As soon as practical, all disturbed soil will be stabilized as per project specifications in accordance with pages 1-35 to 1-60 of TCEQ's Technical Guidance Manual (TGM) RG-348 (2005). Mulching, netting, erosion blankets and seeding are acceptable.

Stabilization measures will be initiated as soon as practicable in portions of the site where construction activities have temporarily or permanently ceased, and except as provided below, will be initiated no more than fourteen (14) days after the construction activity in that portion of the site has temporarily or permanently ceased. Where construction activity on a portion of the site is temporarily ceased, and earth disturbing activities will be resumed within twenty-one (21) days, temporary stabilization measures do not have to be initiated on that portion of site. In areas experiencing droughts where the initiation of stabilization measures by the 14th day after construction activity has temporarily or permanently ceased is precluded by seasonably arid conditions, stabilization measures must be initiated as soon as practicable.

NOTICE OF INTENT (TCEQ-20022)



Notice of Intent (NOI) for an Authorization for Stormwater Discharges Associated with Construction Activity under TPDES General Permit TXR150000

IMPORTANT INFORMATION

Please read and use the General Information and Instructions prior to filling out each question in the NOI form.

Use the NOI Checklist to ensure all required information is completed correctly. **Incomplete applications delay approval or result in automatic denial.**

Once processed your permit authorization can be viewed by entering the following link into your internet browser: http://www2.tceq.texas.gov/wq_dpa/index.cfm or you can contact TCEQ Stormwater Processing Center at 512-239-3700.

ePERMITS

Effective September 1, 2018, this paper form must be submitted to TCEQ with a completed electronic reporting waiver form (TCEQ-20754).

To submit an NOI electronically, enter the following web address into your internet browser and follow the instructions: https://www3.tceq.texas.gov/steers/index.cfm

APPLICATION FEE AND PAYMENT

The application fee for submitting a paper NOI is \$325. The application fee for electronic submittal of a NOI through the TCEQ ePermits system (STEERS) is \$225.

Payment of the application fee can be submitted by mail or through the TCEQ ePay system. The payment and the NOI must be mailed to separate addresses. To access the TCEQ ePay system enter the following web address into your internet browser: http://www.tceq.texas.gov/epay.

Provide your payment information for verification of payment:

- If payment was mailed to TCEQ, provide the following:
 - Check/Money Order Number:
 - Name printed on Check:
- If payment was made via ePay, provide the following:
 - Voucher Number:
 - o A copy of the payment voucher is attached to this paper NOI form.

RE	NEWAL (This portion of the NOI is not applicable after June 3, 2018)		
Is t	this NOI for a renewal of an existing authorization? \square Yes \square No		
If Y	Yes, provide the authorization number here: TXR15		
NC	TE: If an authorization number is not provided, a new number will be assigned.		
SE	CTION 1. OPERATOR (APPLICANT)		
a)	If the applicant is currently a customer with TCEQ, what is the Customer Number (CN) issued to this entity? CN		
	(Refer to Section 1.a) of the Instructions)		
b)	What is the Legal Name of the entity (applicant) applying for this permit? (The legal name must be spelled exactly as filed with the Texas Secretary of State, County, or in the legal document forming the entity.)		
	Click here to enter text		
c)	What is the contact information for the Operator (Responsible Authority)?		
	Prefix (Mr. Ms. Miss):		
	First and Last Name: Suffix:		
	Title: Credentials:		
	Phone Number: Fax Number:		
	E-mail:		
Mailing Address:			
	City, State, and Zip Code:		
	Mailing Information if outside USA:		
	Territory: Click here to enter text		
	Country Code: Postal Code:		
d)	Indicate the type of customer:		
	☐ Individual ☐ Federal Government		
	☐ Limited Partnership ☐ County Government		
	☐ General Partnership ☐ State Government		
	□ Trust □ City Government		
	☐ Sole Proprietorship (D.B.A.) ☐ Other Government		
	□ Corporation □ Other:		
	□ Estate		
e)	Is the applicant an independent operator? \square Yes \square No		

	(If a governmental entity, a si	ubsidiary, or part of a larger corporation, check No.)	
f)	Number of Employees. Select the range applicable to your company.		
	□ 0-20	□ 251-500	
	□ 21-100	□ 501 or higher	
	□ 101-250		
g)		iling Numbers: (Required for Corporations and Limited or Individuals, Government, or Sole Proprietors.)	
	State Franchise Tax ID Numb	er: Click here to enter text.	
	Federal Tax ID:	inter text	
	Texas Secretary of State Char	ter (filing) Number:	
	DUNS Number (if known):	k here to enter text.	
SE	CTION 2. APPLICATION CONT	ACT	
		ne as the applicant identified above?	
13	☐ Yes, go to Section 3	ic as the applicant identified above:	
ъ	☐ No, complete this section		
	efix (Mr. Ms. Miss):	o co	
	rst and Last Name:	Suffix: Click here to enter text.	
		edential: Click here to enter text	
	ganization Name:	enter text	
	one Number:	Fax Number:	
	mail: Click here to enter text.		
	ailing Address:	OF TOXI	
	ternal Routing (Mail Code, Etc.)	Llick here to enter text	
	ty, State, and Zip Code:	re to enter text.	
	ailing information if outside US	A:	
	erritory:	<u> </u>	
Co	ountry Code:	Postal Code:	
SE	CTION 3. REGULATED ENTITY	(RE) INFORMATION ON PROJECT OR SITE	
a)	If this is an existing permitte issued to this site? RN	d site, what is the Regulated Entity Number (RN)	
	(Refer to Section 3.a) of the Ir	structions)	

- b) Name of project or site (the name known by the community where it's located): BLCCS Site Improvements
- c) In your own words, briefly describe the type of construction occurring at the regulated site (residential, industrial, commercial, or other): <u>Commercial</u>
- d) County or Counties (if located in more than one): Bexar
- e) Latitude: <u>29.713561 N</u> Longitude: <u>98.464436 W</u>
- f) Site Address/Location

If the site has a physical address such as 12100 Park 35 Circle, Austin, TX 78753, complete *Section A*.

If the site does not have a physical address, provide a location description in *Section B*. Example: located on the north side of FM 123, 2 miles west of the intersection of FM 123 and Highway 1.

0			
Sec	tic	m	Λ.
DEC	w	,,,	\neg

Street Number and Name:
City, State, and Zip Code:

Section B:

Location Description: <u>0.1 mi NE of the Borgfeld Drive and Highland Crest</u> intersection

City (or city nearest to) where the site is located: San Antonio

Zip Code where the site is located: 78260

SECTION 4. GENERAL CHARACTERISTICS

- a) Is the project or site located on Indian Country Lands?
 - ☐ Yes, do not submit this form. You must obtain authorization through EPA Region 6.

⊠ No

- b) Is your construction activity associated with a facility that, when completed, would be associated with the exploration, development, or production of oil or gas or geothermal resources?
 - ☐ Yes. Note: The construction stormwater runoff may be under jurisdiction of the Railroad Commission of Texas and may need to obtain authorization through EPA Region 6.

⊠ No

- c) What is the Primary Standard Industrial Classification (SIC) Code that best describes the construction activity being conducted at the site? $\underline{1623}$
- d) What is the Secondary SIC Code(s), if applicable?
- e) What is the total number of acres to be disturbed? 0.55
- f) Is the project part of a larger common plan of development or sale?

	⊠ Yes
	□ No. The total number of acres disturbed, provided in e) above, must be 5 or more. If the total number of acres disturbed is less than 5, do not submit this form. See the requirements in the general permit for small construction sites.
g)	What is the estimated start date of the project? <u>10/2/2025</u>
h)	What is the estimated end date of the project? $11/3/2025$
i)	Will concrete truck washout be performed at the site? \square Yes \square No
j)	What is the name of the first water body(ies) to receive the stormwater runoff or potential runoff from the site? <u>Upper Cibolo Creek</u>
k)	What is the segment number(s) of the classified water body(ies) that the discharge will eventually reach? <u>1908</u>
l)	Is the discharge into a Municipal Separate Storm Sewer System (MS4)?
	⊠ Yes □ No
	If Yes, provide the name of the MS4 operator: <u>Bexar County</u>
	Note: The general permit requires you to send a copy of this NOI form to the MS4 operator.
m)	Is the discharge or potential discharge from the site within the Recharge Zone, Contributing Zone, or Contributing Zone within the Transition Zone of the Edwards Aquifer, as defined in 30 TAC Chapter 213?
	☑ Yes, complete the certification below.
	□ No, go to Section 5
	I certify that the copy of the TCEQ-approved Plan required by the Edwards Aquifer Rule (30 TAC Chapter 213) that is included or referenced in the Stormwater Pollution
	Prevention Plan will be implemented.
SE	CTION 5. NOI CERTIFICATION
a)	I certify that I have obtained a copy and understand the terms and conditions of the Construction General Permit (TXR150000).
b)	I certify that the full legal name of the entity applying for this permit has been provided and is legally authorized to do business in Texas.
c)	I understand that a Notice of Termination (NOT) must be submitted when this authorization is no longer needed. $\hfill\square$ Yes
d)	I certify that a Stormwater Pollution Prevention Plan has been developed, will be implemented prior to construction and to the best of my knowledge and belief is compliant with any applicable local sediment and erosion control plans, as required in the Construction General Permit (TXR150000).
	Note: For multiple operators who prepare a shared SWP3, the confirmation of an operator may be limited to its obligations under the SWP3, provided all obligations are

confirmed by at least one operator.

Operator Signatory Name:	
Operator Signatory Title:	
certify under penalty of law that this document and a my direction or supervision in accordance with a system of personnel properly gather and evaluate the information the person or persons who manage the system, or those gathering the information, the information submitted pelief, true, accurate, and complete. I am aware there a submitting false information, including the possibility knowing violations.	em designed to assure that qualified on submitted. Based on my inquiry of se persons directly responsible for is, to the best of my knowledge and are significant penalties for
I further certify that I am authorized under 30 Texas A and submit this document, and can provide document upon request.	
Signature (use blue ink):	Date:

SECTION 6. APPLICANT CERTIFICATION SIGNATURE

NOTICE OF INTENT CHECKLIST (TXR150000)

Did you complete everything? Use this checklist to be sure!

Are you ready to mail your form to TCEQ? Go to the General Information Section of the Instructions for mailing addresses.

Confirm each item (or applicable item) in this form is complete. This checklist is for use by the applicant to ensure a complete application is being submitted. **Missing information may result in denial of coverage under the general permit.** (See NOI process description in the General Information and Instructions.)

APPLICATION FEE
If paying by check:
☐ Check was mailed separately to the TCEQs Cashier's Office. (See Instructions for Cashier's address and Application address.)
□ Check number and name on check is provided in this application.
If using ePay:
\square The voucher number is provided in this application and a copy of the voucher is attached.
RENEWAL
☐ If this application is for renewal of an existing authorization, the authorization number is provided.
OPERATOR INFORMATION
□ Customer Number (CN) issued by TCEQ Central Registry
□ Legal name as filed to do business in Texas. (Call TX SOS 512-463-5555 to verify.)
\square Name and title of responsible authority signing the application.
☐ Phone number and e-mail address
☐ Mailing address is complete & verifiable with USPS. <u>www.usps.com</u>
\square Type of operator (entity type). Is applicant an independent operator?
□ Number of employees.
☐ For corporations or limited partnerships – Tax ID and SOS filing numbers.
$\hfill\square$ Application contact and address is complete & verifiable with USPS. $\underline{\text{http://www.usps.com}}$
REGULATED ENTITY (RE) INFORMATION ON PROJECT OR SITE
□ Regulated Entity Number (RN) (if site is already regulated by TCEQ)
☐ Site/project name and construction activity description
□ County

☐ Latitude and longitude http://www.tceq.texas.gov/gis/sqmaview.html
□ Site Address/Location. Do not use a rural route or post office box.
GENERAL CHARACTERISTICS
□ Indian Country Lands -the facility is not on Indian Country Lands.
□ Construction activity related to facility associated to oil, gas, or geothermal resources
☐ Primary SIC Code that best describes the construction activity being conducted at the site. www.osha.gov/oshstats/sicser.html
☐ Estimated starting and ending dates of the project.
□ Confirmation of concrete truck washout.
\square Acres disturbed is provided and qualifies for coverage through a NOI.
□ Common plan of development or sale.
□ Receiving water body or water bodies.
□ Segment number or numbers.
□ MS4 operator.
□ Edwards Aquifer rule.
CERTIFICATION
☐ Certification statements have been checked indicating Yes.
☐ Signature meets 30 Texas Administrative Code (TAC) §305.44 and is original.

Instructions for Notice of Intent (NOI) for Stormwater Discharges Associated with Construction Activity under TPDES General Permit (TXR150000)

GENERAL INFORMATION

Where to Send the Notice of Intent (NOI):

By Regular Mail: By Overnight or Express Mail:

TCEQ

Stormwater Processing Center (MC228) Stormwater Processing Center (MC228)

P.O. Box 13087 12100 Park 35 Circle

Austin, Texas 78711-3087 Austin, TX

Application Fee:

The application fee of \$325 is required to be paid at the time the NOI is submitted. Failure to submit payment at the time the application is filed will cause delays in acknowledgment or denial of coverage under the general permit. Payment of the fee may be made by check or money order, payable to TCEQ, or through EPAY (electronic payment through the web).

Mailed Payments:

Use the attached General Permit Payment Submittal Form. The application fee is submitted to a different address than the NOI. Read the General Permit Payment Submittal Form for further instructions, including the address to send the payment.

ePAY Electronic Payment: http://www.tceq.texas.gov/epay

When making the payment you must select Water Quality, and then select the fee category "General Permit Construction Storm Water Discharge NOI Application". You must include a copy of the payment voucher with your NOI. Your NOI will not be considered complete without the payment voucher.

TCEQ Contact List:

Application – status and form questions: 512-239-3700, swpermit@tceq.texas.gov 512-239-4671, swgp@tceq.texas.gov

Environmental Law Division: 512-239-0600 Records Management - obtain copies of forms: 512-239-0900

Reports from databases (as available): 512-239-DATA (3282)

Cashier's office: 512-239-0357 or 512-239-0187

Notice of Intent Process:

When your NOI is received by the program, the form will be processed as follows:

• Administrative Review: Each item on the form will be reviewed for a complete response. In addition, the operator's legal name must be verified with Texas Secretary of State as valid and active (if applicable). The address(es) on the form must be verified with the US Postal service as receiving regular mail delivery. Do not give an overnight/express

mailing address.

- **Notice of Deficiency:** If an item is incomplete or not verifiable as indicated above, a notice of deficiency (NOD) will be mailed to the operator. The operator will have 30 days to respond to the NOD. The response will be reviewed for completeness.
- **Acknowledgment of Coverage:** An Acknowledgment Certificate will be mailed to the operator. This certificate acknowledges coverage under the general permit.

or

Denial of Coverage: If the operator fails to respond to the NOD or the response is inadequate, coverage under the general permit may be denied. If coverage is denied, the operator will be notified.

General Permit (Your Permit)

For NOIs submitted **electronically** through ePermits, provisional coverage under the general permit begins immediately following confirmation of receipt of the NOI form by the TCEO.

For **paper** NOIs, provisional coverage under the general permit begins **7 days after a completed NOI is postmarked for delivery** to the TCEQ.

You should have a copy of your general permit when submitting your application. You may view and print your permit for which you are seeking coverage, on the TCEQ web site http://www.tceq.texas.gov. Search using keyword TXR150000.

Change in Operator

An authorization under the general permit is not transferable. If the operator of the regulated project or site changes, the present permittee must submit a Notice of Termination and the new operator must submit a Notice of Intent. The NOT and NOI must be submitted no later than 10 days prior to the change in Operator status.

TCEQ Central Registry Core Data Form

The Core Data Form has been incorporated into this form. Do not send a Core Data Form to TCEQ. After final acknowledgment of coverage under the general permit, the program will assign a Customer Number and Regulated Entity Number, if one has not already been assigned to this customer or site.

For existing customers and sites, you can find the Customer Number and Regulated Entity Number by entering the following web address into your internet browser: http://www15.tceq.texas.gov/crpub/ or you can contact the TCEQ Stormwater Processing Center at 512-239-3700 for assistance. On the website, you can search by your permit number, the Regulated Entity (RN) number, or the Customer Number (CN). If you do not know these numbers, you can select "Advanced Search" to search by permittee name, site address, etc.

The Customer (Permittee) is responsible for providing consistent information to the TCEQ, and for updating all CN and RN data for all authorizations as changes occur. For this permit, a Notice of Change form must be submitted to the program area.

INSTRUCTIONS FOR FILLING OUT THE NOI FORM

Renewal of General Permit. Dischargers holding active authorizations under the expired General Permit are required to submit a NOI to continue coverage. The existing permit number is required. If the permit number is not provided or has been terminated, expired, or denied, a new permit number will be issued.

Section 1. OPERATOR (APPLICANT)

a) Customer Number (CN)

TCEQ's Central Registry will assign each customer a number that begins with CN, followed by nine digits. **This is not a permit number, registration number, or license number**.

If the applicant is an existing TCEQ customer, the Customer Number is available at the following website: http://www15.tceq.texas.gov/crpub/. If the applicant is not an existing TCEQ customer, leave the space for CN blank.

b) Legal Name of Applicant

Provide the current legal name of the applicant. The name must be provided exactly as filed with the Texas Secretary of State (SOS), or on other legal documents forming the entity, as filed in the county. You may contact the SOS at 512-463-5555, for more information related to filing in Texas. If filed in the county, provide a copy of the legal documents showing the legal name.

c) Contact Information for the Applicant (Responsible Authority)

Provide information for the person signing the application in the Certification section. This person is also referred to as the Responsible Authority.

Provide a complete mailing address for receiving mail from the TCEQ. The mailing address must be recognized by the US Postal Service. You may verify the address on the following website: https://tools.usps.com/go/ZipLookupAction!input.action.

The phone number should provide contact to the applicant.

The fax number and e-mail address are optional and should correspond to the applicant.

d) Type of Customer (Entity Type)

Check only one box that identifies the type of entity. Use the descriptions below to identify the appropriate entity type. Note that the selected entity type also indicates the name that must be provided as an applicant for an authorization.

Individual

An individual is a customer who has not established a business, but conducts an activity that needs to be regulated by the TCEQ.

Partnership

A customer that is established as a partnership as defined by the Texas Secretary of State Office (TX SOS). If the customer is a 'General Partnership' or 'Joint Venture' filed in the county (not filed with TX SOS), the legal name of each partner forming

the 'General Partnership' or 'Joint Venture' must be provided. Each 'legal entity' must apply as a co-applicant.

Trust or Estate

A trust and an estate are fiduciary relationships governing the trustee/executor with respect to the trust/estate property.

Sole Proprietorship (DBA)

A sole proprietorship is a customer that is owned by only one person and has not been incorporated. This business may:

- 1. be under the person's name
- 2. have its own name (doing business as or DBA)
- 3. have any number of employees.

If the customer is a Sole Proprietorship or DBA, the 'legal name' of the individual business 'owner' must be provided. The DBA name is not recognized as the 'legal name' of the entity. The DBA name may be used for the site name (regulated entity).

Corporation

A customer that meets all of these conditions:

- 1. is a legally incorporated entity under the laws of any state or country
- 2. is recognized as a corporation by the Texas Secretary of State
- 3. has proper operating authority to operate in Texas

The corporation's 'legal name' as filed with the Texas Secretary of State must be provided as applicant. An 'assumed' name of a corporation is not recognized as the 'legal name' of the entity.

Government

Federal, state, county, or city government (as appropriate)

The customer is either an agency of one of these levels of government or the governmental body itself. The government agency's 'legal name' must be provided as the applicant. A department name or other description of the organization is not recognized as the 'legal name'.

Other

This may include a utility district, water district, tribal government, college district, council of governments, or river authority. Provide the specific type of government.

e) Independent Entity

Check No if this customer is a subsidiary, part of a larger company, or is a governmental entity. Otherwise, check Yes.

f) Number of Employees

Check one box to show the number of employees for this customer's entire company, at all locations. This is not necessarily the number of employees at the site named in the application.

g) Customer Business Tax and Filing Numbers

These are required for Corporations and Limited Partnerships. These are not required for Individuals, Government, and Sole Proprietors.

State Franchise Tax ID Number

Corporations and limited liability companies that operate in Texas are issued a franchise tax identification number. If this customer is a corporation or limited liability company, enter the Tax ID number.

Federal Tax ID

All businesses, except for some small sole proprietors, individuals, or general partnerships should have a federal taxpayer identification number (TIN). Enter this number here. Use no prefixes, dashes, or hyphens. Sole proprietors, individuals, or general partnerships do not need to provide a federal tax ID.

TX SOS Charter (filing) Number

Corporations and Limited Partnerships required to register with the Texas Secretary of State are issued a charter or filing number. You may obtain further information by calling SOS at 512-463-5555.

DUNS Number

Most businesses have a DUNS (Data Universal Numbering System) number issued by Dun and Bradstreet Corp. If this customer has one, enter it here.

Section 2. APPLICATION CONTACT

Provide the name and contact information for the person that TCEQ can contact for additional information regarding this application.

Section 3. REGULATED ENTITY (RE) INFORMATION ON PROJECT OR SITE

a) Regulated Entity Number (RN)

The RN is issued by TCEQ's Central Registry to sites where an activity is regulated by TCEQ. This is not a permit number, registration number, or license number. Search TCEQ's Central Registry to see if the site has an assigned RN at http://www15.tceq.texas.gov/crpub/. If this regulated entity has not been assigned an RN, leave this space blank.

If the site of your business is part of a larger business site, an RN may already be assigned for the larger site. Use the RN assigned for the larger site.

If the site is found, provide the assigned RN and provide the information for the site to be authorized through this application. The site information for this authorization may vary from the larger site information.

An example is a chemical plant where a unit is owned or operated by a separate corporation that is accessible by the same physical address of your unit or facility.

Other examples include industrial parks identified by one common address but different corporations have control of defined areas within the site. In both cases, an RN would be assigned for the physical address location and the permitted sites would be identified separately under the same RN.

b) Name of the Project or Site

Provide the name of the site or project as known by the public in the area where the site is located. The name you provide on this application will be used in the TCEQ Central Registry as the Regulated Entity name.

c) Description of Activity Regulated

In your own words, briefly describe the primary business that you are doing that requires this authorization. Do not repeat the SIC Code description.

d) County

Provide the name of the county where the site or project is located. If the site or project is located in more than one county, provide the county names as secondary.

e) Latitude and Longitude

Enter the latitude and longitude of the site in degrees, minutes, and seconds or decimal form. For help obtaining the latitude and longitude, go to: http://www.tceq.texas.gov/gis/sqmaview.html.

f) Site Address/Location

If a site has an address that includes a street number and street name, enter the complete address for the site in $Section\ A$. If the physical address is not recognized as a USPS delivery address, you may need to validate the address with your local police (911 service) or through an online map site used to locate a site. Please confirm this to be a complete and valid address. Do not use a rural route or post office box for a site location.

If a site does not have an address that includes a street number and street name, provide a complete written location description in *Section B.* For example: "The site is located on the north side of FM 123, 2 miles west of the intersection of FM 123 and Highway 1."

Provide the city (or nearest city) and zip code of the site location.

Section 4. GENERAL CHARACTERISTICS

a) Indian Country Lands

If your site is located on Indian Country Lands, the TCEQ does not have authority to process your application. You must obtain authorization through EPA Region 6, Dallas. Do not submit this form to TCEQ.

b) Construction activity associated with facility associated with exploration, development, or production of oil, gas, or geothermal resources

If your activity is associated with oil and gas exploration, development, or production, you may be under jurisdiction of the Railroad Commission of Texas (RRC) and may need to obtain authorization from EPA Region 6.

Construction activities associated with a facility related to oil, gas or geothermal resources may include the construction of a well site; treatment or storage facility; underground hydrocarbon or natural gas storage facility; reclamation plant; gas processing facility; compressor station; terminal facility where crude oil is stored prior to refining and at which refined products are stored solely for use at the facility; a carbon dioxide geologic storage facility; and a gathering, transmission, or distribution pipeline that will transport crude oil or natural gas, including natural gas liquids, prior to refining of such oil or the use of the natural gas in any manufacturing process or as a residential or industrial fuel.

Where required by federal law, discharges of stormwater associated with construction activities under the RRC's jurisdiction must be authorized by the EPA and the RRC, as applicable. Activities under RRC jurisdiction include construction of a facility that, when completed, would be associated with the exploration, development, or production of oil or gas or geothermal resources, such as a well site; treatment or storage facility; underground hydrocarbon or natural gas storage facility; reclamation plant; gas processing facility; compressor station; terminal facility where crude oil is stored prior to refining and at which refined products are stored solely for use at the facility; a carbon dioxide geologic storage facility under the jurisdiction of the RRC; and a gathering, transmission, or distribution pipeline that will transport crude oil or natural gas, including natural gas liquids, prior to refining of such oil or the use of the natural gas in any manufacturing process or as a residential or industrial fuel. The RRC also has jurisdiction over stormwater from land disturbance associated with a site survey that is conducted prior to construction of a facility that would be regulated by the RRC. Under 33 U.S.C. §1342(l)(2) and §1362(24), EPA cannot require a permit for discharges of stormwater from field activities or operations associated with {oil and gas} exploration, production, processing, or treatment operations, or transmission facilities, including activities necessary to prepare a site for drilling and for the movement and placement of drilling equipment, whether or not such field activities or operations may be considered to be construction activities unless the discharge is contaminated by contact with any overburden, raw material, intermediate product, finished product, byproduct, or waste product located on the site of the facility. Under §3.8 of this title (relating to Water Protection), the RRC prohibits operators from causing or allowing pollution of surface or subsurface water. Operators are encouraged to implement and maintain best management practices (BMPs) to minimize discharges of pollutants, including sediment, in stormwater during construction activities to help ensure protection of surface water quality during storm events.

For more information about the jurisdictions of the RRC and the TCEQ, read the Memorandum of Understanding (MOU) between the RRC and TCEQ at 16 Texas Administrative Code, Part 1, Chapter 3, Rule 3.30, by entering the following link into an internet browser:

http://texreg.sos.state.tx.us/public/readtac\$ext.TacPage?sl=R&app=9&p_dir=&p_rloc=&p_tloc=&p_ploc=&pp=1&p_tac=&ti=16&pt=1&ch=3&rl=30 or contact the TCEQ Stormwater Team at 512-239-4671 for additional information.

c) Primary Standard Industrial Classification (SIC) Code

Provide the SIC Code that best describes the construction activity being conducted at this site.

Common SIC Codes related to construction activities include:

- 1521 Construction of Single Family Homes
- 1522 Construction of Residential Buildings Other than Single Family Homes
- 1541 Construction of Industrial Buildings and Warehouses
- 1542 Construction of Non-residential Buildings, other than Industrial Buildings and Warehouses
- 1611 Highway and Street Construction, except Highway Construction
- 1622 Bridge, Tunnel, and Elevated Highway Construction
- 1623 Water, Sewer, Pipeline and Communications, and Power Line Construction

For help with SIC Codes, enter the following link into your internet browser: http://www.osha.gov/pls/imis/sicsearch.html or you can contact the TCEQ Small Business and Local Government Assistance Section at 800-447-2827 for assistance.

d) Secondary SIC Code

Secondary SIC Code(s) may be provided. Leave this blank if not applicable. For help with SIC Codes, enter the following link into your internet browser: http://www.osha.gov/pls/imis/sicsearch.html or you can contact the TCEQ Small Business and Environmental Assistance Section at 800-447-2827 for assistance.

e) Total Number of Acres Disturbed

Provide the approximate number of acres that the construction site will disturb. Construction activities that disturb less than one acre, unless they are part of a larger common plan that disturbs more than one acre, do not require permit coverage. Construction activities that disturb between one and five acres, unless they are part of a common plan that disturbs more than five acres, do not require submission of an NOI. Therefore, the estimated area of land disturbed should not be less than five, unless the project is part of a larger common plan that disturbs five or more acres. Disturbed means any clearing, grading, excavating, or other similar activities.

If you have any questions about this item, please contact the stormwater technical staff by phone at 512-239-4671 or by email at swgp@tceq.texas.gov.

f) Common Plan of Development

Construction activities that disturb less than five acres do not require submission of an NOI unless they are part of a common plan of development or for sale where the area disturbed is five or more acres. Therefore, the estimated area of land disturbed should not be less than five, unless the project is part of a larger common plan that disturbs five or more acres. Disturbed means any clearing, grading, excavating, or other similar activities.

For more information on what a common plan of development is, refer to the definition of "Common Plan of Development" in the Definitions section of the general permit or enter the following link into your internet browser:

www.tceq.texas.gov/permitting/stormwater/common plan of development steps.html

For further information, go to the TCEQ stormwater construction webpage enter the following link into your internet browser: www.tceq.texas.gov/goto/construction and search for "Additional Guidance and Quick Links". If you have any further questions about the Common Plan of Development you can contact the TCEQ Stormwater Team at 512-239-4671 or the TCEQ Small Business and Environmental Assistance at 800-447-2827.

g) Estimated Start Date of the Project

This is the date that any construction activity or construction support activity is initiated at the site. If renewing the permit provide the original start date of when construction activity for this project began.

h) Estimated End Date of the Project

This is the date that any construction activity or construction support activity will end and final stabilization will be achieved at the site.

i) Will concrete truck washout be performed at the site?

Indicate if you expect that operators of concrete trucks will washout concrete trucks at the construction site.

j) Identify the water body(s) receiving stormwater runoff

The stormwater may be discharged directly to a receiving stream or through a MS4 from your site. It eventually reaches a receiving water body such as a local stream or lake, possibly via a drainage ditch. You must provide the name of the water body that receives the discharge from the site (a local stream or lake).

If your site has more than one outfall you need to include the name of the first water body for each outfall, if they are different.

k) Identify the segment number(s) of the classified water body(s)

Identify the classified segment number(s) receiving a discharge directly or indirectly. Enter the following link into your internet browser to find the segment number of the classified water body where stormwater will flow from the site: www.tceq.texas.gov/waterquality/monitoring/viewer.html or by contacting the TCEQ Water Quality Division at (512) 239-4671 for assistance.

You may also find the segment number in TCEQ publication GI-316 by entering the following link into your internet browser: www.tceq.texas.gov/publications/gi/gi-316 or by contacting the TCEQ Water Quality Division at (512) 239-4671 for assistance.

If the discharge is into an unclassified receiving water and then crosses state lines prior to entering a classified segment, select the appropriate watershed:

- 0100 (Canadian River Basin)
- 0200 (Red River Basin)
- 0300 (Sulfur River Basin)
- 0400 (Cypress Creek Basin)
- 0500 (Sabine River Basin)

Call the Water Quality Assessments section at 512-239-4671 for further assistance.

l) Discharge into MS4 - Identify the MS4 Operator

The discharge may initially be into a municipal separate storm sewer system (MS4). If the stormwater discharge is into an MS4, provide the name of the entity that operates the MS4 where the stormwater discharges. An MS4 operator is often a city, town, county, or utility district, but possibly can be another form of government. Please note that the Construction General Permit requires the Operator to supply the MS4 with a copy of the NOI submitted to TCEQ. For assistance, you may call the technical staff at 512-239-4671.

m) Discharges to the Edwards Aquifer Recharge Zone and Certification

The general permit requires the approved Contributing Zone Plan or Water Pollution Abatement Plan to be included or referenced as a part of the Stormwater Pollution Prevention Plan.

See maps on the TCEQ website to determine if the site is located within the Recharge Zone, Contributing Zone, or Contributing Zone within the Transition Zone of the Edwards Aquifer by entering the following link into an internet browser: www.tceq.texas.gov/field/eapp/viewer.html or by contacting the TCEQ Water Quality Division at 512-239-4671 for assistance.

If the discharge or potential discharge is within the Recharge Zone, Contributing Zone, or Contributing Zone within the Transition Zone of the Edwards Aquifer, a site-specific authorization approved by the Executive Director under the Edwards Aquifer Protection Program (30 TAC Chapter 213) is required before construction can begin.

For questions regarding the Edwards Aquifer Protection Program, contact the appropriate TCEQ Regional Office. For projects in Hays, Travis and Williamson Counties: Austin Regional Office, 12100 Park 35 Circle, Austin, TX 78753, 512-339-2929. For Projects in Bexar, Comal, Kinney, Medina and Uvalde Counties: TCEQ San Antonio Regional Office, 14250 Judson Rd., San Antonio, TX 78233-4480, 210-490-3096.

Section 5. NOI CERTIFICATION

Note: Failure to indicate Yes to all of the certification items may result in denial of coverage under the general permit.

a) Certification of Understanding the Terms and Conditions of Construction General Permit (TXR150000)

Provisional coverage under the Construction General Permit (TXR150000) begins 7 days after the completed paper NOI is postmarked for delivery to the TCEQ. Electronic applications submitted through ePermits have immediate provisional coverage. You must obtain a copy and read the Construction General Permit before submitting your application. You may view and print the Construction General Permit for which you are seeking coverage at the TCEQ web site by entering the following link into an internet browser: www.tceq.texas.gov/goto/construction or you may contact the TCEQ Stormwater processing Center at 512-239-3700 for assistance.

b) Certification of Legal Name

The full legal name of the applicant as authorized to do business in Texas is required. The name must be provided exactly as filed with the Texas Secretary of State (SOS), or

on other legal documents forming the entity, that is filed in the county where doing business. You may contact the SOS at 512-463 5555, for more information related to filing in Texas.

c) Understanding of Notice of Termination

A permittee shall terminate coverage under the Construction General Permit through the submittal of a NOT when the operator of the facility changes, final stabilization has been reached, the discharge becomes authorized under an individual permit, or the construction activity never began at this site.

d) Certification of Stormwater Pollution Prevention Plan

The SWP3 identifies the areas and activities that could produce contaminated runoff at your site and then tells how you will ensure that this contamination is mitigated. For example, in describing your mitigation measures, your site's plan might identify the devices that collect and filter stormwater, tell how those devices are to be maintained, and tell how frequently that maintenance is to be carried out. You must develop this plan in accordance with the TCEQ general permit requirements. This plan must be developed and implemented before you complete this NOI. The SWP3 must be available for a TCEQ investigator to review on request.

Section 6. APPLICANT CERTIFICATION SIGNATURE

The certification must bear an original signature of a person meeting the signatory requirements specified under 30 Texas Administrative Code (TAC) §305.44.

If you are a corporation:

The regulation that controls who may sign an NOI or similar form is 30 Texas Administrative Code §305.44(a)(1) (see below). According to this code provision, any corporate representative may sign an NOI or similar form so long as the authority to sign such a document has been delegated to that person in accordance with corporate procedures. By signing the NOI or similar form, you are certifying that such authority has been delegated to you. The TCEQ may request documentation evidencing such authority.

If you are a municipality or other government entity:

The regulation that controls who may sign an NOI or similar form is 30 Texas Administrative Code §305.44(a)(3) (see below). According to this code provision, only a ranking elected official or principal executive officer may sign an NOI or similar form. Persons such as the City Mayor or County Commissioner will be considered ranking elected officials. In order to identify the principal executive officer of your government entity, it may be beneficial to consult your city charter, county or city ordinances, or the Texas statute(s) under which your government entity was formed. An NOI or similar document that is signed by a government official who is not a ranking elected official or principal executive officer does not conform to §305.44(a)(3). The signatory requirement may not be delegated to a government representative other than those identified in the regulation. By signing the NOI or similar form, you are certifying that you are either a ranking elected official or principal executive officer as required by the administrative code. Documentation demonstrating your position as a ranking elected official or principal executive officer may be requested by the TCEQ.

If you have any questions or need additional information concerning the signatory requirements discussed above, please contact the TCEQ's Environmental Law Division at 512-239-0600.

30 Texas Administrative Code

§305.44. Signatories to Applications

- (a) All applications shall be signed as follows.
- (1) For a corporation, the application shall be signed by a responsible corporate officer. For purposes of this paragraph, a responsible corporate officer means a president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy or decision-making functions for the

corporation; or the manager of one or more manufacturing, production, or operating facilities employing more than 250 persons or having gross annual sales or expenditures exceeding \$25 million (in second-quarter 1980 dollars), if authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures. Corporate procedures governing authority to sign permit or post-closure order applications may provide for assignment or delegation to applicable corporate positions rather than to specific individuals.

- (2) For a partnership or sole proprietorship, the application shall be signed by a general partner or the proprietor, respectively.
- (3) For a municipality, state, federal, or other public agency, the application shall be signed by either a principal executive officer or a ranking elected official. For purposes of this paragraph, a principal executive officer of a federal agency includes the chief executive officer of the agency, or a senior executive officer having responsibility for the overall operations of a principal geographic unit of the agency (e.g., regional administrator of the EPA).

Texas Commission on Environmental Quality General Permit Payment Submittal Form

Use this form to submit your Application Fee only if you are mailing your payment.

Instructions:

- Complete items 1 through 5 below:
- Staple your check in the space provided at the bottom of this document.
- Do not mail this form with your NOI form.
- Do not mail this form to the same address as your NOI.

Mail this form and your check to either of the following:

By Regular U.S. Mail
Texas Commission on Environmental Quality
Financial Administration Division
Cashier's Office, MC-214
P.O. Box 13088
Austin, TX 78711-3088

4. Name on Check or Money Order:

By Overnight or Express Mail
Texas Commission on Environmental Quality
Financial Administration Division
Cashier's Office, MC-214
12100 Park 35 Circle
Austin, TX 78753

Au	stin, TX 78	8711-30	88		Austii	n, TX 78753	
Fe	e Code:	GPA	General	Permit:	TXR150000		
1.	Check or	Money	Order No:	Click here			
2.	Amount o	of Chec	k/Money (Order:		r text.	
3.	Date of C	heck or	Money O	rder:		text.	

5. NOI Information:

If the check is for more than one NOI, list each Project or Site (RE) Name and Physical Address exactly as provided on the NOI. **Do not submit a copy of the NOI with this form, as it could cause duplicate permit application entries!**

If there is not enough space on the form to list all of the projects or sites the authorization will cover, then attach a list of the additional sites.

Project/Site (RE) Name:	ick here to enter text.	
Project/Site (RE) Physical	Address:	

Staple the check or money order to this form in this space.

AGENT AUTHORIZATION FORM (TCEQ-0599)

Agent Authorization Form For Required Signature Edwards Aquifer Protection Program Relating to 30 TAC Chapter 213 Effective June 1, 1999

	Shannon Mills
	Print Name
	Owner
	Title - Owner/President/Other
of	BLCCS Investments, LLC
	Corporation/Partnership/Entity Name
have authorized _	Pape-Dawson Engineers, Inc.
	Print Name of Agent/Engineer
of	Pape-Dawson Engineers, Inc.
	Print Name of Firm

to represent and act on the behalf of the above named Corporation, Partnership, or Entity for the purpose of preparing and submitting this plan application to the Texas Commission on Environmental Quality (TCEQ) for the review and approval consideration of regulated activities.

I also understand that:

- 1. The applicant is responsible for compliance with 30 Texas Administrative Code Chapter 213 and any condition of the TCEQ's approval letter. The TCEQ is authorized to assess administrative penalties of up to \$10,000 per day per violation.
- 2. For those submitting an application who are not the property owner, but who have the right to control and possess the property, additional authorization is required from the owner.
- 3. Application fees are due and payable at the time the application is submitted. The application fee must be sent to the TCEQ cashier or to the appropriate regional office. The application will not be considered until the correct fee is received by the commission.
- 4. A notarized copy of the Agent Authorization Form must be provided for the person preparing the application, and this form must accompany the completed application.
- 5. No person shall commence any regulated activity on the Edwards Aquifer Recharge Zone, Contributing Zone or Transition Zone until the appropriate application for the activity has been filed with and approved by the Executive Director.

SIGNATURE PAGE:


Applicant's Signature

9/24/25 Date

THE STATE OF TEXMS §
County of BEXAV §

BEFORE ME, the undersigned authority, on this day personally appeared <u>Mannon Mills</u> known to me to be the person whose name is subscribed to the foregoing instrument, and acknowledged to me that (s)he executed same for the purpose and consideration therein expressed.

GIVEN under my hand and seal of office on this 24 day of September, 2025.



NOTARY PUBLIC

Deviv Beedle

Typed or Printed Name of Notary

MY COMMISSION EXPIRES: 3/19/2028

APPLICATION FEE FORM (TCEQ-0574)

Application Fee Form

Texas Commission on Environme	ntal Quality							
Name of Proposed Regulated Entity: <u>BLCCS Site Immprovements</u>								
Regulated Entity Location: 0.1 mi NE of the Borgfeld Drive and Highland Crest intersection								
Name of Customer: BLCCS								
Contact Person: Shannon Mills	Phone	e: <u>(210)394-5132</u>						
Customer Reference Number (if is	ssued):CN							
Regulated Entity Reference Numb	er (if issued):RN							
Austin Regional Office (3373)								
Hays	☐ Travis	☐ Wil	liamson					
San Antonio Regional Office (336	2)							
Bexar Bexar	Medina	□Uva	alde					
Comal	Kinney							
Application fees must be paid by	check, certified check, o	r money order, payable	e to the Texas					
Commission on Environmental Q	uality. Your canceled ch	neck will serve as your	receipt. This					
form must be submitted with you	ur fee payment. This pa	yment is being submit	ted to:					
Austin Regional Office	Sa	n Antonio Regional Of	fice					
Mailed to: TCEQ - Cashier	<u></u> ⊙	vernight Delivery to: To	CEQ - Cashier					
Revenues Section	12	2100 Park 35 Circle						
Mail Code 214	Ві	uilding A, 3rd Floor						
P.O. Box 13088	Au	ustin, TX 78753						
Austin, TX 78711-3088	(5	12)239-0357						
Site Location (Check All That App	ly):							
Recharge Zone	Contributing Zone	Transit	ion Zone					
Type of Pla	an	Size	Fee Due					
Water Pollution Abatement Plan	, Contributing Zone							
Plan: One Single Family Resident		Acres	\$					
Water Pollution Abatement Plan								
Plan: Multiple Single Family Resi	dential and Parks	Acres	\$					
Water Pollution Abatement Plan	, Contributing Zone		24.					
Plan: Non-residential		4.18 Acres	\$ 4,000					
Sewage Collection System		L.F.	\$					
Lift Stations without sewer lines		Acres	\$					
Underground or Aboveground St	torage Tank Facility	Tanks	\$					
Piping System(s)(only)		Each	\$					
Exception		Each	\$					
Extension of Time		Each	\$					

Signature:

1 of 2

Date: 9/8/2025

Application Fee Schedule

Texas Commission on Environmental Quality

Edwards Aquifer Protection Program 30 TAC Chapter 213 (effective 05/01/2008)

Water Pollution Abatement Plans and Modifications

Contributing Zone Plans and Modifications

	Project Area in	
Project	Acres	Fee
One Single Family Residential Dwelling	< 5	\$650
Multiple Single Family Residential and Parks	< 5	\$1,500
	5 < 10	\$3,000
	10 < 40	\$4,000
	40 < 100	\$6,500
	100 < 500	\$8,000
	≥ 500	\$10,000
Non-residential (Commercial, industrial,	< 1	\$3,000
institutional, multi-family residential, schools, and	1 < 5	\$4,000
other sites where regulated activities will occur)	5 < 10	\$5,000
	10 < 40	\$6,500
	40 < 100	\$8,000
	≥ 100	\$10,000

Organized Sewage Collection Systems and Modifications

Project	Cost per Linear Foot	Minimum Fee- Maximum Fee
Sewage Collection Systems	\$0.50	\$650 - \$6,500

Underground and Aboveground Storage Tank System Facility Plans and Modifications

Project	Cost per Tank or Piping System	Minimum Fee- Maximum Fee
Underground and Aboveground Storage Tank Facility	\$650	\$650 - \$6,500

Exception Requests

Project	Fee
Exception Request	\$500

Extension of Time Requests

Project	Fee
Extension of Time Request	\$150

CORE DATA FORM (TCEQ-10400)



TCEQ Core Data Form

TCEQ Use Only

For detailed instructions regarding completion of this form, please read the Core Data Form Instructions or call 512-239-5175.

SECTION I: General Information

1. Reason fo	r Submis	sion (If other is c	hecked please de	escribe in s	space p	provided	1.)				
New Permit, Registration or Authorization (Core Data Form should be submitted with the program application.)											
Renewa	l (Core Da	ta Form should b	e submitted with	the renewa	al form)		Other			
2. Customer	Referenc	e Number <i>(if iss</i>		ollow this lin		uloli	3. Re	gulated	Entity Refere	ence Number	(if issued)
CN				r CN or RN Central Ro			R۱	I			
SECTION	II: Cu	stomer Info	<u>ormation</u>								
4. General C	ustomer l	nformation	5. Effective Da	ite for Cus	stomer	Inform	atio	n Updat	es (mm/dd/yyy	/y)	
New Cust □Change in		ne (Verifiable wit	Upo th the Texas Secr	late to Cus				troller o		•	Entity Ownership
											d active with the
			or Texas Con	•			•				
6. Customer	Legal Nai	me (If an individua	, print last name fir	st: eg: Doe,	John)		<u>li</u>	f new Cu	stomer, enter p	revious Custor	ner below:
BLCCS I	nvestme	nts, LLC									
7. TX SOS/CI	PA Filing	Number	8. TX State Tax	x ID (11 digit	ts)		9	. Feder	al Tax ID (9 digi	ts) 10. DUI	NS Number (if applicable)
080401363	39		320786718	883			8	6-328	9271		
11. Type of C	Customer:	☐ Corporati	on		Individ	ual		Pa	rtnership: 🔲 G	eneral 🛛 Limited	1
Government:	☐ City ☐	County 🔲 Federal 🗀	State Other		Sole P	roprieto	rship		Other:		
12. Number ○ 0-20	of Employ 21-100	ees 101-250	251-500		nd high	er		3. Inde _l ⊠ Yes	pendently Ow	ned and Opei No	rated?
14. Custome	r Role (Pr	pposed or Actual) -	as it relates to the				his fo	rm. Plea	se check one of	the following	
Owner		Operat	or	O	wner &	Operat	or				
Occupatio	nal Licens	ee 🗌 Respo	nsible Party	☐ Vo	oluntar	y Clean	up A	pplicant	Other:		
	1665 I	E Borgfeld D	r								
15. Mailing Address:											
	City	San Antonio)	State T			ZIP	78260		ZIP + 4	
16. Country	Mailing In	formation (if outsi	de USA)			17. E-	Mail	Addres	S (if applicable)		
	shannon@blccs.com										
18. Telephon	Telephone Number 19. Extension or Code 20. Fax Number (if applicable)					able)					
(210)39	0) 394-5132										
SECTION	III: Re	egulated En	tity Inform	ation							
					y" is se	elected l	belov	v this for	rm should be a	ccompanied b	y a permit application)
New Regulation New	ulated Enti	ty 🔲 Update	to Regulated Ent	ity Name		Update	to Re	egulated	Entity Informa	ition	
_		•	•	•	ed in (order	to m	eet TO	CEQ Agenc	y Data Stan	dards (removal
	of organizational endings such as Inc, LP, or LLC).										
	22. Regulated Entity Name (Enter name of the site where the regulated action is taking place.)										
BLCCS Si	ıte Impr	ovements									

TCEQ-10400 (02/21) Page 1 of 2

23. Street Addres																
the Regulated En	- F	0'4					(-X-			ZIP						
24. County	-	City				51	tate		ZII	<u> </u>			21	P + 4		
			En	nter Phy	vsical L	ocation	Descripti	on if no	street a	ddress i	s pro	ovided.				
25. Description to Physical Location		App					Borgfel						ersect	tion		
26. Nearest City										S	State			Nea	rest ZIP Code	
San Antonio										T	X			782	260	
27. Latitude (N) In	Decima	al:		29.7	13561			28	3. Longi	itude (W)	In D	ecimal:	98.4	46443	6	
Degrees		Minutes	3	1		Seconds		De	egrees			Minutes			Seconds	
29			4	12		•	48.82			98			27		51.97	
29. Primary SIC C	ode (4 d	igits)	30. 9	Second	lary SIC	Code (4 digits)	31. Pri (5 or 6 o		AICS Cod	de		econd digits)	lary NA	ICS Code	
1623					W	_										
33. What is the Pr	rimary B	Busine	ss of	this er	itity?	(Do not re	epeat the SIC	or NAICS	descriptio	n.)						
34. Mailing								165	5 E Bor	gfeld Dr						
Address:	. 12														1	
Addiess.	-54	Ci	ty	San	Antoni	0	State	TX		ZIP		78260	Z	IP + 4		
35. E-Mail Ad	ddress:	1						s	nannon	@blccs.c	com		,			
36. 7	Telepho	ne Nu	mber			37	7. Extensio	on or Co	de			38. Fax Nu	ımber	(if appl	icable)	
(210)39	94-513	2									()	-		
9. TCEQ Programs orm. See the Core Date	and ID a Form in	Numb structio	ers C	heck all	Program nal guidar	s and wr	rite in the pe	rmits/regi	stration r	numbers th	nat wil	I be affected	d by the	updates	submitted on this	
☐ Dam Safety		D	istricts	3		□ E	dwards Aqu	ifer		Emission	s Inve	entory Air		Industria	l Hazardous Waste	
															7. (6.2)	
☐ Municipal Solid W	aste		ew So	ource Re	view Air		SSF			Petroleun	n Sto	rage Tank		PWS		
						 				Verm			_			
Sludge		∐s	torm V	Vater		🗆 T	itle V Air		_ _	Tires			10	Used Oil		
☐ Voluntary Cleanu		Пи	/aste \	Motor			Vactourster /	\ ariaultur		Motor Die	ahta		-	Othory		
U Voluntary Cleanup	J	v	asie	vvalei		U V	Vastewater A	Agricultur	;	Water Rio	gnis		+'	Other:		
SECTION IV	: Prej	oare	r In	form	ation	 !										
40. Name: Brooke	Lindh	ol, P	.E.					41. Ti	tle:	Vice P	resi	ident				
42. Telephone Nun	nber 4	3. Ext.	/Cod	е	44. Fa	x Numb	per	45. I	-Mail A	ddress	dress					
(210) 375-900	0				() .	*	blir	dholn	n@pap	@pape-dawson.com					
SECTION V:	Autl	noriz	zed	Signa	ature											
6. By my signature ignature authority to dentified in field 39.	below, l	I certif	y, to 1	the best	of my k											
Company:	Pape-D)awsor	n Ena	ineers.	Inc.			Job 7	itle:	Vice Pr	reside	ent				
Name (In Print):	Brooke											hone:	(210) 375-	9000	
Signature:	B	Date: 9/8/25							1							

POLLUTANT LOAD AND REMOVAL CALCULATIONS

Project Name: Borgfeld Lot 4
Date Prepared: 4/22/2024

1. The Required Load Reduction for the total project:

Calculations from RG-348

Page 3-29 Equation 3.3: $L_M = 27.2(A_N \times P)$

Pages 3-27 to 3-30

 $L_{M\,TOTAL\,PROJECT} = \ Required\,TSS\ removal\ resulting\ from\ the\ proposed\ development = 80\%\ of\ increased\ load$

 A_N = Net increase in impervious area for the project

P = Average annual precipitation, inches

Site Data: Determine Required Load Removal Based on the Entire Project

		ta: Determine Required Load Removal Based on the Entire Project
	Bexar	County =
acres	4.85	Total project area included in plan * =
acres	0.00	Predevelopment impervious area within the limits of the plan * =
acres	1.94	Total post-development impervious area within the limits of the plan* =
	0.40	Total post-development impervious cover fraction * =
inches	30	P =
lbs.	1583	$\mathbf{L}_{\mathbf{MTOTALPROJECT}} =$
	5	Number of drainage basins / outfalls areas leaving the plan area =

2. Drainage Basin Parameters (This information should be provided for each basin):

	Dramage Basin/Outtail Area No. =	В	
	Total drainage basin/outfall area =	1.95	acres
Predevelopment imperviou	s area within drainage basin/outfall area =	0.00	acres
Post-development imperviou	s area within drainage basin/outfall area =	1.40	acres
Post-development impervious fra	action within drainage basin/outfall area = L _{M THIS BASIN} =	0.72 1142	lbs.

3. Indicate the proposed BMP Code for this basin.

Proposed BMP =	JF	abbreviation
Removal efficiency =	86	percent

4. Calculate Maximum TSS Load Removed (Lp) for this Drainage Basin by the selected BMP Type.

RG-348 Page 3-33 Equation 3.7: $LR = (BMP \text{ efficiency}) \times P \times (A_I \times 34.6 + A_P \times 0.54)$

 $\begin{array}{l} A_C = \ Total\ On\mbox{-Site}\ drainage\ area\ in\ the\ BMP\ catchment\ area\\ A_1 = \ Impervious\ area\ proposed\ in\ the\ BMP\ catchment\ area\\ A_P = \ Pervious\ area\ remaining\ in\ the\ BMP\ catchment\ area \end{array}$

 L_R = TSS Load removed from this catchment area by the proposed BMP

$A_c =$	1.95	acres
$A_I =$	1.40	acres
$A_P =$	0.55	acres
$L_R =$	1257	lbs.

5. Calculate Fraction of Annual Runoff to Treat the drainage basin / outfall area

Desired L _{M THIS BASIN} =	1225	lbs.
F=	0.07	

6. Calculate Treated Flow required by the BMP Type for this drainage basin / outfall area.

Offsite area draining to BMP =	2.13	acre
Offsite impervious cover draining to BMP =	0.00	acres

Calculations from RG-348			
Pages Section 3.2.22	Rainfall Intensity =	2.00	inches per hou
	Effective Area =	1.34	acres
	Cartridge Length =	54	inches

Peak Treatment Flow Required = 2.70 cubic feet per second

<u>7. Jellyfish</u>
Designed as Required in RG-348
Section 3.2.22

Flow Through Jellyfish Size	Vault	
Jellyfish Size for Flow-Based Configuration = Jellyfish Treatment Flow Rate =	JFPD0808-14-3 2.76 cfs	

CALEB M. CHANCE
98401
OKS (CENSED CONTROL OF STONAL ENGINEER)

1

Texas Commission on Environmental Quality

TSS Removal Calculations 04-20-2009

Project Name: BLCCS Site Improv

Date Prepared: 9/5/2025

Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348.

Characters shown in red are data entry fields.

Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spr-

1. The Required Load Reduction for the total project:

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3.3: $L_{M} = 27.2(A_{N} \times P)$

where:

 $L_{M \, TOTAL \, PROJECT}$ = Required TSS removal resulting from the proposed development = 80% of i

 A_N = Net increase in impervious area for the project

P = Average annual precipitation, inches

Site Data: Determine Required Load Removal Based on the Entire Project

County = Bexar

Total project area included in plan * = 4.18 acres

Predevelopment impervious area within the limits of the plan * = 0.00 acres

Total post-development impervious cover fraction * = 0.42

P = 30 inches

 $L_{M TOTAL PROJECT} = 1420$ lbs.

Number of drainage basins / outfalls areas leaving the plan area = 1



^{*} The values entered in these fields should be for the total project area.

2. Drainage Basin Parameters (This information should be provided for each basin):

	Area B	Drainage Basin/Outfall Area No. =
acres acres acres	0.04 0.00 0.03 0.75	Total drainage basin/outfall area = Predevelopment impervious area within drainage basin/outfall area = Post-development impervious area within drainage basin/outfall area = ost-development impervious fraction within drainage basin/outfall area =
		· · · · · · · · · · · · · · · · · · ·

L_{M THIS BASIN} =

3. Indicate the proposed BMP Code for this basin.

Post-development impervious

Proposed BMP = Vegetated Filter Strips Removal efficiency = 85 percent

24

lbs.

Aqualogic Cartridge Filte Bioretention Contech StormFilter Constructed Wetland **Extended Detention Grassy Swale** Retention / Irrigation Sand Filter

Stormceptor

Vegetated Filter Strips

Vortechs Wet Basin Wet Vault

4. Calculate Maximum TSS Load Removed (L_R) for this Drainage Basin by the selected BMP Type.

RG-348 Page 3-33 Equation 3.7: L_R = (BMP efficiency) x P x (A_I x 34.6 + A_P x 0.54)

A_C = Total On-Site drainage area in the BMP catchment area where:

A_I = Impervious area proposed in the BMP catchment area

 A_P = Pervious area remaining in the BMP catchment area

L_R = TSS Load removed from this catchment area by the proposed BMP

Texas Commission on Environmental Quality

TSS Removal Calculations 04-20-2009

Project Name: BLCCS Site Improv

Date Prepared: 9/5/2025

Additional information is provided for cells with a red triangle in the upper right corner. Place the cursor over the cell Text shown in blue indicate location of instructions in the Technical Guidance Manual - RG-348.

Characters shown in red are data entry fields.

Characters shown in black (Bold) are calculated fields. Changes to these fields will remove the equations used in the spr

1. The Required Load Reduction for the total project:

Calculations from RG-348

Pages 3-27 to 3-30

Page 3-29 Equation 3.3: $L_M = 27.2(A_N \times P)$

where:

 $L_{\text{M TOTAL PROJECT}}$ = Required TSS removal resulting from the proposed development = 80% of i

 A_N = Net increase in impervious area for the project

P = Average annual precipitation, inches

Site Data: Determine Required Load Removal Based on the Entire Project

County = Bexar

Total project area included in plan * = 4.18 acres

Predevelopment impervious area within the limits of the plan * = 0.00 acres

Total post-development impervious cover fraction * = 0.42

Total post-development impervious cover fraction * = 0.42

P = 30 inches

L_{M TOTAL PROJECT} = 1420 lbs.

Number of drainage basins / outfalls areas leaving the plan area = 1



^{*} The values entered in these fields should be for the total project area.

2. Drainage Basin Parameters (This information should be provided for each basin):

Drainage Basin/Outfall Area No. =	Area C	
Total drainage basin/outfall area =	0.34	acres
Predevelopment impervious area within drainage basin/outfall area =	0.00	acres
Post-development impervious area within drainage basin/outfall area =	0.20	acres
Post-development impervious fraction within drainage basin/outfall area =	0.59	
L _{M THIS BASIN} =	163	lbs.

3. Indicate the proposed BMP Code for this basin.

Proposed BMP = Vegetated Filter Strips
Removal efficiency = 85 percent

Aqualogic Cartridge Filte Bioretention Contech StormFilter Constructed Wetland Extended Detention Grassy Swale Retention / Irrigation Sand Filter

Sand Filter Stormceptor

Vegetated Filter Strips

Vortechs Wet Basin Wet Vault

4. Calculate Maximum TSS Load Removed (L_R) for this Drainage Basin by the selected BMP Type.

RG-348 Page 3-33 Equation 3.7: L_R = (BMP efficiency) x P x (A_I x 34.6 + A_P x 0.54)

where: A_C = Total On-Site drainage area in the BMP catchment area

 A_{I} = Impervious area proposed in the BMP catchment area

 A_P = Pervious area remaining in the BMP catchment area

 $L_{\mbox{\scriptsize R}}$ = TSS Load removed from this catchment area by the proposed BMP

EXHIBITS

HIS DOCUMENT HAS BEEN PRODUCED FROM MATERIAL THAT WAS STORED AND/OR TRANSMITTED ELECTRONICALLY AND MAY HAVE BEEN INADVERTENTLY ALTERED. RELY ONLY ON FINAL HARDCOPY MATERIALS BEARING THE CONSULTANT'S ORIGINAL SIGNATURE AND SEAL AERIAL IMAGERY PROVIDED BY GOOGLE® UNLESS OTHERWISE NOTED. Imagery © 2016,CAPCOG,Digital Globe,Texas Orthoimagery Program, USDA Farm Service Agency.

TEXAS COMMISSION ON ENVIRONMENTAL QUALITY CONTRIBUTING ZONE PLAN GENERAL CONSTRUCTION NOTES

1. WRITTEN CONSTRUCTION NOTIFICATION SHOULD BE PROVIDED TO THE APPROPRIATE TCEQ REGIONAL OFFICE NO LATER THAN 48 HOURS PRIOR TO COMMENCEMENT OF THE REGULATED ACTIVITY. INFORMATION SHOULD INCLUDE THE DATE ON WHICH THE REGULATED ACTIVITY WILL COMMENCE, THE NAME OF THE APPROVED PLAN FOR THE REGULATED ACTIVITY, AND THE NAME OF THE PRIME CONTRACTOR WITH THE NAME AND TELEPHONE NUMBER OF THE

2. ALL CONTRACTORS CONDUCTING REGULATED ACTIVITIES ASSOCIATED WITH THIS PROJECT SHOULD BE PROVIDED WITH COMPLETE COPIES OF THE APPROVED CONTRIBUTING ZONE PLAN AND THE TCEQ LETTER INDICATING THE SPECIFIC CONDITIONS OF ITS APPROVAL. DURING THE COURSE OF THESE REGULATED ACTIVITIES, THE CONTRACTOR(S) SHOULD KEEP COPIES OF THE APPROVED PLAN AND APPROVAL LETTER ON-SITE.

3. NO TEMPORARY ABOVEGROUND HYDROCARBON AND HAZARDOUS SUBSTANCE STORAGE TANK SYSTEM MAY BE INSTALLED WITHIN 150 FEET IF A DOMESTIC, INDUSTRIAL, IRRIGATION, OR PUBLIC WATER SUPPLY WELL.

4. PRIOR TO COMMENCING CONSTRUCTION, ALL TEMPORARY EROSION AND SEDIMENTATION (E&S) CONTROL MEASURES MUST BE PROPERLY SELECTED, INSTALLED, AND MAINTAINED IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS AND GOOD ENGINEERING PRACTICES. CONTROLS SPECIFIED IN THE SWPPP SECTION OF THE APPROVED EDWARDS AQUIFER CONTRIBUTING ZONE PLAN ARE REQUIRED DURING CONSTRUCTION. IF INSPECTIONS INDICATE A CONTROL HAS BEEN USED INAPPROPRIATELY, OR INCORRECTLY, THE APPLICANT MUST REPLACE OR MODIFY THE CONTROL FOR SITE SITUATIONS. THE CONTROLS MUST REMAIN IN PLACE UNTIL DISTURBED AREAS ARE REVEGETATED AND THE AREAS HAVE BECOME PERMANENTLY STABILIZED.

5. IF SEDIMENT ESCAPES THE CONSTRUCTION SITE, OFF-SITE ACCUMULATIONS OF SEDIMENT MUST BE REMOVED AT A FREQUENCY SUFFICIENT TO MINIMIZE OFFSITE IMPACTS TO WATER QUALITY (E.G., FUGITIVE SEDIMENT IN STREET BEING WASHED INTO SURFACE STREAMS OR SENSITIVE FEATURES BY THE NEXT RAIN).

6. SEDIMENT MUST BE REMOVED FROM SEDIMENT TRAPS OR SEDIMENTATION PONDS NOT LATER THAN WHEN DESIGN CAPACITY HAS BEEN REDUCED BY 50%. A PERMANENT STAKE MUST BE PROVIDED THAT CAN INDICATE WHEN THE SEDIMENT OCCUPIES 50% OF THE

7. LITTER, CONSTRUCTION DEBRIS, AND CONSTRUCTION CHEMICALS EXPOSED TO STORMWATER SHALL BE PREVENTED FROM BECOMING A POLLUTANT SOURCE FOR STORMWATER DISCHARGES (E.G., SCREENING OUTFALLS, PICKED UP DAILY).

8. ALL SPOILS (EXCAVATED MATERIAL) GENERATED FROM THE PROJECT SITE AND STORED ON-SITE MUST HAVE PROPER E&S CONTROLS INSTALLED. 9. STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICABLE IN PORTIONS

OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED, AND CONSTRUCTION ACTIVITIES WILL NOT RESUME WITHIN 21 DAYS. WHEN THE INITIATION OF STABILIZATION MEASURES BY THE 14TH DAY IS PRECLUDED BY WEATHER CONDITIONS, STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICABLE.

10. THE FOLLOWING RECORDS SHOULD BE MAINTAINED AND MADE AVAILABLE TO THE TCEQ UPON REQUEST: THE DATES WHEN MAJOR GRADING ACTIVITIES OCCUR; THE DATES WHEN CONSTRUCTION ACTIVITIES TEMPORARILY OR PERMANENTLY CEASE ON A PORTION OF THE SITE; AND THE DATES WHEN STABILIZATION MEASURES ARE INITIATED.

11. THE HOLDER OF ANY APPROVED CONTRIBUTING ZONE PLAN MUST NOTIFY THE APPROPRIATE REGIONAL OFFICE IN WRITING AND OBTAIN APPROVAL FROM THE EXECUTIVE DIRECTOR PRIOR TO INITIATING ANY OF THE FOLLOWING:

A. ANY PHYSICAL OR OPERATIONAL MODIFICATION OF ANY BEST MANAGEMENT PRACTICES OR STRUCTURE(S), INCLUDING BUT NOT LIMITED TO TEMPORARY OR PERMANENT PONDS, DAMS, BERMS, SILT FENCES, AND DIVERSIONARY STRUCTURES;

B. ANY CHANGE IN THE NATURE OR CHARACTER OF THE REGULATED ACTIVITY FROM THAT WHICH WAS ORIGINALLY APPROVED;

C. ANY CHANGE THAT WOULD SIGNIFICANTLY IMPACT THE ABILITY TO PREVENT POLLUTION OF THE EDWARDS AQUIFER AND HYDROLOGICALLY CONNECTED SURFACE WATER; OR D. ANY DEVELOPMENT OF LAND PREVIOUSLY IDENTIFIED IN A CONTRIBUTING ZONE PLAN AS UNDEVELOPED.

SAN ANTONIO REGIONAL OFFICE 14250 JUDSON ROAD SAN ANTONIO, TEXAS 78233-4480 PHONE (210) 490-3096 FAX (210) 545-4329

TEMPORARY POLLUTION ABATEMENT NOTES

1. GRAVEL FILTER BAGS SHALL BE PLACED IN AREAS WHERE DRAINAGE FLOW IS CONCENTRATED DUE TO NATURAL CONDITIONS OR CONSTRUCTION ACTIVITIES SUCH AS AT DRAINAGE STRUCTURES. THESE BAGS WILL BE MAINTAINED UNTIL THEY ARE NO LONGER NEEDED OR UNTIL THEY ARE REPLACED WITH PERMANENT POLLUTION ABATEMENT MEASURES.

2. CONSTRUCTION WITHIN THE DEVELOPMENT MAY NOT BE CONTINUOUS. THE CONTRACTOR IS RESPONSIBLE FOR PLACING SILT FENCE ALONG THE DOWN GRADIENT SIDE OF EACH PAD DURING BUILDING CONSTRUCTION. ALL SILT FENCE SHALL BE PLACED PERPENDICULAR TO DRAINAGE FLOW.

GENERAL NOTES

WORKING CONDITIONS AT ALL TIMES.

1. DO NOT DISTURB VEGETATED AREAS (TREES, GRASS, WEEDS, BRUSH, ETC.) ANY MORE THAN NECESSARY FOR CONSTRUCTION.

2. LOCATIONS OF CONSTRUCTION ENTRANCE/EXITS, CONCRETE WASHOUT PITS, AND CONSTRUCTION EQUIPMENT AND MATERIAL STORAGE YARDS TO BE DETERMINED IN THE FIELD. 3. STORM WATER POLLUTION PREVENTION CONTROLS MAY NEED TO BE MODIFIED IN THE FIELD TO

SIGNED AND DATED BY THE RESPONSIBLE PARTY. 4. RESTRICT ENTRY/EXIT TO THE PROJECT SITE TO DESIGNATED LOCATIONS BY USE OF ADEQUATE FENCING, IF NECESSARY.

ACCOMPLISH THE DESIRED EFFECT. ALL MODIFICATIONS ARE TO BE NOTED ON THIS EXHIBIT AND

5. ALL STORM WATER POLLUTION PREVENTION CONTROLS ARE TO BE MAINTAINED AND IN

6. CONTRACTOR, TO THE EXTENT PRACTICAL, SHALL MINIMIZE THE AMOUNT OF AREA DISTURBED. AS SOON AS PRACTICAL, ALL DISTURBED SOIL THAT WILL NOT BE COVERED BY IMPERVIOUS COVER SUCH AS PARKWAY AREAS, EASEMENT AREAS, EMBANKMENT SLOPES, ETC. WILL BE STABILIZED PER APPLICABLE PROJECT SPECIFICATIONS.

7. BEST MANAGEMENT PRACTICES MAY BE INSTALLED IN STAGES TO COINCIDE WITH THE DISTURBANCE OF UPGRADIENT AREAS.

8. BEST MANAGEMENT PRACTICES MAY BE REMOVED IN STAGES ONCE THE WATERSHED FOR THAT PORTION CONTROLLED BY THE BEST MANAGEMENT PRACTICES HAS BEEN STABILIZED.

9. ALL TEMPORARY BMPs WILL BE REMOVED ONCE WATERSHED IS STABILIZED.

10. MUD OR DIRT INADVERTENTLY TRACKED OFF-SITE AND ONTO EXISTING STREETS SHALL BE REMOVED IMMEDIATELY BY HAND OR MECHANICAL BROOM SWEEPING.

11. PRIOR TO INITIATION OF SUBSEQUENT PHASES OF CONSTRUCTION, TEMPORARY BMPs INCLUDING SILT FENCING, CONSTRUCTION ENTRANCE/EXIT, CONCRETE WASHOUT PIT, AND CONSTRUCTION STAGING AREA SHALL BE FIELD LOCATED AS APPROPRIATE FOR THE AREA OF


12. TEMPORARY POLLUTION ABATEMENT MEASURES SHOWN ON THE PLAN ARE FOR THE OVERALL DEVELOPMENT. TEMPORARY BMPs MAY REQUIRE ADJUSTMENT BASED ON PHASING OF CONSTRUCTION OF THE DEVELOPMENT. RECORDS OF ADJUSTMENTS AND REVISIONS SHALL BE MAINTAINED AS APPROPRIATE.

13. TEMPORARY BMPs SHOWN ON THIS SHEET ARE FOR GRAPHICAL PURPOSES AND MAY NOT BE TO SCALE. BMPs SHALL BE LOCATED WITHIN THE PROJECT LIMITS.

14. UPON COMPLETION OF THE PROJECT AND BEFORE FINAL PAYMENT IS ISSUED, CONTRACTOR SHALL REMOVE ALL SEDIMENT AND EROSION CONTROL MEASURES. 15. CONTRACTOR SHALL BE RESPONSIBLE FOR CONSTRUCTION SEQUENCING AND REMOVAL OF TEMPORARY POLLUTION ABATEMENT MEASURES THAT CONFLICT WITH SITE IMPROVEMENTS SUCH AS LANDSCAPING AND FENCES SO AS TO PREVENT SEDIMENT FROM ESCAPING THE PROJECT SITE.

COUNTY COUNTY



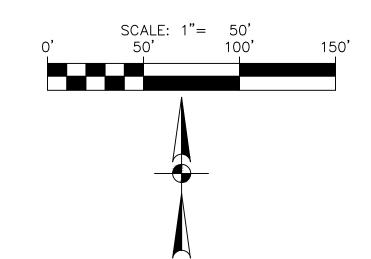

BROOKE LINDHOLM

PROJECT LIMITS

EXISTING CONTOURS DIRECTION OF FLOW

ROCK BERM

STABILIZED CONSTRUCTION ENTRANCE/EXIT

CONCRETE TRUCK WASHOUT PIT

CONSTRUCTION EQUIPMENT, VEHICLE & MATERIALS STORAGE AREA

GRAVEL FILTER BAGS

PROPOSED IMPERVIOUS COVER

MEN.

PLAT NO. 8802-85 JOB NO. ATE SEPTEMBER 2025 DESIGNER CHECKED BL DRAWN AG

THE ENGINEERING SEAL HAS BEEN AFFIXED TO THIS SHEET ONLY FOR THE PURPOSE OF DEMONSTRATING COMPLIANCE WITH THE POLLUTION ABATEMENT SIZING AND TREATMENT REQUIREMENTS OF THE TEXAS COMMISSION ON ENVIRONMENTAL

THIS SHEET HAS BEEN PREPARED FOR PURPOSES OF POLLUTION ABATEMENT ONLY. ALL OTHER CIVIL ENGINEERING RELATED INFORMATION SHOULD BE ACQUIRED FROM THE APPROPRIATE SHEET IN THE CIVIL IMPROVEMENT PLANS.

EXHIBIT

QUALITY'S EDWARDS AQUIFER TECHNICAL GUIDANCE MANUAL.

SCHEMATIC OF TEMPORARY CONSTRUCTION ENTRANCE/EXIT

MATERIALS

THE AGGREGATE SHOULD CONSIST OF 4-INCH TO 8-INCH WASHED STONE OVER A STABLE FOUNDATION AS SPECIFIED IN THE PLAN. 2. THE AGGREGATE SHOULD BE PLACED WITH A MINIMUM THICKNESS OF

3. THE GEOTEXTILE FABRIC SHOULD BE DESIGNED SPECIFICALLY FOR USE AS A SOIL FILTRATION MEDIA WITH AN APPROXIMATE WEIGHT OF 6 OZ/YD2, A MULLEN BURST RATING OF 140 LB/IN2, AND AN EQUIVALENT OPENING SIZE GREATER THAN A NUMBER 50 SIEVE.

4. IF A WASHING FACILITY IS REQUIRED, A LEVEL AREA WITH A MINIMUM OF 4-INCH DIAMETER WASHED STONE OR COMMERCIAL ROCK SHOULD BE INCLUDED IN THE PLANS. DIVERT WASTEWATER TO A SEDIMENT TRAP OF

DRAINAGE

AVOID CURVES ON PUBLIC ROADS AND STEEP SLOPES. REMOVE VEGETATION AND OTHER OBJECTIONABLE MATERIAL FROM THE FOUNDATION AREA. GRADE CROWN FOUNDATION FOR POSITIVE DRAINAGE.

2. THE MINIMUM WIDTH OF THE ENTRANCE/EXIT SHOULD BE 12 FEET OR THE FULL WIDTH OF EXIT ROADWAY, WHICHEVER IS GREATER.

3. THE CONSTRUCTION ENTRANCE SHOULD BE AT LEAST 50 FEET LONG THE SLOPE TOWARD THE ROAD EXCEEDS 2%. CONSTRUCT A RIDGI

FOUNDATION APPROXIMATELY 15 FEET FROM THE ENTRANCE TO DIVERT RUNOFF AWAY FROM THE PUBLIC ROAD. 5. PLACE GEOTEXTILE FABRIC AND GRADE FOUNDATION TO IMPROVE STABILITY,

6-INCHES TO 8-INCHES HIGH WITH 3:1 (H:V) SIDE SLOPES, ACROSS THE

6. PLACE STONE TO DIMENSIONS AND GRADE SHOWN ON PLANS. LEAVE SURFACE SMOOTH AND SLOPE FOR DRAINAGE.

8. INSTALL PIPE UNDER PAD AS NEEDED TO MAINTAIN PROPER PUBLIC ROAD

7. DIVERT ALL SURFACE RUNOFF AND DRAINAGE FROM THE STONE PAD TO A SEDIMENT TRAP OR BASIN.

ESPECIALLY WHERE WET CONDITIONS ARE ANTICIPATED.

WOVEN WIRI SHEATHING

WOVEN WIRE SHEATHING

SECTION "A-A"

ISOMETRIC PLAN VIEW

ROCK BERMS

GEOTEXTILE FABRIC TO

STABILIZE FOUNDATION

SECTION "A-A" OF A

CONSTRUCTION ENTRANCE/EXIT

2. STONE TOO SMALL OR GEOTEXTILE FABRIC ABSENT, RESULTS IN MUDDY

PAD TOO SHORT FOR HEAVY CONSTRUCTION TRAFFIC-EXTEND PAD BEYOND

4. PAD NOT FLARED SUFFICIENTLY AT ROAD SURFACE, RESULTS IN MUD BEING

5. UNSTABLE FOUNDATION - USE GEOTEXTILE FABRIC UNDER PAD AND/OR

THE ENTRANCE SHOULD BE MAINTAINED IN A CONDITION, WHICH WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY.

THIS MAY REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STONE AS

CONDITIONS DEMAND AND REPAIR AND/OR CLEANOUT OF ANY MEASURES

2. ALL SEDIMENT SPILLED, DROPPED, WASHED OR TRACKED ONTO PUBLIC

3. WHEN NECESSARY, WHEELS SHOULD BE CLEANED TO REMOVE SEDIMENT

4. WHEN WASHING IS REQUIRED, IT SHOULD BE DONE ON AN AREA STABILIZED

WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR

5. ALL SEDIMENT SHOULD BE PREVENTED FROM ENTERING ANY STORM DRAIN,

CORRECT

INCORRECT

SOD INSTALLATION

USE PEGS OR STAPLES TO FASTEN SOD

FIRMLY - AT THE ENDS OF STRIPS AND

IN THE CENTER, OR EVERY 3-4 FEET IF

MOW, DRIVE PEGS OR STAPLES FLUSH

THE STRIPS ARE LONG. WHEN READY TO

RIGHTS-OF-WAY SHOULD BE REMOVED IMMEDIATELY BY CONTRACTOR.

INSPECTION AND MAINTENANCE GUIDELINES

1. INADEQUATE RUNOFF CONTROL-SEDIMENT WASHES ONTO PUBLIC ROAD.

COMMON TROUBLE POINTS

CONDITION AS STONE IS PRESSED INTO SOIL.

IMPROVE FOUNDATION DRAINAGE.

USED TO TRAP SEDIMENT

<u>SHOOTS</u> OR GRASS BLADES.

GRASS SHOULD BE GREEN AND

-THATCH- GRASS CLIPPINGS AND

ROOT ZONE - SOIL AND ROOTS.

DEAD LEAVES, UP TO 1/2" THICK.

HEALTHY: MOWED AT A 2"-3"

CUTTING HEIGHT.

SEDIMENT BASIN

THE MINIMUM 50-FOOT LENGTH AS NECESSARY.

TRACKED ON TO ROAD AND POSSIBLE DAMAGE TO ROAD.

PRIOR TO ENTRANCE ONTO PUBLIC RIGHT-OF-WAY.

DITCH OR WATER COURSE BY USING APPROVED METHODS.

THE PURPOSE OF A ROCK BERM IS TO SERVE AS A CHECK DAM IN AREAS OF CONCENTRATED FLOW, TO INTERCEPT SEDIMENT-LADEN RUNOFF, DETAIN THE SEDIMENT AND RELEASE THE WATER IN SHEET FLOW. THE ROCK BERM SHOULD BE USED WHEN THE CONTRIBUTING DRAINAGE AREA IS LESS THAN 5 ACRES. ROCK BERMS ARE USED IN AREAS WHERE THE VOLUME OF RUNOFF IS TOO GREAT FOR A SILT FENCE TO CONTAIN. THEY ARE LESS EFFECTIVE FOR SEDIMENT REMOVAL THAN SILT FENCES, PARTICULARLY FOR FINE PARTICLES, BUT ARE ABLE TO WITHSTAND HIGHER FLOWS THAN A SILT FENCE. AS SUCH, ROCK BERMS ARE OFTEN USED IN AREAS OF CHANNEL FLOWS (DITCHES, GULLIES, ETC.). ROCK BERMS ARE MOST EFFECTIVE AT REDUCING BED LOAD IN CHANNELS AND SHOULD NOT BE SUBSTITUTED FOR OTHER EROSION AND SEDIMENT CONTROL MEASURES FARTHER UP THE WATERSHED.

INSPECTION AND MAINTENANCE GUIDELINES INSPECTION SHOULD BE MADE WEEKLY AND AFTER EACH RAINFALL BY THE RESPONSIBLE PARTY. FOR INSTALLATIONS IN STREAMBEDS, ADDITIONAL DAILY

INSPECTIONS SHOULD BE MADE. REMOVE SEDIMENT AND OTHER DEBRIS WHEN BUILDUP REACHES 6 INCHES AND DISPOSE OF THE ACCUMULATED SILT IN AN APPROVED MANNER THAT

WILL NOT CAUSE ANY ADDITIONAL SILTATION. 3. REPAIR ANY LOOSE WIRE SHEATHING.

WASHOUT, CONSTRUCTION TRAFFIC DAMAGE, ETC.

4. THE BERM SHOULD BE RESHAPED AS NEEDED DURING INSPECTION 5. THE BERM SHOULD BE REPLACED WHEN THE STRUCTURE CEASES TO

FUNCTION AS INTENDED DUE TO SILT ACCUMULATION AMONG THE ROCKS,

6. THE ROCK BERM SHOULD BE LEFT IN PLACE UNTIL ALL UPSTREAM AREAS ARE STABILIZED AND ACCUMULATED SILT REMOVED.

MATERIALS

THE BERM STRUCTURE SHOULD BE SECURED WITH A WOVEN WIRE SHEATHING HAVING MAXIMUM OPENING OF 1 INCH AND A MINIMUM WIRE DIAMETER OF 20 GAUGE GALVANIZED AND SHOULD BE SECURED WITH SHOAT

2. CLEAN, OPEN GRADED 3-INCH TO 5-INCH DIAMETER ROCK SHOULD BE USED, EXCEPT IN AREAS WHERE HIGH VELOCITIES OR LARGE VOLUMES OF FLOW ARE EXPECTED, WHERE 5-INCH TO 8-INCH DIAMETER ROCKS MAY BE

INSTALLATION 1. LAY OUT THE WOVEN WIRE SHEATHING PERPENDICULAR TO THE FLOW LINE. THE SHEATHING SHOULD BE 20 GAUGE WOVEN WIRE MESH WITH 1 INCH

2. BERM SHOULD HAVE A TOP WIDTH OF 2 FEET MINIMUM WITH SIDE SLOPES BEING 2:1 (H:V) OR FLATTER. 3. PLACE THE ROCK ALONG THE SHEATHING AS SHOWN IN THE DIAGRAM TO

A HEIGHT NOT LESS THAN 18". 4. WRAP THE WIRE SHEATHING AROUND THE ROCK AND SECURE WITH TIE WIRE SO THAT THE ENDS OF THE SHEATHING OVERLAP AT LEAST 2 INCHES,

5. BERM SHOULD BE BUILT ALONG THE CONTOUR AT ZERO PERCENT GRADE OR AS NEAR AS POSSIBLE 6. THE ENDS OF THE BERM SHOULD BE TIED INTO EXISTING UPSLOPE GRADE AND THE BERM SHOULD BE BURIED IN A TRENCH APPROXIMATELY 3 TO 4

COMMON TROUBLE POINTS

INCHES DEEP TO PREVENT FAILURE OF THE CONTROL.

AND THE BERM RETAINS ITS SHAPE WHEN WALKED UPON.

. INSUFFICIENT BERM HEIGHT OR LENGTH (RUNOFF QUICKLY ESCAPES OVER THE TOP OR AROUND THE SIDES OF BERM).

2. BERM NOT INSTALLED PERPENDICULAR TO FLOW LINE (RUNOFF ESCAPING AROUND ONE SIDE).

ROCK BERM DETAIL

NOT-TO-SCALE

STEEL FENCE POST MAX. 6' SPACING, SILT FENCE $\overline{}$ MIN. EMBEDMENT = 1' (MIN. HEIGHT 24" (SEE INSTALLATION NOTE 1) ABOVE EXISTING GROUND) WIRE MESH BACKING COMPACTED EARTH 4X4~W1.4xW1.4 MIN. OR ROCK BACKFILL - ALLOWABLE TYPICAL CHAIN LINE FENCE FABRIC IS ACCEPTABLE TRENCH-

STABILIZED CONSTRUCTION ENTRANCE/EXIT DETAIL

NOT-TO-SCALE

LAY SOD IN A STAGGERED PATTERN. BUTT THE STRIPS TIGHTLY AGAINST EACH OTHER. DO NOT LEAVE SPACES AND DO NOT

TING — ANGLED ENDS CAUSED BY TH AUTOMATIC SOD CUTTER MUST BE MATCHED CORRECTLY.

ENDS AND TRIMMING PIECES.

MATERIALS

OF 36 HOURS.

SHOOT GROWTH AND THATCH.

SITE PREPARATION

OVERLAP. A SHARPENED MASON'S TROWEL


IS A HANDY TOOL FOR TUCKING DOWN THE

SHOULD BE 1/2"-3/4" THICK, WITH DENSE ROOT MAT FOR STRENGTH. APPEARANCE OF GOOD SOD

1. ROLL SOD IMMEDIATELY TO ACHIEVE FIRM CONTACT WITH THE SOIL.

2. WATER TO A DEPTH OF 4" AS NEEDED. WATER WELL AS SOON AS THE SOD IS LAID.

3. MOW WHEN THE SOD IS ESTABLISHED - IN 2-3 WEEKS. SET

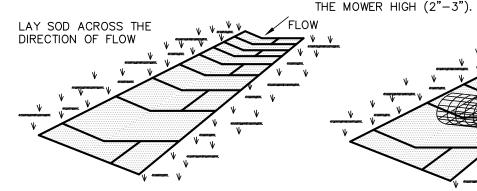

I. SOD SHOULD BE MACHINE CUT AT A UNIFORM SOIL THICKNESS OF 3/4" INCH

(± 1/4" INCH) AT THE TIME OF CUTTING. THIS THICKNESS SHOULD EXCLUDE

2. PIECES OF SOD SHOULD BE CUT TO THE SUPPLIER'S STANDARD WIDTH AND

LENGTH, WITH A MAXIMUM ALLOWABLE DEVIATION IN ANY DIMENSION OF 5%.

STANDARD SIZE SECTIONS OF SOD SHOULD BE STRONG ENOUGH TO

SUPPORT THEIR OWN WEIGHT AND RETAIN THEIR SIZE AND SHAPE WHEN

4. SOD SHOULD BE HARVESTED, DELIVERED, AND INSTALLED WITHIN A PERIOD

PRIOR TO SOIL PREPARATION, AREAS TO BE SODDED SHOULD BE BROUGHT

ROOTS, BRUSH, WIRE, GRADE STAKES AND OTHER OBJECTS THAT WOULD

DETERMINED BY A SOIL TESTING LABORATORY OR REGIONAL RECOMMENDATIONS CAN BE MADE BY COUNTY AGRICULTURAL EXTENSION AGENTS. FERTILIZER

SHOULD BE WORKED INTO THE SOIL TO A DEPTH OF 3 INCHES WITH A DISC,

FINAL HARROWING OR DISCING OPERATION SHOULD BE ON THE CONTOUR.

SPRINGTOOTH HARROW OR OTHER SUITABLE EQUIPMENT. ON SLOPING LAND, THE

SOD STRIPS IN WATERWAYS SHOULD BE LAID PERPENDICULAR TO THE

DIRECTION OF FLOW. CARE SHOULD BE TAKEN TO BUTT ENDS OF STRIPS

2. AFTER ROLLING OR TAMPING, SOD SHOULD BE PEGGED OR STAPLED TO

RESIST WASHOUT DURING THE ESTABLISHMENT PERIOD. MESH OR OTHER

NETTING MAY BE PEGGED OVER THE SOD FOR EXTRA PROTECTION IN CRITICAL

THE SURFACE SHOULD BE CLEARED OF ALL TRASH, DEBRIS AND OF ALL

FERTILIZE ACCORDING TO SOIL TESTS. FERTILIZER NEEDS CAN BE

TORN OR UNEVEN PADS SHOULD NOT BE ACCEPTABLE.

SUSPENDED FROM A FIRM GRASP ON ONE END OF THE SECTION.

TO FINAL GRADE IN ACCORDANCE WITH THE APPROVED PLAN.

INSTALLATION IN CHANNELS

TIGHTLY (SEE FIGURE ABOVE).

INTERFERE WITH PLANTING, FERTILIZING OR MAINTENANCE OPERATIONS.

IN CRITICAL AREAS, SECURE SOD

WITH THE GROUND. WITH NETTING, USE STAPLES. GENERAL INSTALLATION (VA. DEPT. OF CONSERVATION, 1992)

REDUCE ROOT BURNING AND DIEBACK.

SOD SHOULD NOT BE CUT OR LAID IN EXCESSIVELY WET OR DRY WEATHER. SOD ALSO SHOULD NOT BE LAID ON SOIL SURFACES THAT ARE FROZEN. 2. DURING PERIODS OF HIGH TEMPERATURE, THE SOIL SHOULD BE LIGHTLY IRRIGATED IMMEDIATELY PRIOR TO LAYING THE SOD, TO COOL THE SOIL AND

THE FIRST ROW OF SOD SHOULD BE LAID IN A STRAIGHT LINE WITH SUBSEQUENT ROWS PLACED PARALLEL TO AND BUTTING TIGHTLY AGAINST EACH OTHER. LATERAL JOINTS SHOULD BE STAGGERED TO PROMOTE MORE UNIFORM GROWTH AND STRENGTH. CARE SHOULD BE EXERCISED TO ENSURE THAT SOD IS NOT STRETCHED OR OVERLAPPED AND THAT ALL JOINTS ARE BUTTED TIGHT IN ORDER TO PREVENT VOIDS WHICH WOULD CAUSE DRYING OF THE ROOTS (SEE FIGURE ABOVE).

4. ON SLOPES 3:1 OR GREATER, OR WHEREVER EROSION MAY BE A PROBLEM, SOD SHOULD BE LAID WITH STAGGERED JOINTS AND SECURED BY STAPLING OR OTHER APPROVED METHODS. SOD SHOULD BE INSTALLED WITH THE LENGTH PERPENDICULAR TO THE SLOPE (ON CONTOUR).

5. AS SODDING OF CLEARLY DEFINED AREAS IS COMPLETED, SOD SHOULD BE ROLLED OR TAMPED TO PROVIDE FIRM CONTACT BETWEEN ROOTS AND SOIL. AFTER ROLLING, SOD SHOULD BE IRRIGATED TO A DEPTH SUFFICIENT THAT THE UNDERSIDE OF THE SOD PAD AND THE SOIL 4 INCHES BELOW THE SOD IS

UNTIL SUCH TIME A GOOD ROOT SYSTEM BECOMES DEVELOPED, IN THE ABSENCE OF ADEQUATE RAINFALL, WATERING SHOULD BE PERFORMED AS OFTEN AS NECESSARY TO MAINTAIN MOIST SOIL TO A DEPTH OF AT LEAST 4

8. THE FIRST MOWING SHOULD NOT BE ATTEMPTED UNTIL THE SOD IS FIRMLY ROOTED, USUALLY 2-3 WEEKS. NOT MORE THAN ONE THIRD OF THE GRASS LEAF SHOULD BE REMOVED AT ANY ONE CUTTING.

INSPECTION AND MAINTENANCE GUIDELINES SOD SHOULD BE INSPECTED WEEKLY AND AFTER EACH RAIN EVENT TO LOCATE AND REPAIR ANY DAMAGE.

5 DOCUMENT HAS BEEN PRODUCED FROM MATERIAL THAT WAS STORED AND/OR TRANSMITTED ELECTRONICALLY AND MAY HAVE BEEN INADVERTENTLY ALTERED. RELY ONLY ON FINAL HARDCOPY MATERIALS BEARING THE CONSULTANT'S ORIGINAL SIGNATURE AND SEAL AERIAL IMAGERY PROVIDED BY GOOGLE® UNLESS OTHERWISE NOTED. Imagery © 2016,CAPCOG,Digital Globe,Texas Orthoimagery Program, USDA Farm Service Agency.

2. DAMAGE FROM STORMS OR NORMAL CONSTRUCTION ACTIVITIES SUCH AS TIRE RUTS OR DISTURBANCE OF SWALE STABILIZATION SHOULD BE REPAIRED AS

SOD INSTALLATION DETAIL

SOON AS PRACTICAL.

NOT-TO-SCALE

ISOMETRIC PLAN VIEW

SILT FENCE

PEG OR

A SILT FENCE IS A BARRIER CONSISTING OF GEOTEXTILE FABRIC SUPPORTED BY METAL POSTS TO PREVENT SOIL AND SEDIMENT LOSS FROM A SITE. WHEN PROPERLY USED, SILT FENCES CAN BE HIGHLY EFFECTIVE AT CONTROLLING SEDIMENT FROM DISTURBED AREAS. THEY CAUSE RUNOFF TO POND, ALLOWING HEAVIER SOLIDS TO SETTLE OUT. IF NOT PROPERLY INSTALLED, SILT FENCES ARE NOT LIKELY TO BE EFFECTIVE.

THE PURPOSE OF A SILT FENCE IS TO INTERCEPT AND DETAIN WATER-BORN SEDIMENT FROM UNPROTECTED AREAS OF A LIMITED EXTENT. SILT FENCE IS USED DURING THE PERIOD OF CONSTRUCTION NEAR THE PERIMETER OF A DISTURBED AREA TO INTERCEPT SEDIMENT WHILE ALLOWING WATER TO PERCOLATE THROUGH. THIS FENCE SHOULD REMAIN IN PLACE UNTIL THE DISTURBED AREA IS PERMANENTLY STABILIZED. SILT FENCE SHOULD NOT BE USED WHERE THERE IS A CONCENTRATION OF WATER IN A CHANNEL OR DRAINAGE WAY. IF CONCENTRATED FLOW OCCURS AFTER INSTALLATION. CORRECTIVE ACTION MUST BE TAKEN SUCH AS PLACING A ROCK BERM IN THE AREAS OF CONCENTRATED FLOW.

SILT FENCING WITHIN THE SITE MAY BE TEMPORARILY MOVED DURING THE DAY TO ALLOW CONSTRUCTION ACTIVITY PROVIDED IT IS REPLACED AND PROPERLY ANCHORED TO THE GROUND AT THE END OF THE DAY. SILT FENCES ON THE PERIMETER OF THE SITE OR AROUND DRAINAGE WAYS SHOULD NOT BE MOVED AT ANY TIME.

SILT FENCE MATERIAL SHOULD BE POLYPROPYLENE, POLYETHYLENE, OR POLYAMIDE WOVEN OR NONWOVEN FABRIC. THE FABRIC SHOULD BE 36 INCHES, WITH A MINIMUM UNIT WEIGHT OF 4.5 OZ/YD, MULLEN BURST STRENGTH EXCEEDING 190 LB/IN2, ULTRAVIOLET STABILITY EXCEEDING 70%, AND MINIMUM APPARENT OPENING SIZE OF U.S. SIEVE NUMBER 30.

FENCE POSTS SHOULD BE MADE OF HOT ROLLED STEEL, AT LEAST 4 FEET LONG WITH TEE OR Y-BAR CROSS SECTION, SURFACE PAINTED OR GALVANIZED, MINIMUM WEIGHT 1.25 LB/FT, AND BRINDELL HARDNESS

3. WOVEN WIRE BACKING TO SUPPORT THE FABRIC SHOULD BE GALVANIZED 2" X 4" WELDED WIRE, 12 GAUGE MINIMUM.

INSTALLATION

1. STEEL POSTS, WHICH SUPPORT THE SILT FENCE, SHOULD BE INSTALLED ON A SLIGHT ANGLE TOWARD THE ANTICIPATED RUNOFF SOURCE. POSTS MUST BE EMBEDDED A MINIMUM OF 1-FOOT DEEP AND SPACED NOT MORE THAN 8 FEET ON CENTER. WHERE WATER CONCENTRATES, THE MAXIMUM SPACING SHOULD BE 6 FEET.

. LAY OUT FENCING DOWN—SLOPE OF DISTURBED AREA, FOLLOWING THE CONTOUR AS CLOSELY AS POSSIBLE. THE FENCE SHOULD BE SITED SO THAT THE MAXIMUM DRAINAGE AREA IS 1/4 ACRE/100 FEET OF FENCE.

3. THE TOE OF THE SILT FENCE SHOULD BE TRENCHED IN WITH A SPADE OR MECHANICAL TRENCHER, SO THAT THE DOWN-SLOPE FACE OF THE TRENCH IS FLAT AND PERPENDICULAR TO THE LINE OF FLOW. WHERE FENCE CANNOT BE TRENCHED IN (E.G., PAVEMENT OR ROCK OUTCROP), WEIGHT FABRIC FLAP WITH 3 INCHES OF PEA GRAVEL ON UPHILL SIDE TO PREVENT FLOW FROM SEEPING UNDER FENCE.

TO ALLOW FOR THE SILT FENCE FABRIC TO BE LAID IN THE GROUND AND BACKFILLED WITH COMPACTED MATERIAL. 5. SILT FENCE SHOULD BE SECURELY FASTENED TO EACH STEEL SUPPORT POST OR TO WOVEN WIRE, WHICH IS IN TURN ATTACHED TO THE STEEL FENCE

4. THE TRENCH MUST BE A MINIMUM OF 6 INCHES DEEP AND 6 INCHES WIDE

POST. THERE SHOULD BE A 3-FOOT OVERLAP, SECURELY FASTENED WHERE ENDS OF FABRIC MEET 6. SILT FENCE SHOULD BE REMOVED WHEN THE SITE IS COMPLETELY

STABILIZED SO AS NOT TO BLOCK OR IMPEDE STORM FLOW OR DRAINAGE. COMMON TROUBLE POINTS

FENCE NOT INSTALLED ALONG THE CONTOUR CAUSING WATER TO CONCENTRATE AND FLOW OVER THE FENCE.

2. FABRIC NOT SEATED SECURELY TO GROUND (RUNOFF PASSING UNDER FENCE).

3. FENCE NOT INSTALLED PERPENDICULAR TO FLOW LINE (RUNOFF ESCAPING

AROUND SIDES). 4. FENCE TREATING TOO LARGE AN AREA, OR EXCESSIVE CHANNEL FLOW (RUNOFF OVERTOPS OR COLLAPSES FENCE).

INSPECTION AND MAINTENANCE GUIDELINES 1. INSPECT ALL FENCING WEEKLY, AND AFTER RAINFALL


2. REMOVE SEDIMENT WHEN BUILDUP REACHES 6 INCHES.

3. REPLACE TORN FABRIC OR INSTALL A SECOND LINE OF FENCING PARALLEL TO THE TORN SECTION.

4. REPLACE OR REPAIR SECTIONS CRUSHED OR COLLAPSED IN THE COURSE OF CONSTRUCTION ACTIVITY. IF A SECTION OF FENCE IS OBSTRUCTING VEHICULAR ACCESS, CONSIDER RELOCATING IT TO A SPOT WHERE IT WILL PROVIDE EQUAL PROTECTION, BUT WILL NOT OBSTRUCT VEHICLES. A TRIANGULAR FILTER DIKE MAY BE PREFERABLE TO A SILT FENCE AT COMMON VEHICLE ACCESS POINTS.

WHEN CONSTRUCTION IS COMPLETE, THE SEDIMENT SHOULD BE DISPOSED OF IN A MANNER THAT WILL NOT CAUSE ADDITIONAL SILTATION AND THE PRIOR LOCATION OF THE SILT FENCE SHOULD BE REVEGETATED. THE FENCE ITSELF SHOULD BE DISPOSED OF IN AN APPROVED LANDFILL.

SILT FENCE DETAIL NOT-TO-SCALE

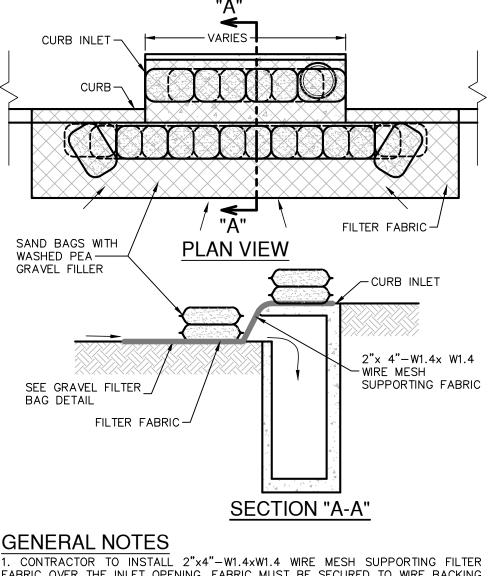

FABRIC OVER THE INLET OPENING. FABRIC MUST BE SECURED TO WIRE BACKING WITH CLIPS OR WIRE TIES AT THIS LOCATION. SAND BAGS FILLED WITH WASHED PEA GRAVEL SHOULD BE PLACED ON TOP OF WIRE MESH ON TOP OF THE INLET AS SHOWN ON THIS DETAIL TO HOLD WIRE MESH IN PLACE. SANDBAGS FILLED WITH WASHED PEA GRAVEL SHOULD ALSO BE PLACED ALONG THE GUTTER AS SHOWN ON THIS DETAIL TO HOLD WIRE MESH IN PLACE. SAND BAGS TO BE STACKED TO FORM A CONTINUOUS BARRIER AROUND INLETS.

2. THE BAGS SHOULD BE TIGHTLY ABUTTED AGAINST EACH OTHER TO PREVENT RUNOFF FROM FLOWING BETWEEN THE BAGS.

INSPECTION AND MAINTENANCE GUIDELINES . INSPECTION SHOULD BE MADE WEEKLY AND AFTER EACH RAINFALL. REPAIR OR REPLACEMENT SHOULD BE MADE PROMPTLY AS NEEDED BY THE CONTRACTOR.

2. REMOVE SEDIMENT WHEN BUILDUP REACHES A DEPTH OF 3 INCHES. REMOVED SEDIMENT SHOULD BE DEPOSITED IN A SUITABLE AREA AND IN SUCH A MANNER THAT IT WILL NOT ERODE.


3. CHECK PLACEMENT OF DEVICE TO PREVENT GAPS BETWEEN DEVICE AND


4. INSPECT FILTER FABRIC AND PATCH OR REPLACE IF TORN OR MISSING.

5. STRUCTURES SHOULD BE REMOVED AND THE AREA STABILIZED ONLY AFTER THE REMAINING DRAINAGE AREA HAS BEEN PROPERLY STABILIZED.

BAGGED GRAVEL CURB INLET PROTECTION DETAIL

NOT-TO-SCALE

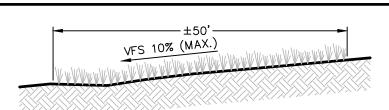

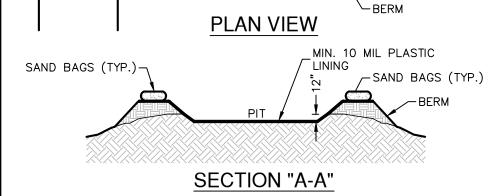

. DETAIL ABOVE ILLUSTRATES MINIMUM DIMENSIONS. PIT CAN BE INCREASED IN SIZE DEPENDING ON EXPECTED FREQUENCY OF USE. . WASHOUT PIT SHALL BE LOCATED IN AN AREA EASILY ACCESSIBLE TO

WASHOUT PIT SHALL NOT BE LOCATED IN AREAS SUBJECT TO INUNDATION FROM STORM WATER RUNOFF. 4. LOCATE WASHOUT AREA AT LEAST 50 FEET FROM SENSITIVE FEATURES,


WASTE GENERATED BY WASHOUT OPERATIONS.

COMPROMISE THE IMPERMEABILITY OF THE MATERIAL.

WHEN TEMPORARY CONCRETE WASHOUT FACILITIES ARE NO LONGER AND DISPOSED OF.

. HOLES, DEPRESSIONS OR OTHER GROUND DISTURBANCES CAUSED BY THE REMOVAL OF THE TEMPORARY CONCRETE WASHOUT FACILITIES SHOULD BE

PIT DETAIL

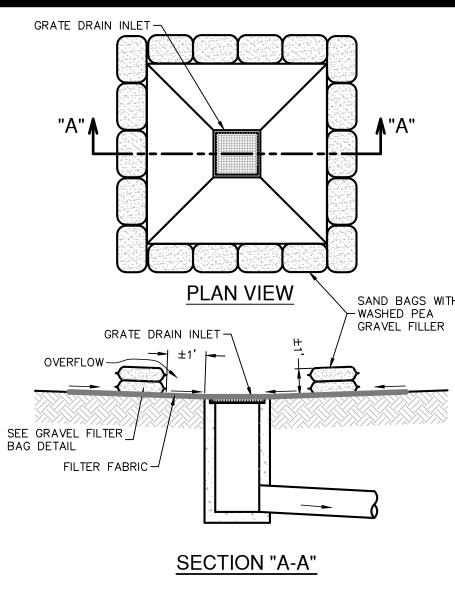

GENERAL NOTES

THE CONTRACTOR.

THE SANDBAGS SHOULD BE FILLED WITH WASHED PEA GRAVEL AND STACKED TO FORM A CONTINUOUS BARRIER ABOUT 1 FOOT HIGH AROUND

2. THE BAGS SHOULD BE TIGHTLY ABUTTED AGAINST EACH OTHER TO PREVENT RUNOFF FROM FLOWING BETWEEN THE BAGS.

INSPECTION AND MAINTENANCE GUIDELINES . INSPECTION SHOULD BE MADE WEEKLY AND AFTER EACH RAINFALI REPAIR OR REPLACEMENT SHOULD BE MADE PROMPTLY AS NEEDED BY

REMOVE SEDIMENT WHEN BUILDUP REACHES A DEPTH OF 3 INCHES. REMOVED SEDIMENT SHOULD BE DEPOSITED IN A SUITABLE AREA AND IN

SUCH A MATTER THAT IT WILL NOT ERODE. 3. CHECK PLACEMENT OF DEVICE TO PREVENT GAPS BETWEEN DEVICE


4. INSPECT FILTER FABRIC AND PATCH OR REPLACE IF TORN OR 5. STRUCTURES SHOULD BE REMOVED AND THE AREA STABILIZED ONLY

BAGGED GRAVEL GRATE INLET


NOT-TO-SCALE


AFTER THE REMAINING DRAINAGE AREA HAS BEEN PROPERLY STABILIZED.

PROTECTION DETAIL

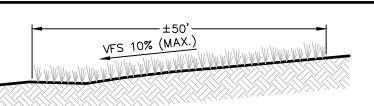

NATURAL VEGETATIVE **BUFFER DETAIL**

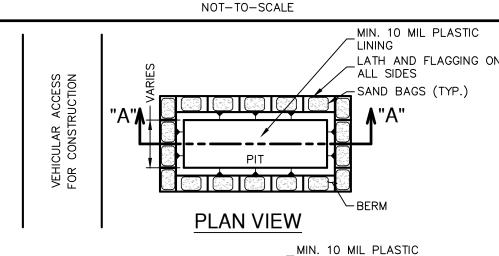

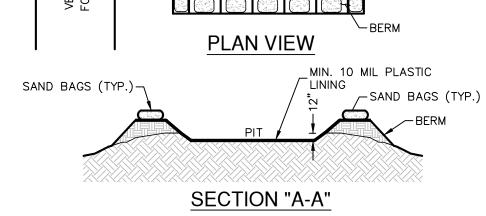

GENERAL NOTES

CONSTRUCTION TRAFFIC.

STORM DRAINS, OPEN DITCHES OR WATER BODIES. 5. TEMPORARY CONCRETE WASHOUT FACILITY SHOULD BE CONSTRUCTED WITH SUFFICIENT QUANTITY AND VOLUME TO CONTAIN ALL LIQUID AND CONCRETE


MATERIALS PLASTIC LINING MATERIAL SHOULD BE A MINIMUM OF 10 MIL IN POLYETHYLENE SHEETING AND SHOULD BE FREE OF HOLES, TEARS, OR OTHER DEFECTS THAT

MAINTENANCE

REQUIRED FOR THE WORK, THE HARDENED CONCRETE SHOULD BE REMOVED . MATERIALS USED TO CONSTRUCT TEMPORARY CONCRETE WASHOUT FACILITIES SHOULD BE REMOVED FROM THE SITE OF THE WORK AND DISPOSED

BACKFILLED AND REPAIRED.

CONCRETE TRUCK WASHOUT NOT-TO-SCALE

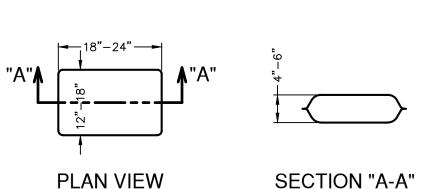


. THE FILTER BAG MATERIAL SHALL BE MADE OF POLYPROPYLENE, POLYETHYLENE OR POLYAMIDE WOVEN FABRIC, MIN. UNIT WEIGHT OF 4 OUNCES/SY, HAVE A MULLEN BURST STRENGTH EXCEEDING 300 PSI AND ULTRAVIOLET STABILITY EXCEEDING 70%.

THE FILTER BAG SHALL BE FILLED WITH CLEAN, MEDIUM WASHED PEA GRAVEL TO COARSE GRAVEL (0.31 TO 0.75 INCH DIAMETER).

GRAVEL FILTER BAG DETAIL

. SAND SHALL <u>NOT</u> BE USED TO FILL THE FILTER BAGS.

NOT-TO-SCALE

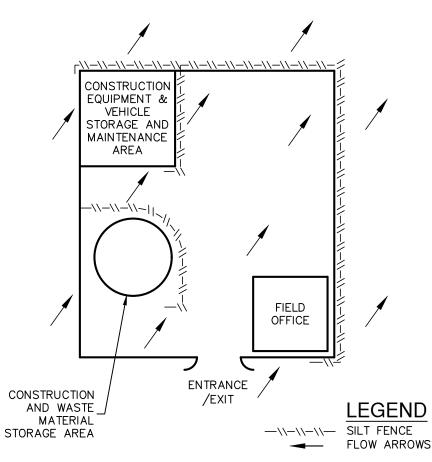

CONSTRUCTION STAGING AREA

NOT-TO-SCALE

THE ENGINEERING SEAL HAS BEEN AFFIXED TO THIS SHEET ONLY FOR THE URPOSE OF DEMONSTRATING COMPLIANCE WITH THE POLLUTION ABATEMENT SIZING AND TREATMENT REQUIREMENTS OF THE TEXAS COMMISSION ON NVIRONMENTAL QUALITY'S EDWARDS AQUIFER TECHNICAL GUIDANCE MANUA

HIS SHEET HAS BEEN PREPARED FOR PURPOSES OF POLLUTION ABATEMENT ONLY. ALL OTHER CIVIL ENGINEERING RELATED INFORMATION SHOULD BE ACQUIRED FROM THE APPROPRIATE SHEET IN TH CIVIL IMPROVEMENT PLANS.

SIGNER

CONTRIBUTING EMPORARY POLLUTION

SIT SAN,


DET,


VE PLAN

BROOKE LINDHOLM

AT NO. 8802-85 ATE SEPTEMBER 2025


ECKED BL DRAWN AG

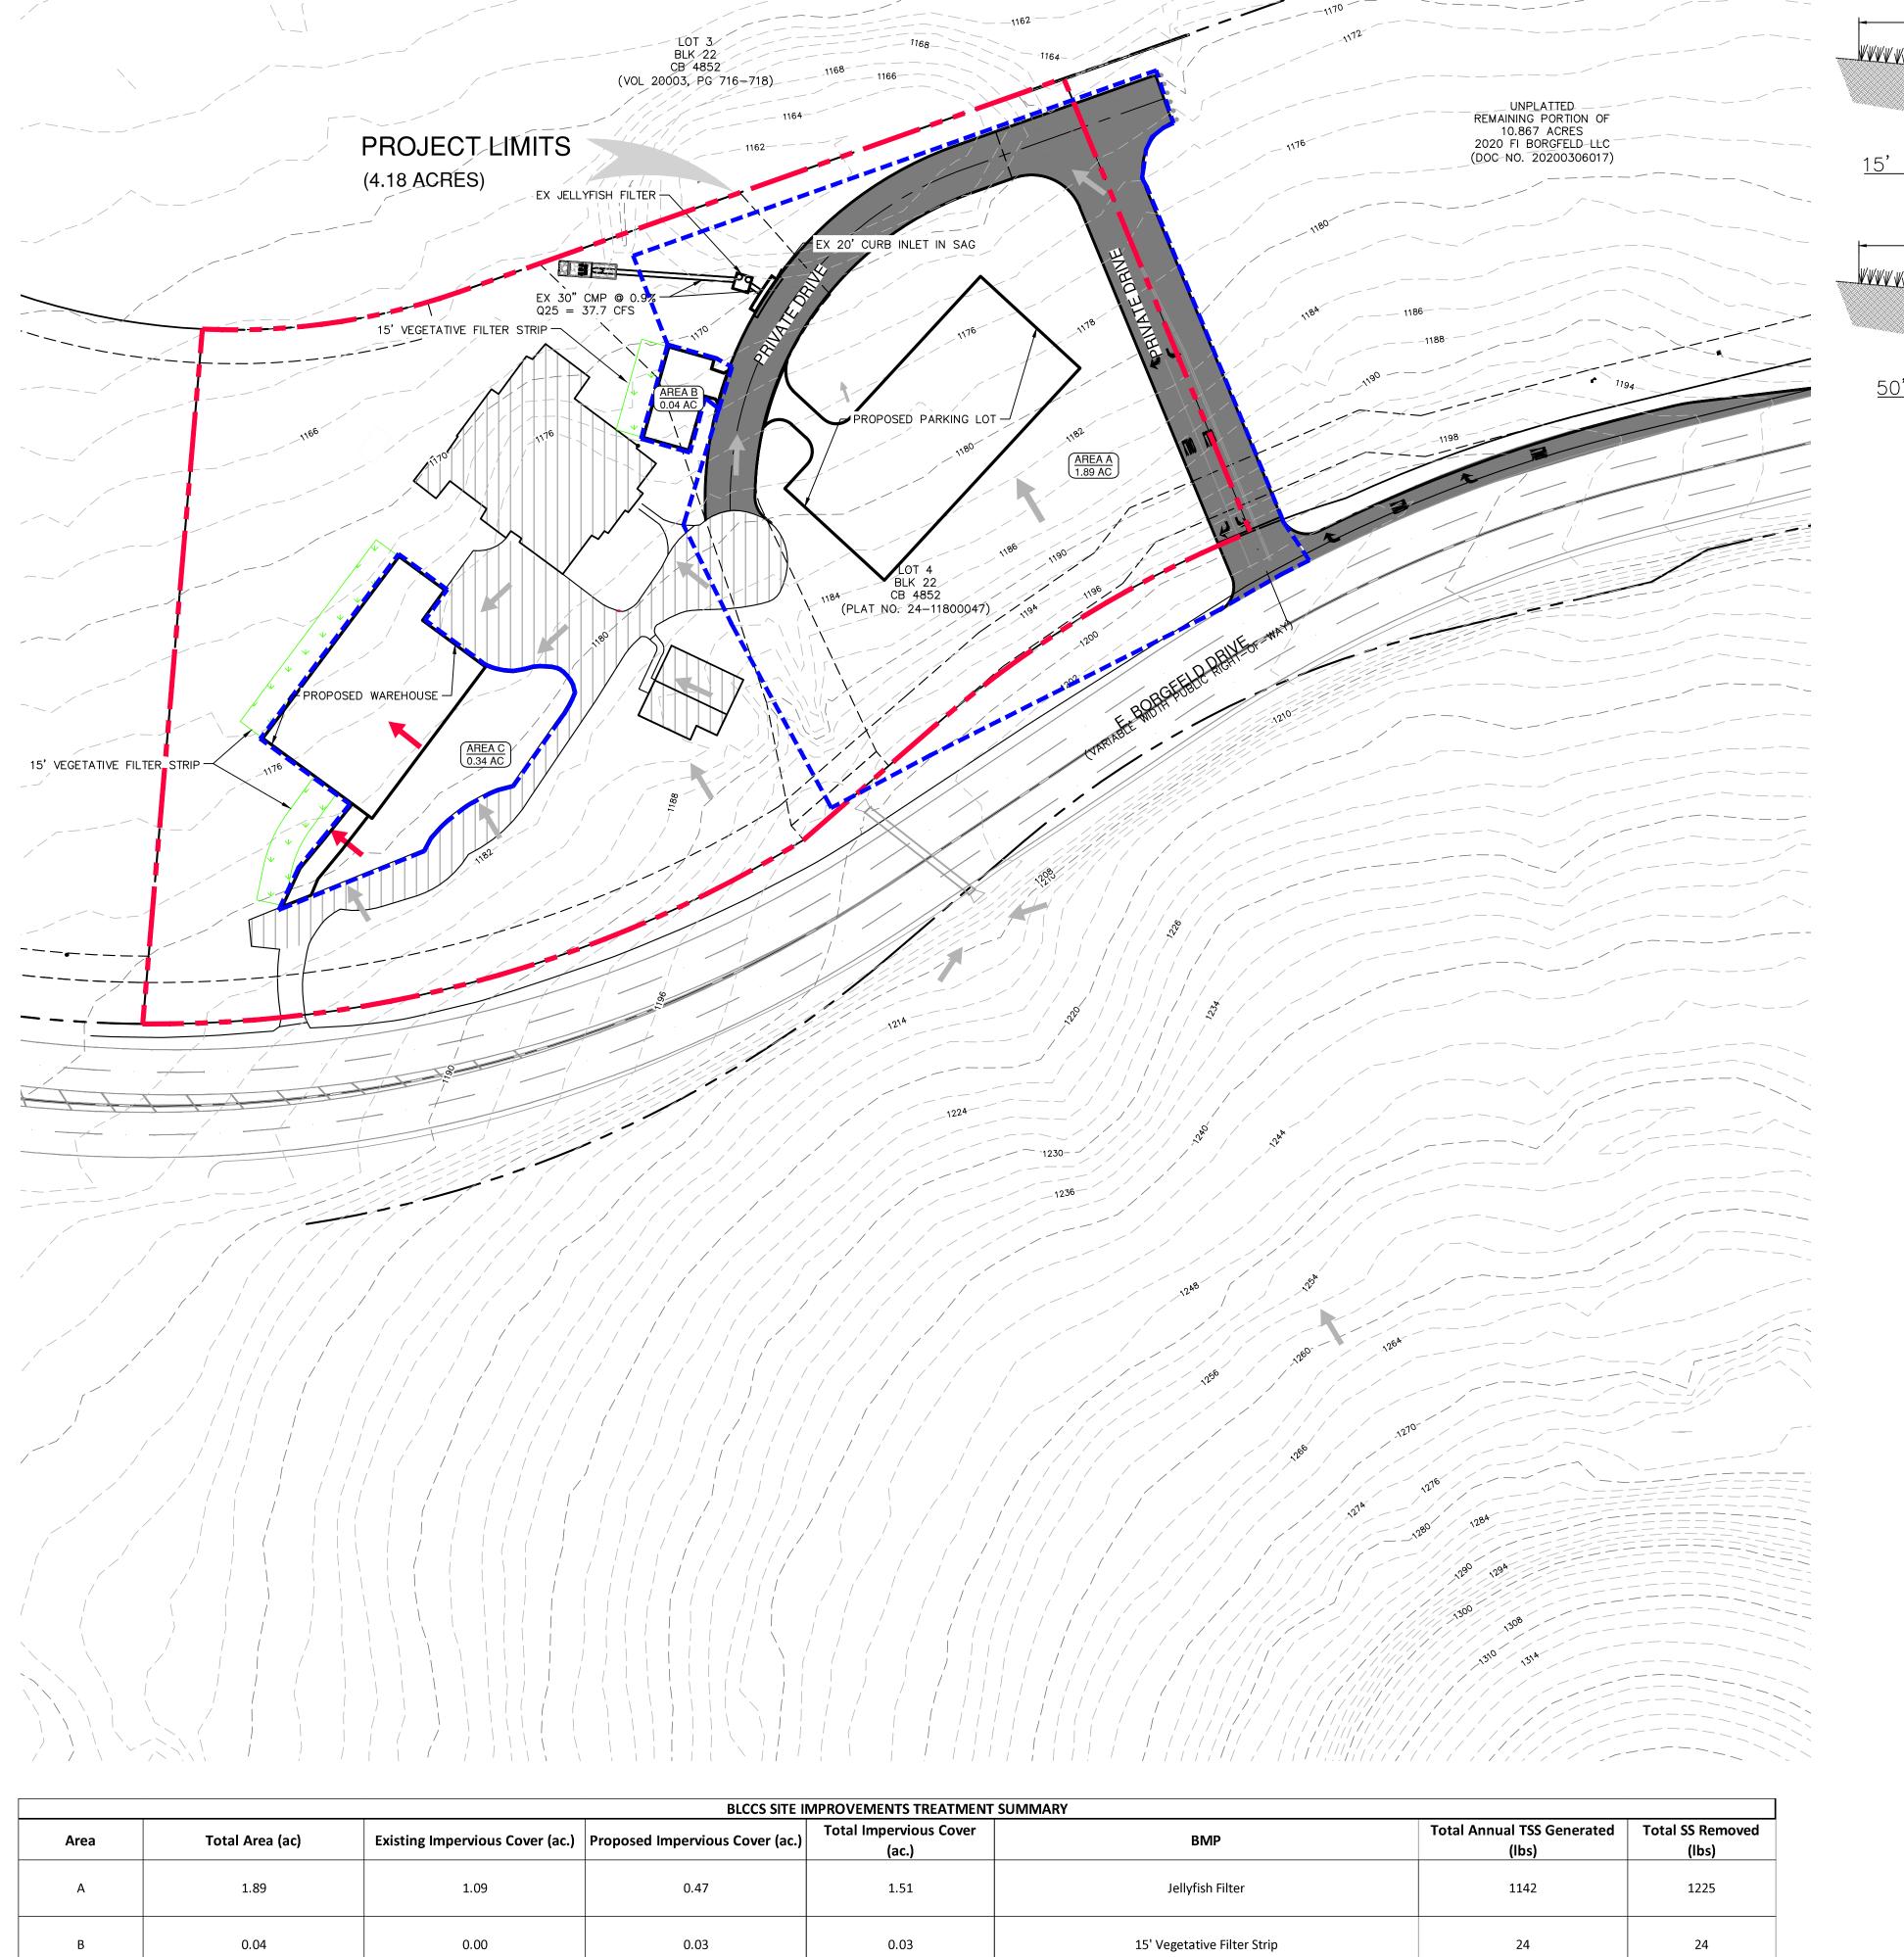

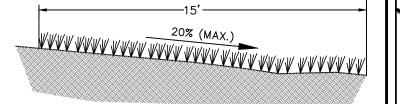


15' ENGINEERED VFS DETAIL

NTS.




50' NATURAL VFS DETAIL

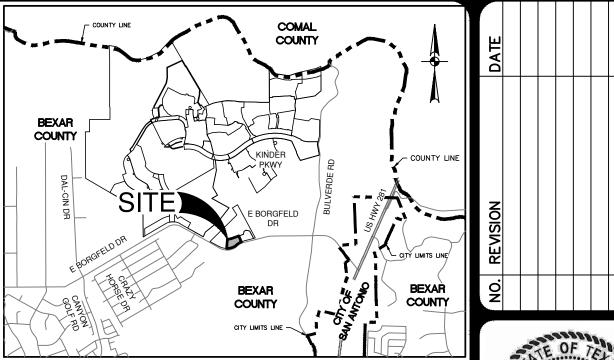


BROOKE LINDHOLM

LOCATION MAP

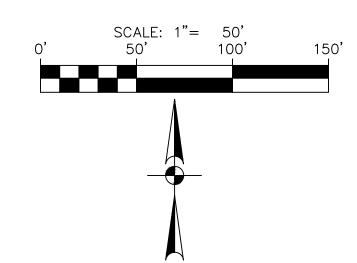

LEGEND



EXISTING CONTOUR FLOW ARROW (EXISTING)

FLOW ARROW (PROPOSED) VEGETATIVE FILTER STRIP

> UNTREATED EXISTING IMPERVIOUS COVER TO IMPERVIOUS COVER ADDED UNDER BORGFELD LOT 4 CZP (APPROVED 8/9/24)

SUMMARY OF PERMANENT POLLUTION ABATEMENT MEASURES:

1.) TEMPORARY BMP'S WILL BE MAINTAINED UNTIL THE SITE IMPROVEMENTS ARE COMPLETED AND THE SITE HAS BEEN STABILIZED, INCLUDING SUFFICIENT VEGETATION BEING ESTABLISHED.

2.) DURING CONSTRUCTION, TO THE EXTENT PRACTICAL, CONTRACTOR SHALL MINIMIZE THE AREA OF SOIL DISTURBANCE. AREAS OF DISTURBED SOIL SHALL BE REVEGETATED TO STABILIZE SOIL USING SOLID SOD IN A STAGGERED PATTERN. SEE DETAIL ON TEMPORARY POLLUTION ABATEMENT DETAIL SHEET AND REFER TO SECTION 1.3.11 IN TCEQ'S TECHNICAL GUIDANCE MANUAL RG-348 (2005). SOD SHOULD BE USED IN CHANNELS AND ON SLOPES > 15%. THE CONTRACTOR MAY SUBSTITUTE THE USE OF SOD WITH THE PLACEMENT OF TOP SOIL AND A FRIABLE SEED BED WITH A PROTECTIVE MATTING OR HYDRAULIC MULCH ALONG WITH WATERING UNTIL VEGETATION IS ESTABLISHED. APPLICATIONS AND PRODUCTS SHALL BE THOSE APPROVED BY TXDOT AS OF FEBRUARY 2001 AND IN COMPLIANCE WITH THE TGM RG-348 (2005). SEED MIXTURE AND/OR GRASS TYPE TO BE DETERMINED BY OWNER AND SHOULD BE IN COMPLIANCE WITH TGM RG-348 (2005) GUIDELINES. IRRIGATION MAY BE REQUIRED IN ORDER TO ESTABLISH SUFFICIENT VEGETATION.

3.) FOR DISTURBED AREAS WHERE INSUFFICIENT SOIL EXISTS TO ESTABLISH VEGETATION, CONTRACTOR SHALL PLACE A MINIMUM OF 6" OF TOPSOIL PRIOR TO REVEGETATION.

4.) TYPICAL SLOPES ON THIS PROJECT RANGE FROM APPROXIMATELY 1.00% TO 20.00%.

PERMANENT POLLUTION ABATEMENT MEASURES:

1.) SILT FENCING AND ROCK BERMS, WHERE APPROPRIATE, WILL BE MAINTAINED UNTIL THE DRIVEWAY AND DRAINAGE IMPROVEMENTS ARE COMPLETED.

2.) TWO (2) ENGINEERED VEGETATIVE FILTER STRIPS, ONE (1) NATURAL VEGETATED FILTER STRIP, AND ONE (1) JELLYFISH® FILTER BASIN WILL SERVE AS THE PERMANENT BEST MANAGEMENT PRACTICES (BMPs).

3.) ENERGY DISSIPATERS (TO HELP REDUCE EROSION) WILL BE PROVIDED AT POINTS OF CONCENTRATED DISCHARGE WHERE EXCESSIVE VELOCITIES MAY BE ENCOUNTERED.

NOTES:

163

1412.00

163

1329.00

1.) CONTRACTOR SHALL INSTALL AND ESTABLISH VEGETATION FOR SOIL STABILIZATION PRIOR TO SITE CLOSEOUT.

2.) ALL PERMANENT BMPs MUST BE CERTIFIED BY A REGISTERED PROFESSIONAL EŃGINEER.

THE ENGINEERING SEAL HAS BEEN AFFIXED TO THIS SHEET ONLY FOR THE PURPOSE OF DEMONSTRATING COMPLIANCE WITH THE POLLUTION ABATEMENT SIZING AND TREATMENT REQUIREMENTS OF THE TEXAS COMMISSION ON ENVIRONMENTAL QUALITY'S EDWARDS AQUIFER TECHNICAL GUIDANCE MANUA

THIS SHEET HAS BEEN PREPARED FOR PURPOSES OF POLLUTION ABATEMENT ONLY. ALL OTHER CIVIL ENGINEERING RELATED INFORMATION SHOULD EXHIBIT 3 BE ACQUIRED FROM THE APPROPRIATE SHEET IN THE CIVIL IMPROVEMENT PLANS.

8802-85 ESIGNER HECKED BL DRAWN AG

ONTRIBUTING ZONE PLAN WATER POLLUTION ABATEMENT

THIS DOCUMENT HAS BEEN PRODUCED FROM MATERIAL THAT WAS STORED AND/OR TRANSMITTED ELECTRONICALLY AND MAY HAVE BEEN INADVERTENTLY ALTERED. RELY ONLY ON FINAL HARDCOPY MATERIALS BEARING THE CONSULTANT'S ORIGINAL SIGNATURE AND SEAL AERIAL IMAGERY PROVIDED BY GOOGL® UNLESS OTHERWISE NOTED. Imagery © 2016,CAPCOG,Digital Globe,Texas Orthoimagery Program, USDA Farm Service Agency.

1.09

0.2

0.70

0.20

1.74

15' Vegetative Filter Strip

0.34

2.27

TOTAL