



Technical Package Cover Page

This file contains the following documents:

1. Summary of application (in plain language)
 - English
 - Alternative Language (Spanish)
 2. First notice (NORI-Notice of Receipt of Application and Intent to Obtain a Permit)
 - English
 - Alternative Language (Spanish)
 3. Second notice (NAPD-Notice of Preliminary Decision)
 - English
 - Alternative Language (Spanish)
 4. Application materials
 5. Draft permit
 6. Technical summary or fact sheet
-



Portada de Paquete Técnico

Este archivo contiene los siguientes documentos:

1. Resumen de la solicitud (en lenguaje sencillo)
 - Inglés
 - Idioma alternativo (español)
2. Primer aviso (NORI, Aviso de Recepción de Solicitud e Intención de Obtener un Permiso)
 - Inglés
 - Idioma alternativo (español)
3. Segundo aviso (NAPD, Aviso de Decisión Preliminar)
 - Inglés
 - Idioma alternativo (español)
4. Materiales de la solicitud
5. Proyecto de permiso
6. Resumen técnico u hoja de datos



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

PLAIN LANGUAGE SUMMARY FOR TPDES OR TLAP PERMIT APPLICATIONS

Plain Language Summary Template and Instructions for Texas Pollutant Discharge Elimination System (TPDES) and Texas Land Application (TLAP) Permit Applications

If you are subject to the alternative language notice requirements in [30 TAC Section 39.426](#), **you must provide a translated copy of the completed plain language summary in the appropriate alternative language as part of your application package.** For your convenience, a Spanish template has been provided below.

ENGLISH TEMPLATE FOR TPDES or TLAP NEW/RENEWAL/AMENDMENT APPLICATIONS

DOMESTIC WASTEWATER

The following summary is provided for this pending water quality permit application being reviewed by the Texas Commission on Environmental Quality as required by 30 TAC Chapter 39. The information provided in this summary may change during the technical review of the application and is not a federal enforceable representation of the permit application.

M/I Homes of Houston, LLC (CN603792359) proposes to operate Kinkaid Road Wastewater Treatment Plant (RN_____), an activated sludge process plant. The facility will be located at 19971 FM 2854 Rd, in Montgomery, Montgomery County, Texas 77064.

This application is for a new application to discharge at a daily average flow of 75,000 gallons per day of treated domestic wastewater.

Discharges from the facility are expected to contain five-day biochemical oxygen demand (BOD₅), total suspended solids, ammonia nitrogen, and dissolved oxygen at or below the limits established by the TCEQ to maintain natural water quality. Domestic wastewater will be treated by an aeration/digester basin, a clarifier, and a chlorine contact chamber.

PLANTILLA EN ESPAÑOL PARA SOLICITUDES NUEVAS/RENOVACIONES/ENMIENDAS DE TPDES o TLAP

AGUAS RESIDUALES DOMÉSTICAS /AGUAS PLUVIALES

El siguiente resumen se proporciona para esta solicitud de permiso de calidad del agua pendiente que está siendo revisada por la Comisión de Calidad Ambiental de Texas según lo requerido por el Capítulo 39 del Código Administrativo de Texas 30. La información proporcionada en este resumen puede cambiar durante la revisión técnica de la solicitud y no es una representación ejecutiva fedérale de la solicitud de permiso.

M/I Homes of Houston, LLC (CN603792359) propone operar la Planta de Tratamiento de Aguas Residuales de Kinkaid Road (RN_____), una planta de proceso de lodos activados. La instalación estará ubicada en 19971 FM 2854 Rd, en Montgomery, Condado de Montgomery, Texas 77064.

Esta solicitud es para una nueva aplicación para descargar a un flujo promedio diario de 75,000 galones por día de aguas residuales domésticas tratadas.

Se espera que las descargas de la instalación contengan la demanda bioquímica de oxígeno (DBO5) de cinco días, sólidos suspendidos totales, nitrógeno amoniacal y oxígeno disuelto en o por debajo de los límites establecidos por la TCEQ para mantener la calidad natural del agua. Las aguas residuales domésticas serán tratadas mediante una balsa de aireación/digestor, un clarificador y una cámara de contacto de cloro.

TEXAS COMMISSION ON ENVIRONMENTAL QUALITY



NOTICE OF RECEIPT OF APPLICATION AND INTENT TO OBTAIN WATER QUALITY PERMIT

PROPOSED PERMIT NO. WQ0016629001

APPLICATION. M/I Homes of Houston, LLC, 1720 West Sam Houston Parkway North, Suite 100, Houston, Texas 77043, has applied to the Texas Commission on Environmental Quality (TCEQ) for proposed Texas Pollutant Discharge Elimination System (TPDES) Permit No. WQ0016629001 (EPA I.D. No. TX0146633) to authorize the discharge of treated wastewater at a volume not to exceed a daily average flow of 75,000 gallons per day. The domestic wastewater treatment facility will be located at 19971 Farm-to-Market Road 2854, near the city of Montgomery, in Montgomery County, Texas 77316. The discharge route will be from the plant site to Mound Creek, thence to Lake Creek. TCEQ received this application on September 23, 2024. The permit application will be available for viewing and copying at Montgomery County Public Library, 104 Interstate 45 North, Conroe, in Montgomery County, Texas prior to the date this notice is published in the newspaper. The application, including any updates, and associated notices are available electronically at the following webpage:

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

This link to an electronic map of the site or facility's general location is provided as a public courtesy and not part of the application or notice. For the exact location, refer to the application.

<https://gisweb.tceq.texas.gov/LocationMapper/?marker=-95.652777,30.346666&level=18>

ALTERNATIVE LANGUAGE NOTICE. Alternative language notice in Spanish is available at: <https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

El aviso de idioma alternativo en español está disponible en

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

ADDITIONAL NOTICE. TCEQ's Executive Director has determined the application is administratively complete and will conduct a technical review of the application. After technical review of the application is complete, the Executive Director may prepare a draft permit and will issue a preliminary decision on the application. **Notice of the Application and Preliminary Decision will be published and mailed to those who are on the county-wide mailing list and to those who are on the mailing list for this application. That notice will contain the deadline for submitting public comments.**

PUBLIC COMMENT / PUBLIC MEETING. You may submit public comments or request a public meeting on this application. The purpose of a public meeting is to provide the opportunity to submit comments or to ask questions about the application. TCEQ will hold a public meeting if the Executive Director determines that there is a significant degree of public

interest in the application or if requested by a local legislator. A public meeting is not a contested case hearing.

OPPORTUNITY FOR A CONTESTED CASE HEARING. After the deadline for submitting public comments, the Executive Director will consider all timely comments and prepare a response to all relevant and material, or significant public comments. **Unless the application is directly referred for a contested case hearing, the response to comments, and the Executive Director's decision on the application, will be mailed to everyone who submitted public comments and to those persons who are on the mailing list for this application. If comments are received, the mailing will also provide instructions for requesting reconsideration of the Executive Director's decision and for requesting a contested case hearing.** A contested case hearing is a legal proceeding similar to a civil trial in state district court.

TO REQUEST A CONTESTED CASE HEARING, YOU MUST INCLUDE THE FOLLOWING ITEMS IN YOUR REQUEST: your name, address, phone number; applicant's name and proposed permit number; the location and distance of your property/activities relative to the proposed facility; a specific description of how you would be adversely affected by the facility in a way not common to the general public; a list of all disputed issues of fact that you submit during the comment period and, the statement "[I/we] request a contested case hearing." If the request for contested case hearing is filed on behalf of a group or association, the request must designate the group's representative for receiving future correspondence; identify by name and physical address an individual member of the group who would be adversely affected by the proposed facility or activity; provide the information discussed above regarding the affected member's location and distance from the facility or activity; explain how and why the member would be affected; and explain how the interests the group seeks to protect are relevant to the group's purpose.

Following the close of all applicable comment and request periods, the Executive Director will forward the application and any requests for reconsideration or for a contested case hearing to the TCEQ Commissioners for their consideration at a scheduled Commission meeting.

The Commission may only grant a request for a contested case hearing on issues the requestor submitted in their timely comments that were not subsequently withdrawn. **If a hearing is granted, the subject of a hearing will be limited to disputed issues of fact or mixed questions of fact and law relating to relevant and material water quality concerns submitted during the comment period.**

MAILING LIST. If you submit public comments, a request for a contested case hearing or a reconsideration of the Executive Director's decision, you will be added to the mailing list for this specific application to receive future public notices mailed by the Office of the Chief Clerk. In addition, you may request to be placed on: (1) the permanent mailing list for a specific applicant name and permit number; and/or (2) the mailing list for a specific county. If you wish to be placed on the permanent and/or the county mailing list, clearly specify which list(s) and send your request to TCEQ Office of the Chief Clerk at the address below.

INFORMATION AVAILABLE ONLINE. For details about the status of the application, visit the Commissioners' Integrated Database at www.tceq.texas.gov/goto/cid. Search the database using the permit number for this application, which is provided at the top of this notice.

AGENCY CONTACTS AND INFORMATION. All public comments and requests must be submitted either electronically at <https://www14.tceq.texas.gov/epic/eComment/>, or in writing to the Texas Commission on Environmental Quality, Office of the Chief Clerk, MC-105, P.O. Box 13087, Austin, Texas 78711-3087. Please be aware that any contact information you provide, including your name, phone number, email address and physical address will become part of the agency's public record. For more information about this permit application or the permitting process, please call the TCEQ Public Education Program, Toll Free, at 1-800-687-4040 or visit their website at www.tceq.texas.gov/goto/pep. Si desea información en Español, puede llamar al 1-800-687-4040.

Further information may also be obtained from M/I Homes of Houston, LLC at the address stated above or by calling Mr. Jonathan White, P.E., L Squared Engineering, at 936-647-0420.

Issuance Date: October 23, 2024

Comisión de Calidad Ambiental del Estado de Texas



AVISO DE RECIBO DE LA SOLICITUD Y EL INTENTO DE OBTENER PERMISO PARA LA CALIDAD DEL AGUA

PERMISO PROPUESTO NO. WQ0016629001

SOLICITUD. M/I Homes of Houston, LLC, 1720 West Sam Houston Parkway North, Suite 100, Houston, Texas 77043, ha solicitado a la Comisión de Calidad Ambiental del Estado de Texas (TCEQ) para el propuesto Permiso No. WQ0016629001 (EPA I.D. No. TX0146633) del Sistema de Eliminación de Descargas de Contaminantes de Texas (TPDES) para autorizar la descarga de aguas residuales tratadas en un volumen que no sobrepasa un flujo promedio diario de 75,000 galones por día. La planta estará ubicada 19971 Farm-to-Market Road 2854, cerca de la ciudad de Montgomery, en el Condado de Montgomery, Texas 77316. La ruta de descarga será desde el sitio de la planta hasta Mound Creek y luego hasta Lake Creek. La TCEQ recibió esta solicitud el 23 de septiembre de 2024. La solicitud de permiso estará disponible para ver y copiar en la Biblioteca Pública del Condado de Montgomery, 104 Interstate 45 North, Conroe, en el condado de Montgomery, Texas, antes de la fecha de publicación de este aviso en el periódico. La solicitud (cualquier actualización y aviso inclusive) está disponible electrónicamente en la siguiente página web:

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

Este enlace a un mapa electrónico de la ubicación general del sitio o de la instalación es proporcionado como una cortesía y no es parte de la solicitud o del aviso. Para la ubicación exacta, consulte la solicitud.

<https://gisweb.tceq.texas.gov/LocationMapper/?marker=-95.652777,30.346666&level=18>

AVISO DE IDIOMA ALTERNATIVO. El aviso de idioma alternativo en español está disponible en <https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

AVISO ADICIONAL. El Director Ejecutivo de la TCEQ ha determinado que la solicitud es administrativamente completa y conducirá una revisión técnica de la solicitud. Después de completar la revisión técnica, el Director Ejecutivo puede preparar un borrador del permiso y emitirá una Decisión Preliminar sobre la solicitud. **El aviso de la solicitud y la decisión preliminar serán publicados y enviado a los que están en la lista de correo de las personas a lo largo del condado que desean recibir los avisos y los que están en la lista de correo que desean recibir avisos de esta solicitud. El aviso dará la fecha límite para someter comentarios públicos.**

COMENTARIO PUBLICO / REUNION PUBLICA. Usted puede presentar comentarios públicos o pedir una reunión pública sobre esta solicitud. El propósito de una reunión pública es dar la oportunidad de presentar comentarios o hacer preguntas acerca de la solicitud. La TCEQ realiza una reunión pública si el Director Ejecutivo determina que hay un grado de interés

público suficiente en la solicitud o si un legislador local lo pide. Una reunión pública no es una audiencia administrativa de lo contencioso.

OPORTUNIDAD DE UNA AUDIENCIA ADMINISTRATIVA DE LO CONTENCIOSO. Después del plazo para presentar comentarios públicos, el Director Ejecutivo considerará todos los comentarios apropiados y preparará una respuesta a todos los comentarios públicos esenciales, pertinentes, o significativos. **A menos que la solicitud haya sido referida directamente a una audiencia administrativa de lo contencioso, la respuesta a los comentarios y la decisión del Director Ejecutivo sobre la solicitud serán enviados por correo a todos los que presentaron un comentario público y a las personas que están en la lista para recibir avisos sobre esta solicitud. Si se reciben comentarios, el aviso también proveerá instrucciones para pedir una reconsideración de la decisión del Director Ejecutivo y para pedir una audiencia administrativa de lo contencioso.** Una audiencia administrativa de lo contencioso es un procedimiento legal similar a un procedimiento legal civil en un tribunal de distrito del estado.

PARA SOLICITAR UNA AUDIENCIA DE CASO IMPUGNADO, USTED DEBE INCLUIR EN SU SOLICITUD LOS SIGUIENTES DATOS: su nombre, dirección, y número de teléfono; el nombre del solicitante y número del permiso; la ubicación y distancia de su propiedad/actividad con respecto a la instalación; una descripción específica de la forma cómo usted sería afectado adversamente por el sitio de una manera no común al público en general; una lista de todas las cuestiones de hecho en disputa que usted presente durante el período de comentarios; y la declaración "[Yo/nosotros] solicito/solicitamos una audiencia de caso impugnado". Si presenta la petición para una audiencia de caso impugnado de parte de un grupo o asociación, debe identificar una persona que representa al grupo para recibir correspondencia en el futuro; identificar el nombre y la dirección de un miembro del grupo que sería afectado adversamente por la planta o la actividad propuesta; proveer la información indicada anteriormente con respecto a la ubicación del miembro afectado y su distancia de la planta o actividad propuesta; explicar cómo y porqué el miembro sería afectado; y explicar cómo los intereses que el grupo desea proteger son pertinentes al propósito del grupo.

Después del cierre de todos los períodos de comentarios y de petición que aplican, el Director Ejecutivo enviará la solicitud y cualquier petición para reconsideración o para una audiencia de caso impugnado a los Comisionados de la TCEQ para su consideración durante una reunión programada de la Comisión. La Comisión sólo puede conceder una solicitud de una audiencia de caso impugnado sobre los temas que el solicitante haya presentado en sus comentarios oportunos que no fueron retirados posteriormente. Si se concede una audiencia, el tema de la audiencia estará limitado a cuestiones de hecho en disputa o cuestiones mixtas de hecho y de derecho relacionadas a intereses pertinentes y materiales de calidad del agua que se hayan presentado durante el período de comentarios.

LISTA DE CORREO. Si somete comentarios públicos, un pedido para una audiencia administrativa de lo contencioso o una reconsideración de la decisión del Director Ejecutivo, la Oficina del Secretario Principal enviará por correo los avisos públicos en relación con la solicitud. Además, puede pedir que la TCEQ ponga su nombre en una o más de las listas de correos siguientes (1) la lista de correo permanente para recibir los avisos de el solicitante indicado por nombre y número del permiso específico y/o (2) la lista de correo de todas las

solicitudes en un condado específico. Si desea que se agregue su nombre en una de las listas designe cual lista(s) y envía por correo su pedido a la Oficina del Secretario Principal de la TCEQ.

INFORMACIÓN DISPONIBLE EN LÍNEA. Para detalles sobre el estado de la solicitud, favor de visitar la Base de Datos Integrada de los Comisionados en www.tceq.texas.gov/goto/cid. Para buscar en la base de datos, utilizar el número de permiso para esta solicitud que aparece en la parte superior de este aviso.

CONTACTOS E INFORMACIÓN A LA AGENCIA. Todos los comentarios públicos y solicitudes deben ser presentadas electrónicamente vía <http://www14.tceq.texas.gov/epic/eComment/> o por escrito dirigidos a la Comisión de Texas de Calidad Ambiental, Oficial de la Secretaría (Office of Chief Clerk), MC-105, P.O. Box 13087, Austin, Texas 78711-3087. Tenga en cuenta que cualquier información personal que usted proporcione, incluyendo su nombre, número de teléfono, dirección de correo electrónico y dirección física pasarán a formar parte del registro público de la Agencia. Para obtener más información acerca de esta solicitud de permiso o el proceso de permisos, llame al programa de educación pública de la TCEQ, gratis, al 1-800-687-4040. Si desea información en Español, puede llamar al 1-800-687-4040.

También se puede obtener más información de M/I Homes of Houston, LLC en la dirección indicado anteriormente o llamando al Sr. Jonathan White, P.E., L Squared Engineering, al 936-647-0420.

Fecha de emisión el 23 de octubre de 2024

Texas Commission on Environmental Quality



NOTICE OF APPLICATION AND PRELIMINARY DECISION FOR TPDES PERMIT FOR MUNICIPAL WASTEWATER

NEW

PERMIT NO. WQ0016629001

APPLICATION AND PRELIMINARY DECISION. M/I Homes of Houston, LLC, 1720 West Sam Houston Parkway North, Suite 100, Houston, Texas 77043, has applied to the Texas Commission on Environmental Quality (TCEQ) for new Texas Pollutant Discharge Elimination System (TPDES) Permit No. WQ0016629001, to authorize the discharge of treated domestic wastewater at a daily average flow not to exceed 75,000 gallons per day. TCEQ received this application on September 23, 2024.

The facility will be located at 19971 Farm-to-Market Road 2854, in Montgomery County, Texas 77316. The treated effluent will be discharged to Mound Creek, thence to Lake Creek in Segment No. 1015 of the San Jacinto River Basin. The unclassified receiving water uses are minimal aquatic life use for Mound Creek (upstream of Appendix D section) and high aquatic life use for Mound Creek (Appendix D section). The designated uses for Segment No. 1015 are primary contact recreation, public water supply, and high aquatic life use. In accordance with 30 Texas Administrative Code §307.5 and TCEQ's *Procedures to Implement the Texas Surface Water Quality Standards* (June 2010), an antidegradation review of the receiving waters was performed. A Tier 1 antidegradation review has preliminarily determined that existing water quality uses will not be impaired by this permit action. Numerical and narrative criteria to protect existing uses will be maintained. A Tier 2 review has preliminarily determined that no significant degradation of water quality is expected in Mound Creek (Appendix D section), which has been identified as having high aquatic life use. Existing uses will be maintained and protected. The preliminary determination can be reexamined and may be modified if new information is received. This link to an electronic map of the site or facility's general location is provided as a public courtesy and is not part of the application or notice. For the exact location, refer to the application.

<https://gisweb.tceq.texas.gov/LocationMapper/?marker=-95.652777,30.346666&level=18>

The TCEQ Executive Director has completed the technical review of the application and prepared a draft permit. The draft permit, if approved, would establish the conditions under which the facility must operate. The Executive Director has made a preliminary decision that this permit, if issued, meets all statutory and regulatory requirements. The permit application, Executive Director's preliminary decision, and draft permit are available for viewing and copying at Montgomery County Public Library, 104 Interstate 45 North, Conroe, in Montgomery County, Texas. The application, including any updates, and associated notices are available electronically at the following webpage:

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

ALTERNATIVE LANGUAGE NOTICE. Alternative language notice in Spanish is available at <https://www.tceq.texas.gov/permitting/wastewater/plain-language-summaries-and-public-notices>. El aviso de idioma alternativo en español está disponible en <https://www.tceq.texas.gov/permitting/wastewater/plain-language-summaries-and-public-notices>.

PUBLIC COMMENT / PUBLIC MEETING. You may submit public comments or request a public meeting about this application. The purpose of a public meeting is to provide the opportunity to submit comments or to ask questions about the application. TCEQ holds a public meeting if the Executive Director determines that there is a significant degree of public interest in the application or if requested by a local legislator. A public meeting is not a contested case hearing.

OPPORTUNITY FOR A CONTESTED CASE HEARING. After the deadline for submitting public comments, the Executive Director will consider all timely comments and prepare a response to all relevant and material or significant public comments. **Unless the application is directly referred for a contested case hearing, the response to comments will be mailed to everyone who submitted public comments and to those persons who are on the mailing list for this application. If comments are received, the mailing will also provide instructions for requesting a contested case hearing or reconsideration of the Executive Director's decision.** A contested case hearing is a legal proceeding similar to a civil trial in a state district court.

TO REQUEST A CONTESTED CASE HEARING, YOU MUST INCLUDE THE FOLLOWING ITEMS IN YOUR REQUEST: your name, address, phone number; applicant's name and proposed permit number; the location and distance of your property/activities relative to the proposed facility; a specific description of how you would be adversely affected by the facility in a way not common to the general public; a list of all disputed issues of fact that you submit during the comment period; and the statement "[I/we] request a contested case hearing." If the request for contested case hearing is filed on behalf of a group or association, the request must designate the group's representative for receiving future correspondence; identify by name and physical address an individual member of the group who would be adversely affected by the proposed facility or activity; provide the information discussed above regarding the affected member's location and distance from the facility or activity; explain how and why the member would be affected; and explain how the interests the group seeks to protect are relevant to the group's purpose.

Following the close of all applicable comment and request periods, the Executive Director will forward the application and any requests for reconsideration or for a contested case hearing to the TCEQ Commissioners for their consideration at a scheduled Commission meeting.

The Commission may only grant a request for a contested case hearing on issues the requestor submitted in their timely comments that were not subsequently withdrawn. **If a hearing is granted, the subject of a hearing will be limited to disputed issues of fact or mixed questions of fact and law relating to relevant and material water quality concerns submitted during the comment period.**

EXECUTIVE DIRECTOR ACTION. The Executive Director may issue final approval of the application unless a timely contested case hearing request or request for reconsideration is filed. If a timely hearing request or request for reconsideration is filed, the Executive Director will not issue final approval of the permit and will forward the application and request to the TCEQ Commissioners for their consideration at a scheduled Commission meeting.

MAILING LIST. If you submit public comments, a request for a contested case hearing or a reconsideration of the Executive Director's decision, you will be added to the mailing list for this specific application to receive future public notices mailed by the Office of the Chief Clerk. In addition, you may request to be placed on: (1) the permanent mailing list for a specific applicant name and permit number; and/or (2) the mailing list for a specific county. If you wish to be placed on the permanent and/or the county mailing list, clearly specify which list(s) and send your request to TCEQ Office of the Chief Clerk at the address below.

All written public comments and public meeting requests must be submitted to the Office of the Chief Clerk, MC 105, Texas Commission on Environmental Quality, P.O. Box 13087, Austin, TX 78711-3087 or electronically at www.tceq.texas.gov/goto/comment within 30 days from the date of newspaper publication of this notice.

INFORMATION AVAILABLE ONLINE. For details about the status of the application, visit the Commissioners' Integrated Database at www.tceq.texas.gov/goto/cid. Search the database using the permit number for this application, which is provided at the top of this notice.

AGENCY CONTACTS AND INFORMATION. Public comments and requests must be submitted either electronically at www.tceq.texas.gov/goto/comment, or in writing to the Texas Commission on Environmental Quality, Office of the Chief Clerk, MC 105, P.O. Box 13087, Austin, Texas 78711-3087. Any personal information you submit to the TCEQ will become part of the agency's record; this includes email addresses. For more information about this permit application or the permitting process, please call the TCEQ Public Education Program, Toll Free, at 1-800-687-4040 or visit their website at www.tceq.texas.gov/goto/pep. Si desea información en Español, puede llamar al 1-800-687-4040.

Further information may also be obtained from M/I Homes of Houston, LLC at the address stated above or by calling Mr. Jonathan White, P.E., L Squared Engineering, at 936-647-0420.

Issuance Date: September 25, 2025

Comisión De Calidad Ambiental Del Estado De Texas



AVISO DE LA SOLICITUD Y DECISIÓN PRELIMINAR PARA EL PERMISO DEL SISTEMA DE ELIMINACION DE DESCARGAS DE CONTAMINANTES DE TEXAS (TPDES) PARA AGUAS RESIDUALES MUNICIPALES

NUEVO

PERMISO NO. WQ0016629001

SOLICITUD Y DECISIÓN PRELIMINAR. M/I Homes of Houston, LLC, 1720 West Sam Houston Parkway North, Suite 100, Houston, Texas 77043 ha solicitado a la Comisión de Calidad Ambiental del Estado de Texas (TCEQ) por un nuevo Para autorizar la descarga de aguas residuales domésticas tratadas con un flujo promedio diario que no exceda 75,000 galones por día. La TCEQ recibió esta solicitud el 23 de septiembre de 2024.

La planta está ubicada en 19971 Farm-to-Market Road 2854 en el Condado de Montgomery, Texas. Este enlace a un mapa electrónico de la ubicación general del sitio o de la instalación es proporcionado como una cortesía y no es parte de la solicitud o del aviso. Para la ubicación exacta, consulte la solicitud. <https://gisweb.tceq.texas.gov/LocationMapper/?marker=-95.652777,30.346666&level=18>

El efluente tratado es descargado al Mound Creek de allí al Lake Creek en el Segmento No. 1015 de la Cuenca del Río San Jacinto Los usos no clasificados de las aguas receptoras son mínimos (minimal) usos de la vida acuática para Mound Creek (aguas arriba de la sección Apéndice D) y elevados (high) usos de la vida acuática para Mound Creek (sección Apéndice D). Los usos designados para el Segmento No. 1015 son recreación primaria de contacto (primary contact recreation), abastecimiento público de agua (public water supply), y elevados (high) uso de vida acuática.

De conformidad con el §307.5 del Título 30 del Código Administrativo de Texas y los *Procedimientos para Implementar los Estándares de Calidad del Agua Superficial de Texas* (junio de 2010), se realizó una revisión de antidegradación de las aguas receptoras. Una revisión de Antidegradación de Nivel 1 determinó preliminarmente que los usos existentes de calidad del agua no se verán afectados por esta acción de permiso. Se mantendrán los criterios numéricos y narrativos para proteger los usos existentes. Una revisión de Nivel 2 determinó preliminarmente que no se espera una degradación significativa de la calidad del agua en Mound Creek (sección Apéndice D), la cual ha sido identificada como de uso elevado de la vida acuática. Los usos existentes serán mantenidos y protegidos.

El Director Ejecutivo de la TCEQ ha completado la revisión técnica de la solicitud y ha preparado un borrador del permiso. El borrador del permiso, si es aprobado, establecería las condiciones bajo las cuales la instalación debe operar. El Director Ejecutivo ha tomado una decisión preliminar que si este permiso es emitido, cumple con todos los requisitos normativos y legales. La solicitud del permiso, la decisión preliminar del Director Ejecutivo y el borrador del permiso están disponibles para leer y copiar en la Biblioteca Pública del Condado de Montgomery, 104 Interstate 45 North, Conroe, en el Condado de Montgomery, Texas. La solicitud (cualquier actualización y aviso inclusive) está disponible electrónicamente en la siguiente página web: <https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>.

AVISO DE IDIOMA ALTERNATIVO. El aviso de idioma alternativo en español está disponible en <https://www.tceq.texas.gov/permitting/wastewater/plain-language-summaries-and-public-notice>.

COMENTARIO PUBLICO / REUNION PUBLICA. Usted puede presentar comentarios públicos o pedir una reunión pública sobre esta solicitud.

El propósito de una reunión pública es dar la oportunidad de presentar comentarios o hacer preguntas acerca de la solicitud. La TCEQ realiza una reunión pública si el Director Ejecutivo determina que hay un grado de interés público suficiente en la solicitud o si un legislador local lo pide. Una reunión pública no es una audiencia administrativa de lo contencioso.

OPORTUNIDAD DE UNA AUDIENCIA ADMINISTRATIVA DE LO CONTENCIOSO.

Después de la fecha límite para presentar comentarios públicos, el Director Ejecutivo considerará los comentarios y preparará una respuesta a todos los comentarios públicos relevantes y materiales, o significativos. **A menos que la solicitud sea remitida directamente para una audiencia de caso impugnado, la respuesta a los comentarios se enviará por correo a todos los que enviaron comentarios públicos y a aquellas personas que estén en la lista de correo para esta solicitud. Si se reciben comentarios, el correo también proporcionará instrucciones para solicitar una audiencia de caso impugnado o reconsiderar la decisión del Director Ejecutivo.** Una audiencia de caso impugnado es un procedimiento legal similar a un juicio civil en un tribunal de distrito estatal.

PARA SOLICITAR UNA AUDIENCIA DE CASO IMPUGNADO, USTED DEBE INCLUIR EN SU SOLICITUD LOS SIGUIENTES DATOS: su nombre, dirección, y número de teléfono; el nombre del solicitante y número del permiso; la ubicación y distancia de su propiedad/actividad con respecto a la instalación; una descripción específica de la forma cómo usted sería afectado adversamente por el sitio de una manera no común al público en general; una lista de todas las cuestiones de hecho en disputa que usted presente durante el período de comentarios; y la declaración "[Yo/nosotros] solicito/solicitamos una audiencia de caso impugnado". Si presenta la petición para una audiencia de caso impugnado de parte de un grupo o asociación, debe identificar una persona que representa al grupo para recibir correspondencia en el futuro; identificar el nombre y la dirección de un miembro del grupo que sería afectado adversamente por la planta o la actividad propuesta; proveer la información indicada anteriormente con respecto a la ubicación del miembro afectado y su distancia de la planta o actividad propuesta; explicar cómo y por qué el miembro sería afectado; y explicar cómo los intereses que el grupo desea proteger son pertinentes al propósito del grupo.

Tras el cierre de todos los periodos de comentarios y solicitudes aplicables, el Director Ejecutivo remitirá la solicitud y cualquier solicitud de reconsideración o de una audiencia de caso impugnado a los Comisionados de la TCEQ para su consideración en una reunión programada de la Comisión.

La Comisión sólo puede conceder una solicitud de una audiencia de caso impugnado sobre los temas que el solicitante haya presentado en sus comentarios oportunos que no fueron retirados posteriormente. Si se concede una audiencia, el tema de la audiencia estará limitado a cuestiones de hecho en disputa o cuestiones mixtas de hecho y de derecho relacionadas a intereses pertinentes y materiales de calidad del agua que se hayan presentado durante el período de comentarios.

ACCIÓN DEL DIRECTOR EJECUTIVO. El Director Ejecutivo puede emitir la aprobación final de la solicitud a menos que se presente una solicitud de audiencia de caso impugnado oportunamente o una solicitud de reconsideración. Si se presenta una solicitud de audiencia oportuna o una solicitud de reconsideración, el Director Ejecutivo no emitirá la aprobación final del permiso y enviará la solicitud y la solicitud a los Comisionados de TCEQ para su consideración en una reunión programada de la Comisión.

LISTA DE CORREO. Si envía comentarios públicos, una solicitud de una audiencia de caso impugnado o una reconsideración de la decisión del Director Ejecutivo, se le agregará a la lista de correo de esta solicitud específica para recibir futuros avisos públicos enviados por correo por la Oficina del Secretario Oficial. Además, puede solicitar ser colocado en: (1) la lista de correo permanente para un nombre de solicitante específico y número de permiso; y/o (2) la lista de correo para un condado específico. Si desea ser colocado en la lista de correo permanente y / o del condado, especifique claramente qué lista (s) y envíe su solicitud a la Oficina del Secretario Oficial de la TCEQ a la dirección a continuación.

Todos los comentarios públicos escritos y las solicitudes de reunión pública deben enviarse a Office of the Chief Clerk, MC 105, TCEQ, P.O. Box 13087, Austin, TX 78711-3087 o electrónicamente a www.tceq.texas.gov/goto/comment dentro de los 30 días a partir de la fecha de publicación de este aviso en el periódico.

CONTACTOS E INFORMACIÓN DE LA AGENCIA. Los comentarios y solicitudes públicas deben enviarse electrónicamente a www.tceq.texas.gov/goto/comment, o por escrito a Texas Commission on Environmental Quality, Office of the Chief Clerk, MC-105, P.O. Box 13087, Austin, Texas 78711-3087. Cualquier información personal que envíe a la TCEQ pasará a formar parte del registro de la agencia; esto incluye las direcciones de correo electrónico. Para obtener más información sobre esta solicitud de permiso o el proceso de permisos, llame al Programa de Educación Pública de TCEQ, línea gratuita, al 1-800-687-4040 o visite su sitio web en www.tceq.texas.gov/goto/pep. Si desea información en español, puede llamar al 1-800-687-4040.

También se puede obtener información adicional de M/I Homes of Houston, LLC a la dirección indicada arriba o llamando al Sr. Jonathan White, P.E., L Squared Engineering, al 936-647-0420.

Fecha de emission: el 25 de Septiembre de 2025.

Kinkaid Road Wastewater Treatment Plant
TCEQ Domestic Wastewater Permit Application
L Squared Project Number: 10989



L SQUARED ENGINEERING

MUNICIPAL COMMERCIAL RESIDENTIAL



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

DOMESTIC WASTEWATER PERMIT APPLICATION CHECKLIST

Complete and submit this checklist with the application.

APPLICANT NAME: M/I Homes of Houston, LLC

PERMIT NUMBER (If new, leave blank): WQ00 Click to enter text.

Indicate if each of the following items is included in your application.

	Y	N		Y	N
Administrative Report 1.0	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Original USGS Map Attachment C	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Administrative Report 1.1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Affected Landowners Map Att K	<input checked="" type="checkbox"/>	<input type="checkbox"/>
SPIF Attachment I	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Landowner Disk or Labels Att K	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Core Data Form Attachment A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Buffer Zone Map Attachment E	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public Involvement Plan Form B	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Flow Diagram Attachment G	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Technical Report 1.0	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Site Drawing Attachment D	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Technical Report 1.1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Original Photographs Att O	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Worksheet 2.0	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Design Calculations Att H	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Worksheet 2.1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Solids Management Plan Att I	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Worksheet 3.0	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Water Balance	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Worksheet 3.1	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
Worksheet 3.2	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
Worksheet 3.3	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
Worksheet 4.0	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
Worksheet 5.0	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
Worksheet 6.0	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
Worksheet 7.0	<input type="checkbox"/>	<input checked="" type="checkbox"/>			

For TCEQ Use Only

Segment Number _____ County _____
 Expiration Date _____ Region _____
 Permit Number _____



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

DOMESTIC WASTEWATER PERMIT APPLICATION ADMINISTRATIVE REPORT 1.0

For any questions about this form, please contact the Applications Review and Processing Team at 512-239-4671.

Section 1. Application Fees (Instructions Page 26)

Indicate the amount submitted for the application fee (check only one).

Flow	New/Major Amendment	Renewal
<0.05 MGD	\$350.00 <input type="checkbox"/>	\$315.00 <input type="checkbox"/>
≥0.05 but <0.10 MGD	\$550.00 <input checked="" type="checkbox"/>	\$515.00 <input type="checkbox"/>
≥0.10 but <0.25 MGD	\$850.00 <input type="checkbox"/>	\$815.00 <input type="checkbox"/>
≥0.25 but <0.50 MGD	\$1,250.00 <input type="checkbox"/>	\$1,215.00 <input type="checkbox"/>
≥0.50 but <1.0 MGD	\$1,650.00 <input type="checkbox"/>	\$1,615.00 <input type="checkbox"/>
≥1.0 MGD	\$2,050.00 <input type="checkbox"/>	\$2,015.00 <input type="checkbox"/>

Minor Amendment (for any flow) \$150.00

Payment Information:

Mailed Check/Money Order Number:
 Check/Money Order Amount:
 Name Printed on Check:
 EPAY Voucher Number: 721554 & 721555
 Copy of Payment Voucher enclosed? Yes

Section 2. Type of Application (Instructions Page 26)

a. Check the box next to the appropriate authorization type.

- Publicly-Owned Domestic Wastewater
- Privately-Owned Domestic Wastewater
- Conventional Wastewater Treatment

b. Check the box next to the appropriate facility status.

- Active Inactive

c. Check the box next to the appropriate permit type.

- TPDES Permit
- TLAP
- TPDES Permit with TLAP component
- Subsurface Area Drip Dispersal System (SADDs)

d. Check the box next to the appropriate application type

- New
- Major Amendment *with* Renewal
- Major Amendment *without* Renewal
- Renewal without changes
- Minor Amendment *with* Renewal
- Minor Amendment *without* Renewal
- Minor Modification of permit

e. For amendments or modifications, describe the proposed changes: [Click to enter text.](#)

f. For existing permits:

Permit Number: WQ00 [Click to enter text.](#)

EPA I.D. (TPDES only): TX [Click to enter text.](#)

Expiration Date: [Click to enter text.](#)

Section 3. Facility Owner (Applicant) and Co-Applciant Information (Instructions Page 26)

A. The owner of the facility must apply for the permit.

What is the Legal Name of the entity (applicant) applying for this permit?

M/I Homes of Houston, LLC

(The legal name must be spelled exactly as filed with the Texas Secretary of State, County, or in the legal documents forming the entity.)

If the applicant is currently a customer with the TCEQ, what is the Customer Number (CN)? You may search for your CN on the TCEQ website at <http://www15.tceq.texas.gov/crpub/>

CN: 603792359

What is the name and title of the person signing the application? The person must be an executive official meeting signatory requirements in 30 TAC § 305.44.

Prefix: Mr.

Last Name, First Name: Boozer, Brannon

Title: Vice President

Credential: [Click to enter text.](#)

B. Co-applciant information. Complete this section only if another person or entity is required to apply as a co-permittee.

What is the Legal Name of the co-applciant applying for this permit?

[Click to enter text.](#)

(The legal name must be spelled exactly as filed with the TX SOS, with the County, or in the legal documents forming the entity.)

If the co-applicant is currently a customer with the TCEQ, what is the Customer Number (CN)? You may search for your CN on the TCEQ website at: <http://www15.tceq.texas.gov/crpub/>

CN: Click to enter text.

What is the name and title of the person signing the application? The person must be an executive official meeting signatory requirements in 30 TAC § 305.44.

Prefix: Click to enter text.

Last Name, First Name: Click to enter text.

Title: Click to enter text.

Credential: Click to enter text.

Provide a brief description of the need for a co-permittee: Click to enter text.

C. Core Data Form

Complete the Core Data Form for each customer and include as an attachment. If the customer type selected on the Core Data Form is **Individual**, complete **Attachment 1** of Administrative Report 1.0. Attachment A

Section 4. Application Contact Information (Instructions Page 27)

This is the person(s) TCEQ will contact if additional information is needed about this application. Provide a contact for administrative questions and technical questions.

A. Prefix: Mr.

Last Name, First Name: Boozer, Brannon

Title: Vice President

Credential: Click to enter text.

Organization Name: M/I Homes of Houston, LLC

Mailing Address: 1720 W Sam Houston Parkway N. STE #100
TX 77304

City, State, Zip Code: Houston

Phone No.: (832)623-0015

E-mail Address: BBoozer@mihomes.com

Check one or both: Administrative Contact Technical Contact

B. Prefix: Mr.

Last Name, First Name: White, Jonathan

Title: Professional Engineer

Credential: P.E.

Organization Name: L Squared Engineering

Mailing Address: 3307 W Davis St, Suite 100 City, State, Zip Code: Conroe, TX 77304

Phone No.: (936)647-0420

E-mail Address: Jwhite@L2Engineering.com

Check one or both: Administrative Contact Technical Contact

Section 5. Permit Contact Information (Instructions Page 27)

Provide the names and contact information for two individuals that can be contacted throughout the permit term.

A. Prefix: Mr.

Last Name, First Name: Boozer, Brannon

Title: Vice President

Credential: Click to enter text.

Organization Name: M/I Homes of Houston, LLC

Mailing Address: 1720 W Sam Houston Parkway N. STE #100

City, State, Zip Code: Houston

TX 77064

Phone No.: (832)623-0015

E-mail Address: BBoozer@mihomes.com

B. Prefix: Mr.

Last Name, First Name: White, Jonathan

Title: Professional Engineer

Credential: P.E.

Organization Name: L Squared Engineering

Mailing Address: 3307 W Davis St, Suite 100 City, State, Zip Code: Conroe, TX 77304

Phone No.: (936)647-0420

E-mail Address: Jwhite@L2Engineering.com

Section 6. Billing Contact Information (Instructions Page 27)

The permittee is responsible for paying the annual fee. The annual fee will be assessed to permits *in effect on September 1 of each year*. The TCEQ will send a bill to the address provided in this section. The permittee is responsible for terminating the permit when it is no longer needed (using form TCEQ-20029).

Prefix: Mr.

Last Name, First Name: Boozer, Brannon

Title: Vice President

Credential: Click to enter text.

Organization Name: M/I Homes of Houston, LLC

Mailing Address: 1720 W Sam Houston Parkway N. STE #100
TX 77064

City, State, Zip Code: Houston

Phone No.: (832)623-0015

E-mail Address: BBoozer@mihomes.com

Section 7. DMR/MER Contact Information (Instructions Page 27)

Provide the name and complete mailing address of the person delegated to receive and submit Discharge Monitoring Reports (DMR) (EPA 3320-1) or maintain Monthly Effluent Reports (MER).

Prefix: Mr.

Last Name, First Name: Boozer, Brannon

Title: Vice President

Credential: Click to enter text.

Organization Name: M/I Homes of Houston, LLC

Mailing Address: 1720 W Sam Houston Parkway N. STE #100
TX 77064

City, State, Zip Code: Houston

Phone No.: (832)623-0015

E-mail Address: BBoozer@mihomes.com

Section 8. Public Notice Information (Instructions Page 27)

A. Individual Publishing the Notices

Prefix: Mr.

Last Name, First Name: White, Jonathan

Title: Professional Engineer

Credential: P.E.

Organization Name: L Squared Engineering

Mailing Address: 3307 W Davis St, Suite 100 City, State, Zip Code: Conroe, TX 77304

Phone No.: (936)647-0420

E-mail Address: Jwhite@L2Engineering.com

B. Method for Receiving Notice of Receipt and Intent to Obtain a Water Quality Permit Package

Indicate by a check mark the preferred method for receiving the first notice and instructions:

- E-mail Address
- Fax
- Regular Mail

C. Contact permit to be listed in the Notices

Prefix: Mr. Last Name, First Name: White, Jonathan
Title: Professional Engineer Credential: P.E.
Organization Name: L Squared Engineering
Mailing Address: 3307 W Davis St, Suite 100 City, State, Zip Code: Conroe, TX 77304
Phone No.: (936)647-0420 E-mail Address: Jwhite@L2Engineering.com

D. Public Viewing Information

If the facility or outfall is located in more than one county, a public viewing place for each county must be provided.

Public building name: Montgomery County Public Library
Location within the building:
Physical Address of Building: 104 Interstate 45 N, Conroe, TX 77301
City: Conroe
Contact Name:
Phone No.: (936)5397814 Ext.:

E. Bilingual Notice Requirements

This information is required for **new, major amendment, minor amendment or minor modification, and renewal** applications.

This section of the application is only used to determine if alternative language notices will be needed. Complete instructions on publishing the alternative language notices will be in your public notice package.

Please call the bilingual/ESL coordinator at the nearest elementary and middle schools and obtain the following information to determine whether an alternative language notices are required.

1. Is a bilingual education program required by the Texas Education Code at the elementary or middle school nearest to the facility or proposed facility?

Yes No

If **no**, publication of an alternative language notice is not required; **skip to** Section 9 below.

2. Are the students who attend either the elementary school or the middle school enrolled in a bilingual education program at that school?

Yes No

3. Do the students at these schools attend a bilingual education program at another location?
 Yes No
4. Would the school be required to provide a bilingual education program but the school has waived out of this requirement under 19 TAC §89.1205(g)?
 Yes No
5. If the answer is **yes** to **question 1, 2, 3, or 4**, public notices in an alternative language are required. Which language is required by the bilingual program? Spanish

F. Plain Language Summary Template

Complete the Plain Language Summary (TCEQ Form 20972) and include as an attachment.

Attachment: [Attachment 2](#)

G. Public Involvement Plan Form

Complete the Public Involvement Plan Form (TCEQ Form 20960) for each application for a **new permit or major amendment to a permit** and include as an attachment.

Attachment: B

Section 9. Regulated Entity and Permitted Site Information (Instructions Page 29)

- A. If the site is currently regulated by TCEQ, provide the Regulated Entity Number (RN) issued to this site. RN Click to enter text.

Search the TCEQ’s Central Registry at <http://www15.tceq.texas.gov/crpub/> to determine if the site is currently regulated by TCEQ.

- B. Name of project or site (the name known by the community where located):

Kinkaid Road Wastewater Treatment Plant

- C. Owner of treatment facility: M/I Homes of Houston, LLC

Ownership of Facility: Public Private Both Federal

- D. Owner of land where treatment facility is or will be:

Prefix: Mr.

Last Name, First Name: Boozer, Brannon

Title: Vice President

Credential: Click to enter text.

Organization Name: M/I Homes of Houston, LLC

Mailing Address: 1720 W Sam Houston Parkway N. STE #100 TX 77064

City, State, Zip Code: Houston

Phone No.: (832)623-0015

E-mail Address: BBoozer@mihomes.com

If the landowner is not the same person as the facility owner or co-applicant, attach a lease agreement or deed recorded easement. See instructions.

Attachment: N/A

E. Owner of effluent disposal site:

Prefix: N/A

Last Name, First Name: N/A

Title: N/A

Credential: N/A

Organization Name: N/A

Mailing Address: N/A

City, State, Zip Code: N/A

Phone No.: N/A

E-mail Address: N/A

If the landowner is not the same person as the facility owner or co-applicant, attach a lease agreement or deed recorded easement. See instructions.

Attachment: N/A

F. Owner sewage sludge disposal site (if authorization is requested for sludge disposal on property owned or controlled by the applicant):

Prefix: N/A

Last Name, First Name: N/A

Title: N/A

Credential: N/A

Organization Name: N/A

Mailing Address: N/A

City, State, Zip Code: N/A

Phone No.: N/A

E-mail Address: N/A

If the landowner is not the same person as the facility owner or co-applicant, attach a lease agreement or deed recorded easement. See instructions.

Attachment: N/A

Section 10. TPDES Discharge Information (Instructions Page 31)

A. Is the wastewater treatment facility location in the existing permit accurate?

- Yes No

If **no, or a new permit application**, please give an accurate description:

New Permit: The effluent disposal site is located near 19971 FM 2854 Rd Montgomery, TX 77064.

B. Are the point(s) of discharge and the discharge route(s) in the existing permit correct?

- Yes No

If **no, or a new or amendment permit application**, provide an accurate description of the point of discharge and the discharge route to the nearest classified segment as defined in 30 TAC Chapter 307:

New Permit: The plant will discharge treated effluent to Mound Creek (Segment Number 1015A).

City nearest the outfall(s): Conroe, TX

County in which the outfalls(s) is/are located: Montgomery County

C. Is or will the treated wastewater discharge to a city, county, or state highway right-of-way, or a flood control district drainage ditch?

- Yes No

If **yes**, indicate by a check mark if:

- Authorization granted Authorization pending

For **new and amendment** applications, provide copies of letters that show proof of contact and the approval letter upon receipt.

Attachment: N/A

- D. For all applications involving an average daily discharge of 5 MGD or more, provide the names of all counties located within 100 statute miles downstream of the point(s) of discharge: N/A

Section 11. TLAP Disposal Information (Instructions Page 32)

- A. For TLAPs, is the location of the effluent disposal site in the existing permit accurate?

- Yes No

If **no, or a new or amendment permit application**, provide an accurate description of the disposal site location:

Not a TLAP

- B. City nearest the disposal site: N/A

- C. County in which the disposal site is located: N/A

- D. For TLAPs, describe the routing of effluent from the treatment facility to the disposal site:

N/A

- E. For TLAPs, please identify the nearest watercourse to the disposal site to which rainfall runoff might flow if not contained: N/A

Section 12. Miscellaneous Information (Instructions Page 32)

- A. Is the facility located on or does the treated effluent cross American Indian Land?

- Yes No

- B. If the existing permit contains an onsite sludge disposal authorization, is the location of the sewage sludge disposal site in the existing permit accurate?

- Yes No Not Applicable

If No, or if a new onsite sludge disposal authorization is being requested in this permit application, provide an accurate location description of the sewage sludge disposal site.

Sludge will be hauled off TBD.

C. Did any person formerly employed by the TCEQ represent your company and get paid for service regarding this application?

Yes No

If yes, list each person formerly employed by the TCEQ who represented your company and was paid for service regarding the application: [Click to enter text.](#)

D. Do you owe any fees to the TCEQ?

Yes No

If yes, provide the following information:

Account number: [Click to enter text.](#)

Amount past due: [Click to enter text.](#)

E. Do you owe any penalties to the TCEQ?

Yes No

If yes, please provide the following information:

Enforcement order number: [Click to enter text.](#)

Amount past due: [Click to enter text.](#)

Section 13. Attachments (Instructions Page 33)

Indicate which attachments are included with the Administrative Report. Check all that apply:

- Lease agreement or deed recorded easement, if the land where the treatment facility is located or the effluent disposal site are not owned by the applicant or co-applicant.
- Original full-size USGS Topographic Map with the following information:
- Applicant's property boundary
 - Treatment facility boundary
 - Labeled point of discharge for each discharge point (TPDES only)
 - Highlighted discharge route for each discharge point (TPDES only)
 - Onsite sewage sludge disposal site (if applicable)
 - Effluent disposal site boundaries (TLAP only)
 - New and future construction (if applicable)
 - 1 mile radius information
 - 3 miles downstream information (TPDES only)
 - All ponds.
- Attachment 1 for Individuals as co-applicants
- Other Attachments. Please specify: [Attachment 1 \(SPIF\) & Attachment 2 \(Plain Language Summary\)](#)

Section 14. Signature Page (Instructions Page 34)

If co-applicants are necessary, each entity must submit an original, separate signature page.

Permit Number: Click to enter text.

Applicant: M/I Homes of Houston, LLC

Certification:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

I further certify that I am authorized under 30 Texas Administrative Code § 305.44 to sign and submit this document, and can provide documentation in proof of such authorization upon request.

Signatory name (typed or printed): Brannon Boozer

Signatory title: Vice President


Signature:  Date: 9/12/24

(Use blue ink)

Subscribed and Sworn to before me by the said Brannon Boozer
on this 12th day of September, 20 24.
My commission expires on the 16th day of December, 20 25.


Notary Public

[SEAL]



Harris
County, Texas

DOMESTIC WASTEWATER PERMIT APPLICATION ADMINISTRATIVE REPORT 1.0

The following information is required for new and amendment applications.

Section 1. Affected Landowner Information (Instructions Page 36)

- A. Indicate by a check mark that the landowners map or drawing, with scale, includes the following information, as applicable:
- The applicant's property boundaries
 - The facility site boundaries within the applicant's property boundaries
 - The distance the buffer zone falls into adjacent properties and the property boundaries of the landowners located within the buffer zone
 - The property boundaries of all landowners surrounding the applicant's property (Note: if the application is a major amendment for a lignite mine, the map must include the property boundaries of all landowners adjacent to the new facility (ponds).)
 - The point(s) of discharge and highlighted discharge route(s) clearly shown for one mile downstream
 - The property boundaries of the landowners located on both sides of the discharge route for one full stream mile downstream of the point of discharge
 - N/A The property boundaries of the landowners along the watercourse for a one-half mile radius from the point of discharge if the point of discharge is into a lake, bay, estuary, or affected by tides
 - N/A The boundaries of the effluent disposal site (for example, irrigation area or subsurface drainfield site) and all evaporation/holding ponds within the applicant's property
 - N/A The property boundaries of all landowners surrounding the effluent disposal site
 - N/A The boundaries of the sludge land application site (for land application of sewage sludge for beneficial use) and the property boundaries of landowners surrounding the applicant's property boundaries where the sewage sludge land application site is located
 - N/A The property boundaries of landowners within one-half mile in all directions from the applicant's property boundaries where the sewage sludge disposal site (for example, sludge surface disposal site or sludge monofill) is located
- B. Indicate by a check mark that a separate list with the landowners' names and mailing addresses cross-referenced to the landowner's map has been provided.
- C. Indicate by a check mark in which format the landowners list is submitted:
- USB Drive Four sets of labels
- D. Provide the source of the landowners' names and mailing addresses: Montgomery County Appraisal District
- E. As required by *Texas Water Code § 5.115*, is any permanent school fund land affected by this application?
- Yes No

If **yes**, provide the location and foreseeable impacts and effects this application has on the land(s):

Click to enter text.

Section 2. Original Photographs (Instructions Page 38)

Provide original ground level photographs. Indicate with checkmarks that the following information is provided.

- At least one original photograph of the new or expanded treatment unit location
- At least two photographs of the existing/proposed point of discharge and as much area downstream (photo 1) and upstream (photo 2) as can be captured. If the discharge is to an open water body (e.g., lake, bay), the point of discharge should be in the right or left edge of each photograph showing the open water and with as much area on each respective side of the discharge as can be captured.
- N/A At least one photograph of the existing/proposed effluent disposal site
- A plot plan or map showing the location and direction of each photograph

Section 3. Buffer Zone Map (Instructions Page 38)

A. Buffer zone map. Provide a buffer zone map on 8.5 x 11-inch paper with all of the following information. The applicant's property line and the buffer zone line may be distinguished by using dashes or symbols and appropriate labels.

- The applicant's property boundary;
- The required buffer zone; and
- Each treatment unit; and
- The distance from each treatment unit to the property boundaries.

B. Buffer zone compliance method. Indicate how the buffer zone requirements will be met. Check all that apply.

- Ownership
- Restrictive easement
- Nuisance odor control
- Variance

C. Unsuitable site characteristics. Does the facility comply with the requirements regarding unsuitable site characteristic found in 30 TAC § 309.13(a) through (d)?

- Yes No

DOMESTIC WASTEWATER PERMIT APPLICATION

SUPPLEMENTAL PERMIT INFORMATION FORM (SPIF)

This form applies to TPDES permit applications only. Complete and attach the Supplemental Permit information Form (SPIF) (TCEQ Form 20971).

Attachment: [Attachment 1](#)

WATER QUALITY PERMIT

PAYMENT SUBMITTAL FORM

Use this form to submit the Application Fee, if the mailing the payment.

- Complete items 1 through 5 below.
- Staple the check or money order in the space provided at the bottom of this document.
- **Do Not mail this form with the application form.**
- Do not mail this form to the same address as the application.
- Do not submit a copy of the application with this form as it could cause duplicate permit entries.

Mail this form and the check or money order to:

BY REGULAR U.S. MAIL

Texas Commission on Environmental Quality
Financial Administration Division
Cashier's Office, MC-214
P.O. Box 13088
Austin, Texas 78711-3088

BY OVERNIGHT/EXPRESS MAIL

Texas Commission on Environmental Quality
Financial Administration Division
Cashier's Office, MC-214
12100 Park 35 Circle
Austin, Texas 78753

Fee Code: WQP **Waste Permit No:** [Click to enter text.](#)

1. Check or Money Order Number: [Click to enter text.](#)
2. Check or Money Order Amount: [Click to enter text.](#)
3. Date of Check or Money Order: [Click to enter text.](#)
4. Name on Check or Money Order: [Click to enter text.](#)

5. APPLICATION INFORMATION

Name of Project or Site: Kinkaid Road Wastewater Treatment Plant

Physical Address of Project or Site: 19971 FM 2854 Rd Montgomery, TX 77064

If the check is for more than one application, attach a list which includes the name of each Project or Site (RE) and Physical Address, exactly as provided on the application.

Staple Check or Money Order in This Space

ATTACHMENT 1

INDIVIDUAL INFORMATION

Section 1. Individual Information (Instructions Page 41)

Complete this attachment if the facility applicant or co-applicant is an individual. Make additional copies of this attachment if both are individuals.

Prefix (Mr., Ms., Miss): [Click to enter text.](#)

Full legal name (Last Name, First Name, Middle Initial): [Click to enter text.](#)

Driver's License or State Identification Number: [Click to enter text.](#)

Date of Birth: [Click to enter text.](#)

Mailing Address: [Click to enter text.](#)

City, State, and Zip Code: [Click to enter text.](#)

Phone Number: [Click to enter text.](#) Fax Number: [Click to enter text.](#)

E-mail Address: [Click to enter text.](#)

CN: [Click to enter text.](#)

For Commission Use Only:

Customer Number:

Regulated Entity Number:

Permit Number:

DOMESTIC WASTEWATER PERMIT APPLICATION CHECKLIST OF COMMON DEFICIENCIES

Below is a list of common deficiencies found during the administrative review of domestic wastewater permit applications. To ensure the timely processing of this application, please review the items below and indicate by checking Yes that each item is complete and in accordance applicable rules at 30 TAC Chapters 21, 281, and 305. If an item is not required this application, indicate by checking N/A where appropriate. Please do not submit the application until the items below have been addressed.

Core Data Form (TCEQ Form No. 10400) Yes
*(Required for all application types. Must be completed in its entirety and signed.
 Note: Form may be signed by applicant representative.)*

Correct and Current Industrial Wastewater Permit Application Forms Yes
(TCEQ Form Nos. 10053 and 10054. Version dated 6/25/2018 or later.)

Water Quality Permit Payment Submittal Form (Page 19) Yes
(Original payment sent to TCEQ Revenue Section. See instructions for mailing address.)

7.5 Minute USGS Quadrangle Topographic Map Attached Yes
*(Full-size map if seeking "New" permit.
 8 ½ x 11 acceptable for Renewals and Amendments)*

Current/Non-Expired, Executed Lease Agreement or Easement N/A Yes

Landowners Map N/A Yes
(See instructions for landowner requirements)

Things to Know:

- All the items shown on the map must be labeled.
- The applicant's complete property boundaries must be delineated which includes boundaries of contiguous property owned by the applicant.
- The applicant cannot be its own adjacent landowner. You must identify the landowners immediately adjacent to their property, regardless of how far they are from the actual facility.
- If the applicant's property is adjacent to a road, creek, or stream, the landowners on the opposite side must be identified. Although the properties are not adjacent to applicant's property boundary, they are considered potentially affected landowners. If the adjacent road is a divided highway as identified on the USGS topographic map, the applicant does not have to identify the landowners on the opposite side of the highway.

Landowners Cross Reference List N/A Yes
(See instructions for landowner requirements)

Landowners Labels or USB Drive attached N/A Yes
(See instructions for landowner requirements)

Original signature per 30 TAC § 305.44 - Blue Ink Preferred Yes
*(If signature page is not signed by an elected official or principle executive officer,
 a copy of signature authority/delegation letter must be attached)*

Plain Language Summary Yes

Print this voucher for your records. If you are sending the TCEQ hardcopy documents related to this payment, include a copy of this voucher.

Transaction Information**Voucher Number:** 721554**Trace Number:** 582EA000625652**Date:** 09/17/2024 11:37 AM**Payment Method:** CC - Authorization 000001560G**Voucher Amount:** \$500.00**Fee Type:** WW PERMIT - FACILITY WITH FLOW >= .05 & < .10 MGD - NEW AND MAJOR AMENDMENTS**ePay Actor:** JERRY BARNES**Actor Email:** jbarnes@l2engineering.com**IP:** 24.32.135.66**Payment Contact Information****Name:** JONATHAN WHITE**Company:** L SQUARED ENGINEERING**Address:** 3307 WEST DAVIS STREET, CONROE, TX 77304**Phone:** 936-647-0420**Site Information****Site Name:** KINKAID ROAD WASTEWATER TREATMENT PLANT**Site Location:** 19971 FM 2854 RD MONTGOMERY TX 77064**Customer Information****CN:** CN603792359**Customer Address:** 1720 W SAM HOUSTON PKWY N 100, HOUSTON, TX 77304[Close](#)

Print this voucher for your records. If you are sending the TCEQ hardcopy documents related to this payment, include a copy of this voucher.

Transaction Information

Voucher Number: 721555
Trace Number: 582EA000625652
Date: 09/17/2024 11:37 AM
Payment Method: CC - Authorization 000001560G
Voucher Amount: \$50.00
Fee Type: 30 TAC 305.53B WQ NOTIFICATION FEE
ePay Actor: JERRY BARNES
Actor Email: jbarnes@l2engineering.com
IP: 24.32.135.66

Payment Contact Information

Name: JONATHAN WHITE
Company: L SQUARED ENGINEERING
Address: 3307 WEST DAVIS STREET, CONROE, TX 77304
Phone: 936-647-0420

[Close](#)

**TEXAS COMMISSION ON ENVIRONMENTAL QUALITY
SUPPLEMENTAL PERMIT INFORMATION FORM (SPIF)**

**FOR AGENCIES REVIEWING DOMESTIC OR INDUSTRIAL
TPDES WASTEWATER PERMIT APPLICATIONS**

TCEQ USE ONLY:

Application type: Renewal Major Amendment Minor Amendment New

County: _____ Segment Number: _____

Admin Complete Date: _____

Agency Receiving SPIF:

Texas Historical Commission

U.S. Fish and Wildlife

Texas Parks and Wildlife Department

U.S. Army Corps of Engineers

This form applies to TPDES permit applications only. (Instructions, Page 53)

Complete this form as a separate document. TCEQ will mail a copy to each agency as required by our agreement with EPA. If any of the items are not completely addressed or further information is needed, we will contact you to provide the information before issuing the permit. Address each item completely.

Do not refer to your response to any item in the permit application form. Provide each attachment for this form separately from the Administrative Report of the application. The application will not be declared administratively complete without this SPIF form being completed in its entirety including all attachments. Questions or comments concerning this form may be directed to the Water Quality Division's Application Review and Processing Team by email at WQ-ARPTeam@tceq.texas.gov or by phone at (512) 239-4671.

The following applies to all applications:

Permittee: M/I Homes of Houston, LLC

Permit No. WQ00 _____

EPA ID No. TX _____

Address of the project (or a location description that includes street/highway, city/vicinity, and county):

The site is located at 19971 FM 2854 Rd Montgomery, TX 77064

Provide the name, address, phone and fax number of an individual that can be contacted to answer specific questions about the property.

Prefix (Mr., Ms., Miss): Mr.

First and Last Name: Jonathan White

Credential (P.E, P.G., Ph.D., etc.): P.E.

Title: Professional Engineer

Mailing Address: 3307 W Davis St, Suite 100

City, State, Zip Code: Conroe, TX 77304

Phone No.: (936)647-0420 Ext.: Fax No.:

E-mail Address: jwhite@L2Engineering.com

1. List the county in which the facility is located: Montgomery
2. If the property is publicly owned and the owner is different than the permittee/applicant, please list the owner of the property.

N/A

3. Provide a description of the effluent discharge route. The discharge route must follow the flow of effluent from the point of discharge to the nearest major watercourse (from the point of discharge to a classified segment as defined in 30 TAC Chapter 307). If known, please identify the classified segment number.

The plant will discharge treated effluent to an unclassified freshwater stream Mound Creek (Segment 1015A) ; thence to Lake Creek (Segment 1015), thence into West Fork San Jacinto River (Segment 1004) and ultimately to Lake Houston (Segment 1002).

4. Please provide a separate 7.5-minute USGS quadrangle map with the project boundaries plotted and a general location map showing the project area. Please highlight the discharge route from the point of discharge for a distance of one mile downstream. (This map is required in addition to the map in the administrative report).

Provide original photographs of any structures 50 years or older on the property.

Does your project involve any of the following? Check all that apply.

- Proposed access roads, utility lines, construction easements
- Visual effects that could damage or detract from a historic property's integrity
- Vibration effects during construction or as a result of project design
- Additional phases of development that are planned for the future
- Sealing caves, fractures, sinkholes, other karst features

Disturbance of vegetation or wetlands

1. List proposed construction impact (surface acres to be impacted, depth of excavation, sealing of caves, or other karst features):

N/A

2. Describe existing disturbances, vegetation, and land use:

N/A

THE FOLLOWING ITEMS APPLY ONLY TO APPLICATIONS FOR NEW TPDES PERMITS AND MAJOR AMENDMENTS TO TPDES PERMITS

3. List construction dates of all buildings and structures on the property:

Phase I - Construction begins August 2025 and ends January 2026, Phase II Construction Begins August 2026 and ends January 2027.

4. Provide a brief history of the property, and name of the architect/builder, if known.

The property covers approximately 109 acres and includes a creek, ponds, and an existing home. Access to the site is provided from FM 2854 Road and Kinkaid Rd W. The land is mostly agricultural with the area surrounding the creek being mostly forested.



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

**PLAIN LANGUAGE SUMMARY FOR TPDES OR
TLAP PERMIT APPLICATIONS**

**Plain Language Summary Template and Instructions for Texas
Pollutant Discharge Elimination System (TPDES) and Texas
Land Application (TLAP) Permit Applications**

If you are subject to the alternative language notice requirements in [30 TAC Section 39.426](#), **you must provide a translated copy of the completed plain language summary in the appropriate alternative language as part of your application package.** For your convenience, a Spanish template has been provided below.

ENGLISH TEMPLATE FOR TPDES or TLAP NEW/RENEWAL/AMENDMENT APPLICATIONS

DOMESTIC WASTEWATER

The following summary is provided for this pending water quality permit application being reviewed by the Texas Commission on Environmental Quality as required by 30 TAC Chapter 39. The information provided in this summary may change during the technical review of the application and is not a federal enforceable representation of the permit application.

M/I Homes of Houston, LLC (CN603792359) proposes to operate Kinkaid Road Wastewater Treatment Plant (RN_____), an activated sludge process plant. The facility will be located at 19971 FM 2854 Rd, in Montgomery, Montgomery County, Texas 77064.

This application is for a new application to discharge at a daily average flow of 75,000 gallons per day of treated domestic wastewater.

Discharges from the facility are expected to contain five-day biochemical oxygen demand (BOD₅), total suspended solids, ammonia nitrogen, and dissolved oxygen at or below the limits established by the TCEQ to maintain natural water quality. Domestic wastewater will be treated by an aeration/digester basin, a clarifier, and a chlorine contact chamber.

PLANTILLA EN ESPAÑOL PARA SOLICITUDES NUEVAS/RENOVACIONES/ENMIENDAS DE TPDES o TLAP

AGUAS RESIDUALES DOMÉSTICAS /AGUAS PLUVIALES

El siguiente resumen se proporciona para esta solicitud de permiso de calidad del agua pendiente que está siendo revisada por la Comisión de Calidad Ambiental de Texas según lo requerido por el Capítulo 39 del Código Administrativo de Texas 30. La información proporcionada en este resumen puede cambiar durante la revisión técnica de la solicitud y no es una representación ejecutiva fedérale de la solicitud de permiso.

M/I Homes of Houston, LLC (CN603792359) propone operar la Planta de Tratamiento de Aguas Residuales de Kinkaid Road (RN_____), una planta de proceso de lodos activados. La instalación estará ubicada en 19971 FM 2854 Rd, en Montgomery, Condado de Montgomery, Texas 77064.

Esta solicitud es para una nueva aplicación para descargar a un flujo promedio diario de 75,000 galones por día de aguas residuales domésticas tratadas.

Se espera que las descargas de la instalación contengan la demanda bioquímica de oxígeno (DBO5) de cinco días, sólidos suspendidos totales, nitrógeno amoniacal y oxígeno disuelto en o por debajo de los límites establecidos por la TCEQ para mantener la calidad natural del agua. Las aguas residuales domésticas serán tratadas mediante una balsa de aireación/digestor, un clarificador y una cámara de contacto de cloro.



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

**DOMESTIC WASTEWATER PERMIT APPLICATION
TECHNICAL REPORT 1.0**

For any questions about this form, please contact the Domestic Wastewater Permitting Team at 512-239-4671.

The following information is required for all renewal, new, and amendment applications.

Section 1. Permitted or Proposed Flows (Instructions Page 43)

A. Existing/Interim I Phase

Design Flow (MGD): 0.0375

2-Hr Peak Flow (MGD): 0.15

Estimated construction start date: 08/30/2025

Estimated waste disposal start date: 01/15/2026

B. Interim II Phase

Design Flow (MGD):

2-Hr Peak Flow (MGD):

Estimated construction start date:

Estimated waste disposal start date:

C. Final Phase

Design Flow (MGD): 0.075

2-Hr Peak Flow (MGD): 0.3

Estimated construction start date: 08/30/2026

Estimated waste disposal start date: 01/26/2027

D. Current Operating Phase: N/A

Provide the startup date of the facility: N/A

Section 2. Treatment Process (Instructions Page 43)

A. Current Operating Phase

Provide a detailed description of the treatment process. **Include the type of treatment plant, mode of operation, and all treatment units.** Start with the plant's head works and

finish with the point of discharge. Include all sludge processing and drying units. **If more than one phase exists or is proposed, a description of *each phase* must be provided.**

See Attachment G

B. Treatment Units

In Table 1.0(1), provide the treatment unit type, the number of units, and dimensions (length, width, depth) of each treatment unit, accounting for *all* phases of operation.

Table 1.0(1) - Treatment Units

Treatment Unit Type	Number of Units	Dimensions (L x W x D)
See Attachment F		

C. Process Flow Diagram

Provide flow diagrams for the existing facilities and **each** proposed phase of construction.

Attachment: See Attachment G

Section 3. Site Information and Drawing (Instructions Page 44)

Provide the TPDES discharge outfall latitude and longitude. Enter N/A if not applicable.

- Latitude: 30°20'47.66"N
- Longitude: 95°39'09.89"W

Provide the TLAP disposal site latitude and longitude. Enter N/A if not applicable.

- Latitude: N/A
- Longitude: N/A

Provide a site drawing for the facility that shows the following:

- The boundaries of the treatment facility;
- The boundaries of the area served by the treatment facility;
- If land disposal of effluent, the boundaries of the disposal site and all storage/holding ponds; and
- If sludge disposal is authorized in the permit, the boundaries of the land application or disposal site.

Attachment: See Attachment D

Provide the name **and** a description of the area served by the treatment facility.

<u>Residential Subdivision at FM 2854 and Kinkaid Road</u>
--

Collection System Information for wastewater TPDES permits only: Provide information for each **uniquely owned** collection system, existing and new, served by this facility, including satellite collection systems. **Please see the instructions for a detailed explanation and examples.**

Collection System Information

Collection System Name	Owner Name	Owner Type	Population Served
Kinkaid Road Collection System	M/I Homes of Houston, LLC	Privately Owned	590
		Choose an item.	
		Choose an item.	
		Choose an item.	

Section 4. Unbuilt Phases (Instructions Page 45)

Is the application for a renewal of a permit that contains an unbuilt phase or phases?

- Yes No

If **yes**, does the existing permit contain a phase that has not been constructed **within five years** of being authorized by the TCEQ?

- Yes No

If **yes**, provide a detailed discussion regarding the continued need for the unbuilt phase. **Failure to provide sufficient justification may result in the Executive Director recommending denial of the unbuilt phase or phases.**

N/A

Section 5. Closure Plans (Instructions Page 45)

Have any treatment units been taken out of service permanently, or will any units be taken out of service in the next five years?

- Yes No

If **yes**, was a closure plan submitted to the TCEQ?

Yes No

If **yes**, provide a brief description of the closure and the date of plan approval.

N/A

Section 6. Permit Specific Requirements (Instructions Page 45)

For applicants with an existing permit, check the Other Requirements or Special Provisions of the permit.

A. Summary transmittal

Have plans and specifications been approved for the existing facilities and each proposed phase?

Yes No

If **yes**, provide the date(s) of approval for each phase: [Click to enter text.](#)

Provide information, including dates, on any actions taken to meet a *requirement or provision* pertaining to the submission of a summary transmittal letter. **Provide a copy of an approval letter from the TCEQ, if applicable.**

N/A

B. Buffer zones

Have the buffer zone requirements been met?

Yes No

Provide information below, including dates, on any actions taken to meet the conditions of the buffer zone. If available, provide any new documentation relevant to maintaining the buffer zones.

Buffer zone is provided to all sides of the plant and does not encroach into any adjacent properties.

C. Other actions required by the current permit

Does the *Other Requirements* or *Special Provisions* section in the existing permit require submission of any other information or other required actions? Examples include Notification of Completion, progress reports, soil monitoring data, etc.

Yes No

If **yes**, provide information below on the status of any actions taken to meet the conditions of an *Other Requirement* or *Special Provision*.

N/A

D. Grit and grease treatment

1. Acceptance of grit and grease waste

Does the facility have a grit and/or grease processing facility onsite that treats and decants or accepts transported loads of grit and grease waste that are discharged directly to the wastewater treatment plant prior to any treatment?

Yes No

If **No**, stop here and continue with Subsection E. Stormwater Management.

2. Grit and grease processing

Describe below how the grit and grease waste is treated at the facility. In your description, include how and where the grit and grease is introduced to the treatment works and how it is separated or processed. Provide a flow diagram showing how grit and grease is processed at the facility.

N/A

3. Grit disposal

Does the facility have a Municipal Solid Waste (MSW) registration or permit for grit disposal?

Yes No

If **No**, contact the TCEQ Municipal Solid Waste team at 512-239-2335. Note: A registration or permit is required for grit disposal. Grit shall not be combined with treatment plant sludge. See the instruction booklet for additional information on grit disposal requirements and restrictions.

Describe the method of grit disposal.

N/A

4. Grease and decanted liquid disposal

Note: A registration or permit is required for grease disposal. Grease shall not be combined with treatment plant sludge. For more information, contact the TCEQ Municipal Solid Waste team at 512-239-2335.

Describe how the decant and grease are treated and disposed of after grit separation.

N/A

E. Stormwater management

1. Applicability

Does the facility have a design flow of 1.0 MGD or greater in any phase?

Yes No

Does the facility have an approved pretreatment program, under 40 CFR Part 403?

Yes No

If no to both of the above, then skip to Subsection F, Other Wastes Received.

2. MSGP coverage

Is the stormwater runoff from the WWTP and dedicated lands for sewage disposal currently permitted under the TPDES Multi-Sector General Permit (MSGP), TXR050000?

Yes No

If yes, please provide MSGP Authorization Number and skip to Subsection F, Other Wastes Received:

TXR05 N/A or TXRNE N/A

If no, do you intend to seek coverage under TXR050000?

Yes No

3. Conditional exclusion

Alternatively, do you intend to apply for a conditional exclusion from permitting based TXR050000 (Multi Sector General Permit) Part II B.2 or TXR050000 (Multi Sector General Permit) Part V, Sector T 3(b)?

Yes No

If yes, please explain below then proceed to Subsection F, Other Wastes Received:

N/A

4. Existing coverage in individual permit

Is your stormwater discharge currently permitted through this individual TPDES or TLAP permit?

Yes No

If yes, provide a description of stormwater runoff management practices at the site that are authorized in the wastewater permit then skip to Subsection F, Other Wastes Received.

N/A

5. Zero stormwater discharge

Do you intend to have no discharge of stormwater via use of evaporation or other means?

Yes No

If yes, explain below then skip to Subsection F. Other Wastes Received.

N/A

Note: If there is a potential to discharge any stormwater to surface water in the state as the result of any storm event, then permit coverage is required under the MSGP or an individual discharge permit. This requirement applies to all areas of facilities with treatment plants or systems that treat, store, recycle, or reclaim domestic sewage, wastewater or sewage sludge (including dedicated lands for sewage sludge disposal located within the onsite property boundaries) that meet the applicability criteria of above. You have the option of obtaining coverage under the MSGP for direct discharges, (recommended), or obtaining coverage under this individual permit.

6. Request for coverage in individual permit

Are you requesting coverage of stormwater discharges associated with your treatment plant under this individual permit?

Yes No

If yes, provide a description of stormwater runoff management practices at the site for which you are requesting authorization in this individual wastewater permit and describe whether you intend to comingle this discharge with your treated effluent or discharge it via a separate dedicated stormwater outfall. Please also indicate if you

intend to divert stormwater to the treatment plant headworks and indirectly discharge it to water in the state.

N/A

Note: Direct stormwater discharges to waters in the state authorized through this individual permit will require the development and implementation of a stormwater pollution prevention plan (SWPPP) and will be subject to additional monitoring and reporting requirements. Indirect discharges of stormwater via headworks recycling will require compliance with all individual permit requirements including 2-hour peak flow limitations. All stormwater discharge authorization requests will require additional information during the technical review of your application.

F. Discharges to the Lake Houston Watershed

Does the facility discharge in the Lake Houston watershed?

Yes No

If yes, attach a Sewage Sludge Solids Management Plan. See Example 5 in the instructions. Attachment I

G. Other wastes received including sludge from other WWTPs and septic waste

1. Acceptance of sludge from other WWTPs

Does or will the facility accept sludge from other treatment plants at the facility site?

Yes No

If yes, attach sewage sludge solids management plan. See Example 5 of instructions.

In addition, provide the date the plant started or is anticipated to start accepting sludge, an estimate of monthly sludge acceptance (gallons or millions of gallons), an estimate of the BOD₅ concentration of the sludge, and the design BOD₅ concentration of the influent from the collection system. Also note if this information has or has not changed since the last permit action.

N/A

Note: Permits that accept sludge from other wastewater treatment plants may be required to have influent flow and organic loading monitoring.

2. Acceptance of septic waste

Is the facility accepting or will it accept septic waste?

Yes No

If yes, does the facility have a Type V processing unit?

Yes No

If yes, does the unit have a Municipal Solid Waste permit?

Yes No

If **yes to any of the above**, provide the date the plant started or is anticipated to start accepting septic waste, an estimate of monthly septic waste acceptance (gallons or millions of gallons), an estimate of the BOD₅ concentration of the septic waste, and the design BOD₅ concentration of the influent from the collection system. Also note if this information has or has not changed since the last permit action.

N/A

Note: Permits that accept sludge from other wastewater treatment plants may be required to have influent flow and organic loading monitoring.

3. Acceptance of other wastes (not including septic, grease, grit, or RCRA, CERCLA or as discharged by IUs listed in Worksheet 6)

Is or will the facility accept wastes that are not domestic in nature excluding the categories listed above?

Yes No

If **yes**, provide the date that the plant started accepting the waste, an estimate how much waste is accepted on a monthly basis (gallons or millions of gallons), a description of the entities generating the waste, and any distinguishing chemical or other physical characteristic of the waste. Also note if this information has or has not changed since the last permit action.

N/A

Section 7. Pollutant Analysis of Treated Effluent (Instructions Page 50)

Is the facility in operation?

Yes No

If **no**, this section is not applicable. Proceed to Section 8.

If **yes**, provide effluent analysis data for the listed pollutants. **Wastewater treatment facilities** complete Table 1.0(2). **Water treatment facilities** discharging filter backwash water, complete Table 1.0(3). Provide copies of the laboratory results sheets. **These tables are not applicable for a minor amendment without renewal.** See the instructions for guidance.

Note: The sample date must be within 1 year of application submission.

Table1.0(2) – Pollutant Analysis for Wastewater Treatment Facilities

Pollutant	Average Conc.	Max Conc.	No. of Samples	Sample Type	Sample Date/Time
CBOD ₅ , mg/l					
Total Suspended Solids, mg/l					
Ammonia Nitrogen, mg/l					
Nitrate Nitrogen, mg/l					
Total Kjeldahl Nitrogen, mg/l					
Sulfate, mg/l					
Chloride, mg/l					
Total Phosphorus, mg/l					
pH, standard units					
Dissolved Oxygen*, mg/l					
Chlorine Residual, mg/l					
<i>E.coli</i> (CFU/100ml) freshwater					
Enterococci (CFU/100ml) saltwater					
Total Dissolved Solids, mg/l					
Electrical Conductivity, µmohs/cm, †					
Oil & Grease, mg/l					
Alkalinity (CaCO ₃)*, mg/l					

*TPDES permits only

†TLAP permits only

Table1.0(3) – Pollutant Analysis for Water Treatment Facilities

Pollutant	Average Conc.	Max Conc.	No. of Samples	Sample Type	Sample Date/Time
Total Suspended Solids, mg/l					
Total Dissolved Solids, mg/l					
pH, standard units					
Fluoride, mg/l					
Aluminum, mg/l					
Alkalinity (CaCO ₃), mg/l					

Section 8. Facility Operator (Instructions Page 50)Facility Operator Name: TBDFacility Operator's License Classification and Level: TBDFacility Operator's License Number: TBD

Section 9. Sludge and Biosolids Management and Disposal (Instructions Page 51)

A. WWTP's Biosolids Management Facility Type

Check all that apply. See instructions for guidance

- Design flow \geq 1 MGD
- Serves \geq 10,000 people
- Class I Sludge Management Facility (per 40 CFR § 503.9)
- Biosolids generator
- Biosolids end user - land application (onsite)
- Biosolids end user - surface disposal (onsite)
- Biosolids end user - incinerator (onsite)

B. WWTP's Biosolids Treatment Process

Check all that apply. See instructions for guidance.

- Aerobic Digestion
- Air Drying (or sludge drying beds)
- Lower Temperature Composting
- Lime Stabilization
- Higher Temperature Composting
- Heat Drying
- Thermophilic Aerobic Digestion
- Beta Ray Irradiation
- Gamma Ray Irradiation
- Pasteurization
- Preliminary Operation (e.g. grinding, de-gritting, blending)
- Thickening (e.g. gravity thickening, centrifugation, filter press, vacuum filter)
- Sludge Lagoon
- Temporary Storage ($<$ 2 years)
- Long Term Storage (\geq 2 years)
- Methane or Biogas Recovery
- Other Treatment Process: [Click to enter text.](#)

C. Biosolids Management

Provide information on the *intended* biosolids management practice. Do not enter every management practice that you want authorized in the permit, as the permit will authorize

all biosolids management practices listed in the instructions. Rather indicate the management practice the facility plans to use.

Biosolids Management

Management Practice	Handler or Preparer Type	Bulk or Bag Container	Amount (dry metric tons)	Pathogen Reduction Options	Vector Attraction Reduction Option
Disposal in Landfill	Off-site Third-Party Handler or Preparer	Bulk	3		Option 1: Volatile solids reduced by 38%
Choose an item.	Choose an item.	Choose an item.		Choose an item.	Choose an item.
Choose an item.	Choose an item.	Choose an item.		Choose an item.	Choose an item.

If “Other” is selected for Management Practice, please explain (e.g. monofill or transport to another WWTP): [Click to enter text.](#)

D. Disposal site

Disposal site name: TBD

TCEQ permit or registration number: TBD

County where disposal site is located: TBD

E. Transportation method

Method of transportation (truck, train, pipe, other): TBD

Name of the hauler: TBD

Hauler registration number: TBD

Sludge is transported as a:

Liquid semi-liquid semi-solid solid

Section 10. Permit Authorization for Sewage Sludge Disposal (Instructions Page 53)

A. Beneficial use authorization

Does the existing permit include authorization for land application of sewage sludge for beneficial use?

Yes No

If yes, are you requesting to continue this authorization to land apply sewage sludge for beneficial use?

Yes No

If yes, is the completed **Application for Permit for Beneficial Land Use of Sewage Sludge (TCEQ Form No. 10451)** attached to this permit application (see the instructions for details)?

Yes No

B. Sludge processing authorization

Does the existing permit include authorization for any of the following sludge processing, storage or disposal options?

Sludge Composting	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Marketing and Distribution of sludge	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Sludge Surface Disposal or Sludge Monofill	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Temporary storage in sludge lagoons	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No

If **yes** to any of the above sludge options and the applicant is requesting to continue this authorization, is the completed **Domestic Wastewater Permit Application: Sewage Sludge Technical Report (TCEQ Form No. 10056)** attached to this permit application?

Yes No

Section 11. Sewage Sludge Lagoons (Instructions Page 53)

Does this facility include sewage sludge lagoons?

Yes No

If yes, complete the remainder of this section. If no, proceed to Section 12.

A. Location information

The following maps are required to be submitted as part of the application. For each map, provide the Attachment Number.

- Original General Highway (County) Map:
Attachment: [Click to enter text.](#)
- USDA Natural Resources Conservation Service Soil Map:
Attachment: [Click to enter text.](#)
- Federal Emergency Management Map:
Attachment: [Click to enter text.](#)
- Site map:
Attachment: [Click to enter text.](#)

Discuss in a description if any of the following exist within the lagoon area. Check all that apply.

- Overlap a designated 100-year frequency flood plain
- Soils with flooding classification
- Overlap an unstable area
- Wetlands
- Located less than 60 meters from a fault
- None of the above

Attachment: N/A

If a portion of the lagoon(s) is located within the 100-year frequency flood plain, provide the protective measures to be utilized including type and size of protective structures:

N/A

B. Temporary storage information

Provide the results for the pollutant screening of sludge lagoons. These results are in addition to pollutant results in *Section 7 of Technical Report 1.0*.

Nitrate Nitrogen, mg/kg: [Click to enter text.](#)

Total Kjeldahl Nitrogen, mg/kg: [Click to enter text.](#)

Total Nitrogen (=nitrate nitrogen + TKN), mg/kg: [Click to enter text.](#)

Phosphorus, mg/kg: [Click to enter text.](#)

Potassium, mg/kg: [Click to enter text.](#)

pH, standard units: [Click to enter text.](#)

Ammonia Nitrogen mg/kg: [Click to enter text.](#)

Arsenic: [Click to enter text.](#)

Cadmium: [Click to enter text.](#)

Chromium: [Click to enter text.](#)

Copper: [Click to enter text.](#)

Lead: [Click to enter text.](#)

Mercury: [Click to enter text.](#)

Molybdenum: [Click to enter text.](#)

Nickel: [Click to enter text.](#)

Selenium: [Click to enter text.](#)

Zinc: [Click to enter text.](#)

Total PCBs: [Click to enter text.](#)

Provide the following information:

Volume and frequency of sludge to the lagoon(s): [Click to enter text.](#)

Total dry tons stored in the lagoons(s) per 365-day period: [Click to enter text.](#)

Total dry tons stored in the lagoons(s) over the life of the unit: [Click to enter text.](#)

C. Liner information

Does the active/proposed sludge lagoon(s) have a liner with a maximum hydraulic conductivity of 1×10^{-7} cm/sec?

Yes No

If yes, describe the liner below. Please note that a liner is required.

N/A

D. Site development plan

Provide a detailed description of the methods used to deposit sludge in the lagoon(s):

N/A

Attach the following documents to the application.

- Plan view and cross-section of the sludge lagoon(s)
Attachment: [Click to enter text.](#)
- Copy of the closure plan
Attachment: [Click to enter text.](#)
- Copy of deed recordation for the site
Attachment: [Click to enter text.](#)
- Size of the sludge lagoon(s) in surface acres and capacity in cubic feet and gallons
Attachment: [Click to enter text.](#)
- Description of the method of controlling infiltration of groundwater and surface water from entering the site
Attachment: [Click to enter text.](#)
- Procedures to prevent the occurrence of nuisance conditions
Attachment: [Click to enter text.](#)

E. Groundwater monitoring

Is groundwater monitoring currently conducted at this site, or are any wells available for groundwater monitoring, or are groundwater monitoring data otherwise available for the sludge lagoon(s)?

- Yes No

If groundwater monitoring data are available, provide a copy. Provide a profile of soil types encountered down to the groundwater table and the depth to the shallowest groundwater as a separate attachment.

Attachment: [Click to enter text.](#)

Section 12. Authorizations/Compliance/Enforcement (Instructions Page 55)

A. Additional authorizations

Does the permittee have additional authorizations for this facility, such as reuse authorization, sludge permit, etc?

Yes No

If yes, provide the TCEQ authorization number and description of the authorization:

N/A

B. Permittee enforcement status

Is the permittee currently under enforcement for this facility?

Yes No

Is the permittee required to meet an implementation schedule for compliance or enforcement?

Yes No

If yes to either question, provide a brief summary of the enforcement, the implementation schedule, and the current status:

N/A

Section 13. RCRA/CERCLA Wastes (Instructions Page 55)

A. RCRA hazardous wastes

Has the facility received in the past three years, does it currently receive, or will it receive RCRA hazardous waste?

Yes No

B. Remediation activity wastewater

Has the facility received in the past three years, does it currently receive, or will it receive CERCLA wastewater, RCRA remediation/corrective action wastewater or other remediation activity wastewater?

Yes No

C. Details about wastes received

If **yes** to either Subsection A or B above, provide detailed information concerning these wastes with the application.

Attachment: N/A

Section 14. Laboratory Accreditation (Instructions Page 56)

All laboratory tests performed must meet the requirements of *30 TAC Chapter 25, Environmental Testing Laboratory Accreditation and Certification*, which includes the following general exemptions from National Environmental Laboratory Accreditation Program (NELAP) certification requirements:

- The laboratory is an in-house laboratory and is:
 - periodically inspected by the TCEQ; or
 - located in another state and is accredited or inspected by that state; or
 - performing work for another company with a unit located in the same site; or
 - performing pro bono work for a governmental agency or charitable organization.
- The laboratory is accredited under federal law.
- The data are needed for emergency-response activities, and a laboratory accredited under the Texas Laboratory Accreditation Program is not available.
- The laboratory supplies data for which the TCEQ does not offer accreditation.

The applicant should review 30 TAC Chapter 25 for specific requirements.

The following certification statement shall be signed and submitted with every application. See the Signature Page section in the Instructions, for a list of designated representatives who may sign the certification.

CERTIFICATION:

I certify that all laboratory tests submitted with this application meet the requirements of *30 TAC Chapter 25, Environmental Testing Laboratory Accreditation and Certification*.

Printed Name: N/A

Title: N/A

Signature: _____

Date: _____

DOMESTIC WASTEWATER PERMIT APPLICATION TECHNICAL REPORT 1.1

The following information is required for new and amendment major applications.

Section 1. Justification for Permit (Instructions Page 57)

A. Justification of permit need

Provide a detailed discussion regarding the need for any phase(s) not currently permitted. Failure to provide sufficient justification may result in the Executive Director recommending denial of the proposed phase(s) or permit.

Due to the overall phasing and growth planned, all phases will need to be completed according to Attachment L. The completion dates for each phase can be found on page 1 of Domestic Technical Report 1.0.

B. Regionalization of facilities

For additional guidance, please review [TCEQ's Regionalization Policy for Wastewater Treatment](#)¹.

Provide the following information concerning the potential for regionalization of domestic wastewater treatment facilities:

1. Municipally incorporated areas

If the applicant is a city, then Item 1 is not applicable. Proceed to Item 2 Utility CCN areas.

Is any portion of the proposed service area located in an incorporated city?

Yes No Not Applicable

If yes, within the city limits of: [Click to enter text.](#)

If yes, attach correspondence from the city.

Attachment: [Click to enter text.](#)

If consent to provide service is available from the city, attach a justification for the proposed facility and a cost analysis of expenditures that includes the cost of connecting to the city versus the cost of the proposed facility or expansion attached.

Attachment: [Click to enter text.](#)

2. Utility CCN areas

Is any portion of the proposed service area located inside another utility's CCN area?

Yes No

¹ <https://www.tceq.texas.gov/permitting/wastewater/tceq-regionalization-for-wastewater>

If **yes**, attach a justification for the proposed facility and a cost analysis of expenditures that includes the cost of connecting to the CCN facilities versus the cost of the proposed facility or expansion.

Attachment: [Click to enter text.](#)

3. *Nearby WWTPs or collection systems*

Are there any domestic permitted wastewater treatment facilities or collection systems located within a three-mile radius of the proposed facility?

Yes No

If **yes**, attach a list of these facilities and collection systems that includes each permittee's name and permit number, and an area map showing the location of these facilities and collection systems.

Attachment: [Attachment P](#)

If **yes**, attach proof of mailing a request for service to each facility and collection system, the letters requesting service, and correspondence from each facility and collection system.

Attachment: [Attachment P](#)

If the facility or collection system agrees to provide service, attach a justification for the proposed facility and a cost analysis of expenditures that includes the cost of connecting to the facility or collection system versus the cost of the proposed facility or expansion.

Attachment: [N/A](#)

Section 2. Proposed Organic Loading (Instructions Page 59)

Is this facility in operation?

Yes No

If **no**, proceed to Item B, Proposed Organic Loading.

If **yes**, provide organic loading information in Item A, Current Organic Loading

A. Current organic loading

Facility Design Flow (flow being requested in application): [Click to enter text.](#)

Average Influent Organic Strength or BOD₅ Concentration in mg/l: [Click to enter text.](#)

Average Influent Loading (lbs/day = total average flow X average BOD₅ conc. X 8.34): [Click to enter text.](#)

Provide the source of the average organic strength or BOD₅ concentration.

[Click to enter text.](#)

B. Proposed organic loading

This table must be completed if this application is for a facility that is not in operation or if this application is to request an increased flow that will impact organic loading.

Table 1.1(1) – Design Organic Loading

Source	Total Average Flow (MGD)	Influent BOD5 Concentration (mg/l)
Municipality		
Subdivision	.075	300
Trailer park - transient		
Mobile home park		
School with cafeteria and showers		
School with cafeteria, no showers		
Recreational park, overnight use		
Recreational park, day use		
Office building or factory		
Motel		
Restaurant		
Hospital		
Nursing home		
Other		
TOTAL FLOW from all sources	.075	
AVERAGE BOD ₅ from all sources		300

Section 3. Proposed Effluent Quality and Disinfection (Instructions Page 59)

A. Existing/Interim I Phase Design Effluent Quality

Biochemical Oxygen Demand (5-day), mg/l: 10

Total Suspended Solids, mg/l: 15

Ammonia Nitrogen, mg/l: 3

Total Phosphorus, mg/l: N/A

Dissolved Oxygen, mg/l: 2

Other: N/A

B. Interim II Phase Design Effluent Quality

Biochemical Oxygen Demand (5-day), mg/l: [Click to enter text.](#)

Total Suspended Solids, mg/l: [Click to enter text.](#)

Ammonia Nitrogen, mg/l: [Click to enter text.](#)

Total Phosphorus, mg/l: [Click to enter text.](#)

Dissolved Oxygen, mg/l: [Click to enter text.](#)

Other:

C. Final Phase Design Effluent Quality

Biochemical Oxygen Demand (5-day), mg/l: 10

Total Suspended Solids, mg/l: 15

Ammonia Nitrogen, mg/l: 3

Total Phosphorus, mg/l: N/A

Dissolved Oxygen, mg/l: 2

Other: N/A

D. Disinfection Method

Identify the proposed method of disinfection.

Chlorine: 2 mg/l after 20 minutes detention time at peak flow

Dechlorination process: [Click to enter text.](#)

Ultraviolet Light: [Click to enter text.](#) seconds contact time at peak flow

Other: [Click to enter text.](#)

Section 4. Design Calculations (Instructions Page 59)

Attach design calculations and plant features for each proposed phase. Example 4 of the instructions includes sample design calculations and plant features.

Attachment: [See attachment H](#)

Section 5. Facility Site (Instructions Page 60)

A. 100-year floodplain

Will the proposed facilities be located above the 100-year frequency flood level?

Yes No

If **no**, describe measures used to protect the facility during a flood event. Include a site map showing the location of the treatment plant within the 100-year frequency flood level. If applicable, provide the size and types of protective structures.

N/A

Provide the source(s) used to determine 100-year frequency flood plain.

For a new or expansion of a facility, will a wetland or part of a wetland be filled?

Yes No

If **yes**, has the applicant applied for a US Corps of Engineers 404 Dredge and Fill Permit?

Yes No

If **yes**, provide the permit number: [Click to enter text.](#)

If **no**, provide the approximate date you anticipate submitting your application to the Corps: [Click to enter text.](#)

B. Wind rose

Attach a wind rose: [Attachment J](#)

Section 6. Permit Authorization for Sewage Sludge Disposal (Instructions Page 60)

A. Beneficial use authorization

Are you requesting to include authorization to land apply sewage sludge for beneficial use on property located adjacent to the wastewater treatment facility under the wastewater permit?

Yes No

If **yes**, attach the completed **Application for Permit for Beneficial Land Use of Sewage Sludge (TCEQ Form No. 10451)**: [Click to enter text.](#)

B. Sludge processing authorization

Identify the sludge processing, storage or disposal options that will be conducted at the wastewater treatment facility:

- Sludge Composting
- Marketing and Distribution of sludge
- Sludge Surface Disposal or Sludge Monofill

If **any of the above**, sludge options are selected, attach the completed **Domestic Wastewater Permit Application: Sewage Sludge Technical Report (TCEQ Form No. 10056)**: [Click to enter text.](#)

Section 7. Sewage Sludge Solids Management Plan (Instructions Page 61)

Attach a solids management plan to the application.

Attachment: [Attachment I](#)

The sewage sludge solids management plan must contain the following information:

- Treatment units and processes dimensions and capacities
- Solids generated at 100, 75, 50, and 25 percent of design flow
- Mixed liquor suspended solids operating range at design and projected actual flow

- Quantity of solids to be removed and a schedule for solids removal
- Identification and ownership of the ultimate sludge disposal site
- For facultative lagoons, design life calculations, monitoring well locations and depths, and the ultimate disposal method for the sludge from the facultative lagoon

An example of a sewage sludge solids management plan has been included as Example 5 of the instructions.

DOMESTIC WASTEWATER PERMIT APPLICATION WORKSHEET 2.0: RECEIVING WATERS

The following information is required for all TPDES permit applications.

Section 1. Domestic Drinking Water Supply (Instructions Page 64)

Is there a surface water intake for domestic drinking water supply located within 5 miles downstream from the point or proposed point of discharge?

Yes No

If **no**, proceed to Section 2. If **yes**, provide the following:

Owner of the drinking water supply: [Click to enter text.](#)

Distance and direction to the intake: [Click to enter text.](#)

Attach a USGS map that identifies the location of the intake.

Attachment: [Click to enter text.](#)

Section 2. Discharge into Tidally Affected Waters (Instructions Page 64)

Does the facility discharge into tidally affected waters?

Yes No

If **no**, proceed to Section 3. If **yes**, complete the remainder of this section. If no, proceed to Section 3.

A. Receiving water outfall

Width of the receiving water at the outfall, in feet: [Click to enter text.](#)

B. Oyster waters

Are there oyster waters in the vicinity of the discharge?

Yes No

If **yes**, provide the distance and direction from outfall(s).

N/A

C. Sea grasses

Are there any sea grasses within the vicinity of the point of discharge?

Yes No

If **yes**, provide the distance and direction from the outfall(s).

N/A

Section 3. Classified Segments (Instructions Page 64)

Is the discharge directly into (or within 300 feet of) a classified segment?

Yes No

If **yes**, this Worksheet is complete.

If **no**, complete Sections 4 and 5 of this Worksheet.

Section 4. Description of Immediate Receiving Waters (Instructions Page 65)

Name of the immediate receiving waters: Mound Creek Segment 1015A

A. Receiving water type

Identify the appropriate description of the receiving waters.

- Stream
- Freshwater Swamp or Marsh
- Lake or Pond

Surface area, in acres: Click to enter text.

Average depth of the entire water body, in feet: Click to enter text.

Average depth of water body within a 500-foot radius of discharge point, in feet:
Click to enter text.

- Man-made Channel or Ditch
- Open Bay
- Tidal Stream, Bayou, or Marsh
- Other, specify: Click to enter text.

B. Flow characteristics

If a stream, man-made channel or ditch was checked above, provide the following. For existing discharges, check one of the following that best characterizes the area *upstream* of the discharge. For new discharges, characterize the area *downstream* of the discharge (check one).

- Intermittent - dry for at least one week during most years
- Intermittent with Perennial Pools - enduring pools with sufficient habitat to maintain significant aquatic life uses
- Perennial - normally flowing

Check the method used to characterize the area upstream (or downstream for new dischargers).

- USGS flow records
- Historical observation by adjacent landowners
- Personal observation
- Other, specify: Click to enter text.

C. Downstream perennial confluences

List the names of all perennial streams that join the receiving water within three miles downstream of the discharge point.

Mound Creek

D. Downstream characteristics

Do the receiving water characteristics change within three miles downstream of the discharge (e.g., natural or man-made dams, ponds, reservoirs, etc.)?

- Yes No

If yes, discuss how.

E. Normal dry weather characteristics

Provide general observations of the water body during normal dry weather conditions.

The immediate downstream waterbody (freshwater stream) is dry during dry weather.

Date and time of observation: September 13,2024

Was the water body influenced by stormwater runoff during observations?

- Yes No

Section 5. General Characteristics of the Waterbody (Instructions Page 66)

A. Upstream influences

Is the immediate receiving water upstream of the discharge or proposed discharge site influenced by any of the following? Check all that apply.

- | | |
|---|--|
| <input type="checkbox"/> Oil field activities | <input type="checkbox"/> Urban runoff |
| <input type="checkbox"/> Upstream discharges | <input checked="" type="checkbox"/> Agricultural runoff |
| <input type="checkbox"/> Septic tanks | <input type="checkbox"/> Other(s), specify: Click to enter text. |

B. Waterbody uses

Observed or evidences of the following uses. Check all that apply.

- | | |
|--|--|
| <input type="checkbox"/> Livestock watering | <input type="checkbox"/> Contact recreation |
| <input type="checkbox"/> Irrigation withdrawal | <input checked="" type="checkbox"/> Non-contact recreation |
| <input type="checkbox"/> Fishing | <input type="checkbox"/> Navigation |
| <input type="checkbox"/> Domestic water supply | <input type="checkbox"/> Industrial water supply |
| <input type="checkbox"/> Park activities | <input type="checkbox"/> Other(s), specify: Click to enter text. |

C. Waterbody aesthetics

Check one of the following that best describes the aesthetics of the receiving water and the surrounding area.

- Wilderness: outstanding natural beauty; usually wooded or unpastured area; water clarity exceptional
- Natural Area: trees and/or native vegetation; some development evident (from fields, pastures, dwellings); water clarity discolored
- Common Setting: not offensive; developed but uncluttered; water may be colored or turbid
- Offensive: stream does not enhance aesthetics; cluttered; highly developed; dumping areas; water discolored

Attachment A – Core Data Form



TCEQ Core Data Form

For detailed instructions on completing this form, please read the Core Data Form Instructions or call 512-239-5175.

SECTION I: General Information

1. Reason for Submission (If other is checked please describe in space provided.)		
<input checked="" type="checkbox"/> New Permit, Registration or Authorization (Core Data Form should be submitted with the program application.)		
<input type="checkbox"/> Renewal (Core Data Form should be submitted with the renewal form)	<input type="checkbox"/> Other	
2. Customer Reference Number (if issued)	Follow this link to search for CN or RN numbers in Central Registry**	3. Regulated Entity Reference Number (if issued)
CN 603792359		RN

SECTION II: Customer Information

4. General Customer Information		5. Effective Date for Customer Information Updates (mm/dd/yyyy)	
<input checked="" type="checkbox"/> New Customer		<input type="checkbox"/> Update to Customer Information	
<input type="checkbox"/> Change in Legal Name (Verifiable with the Texas Secretary of State or Texas Comptroller of Public Accounts)		<input type="checkbox"/> Change in Regulated Entity Ownership	
<i>The Customer Name submitted here may be updated automatically based on what is current and active with the Texas Secretary of State (SOS) or Texas Comptroller of Public Accounts (CPA).</i>			
6. Customer Legal Name (If an individual, print last name first: eg: Doe, John)		<i>If new Customer, enter previous Customer below:</i>	
M/I Homes of Houston, LLC			
7. TX SOS/CPA Filing Number	8. TX State Tax ID (11 digits)	9. Federal Tax ID (9 digits)	10. DUNS Number (if applicable)
	32041526461		
11. Type of Customer:		Partnership: <input type="checkbox"/> General <input type="checkbox"/> Limited	
<input type="checkbox"/> Corporation		<input type="checkbox"/> Individual	
Government: <input type="checkbox"/> City <input type="checkbox"/> County <input type="checkbox"/> Federal <input type="checkbox"/> Local <input type="checkbox"/> State <input checked="" type="checkbox"/> Other		<input type="checkbox"/> Sole Proprietorship	
<input checked="" type="checkbox"/> Other: Texas LLC			
12. Number of Employees		13. Independently Owned and Operated?	
<input type="checkbox"/> 0-20 <input checked="" type="checkbox"/> 21-100 <input type="checkbox"/> 101-250 <input type="checkbox"/> 251-500 <input type="checkbox"/> 501 and higher		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
14. Customer Role (Proposed or Actual) – as it relates to the Regulated Entity listed on this form. Please check one of the following			
<input type="checkbox"/> Owner <input type="checkbox"/> Operator <input checked="" type="checkbox"/> Owner & Operator <input type="checkbox"/> Other:			
<input type="checkbox"/> Occupational Licensee <input type="checkbox"/> Responsible Party <input type="checkbox"/> VCP/BSA Applicant			
15. Mailing Address: 1720 W Sam Houston Parkway N.			
Suite 100			
City	Houston	State	TX
ZIP	77064	ZIP + 4	
16. Country Mailing Information (if outside USA)		17. E-Mail Address (if applicable)	
		BBoozer@mihomes.com	
18. Telephone Number	19. Extension or Code	20. Fax Number (if applicable)	

SECTION III: Regulated Entity Information**21. General Regulated Entity Information** (If "New Regulated Entity" is selected, a new permit application is also required.) New Regulated Entity Update to Regulated Entity Name Update to Regulated Entity Information*The Regulated Entity Name submitted may be updated, in order to meet TCEQ Core Data Standards (removal of organizational endings such as Inc, LP, or LLC).***22. Regulated Entity Name** (Enter name of the site where the regulated action is taking place.)

Kinkaid Road Wastewater Treatment Plant

23. Street Address of the Regulated Entity:

19971 FM 2854 Rd

(No PO Boxes)

City	Montgomery	State	TX	ZIP	77064	ZIP + 4	
------	------------	-------	----	-----	-------	---------	--

24. County

Montgomery County

If no Street Address is provided, fields 25-28 are required.

25. Description to**Physical Location:****26. Nearest City****State****Nearest ZIP Code***Latitude/Longitude are required and may be added/updated to meet TCEQ Core Data Standards. (Geocoding of the Physical Address may be used to supply coordinates where none have been provided or to gain accuracy).***27. Latitude (N) In Decimal:**

30.346572

28. Longitude (W) In Decimal:

95.652747

Degrees

Minutes

Seconds

Degrees

Minutes

Seconds

30

20

47.66

95

39

09.89

29. Primary SIC Code**30. Secondary SIC Code****31. Primary NAICS Code****32. Secondary NAICS Code**

(4 digits)

(4 digits)

(5 or 6 digits)

(5 or 6 digits)

6500

6552

33. What is the Primary Business of this entity? (Do not repeat the SIC or NAICS description.)

Real Estate

34. Mailing

1720 W Sam Houston Parkway N.

Address:

Suite 100

City

Houston

State

TX

ZIP

77064

ZIP + 4

35. E-Mail Address:

BBoozer@mihomes.com

36. Telephone Number**37. Extension or Code****38. Fax Number** (if applicable)

(832) 623-15

() -

39. TCEQ Programs and ID Numbers Check all Programs and write in the permits/registration numbers that will be affected by the updates submitted on this form. See the Core Data Form instructions for additional guidance.

<input type="checkbox"/> Dam Safety	<input type="checkbox"/> Districts	<input type="checkbox"/> Edwards Aquifer	<input type="checkbox"/> Emissions Inventory Air	<input type="checkbox"/> Industrial Hazardous Waste
<input type="checkbox"/> Municipal Solid Waste	<input type="checkbox"/> New Source Review Air	<input type="checkbox"/> OSSF	<input type="checkbox"/> Petroleum Storage Tank	<input type="checkbox"/> PWS
<input type="checkbox"/> Sludge	<input type="checkbox"/> Storm Water	<input type="checkbox"/> Title V Air	<input type="checkbox"/> Tires	<input type="checkbox"/> Used Oil
<input type="checkbox"/> Voluntary Cleanup	<input checked="" type="checkbox"/> Wastewater	<input type="checkbox"/> Wastewater Agriculture	<input type="checkbox"/> Water Rights	<input type="checkbox"/> Other:

SECTION IV: Preparer Information

40. Name:	Jonathan White		41. Title:	Professional Engineer
42. Telephone Number	43. Ext./Code	44. Fax Number	45. E-Mail Address	
(936) 647-0420		() -	Jwhite@L2Engineering.com	

SECTION V: Authorized Signature

46. By my signature below, I certify, to the best of my knowledge, that the information provided in this form is true and complete, and that I have signature authority to submit this form on behalf of the entity specified in Section II, Field 6 and/or as required for the updates to the ID numbers identified in field 39.

Company:	M/I Homes of Houston, LLC	Job Title:	Owner/Operator	
Name (In Print):	Brannon Boozer	Phone:	(832) 623- 0015	
Signature:		Date:	9/12/24	

Attachment B – Public Involvement Plan



Texas Commission on Environmental Quality

Public Involvement Plan Form for Permit and Registration Applications

The Public Involvement Plan is intended to provide applicants and the agency with information about how public outreach will be accomplished for certain types of applications in certain geographical areas of the state. It is intended to apply to new activities; major changes at existing plants, facilities, and processes; and to activities which are likely to have significant interest from the public. This preliminary screening is designed to identify applications that will benefit from an initial assessment of the need for enhanced public outreach.

All applicable sections of this form should be completed and submitted with the permit or registration application. For instructions on how to complete this form, see TCEQ-20960-inst.

Section 1. Preliminary Screening

New Permit or Registration Application

New Activity - modification, registration, amendment, facility, etc. (see instructions)

If neither of the above boxes are checked, completion of the form is not required and does not need to be submitted.

Section 2. Secondary Screening

Requires public notice,

Considered to have significant public interest, **and**

Located within any of the following geographical locations:

- Austin
- Dallas
- Fort Worth
- Houston
- San Antonio
- West Texas
- Texas Panhandle
- Along the Texas/Mexico Border
- Other geographical locations should be decided on a case-by-case basis

**If all the above boxes are not checked, a Public Involvement Plan is not necessary.
Stop after Section 2 and submit the form.**

Public Involvement Plan not applicable to this application. Provide **brief** explanation.

Section 5. Community and Demographic Information

Community information can be found using EPA's EJ Screen, U.S. Census Bureau information, or generally available demographic tools.

Information gathered in this section can assist with the determination of whether alternative language notice is necessary. Please provide the following information.

(City)

(County)

(Census Tract)

Please indicate which of these three is the level used for gathering the following information.

City

County

Census Tract

- (a) Percent of people over 25 years of age who at least graduated from high school

- (b) Per capita income for population near the specified location

- (c) Percent of minority population and percent of population by race within the specified location

- (d) Percent of Linguistically Isolated Households by language within the specified location

- (e) Languages commonly spoken in area by percentage

- (f) Community and/or Stakeholder Groups

- (g) Historic public interest or involvement

Section 6. Planned Public Outreach Activities

(a) Is this application subject to the public participation requirements of Title 30 Texas Administrative Code (30 TAC) Chapter 39?

Yes No

(b) If yes, do you intend at this time to provide public outreach other than what is required by rule?

Yes No

If Yes, please describe.

If you answered “yes” that this application is subject to 30 TAC Chapter 39, answering the remaining questions in Section 6 is not required.

(c) Will you provide notice of this application in alternative languages?

Yes No

Please refer to Section 5. If more than 5% of the population potentially affected by your application is Limited English Proficient, then you are required to provide notice in the alternative language.

If yes, how will you provide notice in alternative languages?

- Publish in alternative language newspaper
- Posted on Commissioner’s Integrated Database Website
- Mailed by TCEQ’s Office of the Chief Clerk
- Other (specify)

(d) Is there an opportunity for some type of public meeting, including after notice?

Yes No

(e) If a public meeting is held, will a translator be provided if requested?

Yes No

(f) Hard copies of the application will be available at the following (check all that apply):

- TCEQ Regional Office TCEQ Central Office
- Public Place (specify)

Section 7. Voluntary Submittal

For applicants voluntarily providing this Public Involvement Plan, who are not subject to formal public participation requirements.

Will you provide notice of this application, including notice in alternative languages?

Yes No

What types of notice will be provided?

- Publish in alternative language newspaper
- Posted on Commissioner’s Integrated Database Website
- Mailed by TCEQ’s Office of the Chief Clerk
- Other (specify)


Attachment C – USGS Maps



U.S. DEPARTMENT OF THE INTERIOR
U.S. GEOLOGICAL SURVEY



KEENAN QUADRANGLE
TEXAS - MONTGOMERY COUNTY
7.5-MINUTE SERIES


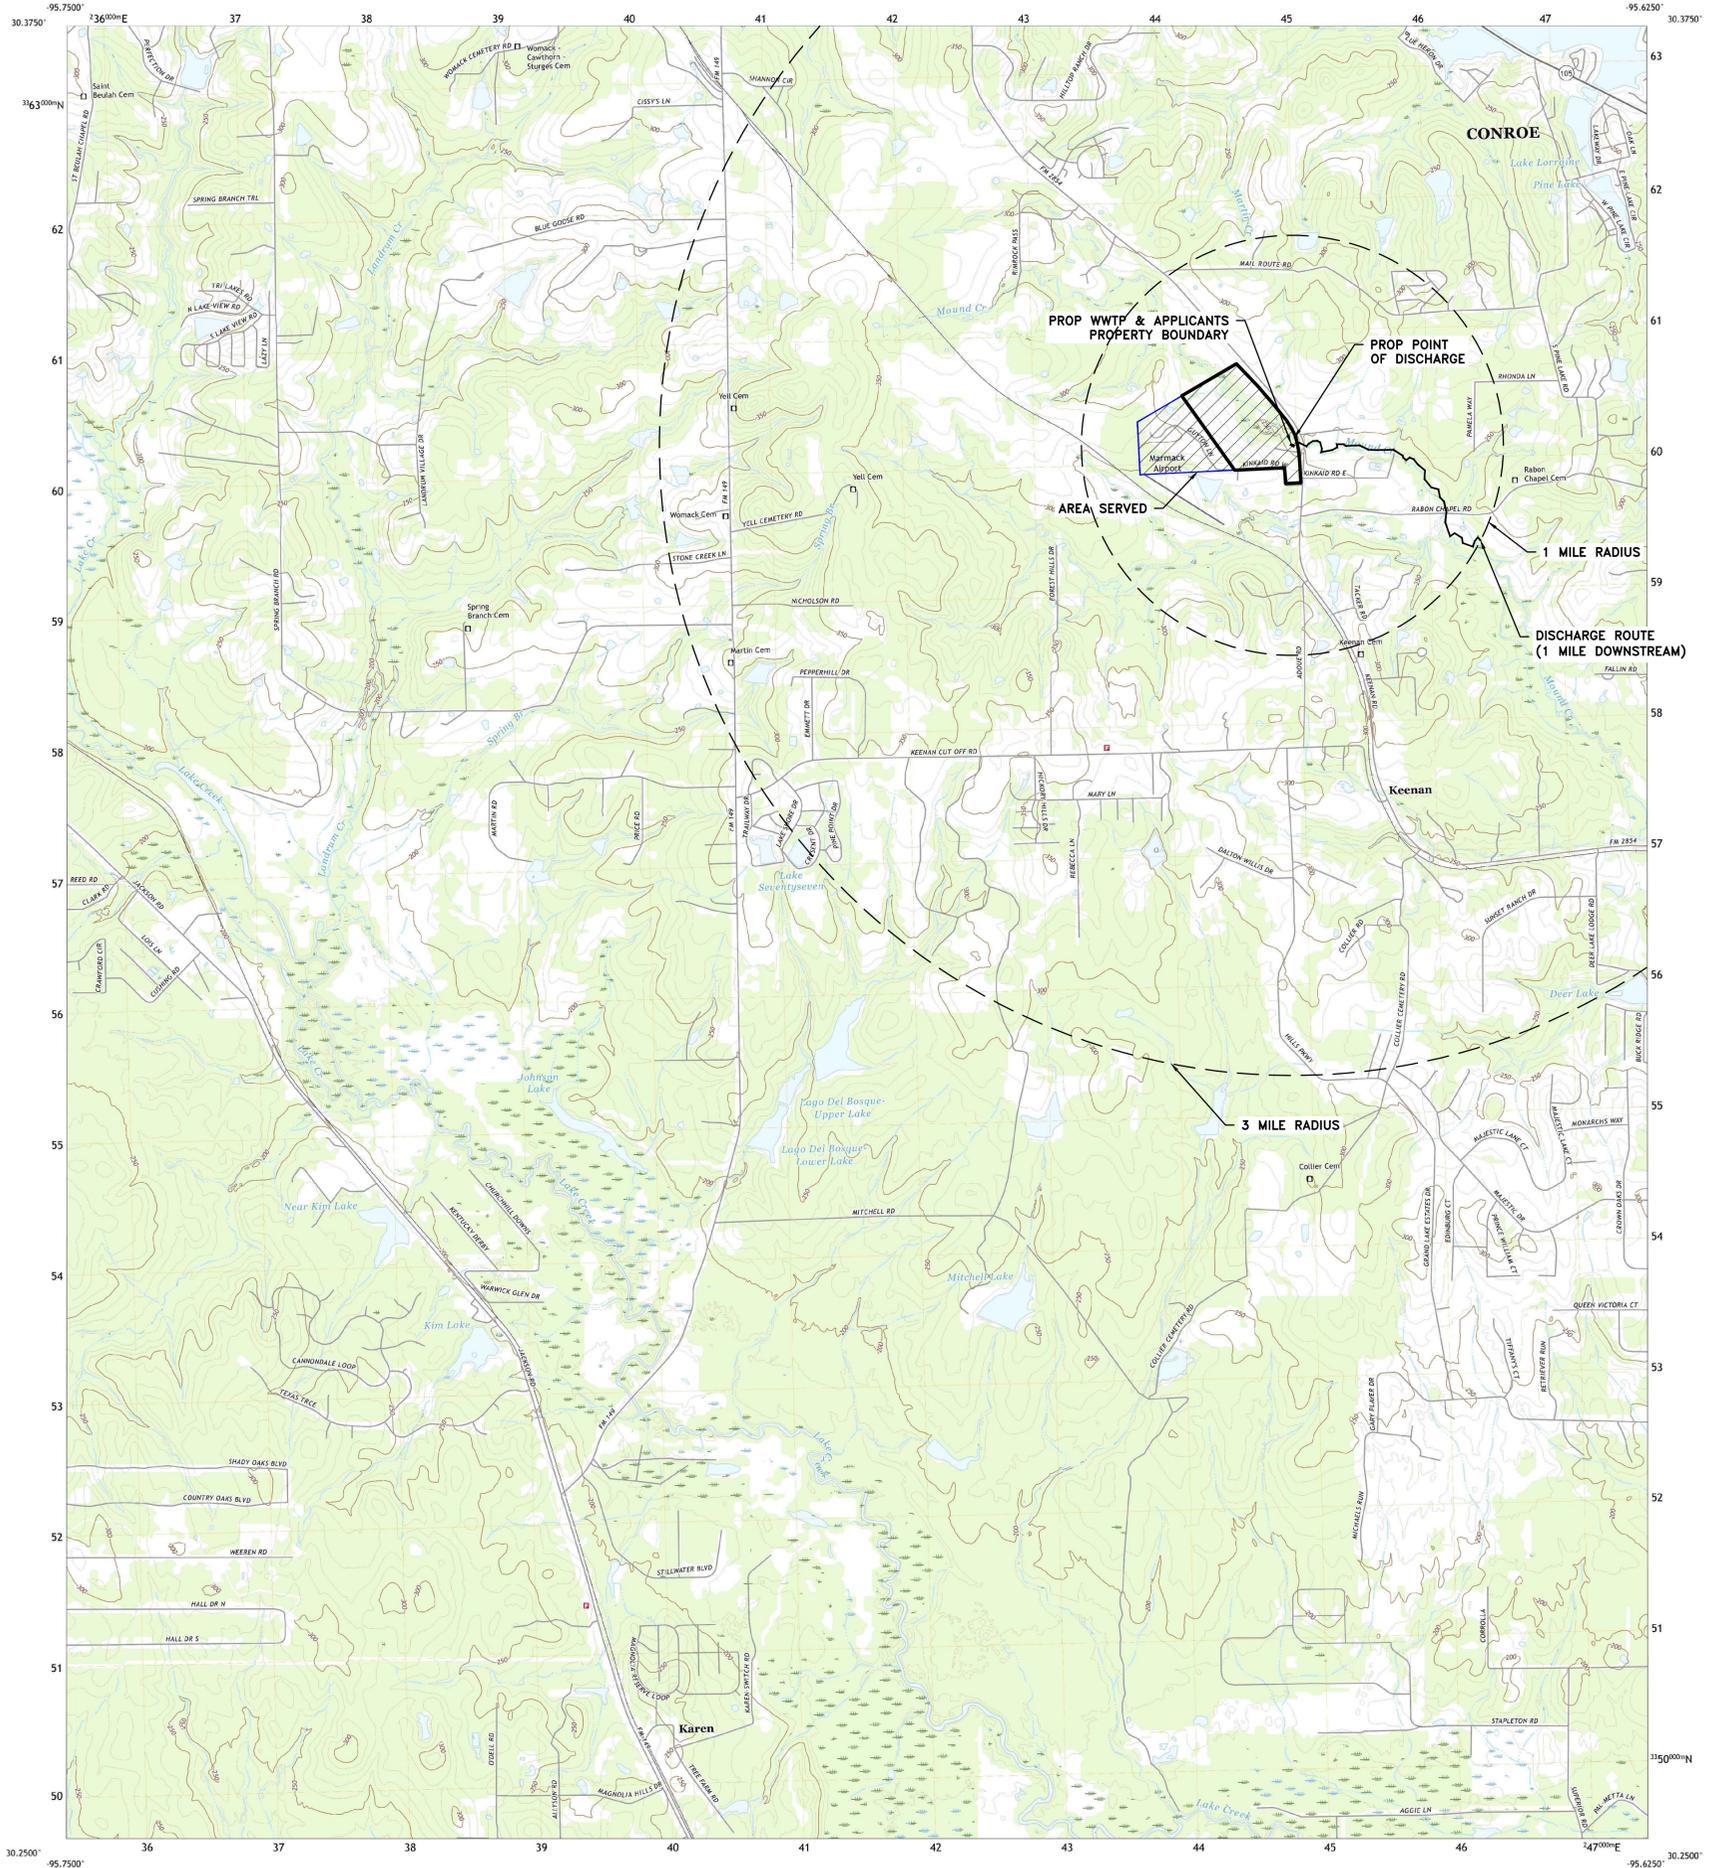


L SQUARED ENGINEERING

Produced by the United States Geological Survey

North American Datum of 1983 (NAD83)
World Geodetic System of 1984 (WGS84). Projection and
1:200-meter grid/contour interval. Traverse Mercator, Zone 15R.
This map is not a legal document. Boundaries may be
generalized for this map scale. Private lands within government
reservations may not be shown. Obtain permission before
entering private lands.

Imagery:NADP, September 2016, November 2016
Roads:U.S. Census Bureau, 2013
Names:GNIS, 1979 - 2022
Hydrography:National Hydrography Dataset, 2003 - 2018
Contours:National Elevation Dataset, 2010
Boundaries:Multiple sources, see metadata file, 2019 - 2021
Wetlands:FWS National Wetlands Inventory, Not Available



1	2	3
4	5	6
7	8	9

1 Davis
2 Montgomery
3 Shepard Hill
4 Plosterville
5 Cowi Spur
6 Magnolia West
7 Magnolia East
8 Oklahoma

ROAD CLASSIFICATION	
	Expressway
	Secondary Hwy
	Ramp
	Local Connector
	Local Road
	4WD
	US Route
	State Route

CONTOUR INTERVAL 10 FEET
NORTH AMERICAN VERTICAL DATUM OF 1988
This map was produced to conform with the
National Geospatial Program US Topo Product Standard.

KEENAN, TX
2022




NSN 7540-01-000-1000
NCA REF NO. U.S. G.S. 3035



U.S. DEPARTMENT OF THE INTERIOR
U.S. GEOLOGICAL SURVEY





MONTGOMERY QUADRANGLE
TEXAS - MONTGOMERY COUNTY
7.5-MINUTE SERIES

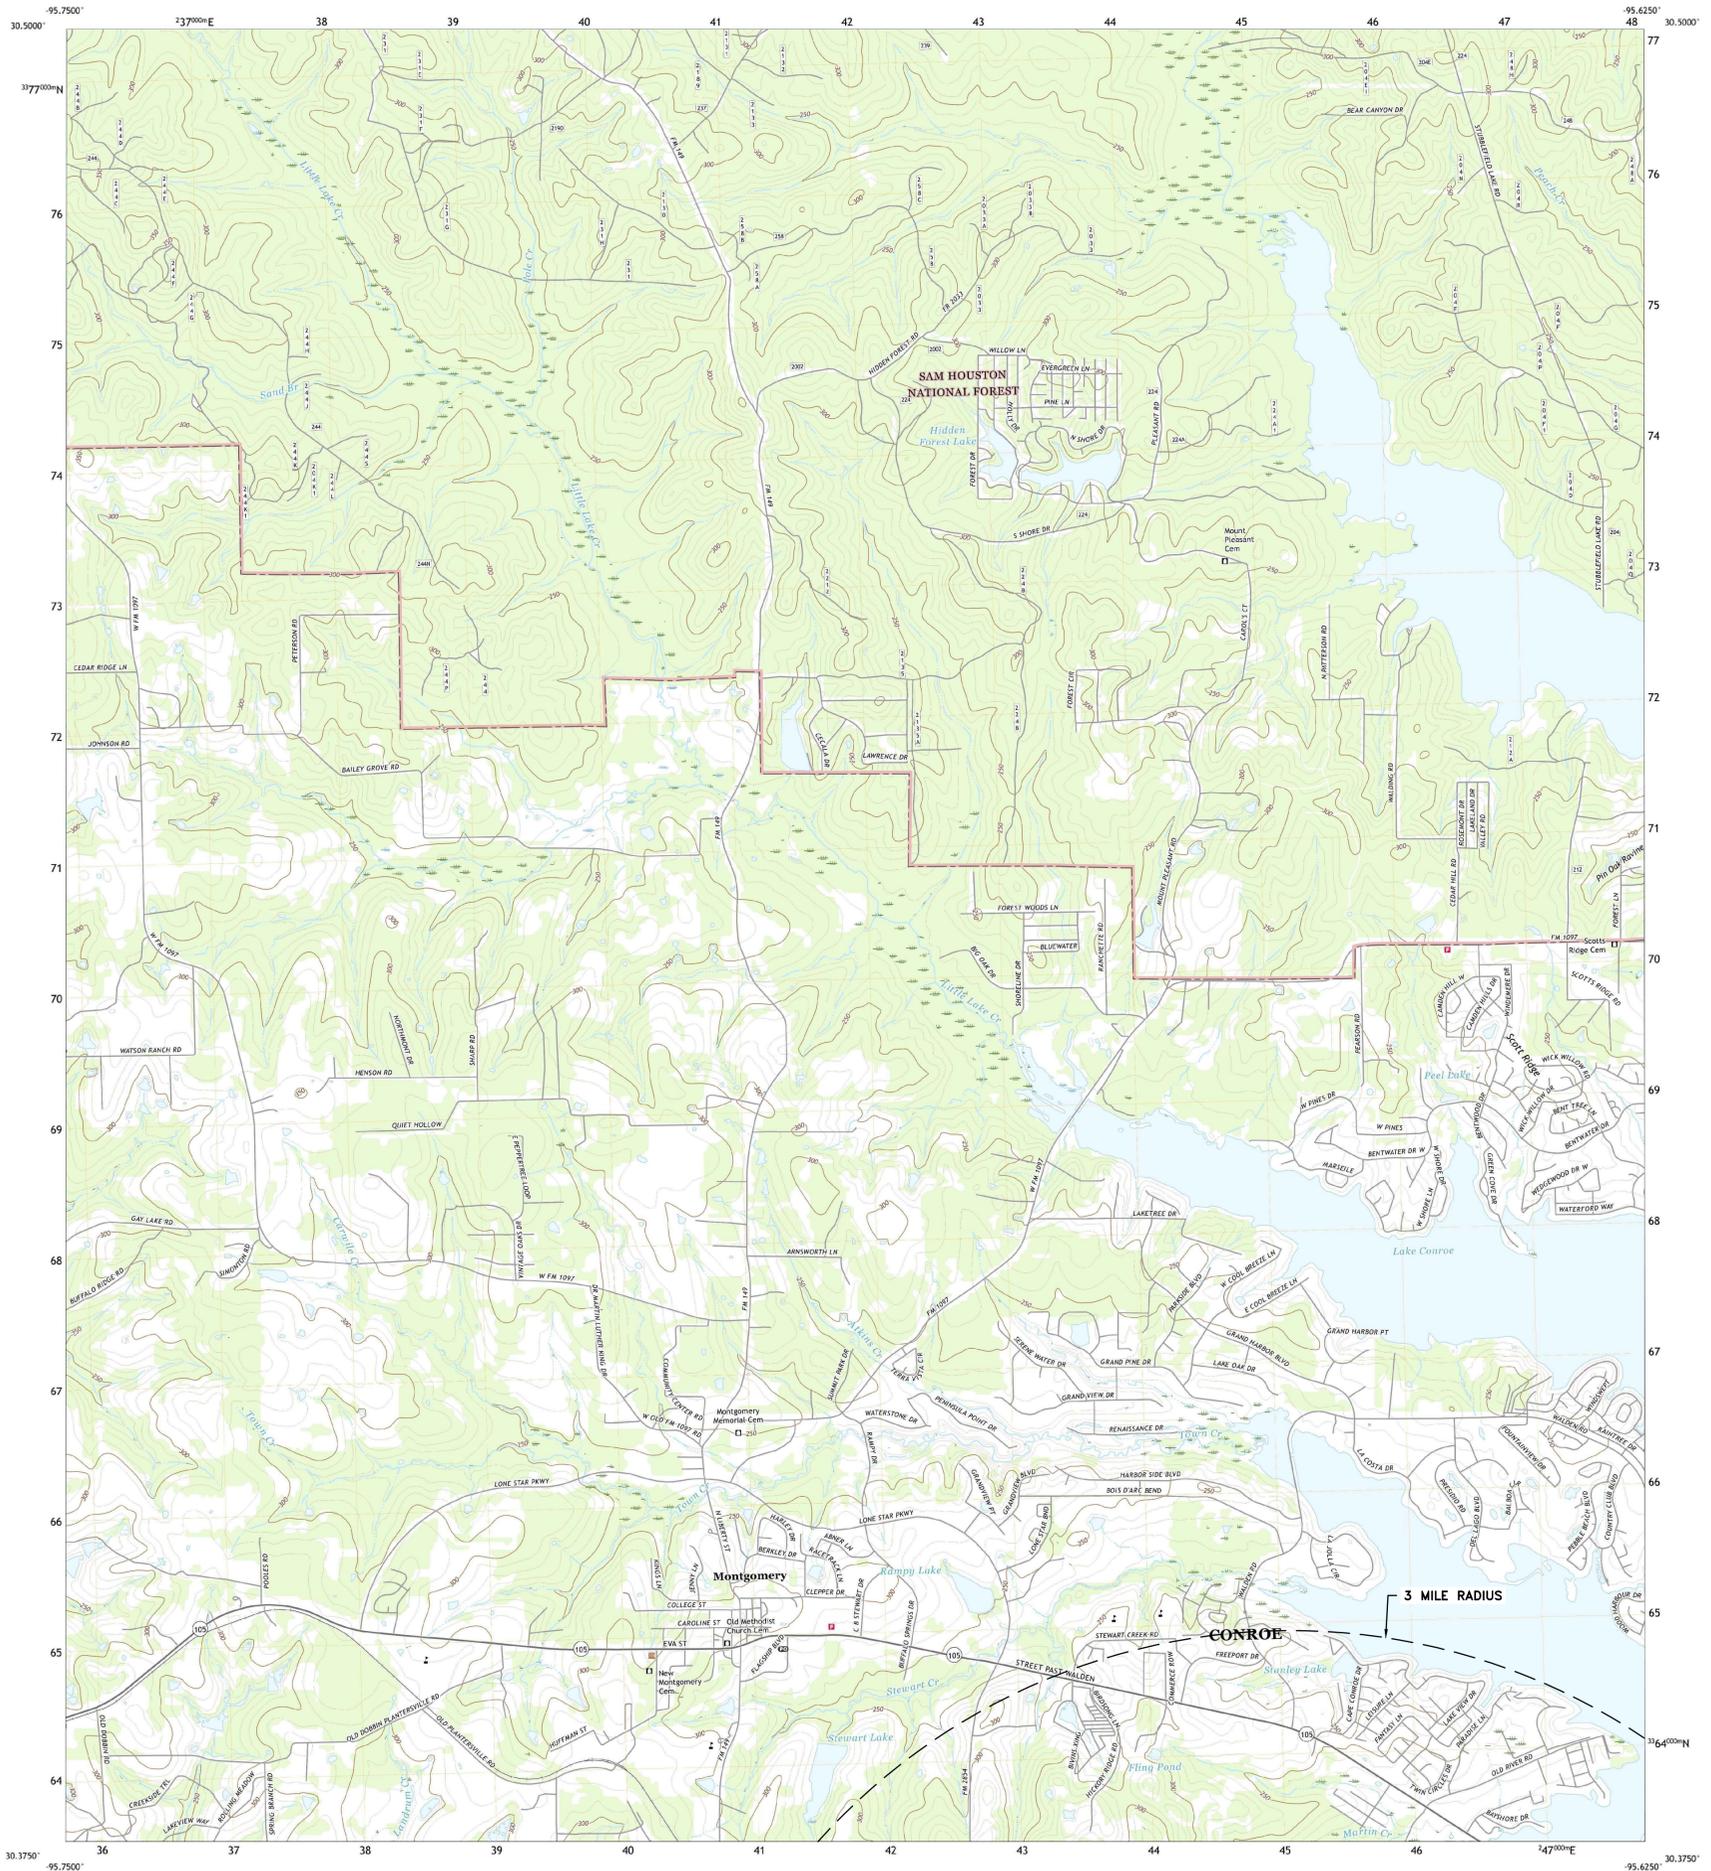

L SQUARED ENGINEERING

Produced by the United States Geological Survey
North American Datum of 1983 (NAD83)
World Geodetic System of 1984 (WGS84). Projection and
1 200-meter grid/contour interval. Traverse Mercator, Zone 18R.
This map is not a legal document. Boundaries may be
generated for this map scale. Private lands within government
reservations may not be shown. Obtain permission before
entering private lands.

Imagery.....NAP, September 2016 - November 2016
Roads.....U.S. Census Bureau, 2015
Roads within US Forest Service Lands.....USFS Topo Data
with United Forest Service updates, 2012
Names.....USGS, 2008 - 2021
Hydrography.....National Hydrography Dataset, 2003 - 2018
Contours.....National Elevation Dataset, 2003
Boundaries.....Multiple sources; see metadata file 2017 - 2021
Wetlands.....FWS National Wetlands Inventory Not Available



1	2	3
4	5	6
7	8	9


1 Richards
2 San Jacinto
3 Moore Grove
4 Davis
5 Shepard Hill
6 Plasterville
7 Kemmer
8 Cow Spur

ROAD CLASSIFICATION

Expressway	Local Connector
Secondary Hwy	Local Road
Ramp	4WD
Interstate Route	US Route
FS Primary Route	FS Passenger Route
	FS High Clearance Route
	State Route

Check with local Forest Service unit
for current travel conditions and restrictions.

MONTGOMERY, TX
2022






U.S. DEPARTMENT OF THE INTERIOR
U.S. GEOLOGICAL SURVEY




SHEPARD HILL QUADRANGLE
TEXAS - MONTGOMERY COUNTY
7.5-MINUTE SERIES

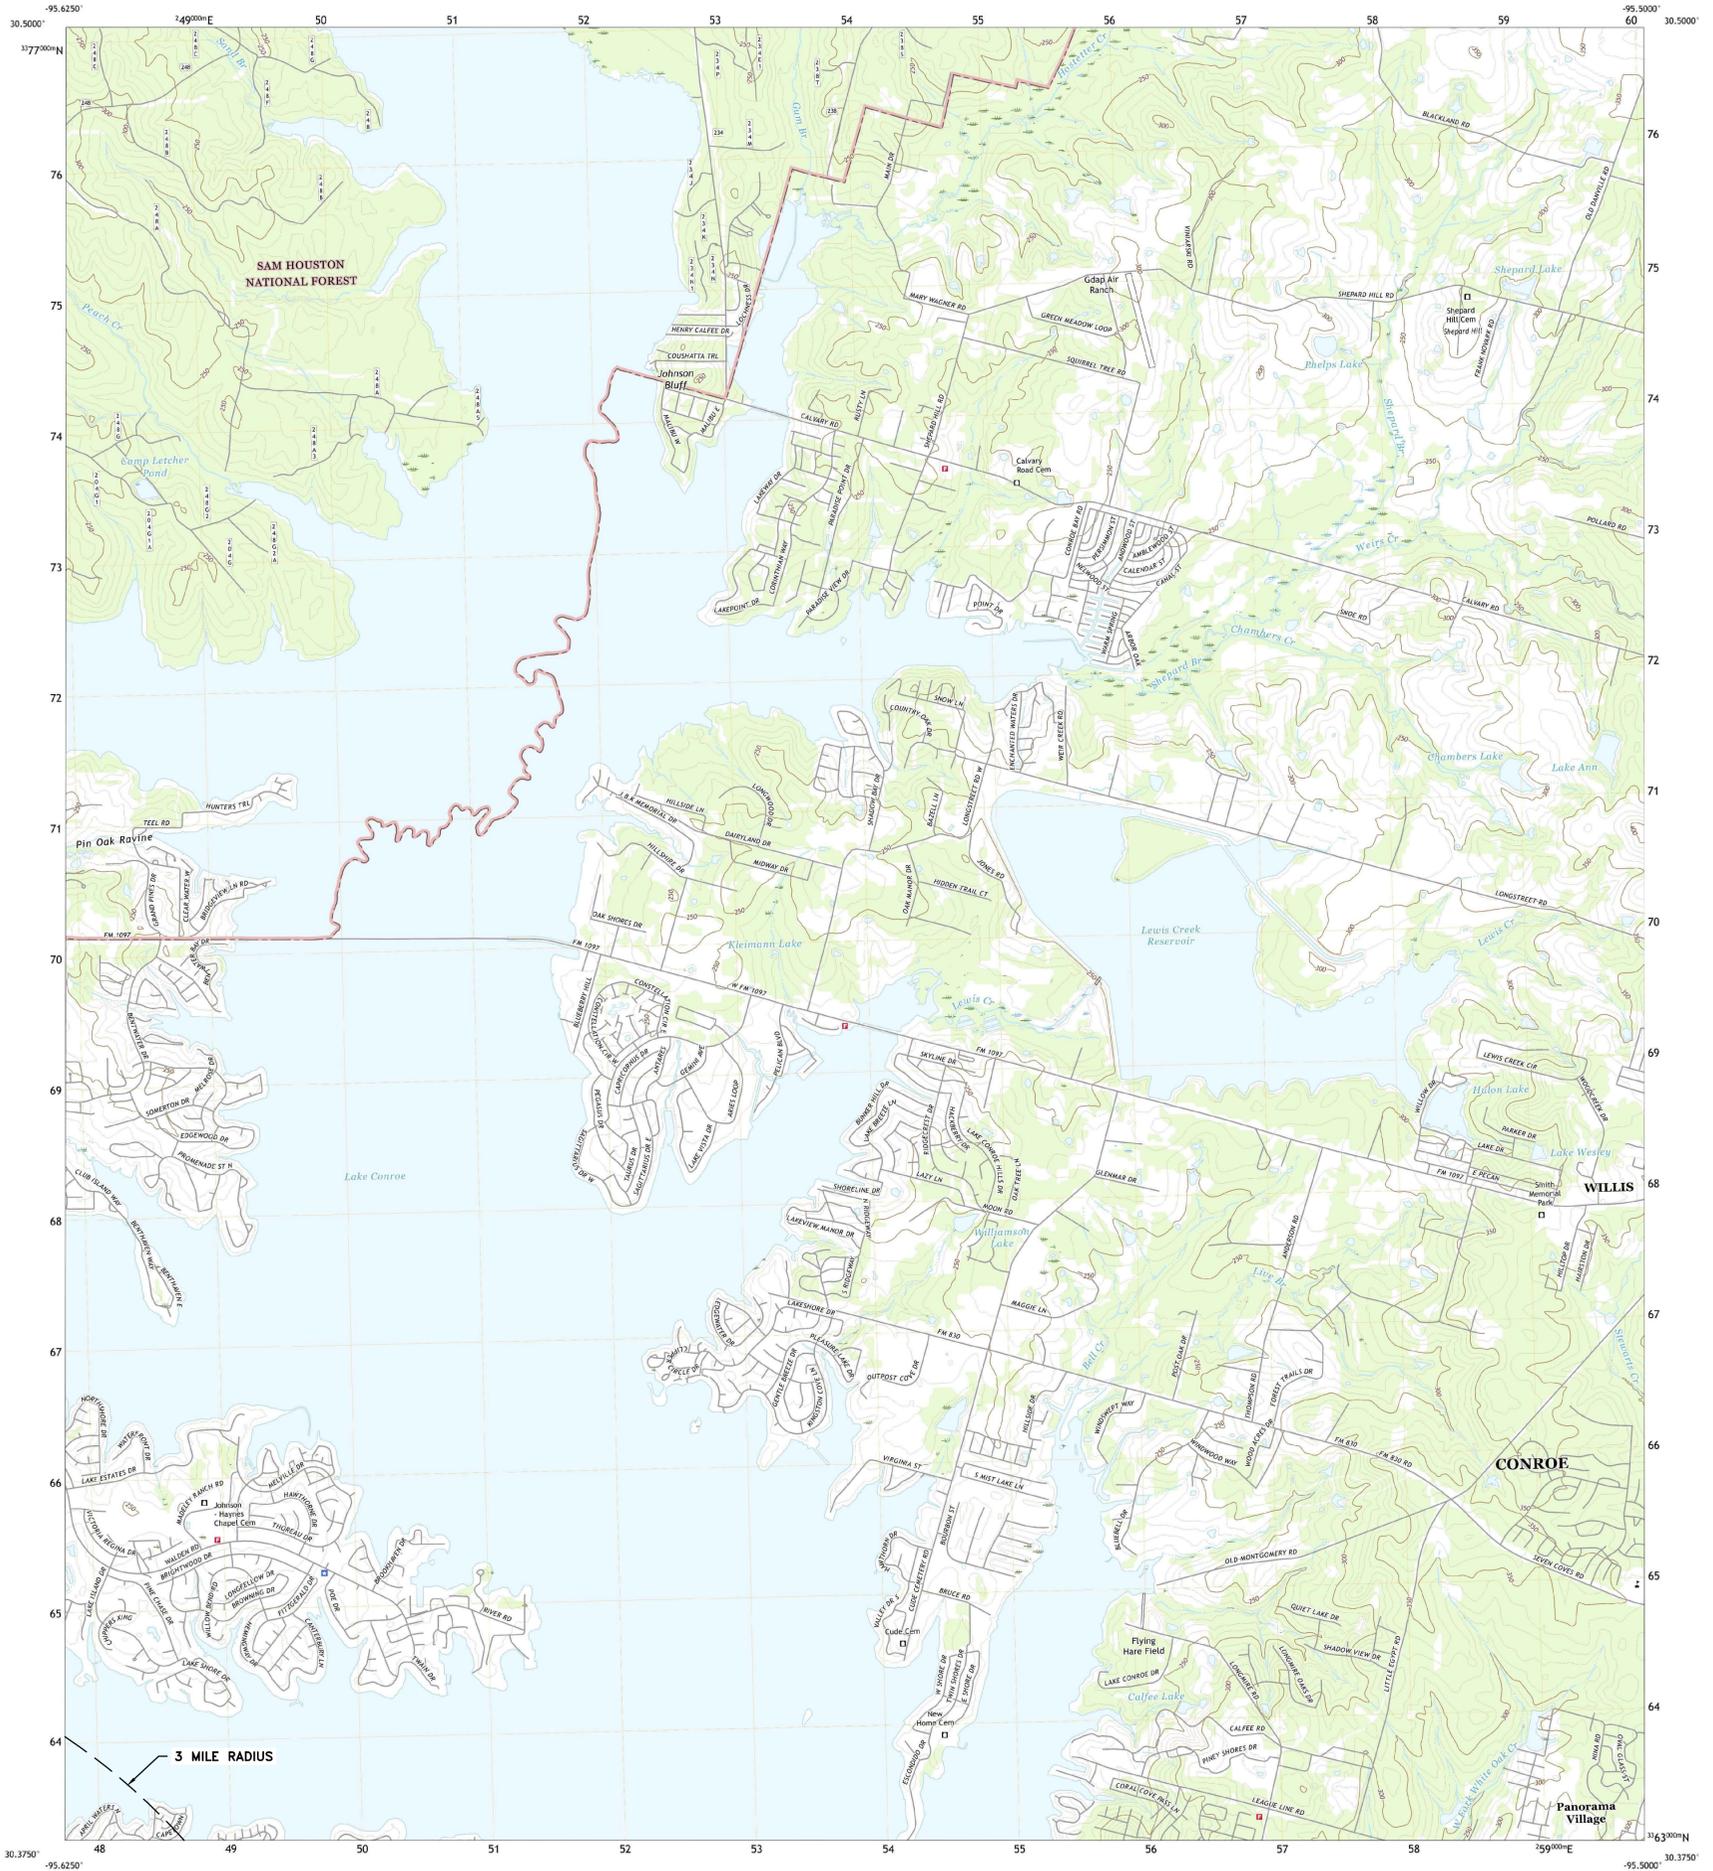

Produced by the United States Geological Survey
North American Datum of 1983 (NAD83)
World Geodetic System of 1984 (WGS84). Projection and
1000-meter grid/Universal Transverse Mercator, Zone 19K
This map is not a legal document. Boundaries may be
generalized for this map scale. Private lands within government
reservations may not be shown. Obtain permission before
entering private lands.

Imagery: NAD, September 2016, November 2016
Roads: U.S. Census Bureau, 2015
Roads within US Forest Service: FSTopo Data
with limited Forest Service updates, 2012
Names: GNIS, 1979 - 2011
Hydrography: National Hydrography Dataset, 2003 - 2016
Contours: National Elevation Dataset, 2010
Boundaries: Multiple sources; see metadata file 2017 - 2021
Wetlands: FWS National Wetlands Inventory Not Available




1	2	3	San Jacinto
4	5	6	New Waverly
7	8	9	Willis
10	11	12	Klosterman
13	14	15	Conroe

ROAD CLASSIFICATION	
Expressway	Local Connector
Secondary Hwy	Local Road
Interstate Route	4WD
PS Primary Route	US Route
	State Route
	FS Passenger Route
	FS High Clearance Route

Check with local Forest Service unit
for current travel conditions and restrictions.

SHEPARD HILL, TX
2022






U.S. DEPARTMENT OF THE INTERIOR
U.S. GEOLOGICAL SURVEY



COWL SPUR QUADRANGLE
TEXAS - MONTGOMERY COUNTY
7.5-MINUTE SERIES

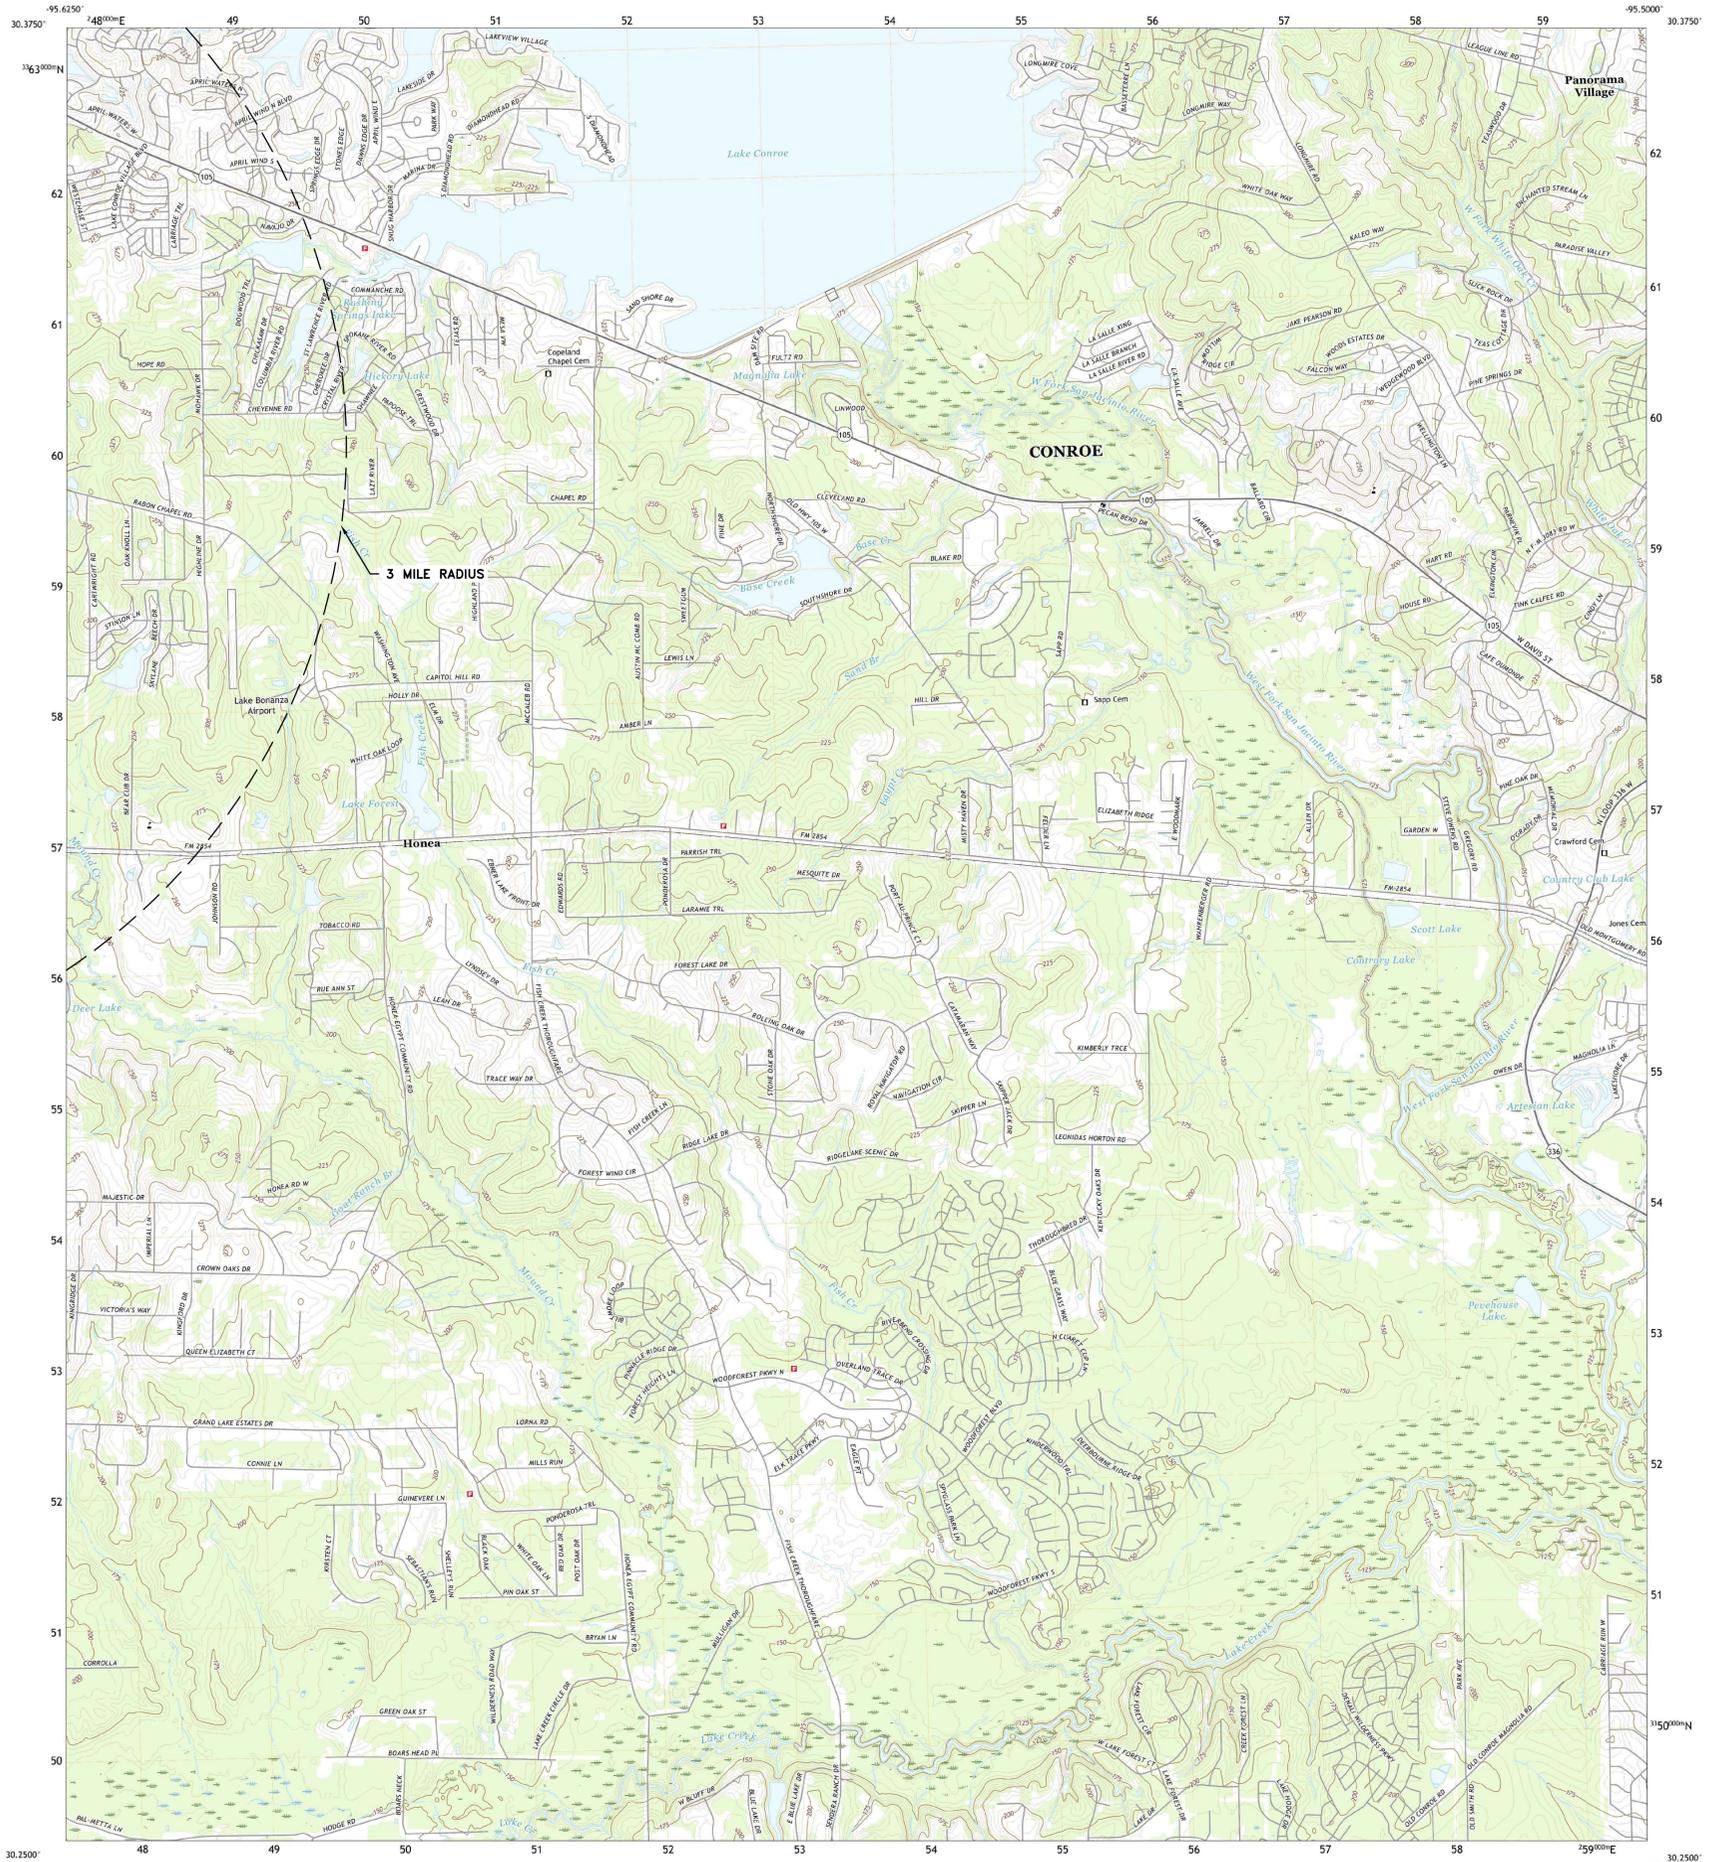


L SQUARED ENGINEERING

Produced by the United States Geological Survey

North American Datum of 1983 (NAD83)
World Geodetic System of 1984 (WGS84) Projection and
1000-meter grid/Universal Transverse Mercator, Zone 15R
This map is not a legal document. Boundaries may be
generalized for this map scale. Private lands within government
reservations may not be shown. Obtain permission before
entering private lands.

Imagery.....NAP, September 2016 - November 2016
Roads.....U.S. Census Bureau, 2015
Names.....GNIS, 1979 - 2022
Hydrography.....National Hydrography Dataset, 2003 - 2018
Contours.....National Elevation Dataset, 2010
Boundaries.....Multiple sources; 1861 - 2011
Wetlands.....FWS National Wetlands Inventory Not Available



ADJACENT QUADRANGLES

1	2	3
4	5	6
7	8	9

1 Montgomery
2 Spang Hill
3 Wells
4 Keeneth
5 Conroe
6 Magnolia East
7 Oklahoma
8 Tamina




COWL SPUR, TX
2022



Attachment D – Site Drawings

L:\SHARED\L2 ENGINEERING PROJECTS\ENGINEERING PROJECTS\10989-HOME PLACE\03 CAD\DESIGN SET\WWTP\WWTP EXHIBITS-10989.DWG Sep. 13, 2024-7:23 AM

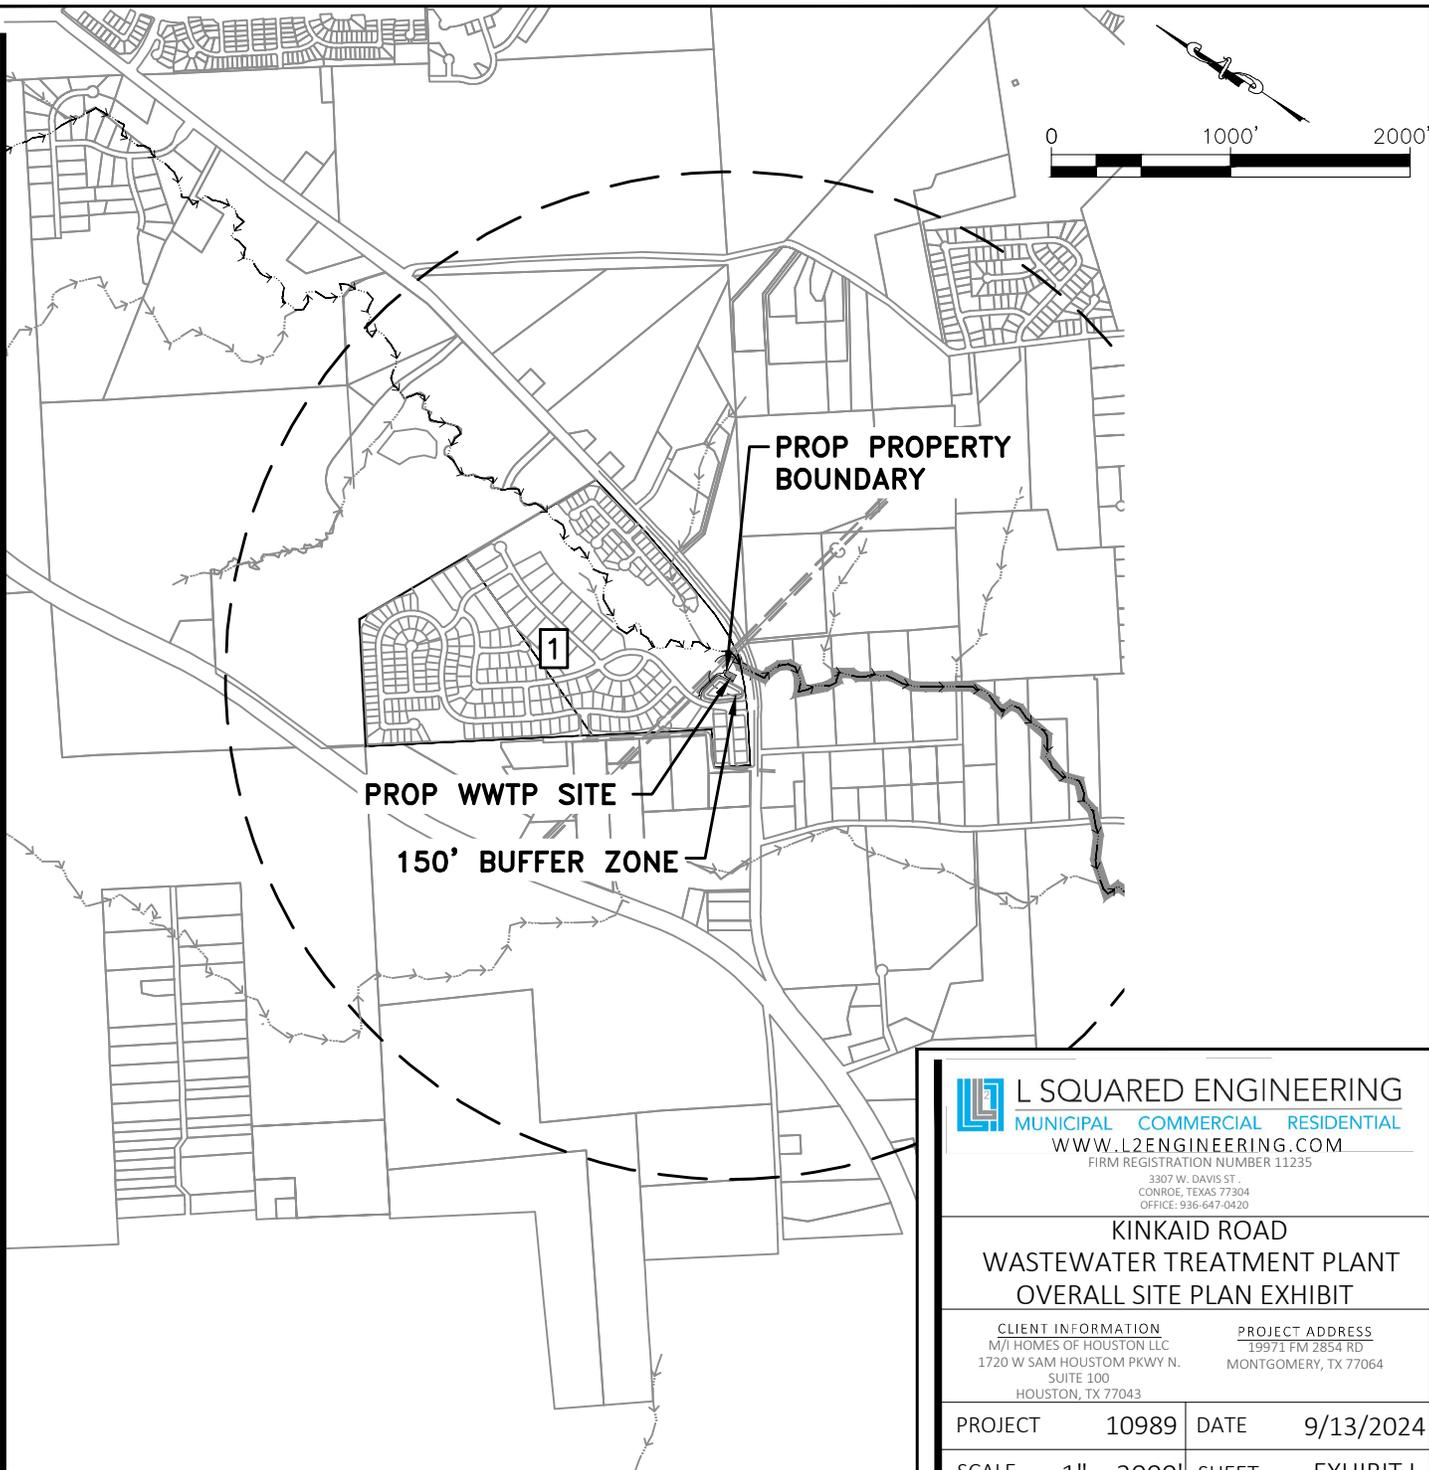

NUMBER	PROPERTY ID	OWNER NAME
1	R293492, R34683, R293492, R391984, R261185, R363788	M/I Homes of Houston

L SQUARED ENGINEERING
MUNICIPAL COMMERCIAL RESIDENTIAL
WWW.L2ENGINEERING.COM
FIRM REGISTRATION NUMBER 11235
3307 W. DAVIS ST.
CONROE, TEXAS 77304
OFFICE: 936-647-0420

**KINKAID ROAD
WASTEWATER TREATMENT PLANT
OVERALL SITE PLAN EXHIBIT**

CLIENT INFORMATION M/I HOMES OF HOUSTON LLC 1720 W SAM HOUSTON PKWY N. SUITE 100 HOUSTON, TX 77043	PROJECT ADDRESS 19971 FM 2854 RD MONTGOMERY, TX 77064
---	--

PROJECT	10989	DATE	9/13/2024
SCALE	1" = 2000'	SHEET	EXHIBIT I


THIS DOCUMENT IS RELEASED FOR
THE PURPOSE OF INTERIM REVIEW
UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
OR
JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
NOT FOR CONSTRUCTION

9/13/2024

L:\SHARED\L2 ENGINEERING PROJECTS\ENGINEERING PROJECTS\10989-HOME PLACE\03 CAD\DESIGN SET\WWTP\WWTP EXHIBITS-10989.DWG Sep. 13, 2024-7:23 AM

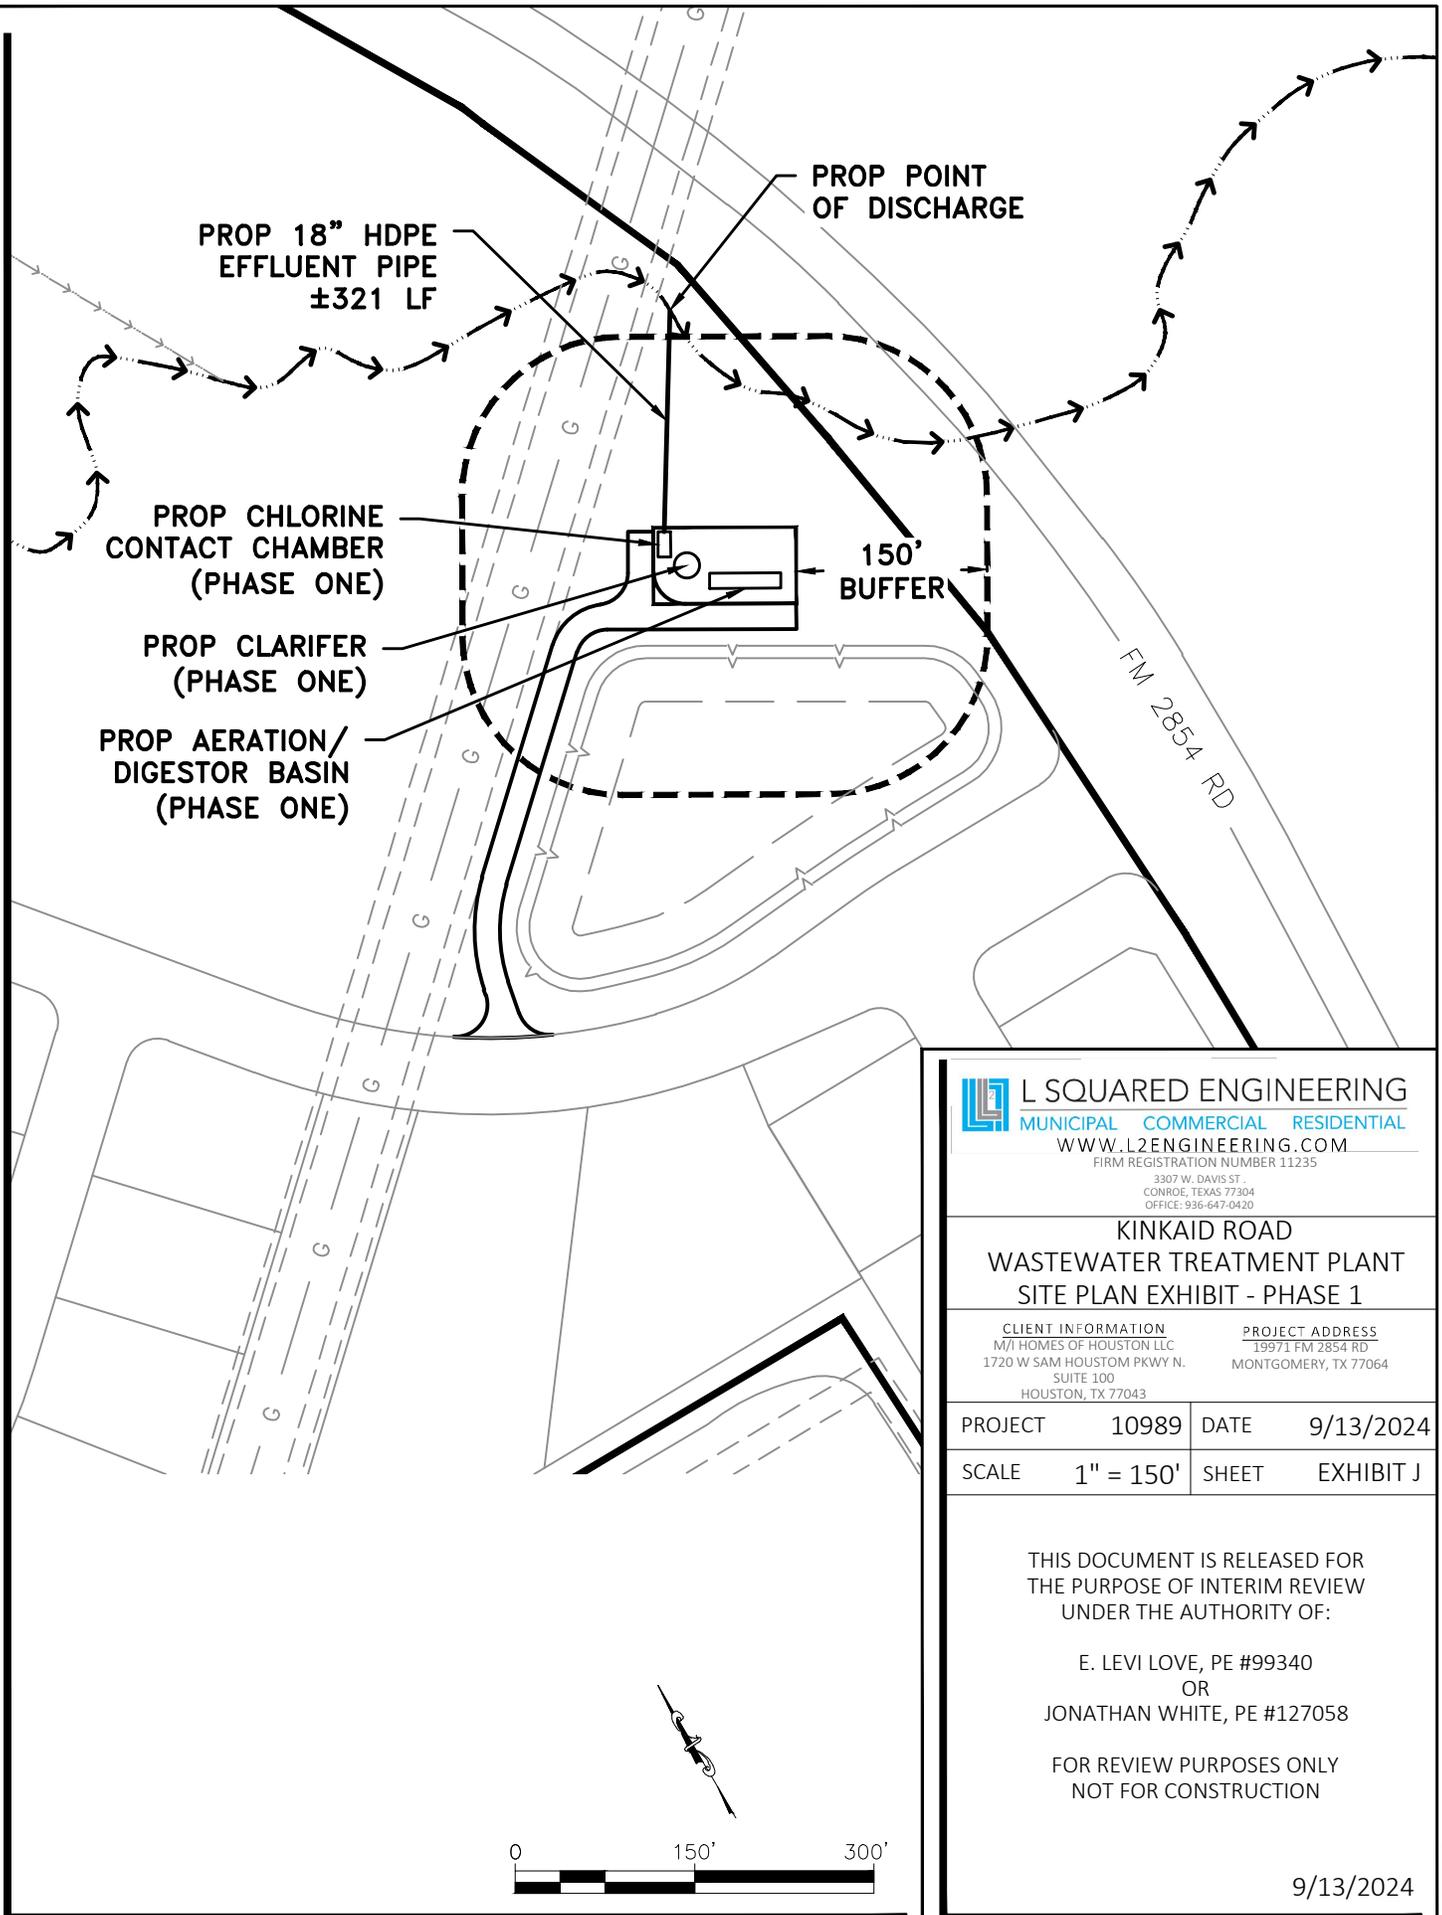

L SQUARED ENGINEERING
 MUNICIPAL COMMERCIAL RESIDENTIAL
 WWW.L2ENGINEERING.COM
 FIRM REGISTRATION NUMBER 11235
 3307 W. DAVIS ST.
 CONROE, TEXAS 77304
 OFFICE: 936-647-0420

**KINKAID ROAD
 WASTEWATER TREATMENT PLANT
 SITE PLAN EXHIBIT - PHASE 1**

CLIENT INFORMATION M/I HOMES OF HOUSTON LLC 1720 W SAM HOUSTON PKWY N. SUITE 100 HOUSTON, TX 77043	PROJECT ADDRESS 19971 FM 2854 RD MONTGOMERY, TX 77064
---	--

PROJECT	10989	DATE	9/13/2024
SCALE	1" = 150'	SHEET	EXHIBIT J


THIS DOCUMENT IS RELEASED FOR THE PURPOSE OF INTERIM REVIEW UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
 OR
 JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
 NOT FOR CONSTRUCTION

9/13/2024

L:\SHARED\L2 ENGINEERING PROJECTS\ENGINEERING PROJECTS\10989-HOME PLACE\03 CAD\DESIGN SET\WWTP\WWTP EXHIBITS-10989.DWG Sep. 13, 2024-7:23 AM

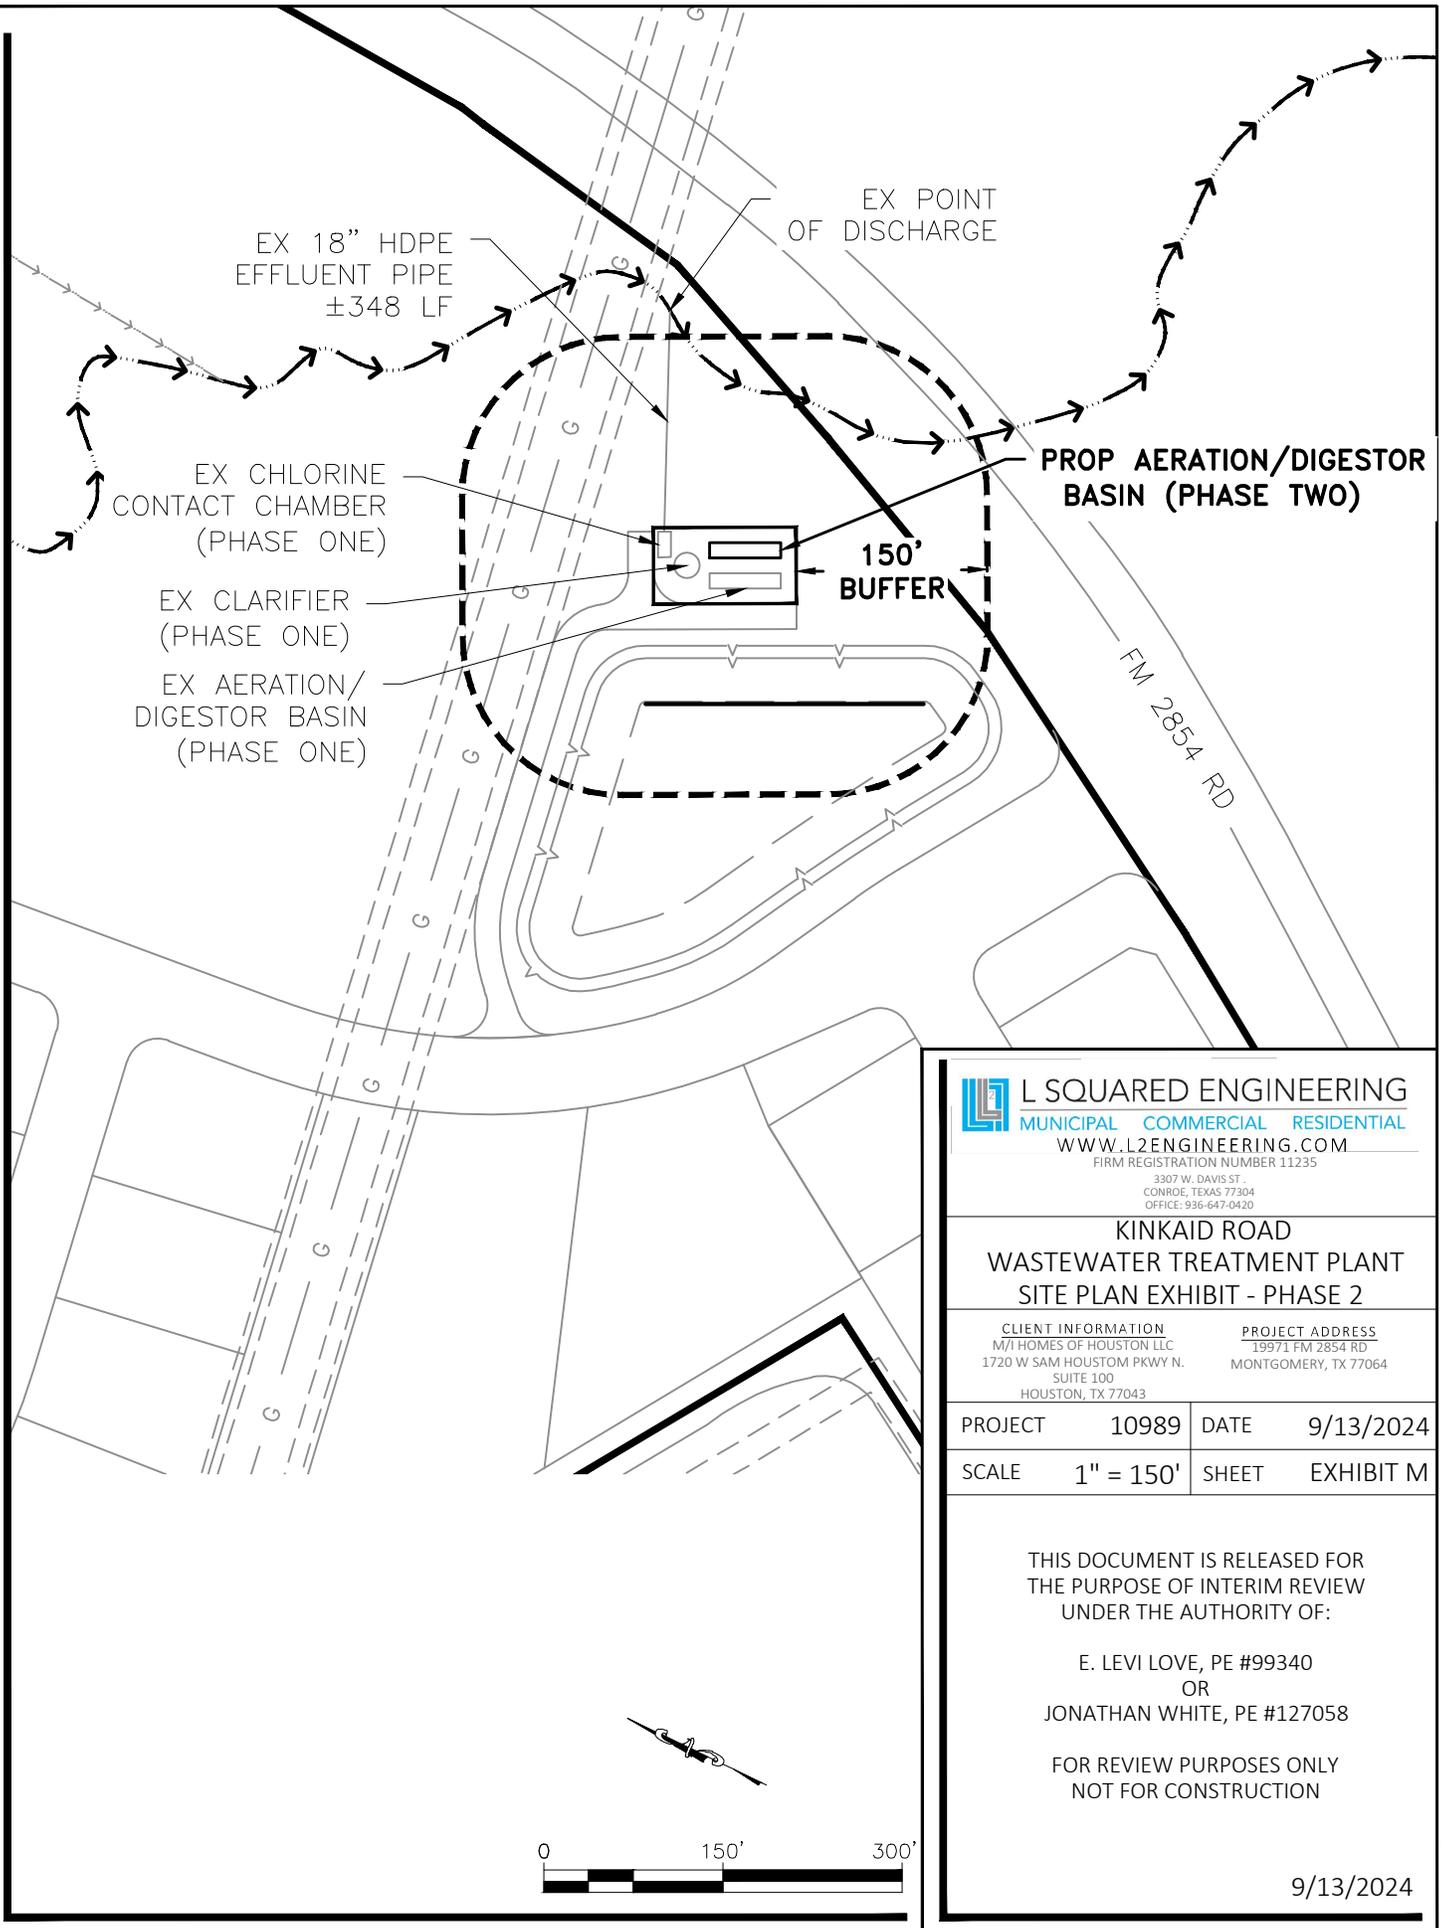

L SQUARED ENGINEERING
MUNICIPAL COMMERCIAL RESIDENTIAL
WWW.L2ENGINEERING.COM
FIRM REGISTRATION NUMBER 11235
3307 W. DAVIS ST.
CONROE, TEXAS 77304
OFFICE: 936-647-0420

**KINKAID ROAD
WASTEWATER TREATMENT PLANT
SITE PLAN EXHIBIT - PHASE 2**

CLIENT INFORMATION M/I HOMES OF HOUSTON LLC 1720 W SAM HOUSTON PKWY N. SUITE 100 HOUSTON, TX 77043	PROJECT ADDRESS 19971 FM 2854 RD MONTGOMERY, TX 77064
---	--

PROJECT	10989	DATE	9/13/2024
SCALE	1" = 150'	SHEET	EXHIBIT M

THIS DOCUMENT IS RELEASED FOR THE PURPOSE OF INTERIM REVIEW UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
OR
JONATHAN WHITE, PE #127058


FOR REVIEW PURPOSES ONLY
NOT FOR CONSTRUCTION

9/13/2024



Attachment E – Buffer Zone Maps

L:\SHARED\L2 ENGINEERING PROJECTS\ENGINEERING PROJECTS\10989-HOME PLACE\03 CAD\DESIGN SET\WTP\WTP EXHIBITS-10989.DWG Sep. 13, 2024-7:23 AM

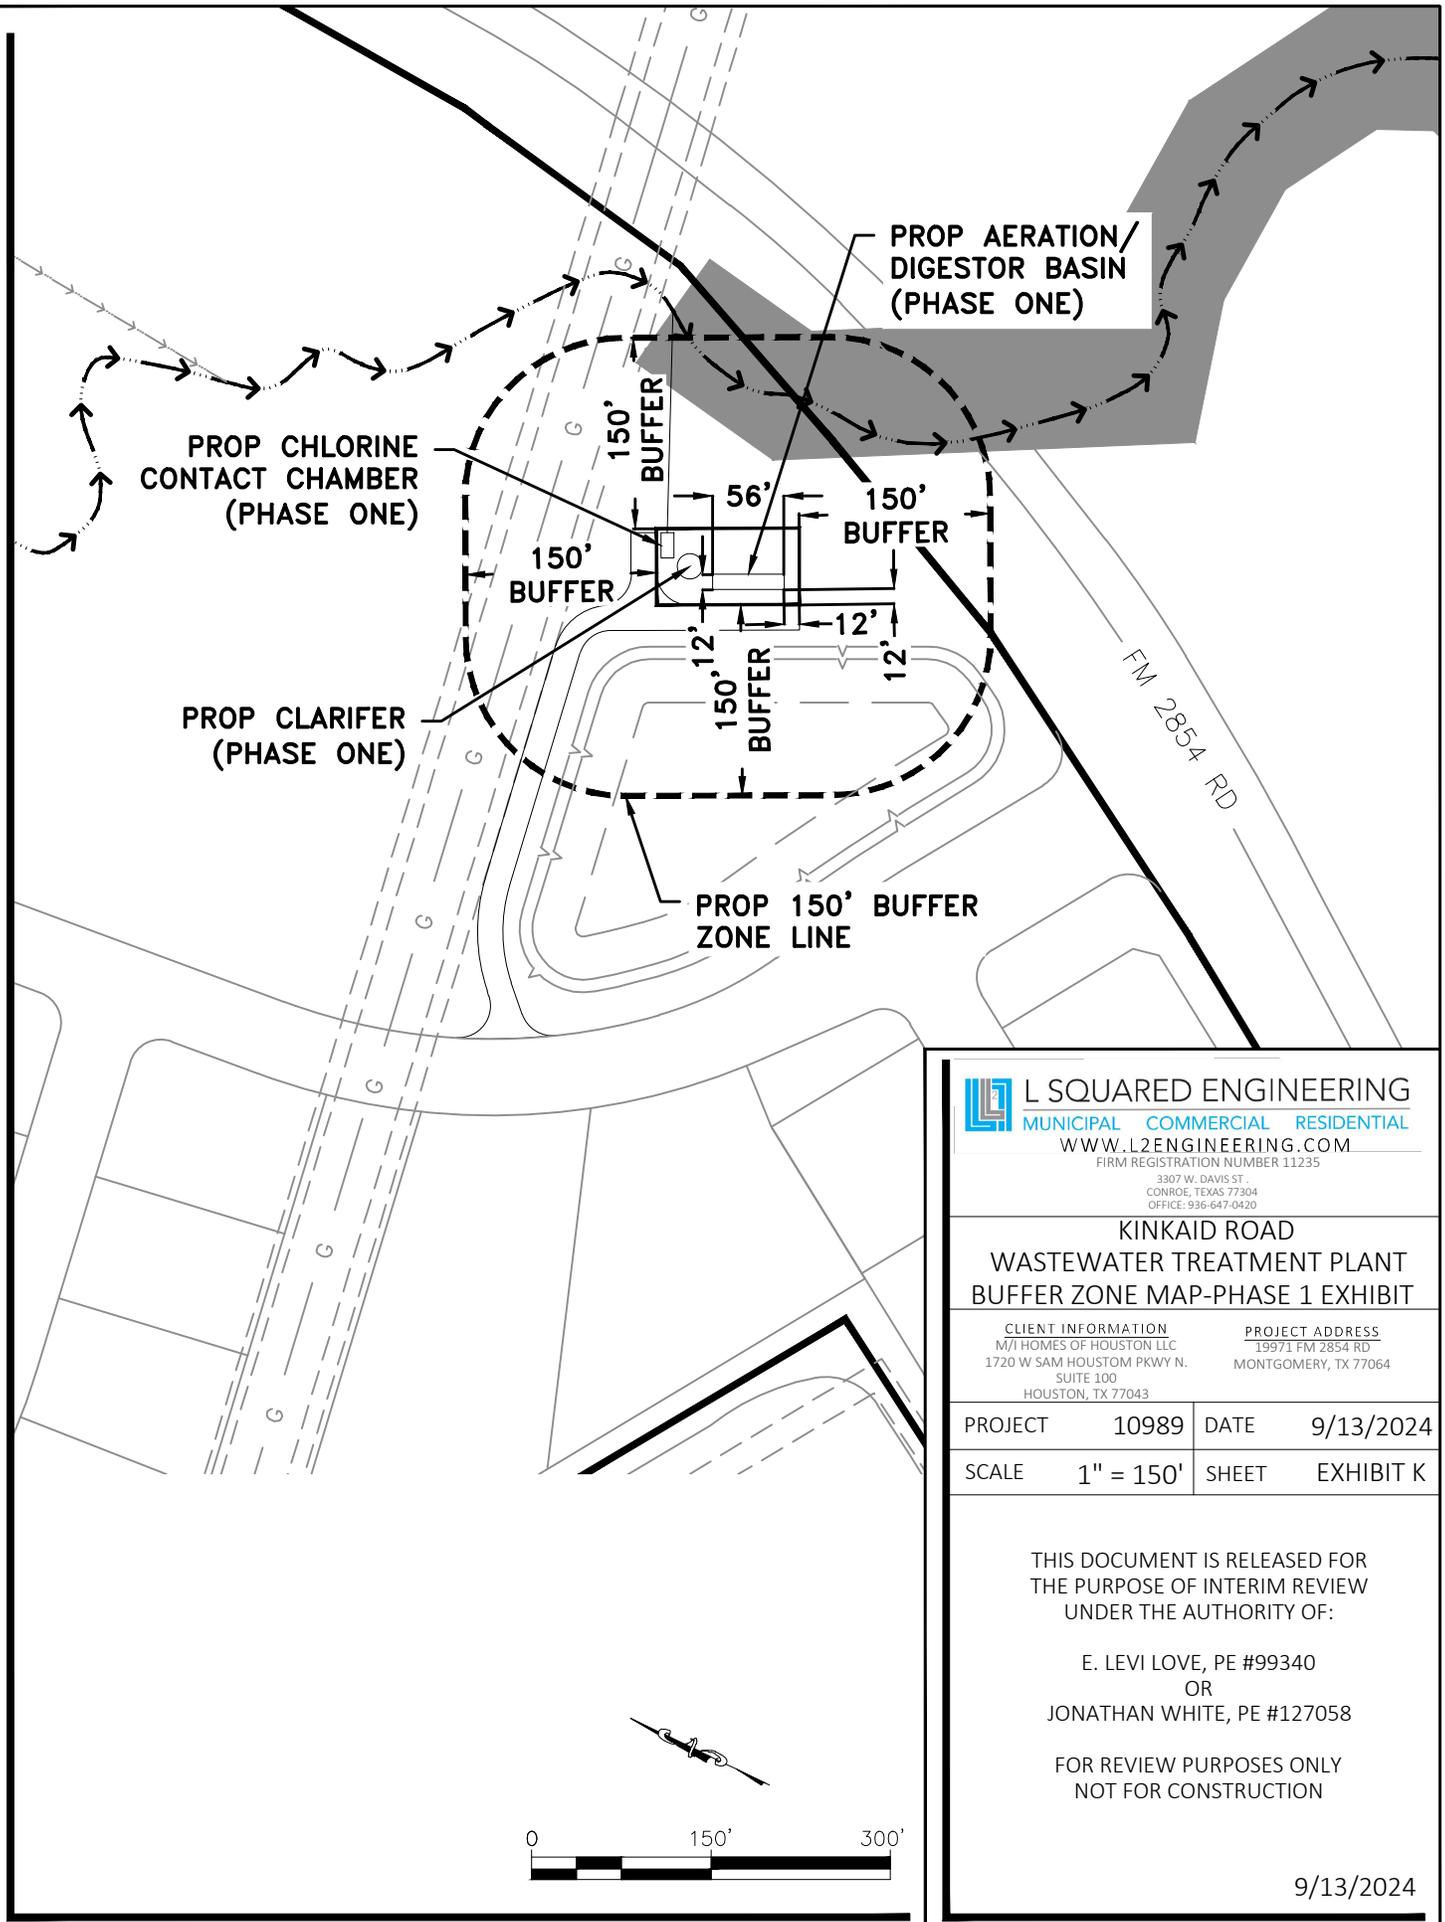

L SQUARED ENGINEERING
 MUNICIPAL COMMERCIAL RESIDENTIAL
 WWW.L2ENGINEERING.COM
 FIRM REGISTRATION NUMBER 11235
 3307 W. DAVIS ST.
 CONROE, TEXAS 77304
 OFFICE: 936-647-0420

**KINKAID ROAD
 WASTEWATER TREATMENT PLANT
 BUFFER ZONE MAP-PHASE 1 EXHIBIT**

CLIENT INFORMATION M/I HOMES OF HOUSTON LLC 1720 W SAM HOUSTON PKWY N. SUITE 100 HOUSTON, TX 77043	PROJECT ADDRESS 19971 FM 2854 RD MONTGOMERY, TX 77064
---	--

PROJECT	10989	DATE	9/13/2024
SCALE	1" = 150'	SHEET	EXHIBIT K


THIS DOCUMENT IS RELEASED FOR THE PURPOSE OF INTERIM REVIEW UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
 OR
 JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
 NOT FOR CONSTRUCTION

9/13/2024

L:\SHARED\L2 ENGINEERING PROJECTS\ENGINEERING PROJECTS\10989-HOME PLACE\03 CAD\DESIGN SET\WTP\WTP EXHIBITS-10989.DWG Sep. 13, 2024-7:23 AM

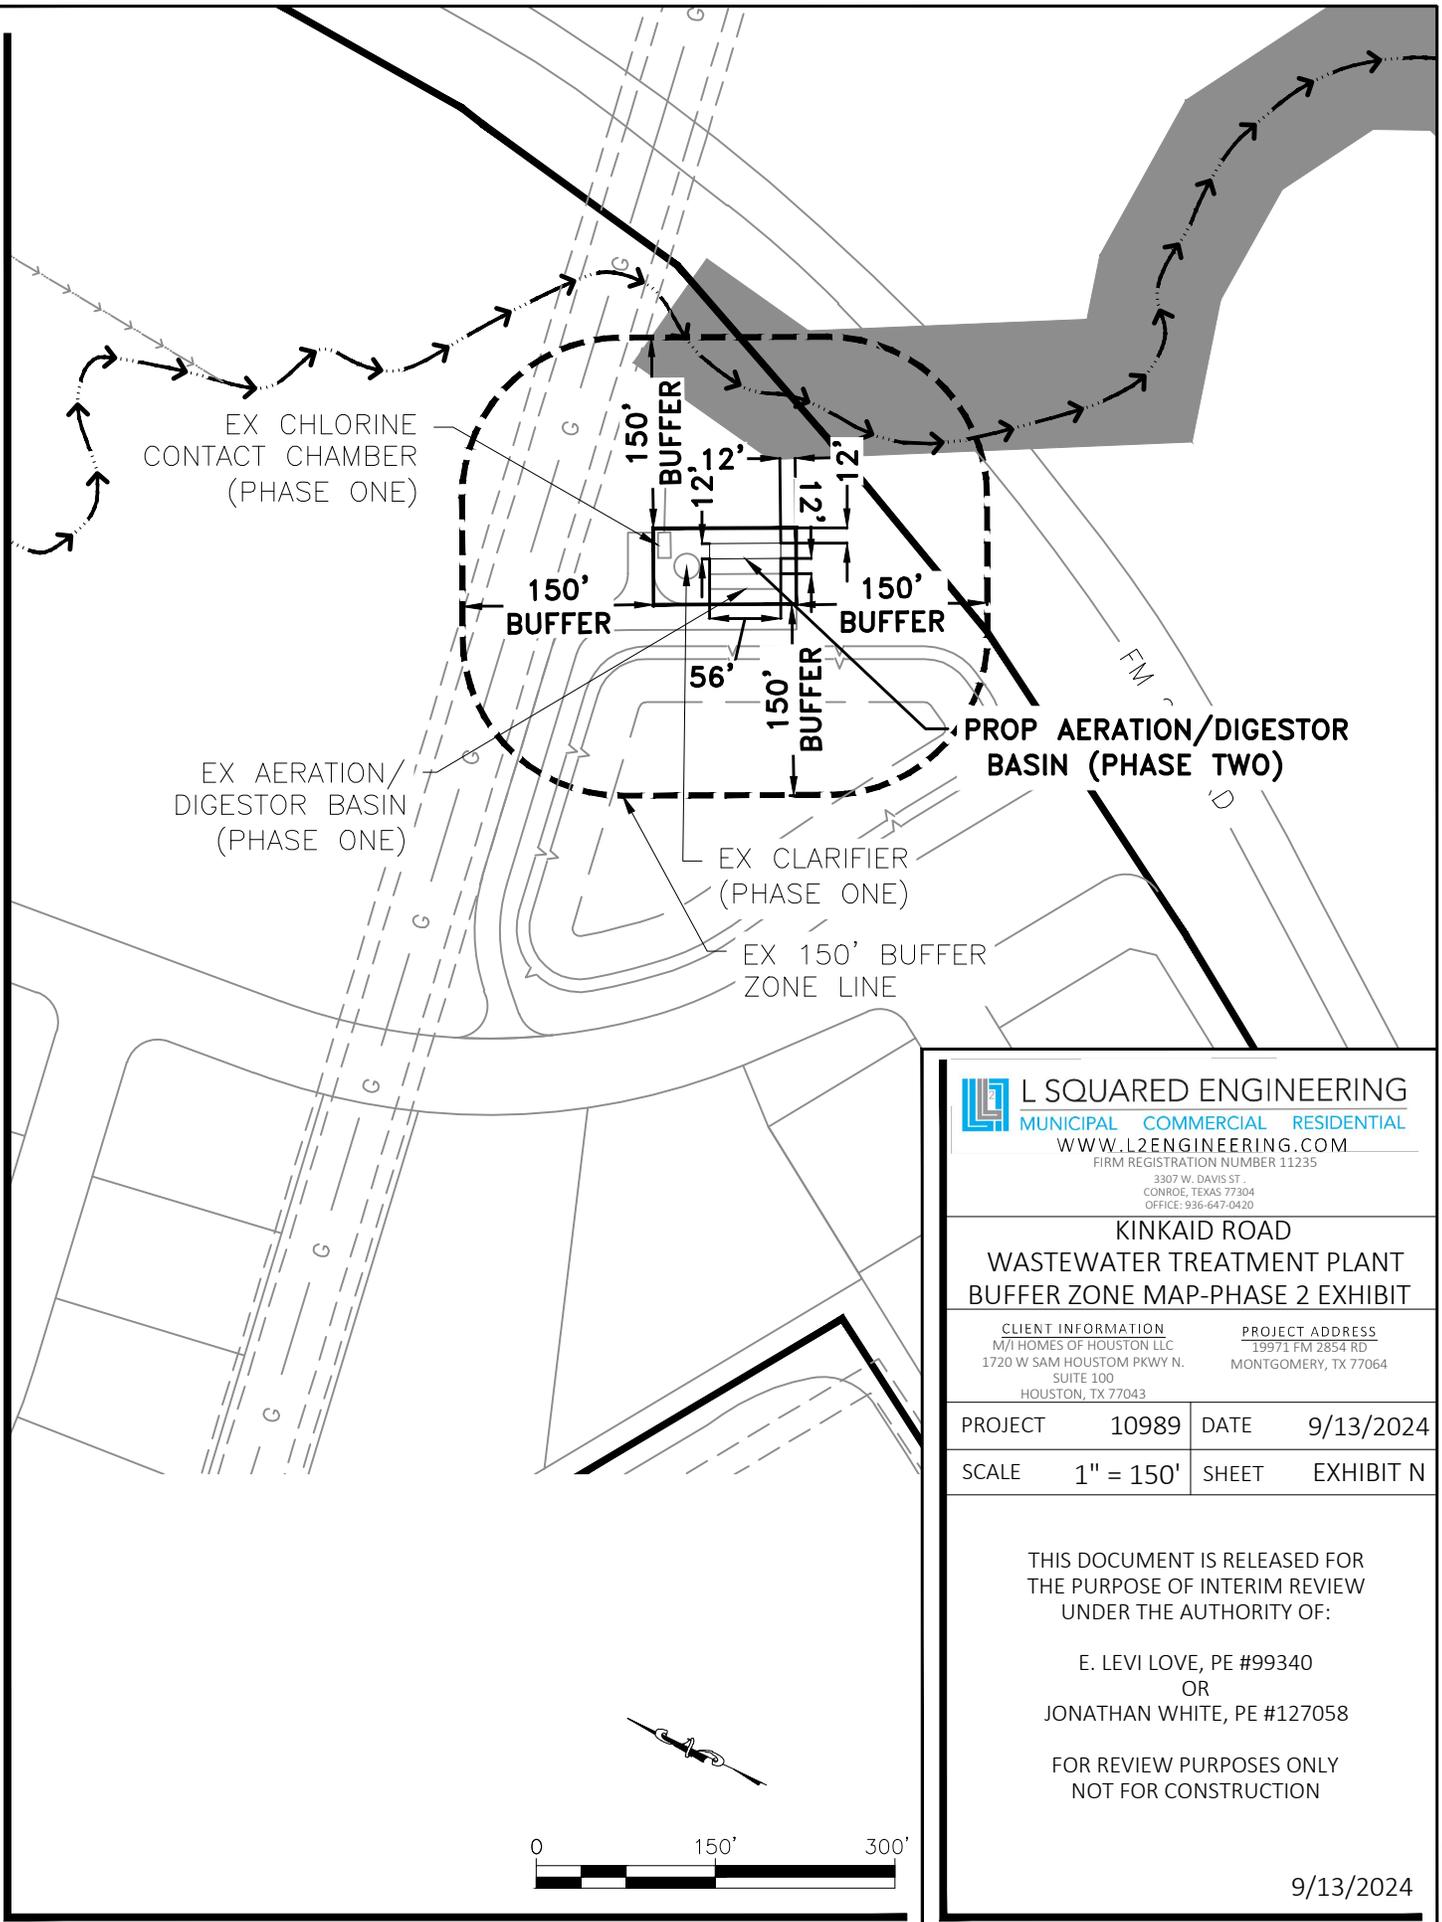

L SQUARED ENGINEERING
 MUNICIPAL COMMERCIAL RESIDENTIAL
 WWW.L2ENGINEERING.COM
 FIRM REGISTRATION NUMBER 11235
 3307 W. DAVIS ST.
 CONROE, TEXAS 77304
 OFFICE: 936-647-0420

**KINKAID ROAD
 WASTEWATER TREATMENT PLANT
 BUFFER ZONE MAP-PHASE 2 EXHIBIT**

CLIENT INFORMATION M/I HOMES OF HOUSTON LLC 1720 W SAM HOUSTON PKWY N. SUITE 100 HOUSTON, TX 77043	PROJECT ADDRESS 19971 FM 2854 RD MONTGOMERY, TX 77064
---	--

PROJECT	10989	DATE	9/13/2024
SCALE	1" = 150'	SHEET	EXHIBIT N

THIS DOCUMENT IS RELEASED FOR THE PURPOSE OF INTERIM REVIEW UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
 OR
 JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
 NOT FOR CONSTRUCTION

9/13/2024

Attachment F – Facility Dimensions & Facility Features

Facility Dimensions & Facility Features

The facility will employ the complete mix variation of the activated sludge process designed for single stage nitrification - From the lift station the wastewater will travel through a coarse bar screen then to the complete mix basin; from the basin the mix-liquor will be transferred to the clarifier where solids will be settled out and clear water will flow over the weirs then into the chlorine contact basin. The settled solids will either be transferred to the digester or returned to the headworks.

Phase I – 0.0375MGD


<u>Unit</u>	<u>Length</u>	<u>Width</u>	<u>Height</u>
Clarifier		20' Dia.	10'
Chlorine Contact	955 CUFT		
Aeration	32'	9'	9.5'
Digester	24'	9'	9.5'

Phase II – 0.075MGD

<u>Unit</u>	<u>Length</u>	<u>Width</u>	<u>Height</u>
Aeration	32'	9'	9.5'
Digester	24'	9'	9.5'

- For short power outages the sewage will be contained in the collection system. The plant features digesters, chlorinator, and stand-by blowers. The plant is to be maintained and operated by personnel licensed by the State of Texas.
- The plant is designed to be maintained without bypassing. Replacement or repair of the interior coating system is the only maintenance item that would necessitate bypassing and the epoxy system should last 25-30 years.
- An intruder resistant fence will be placed around the facility.

Attachment G – Process Flow Diagram

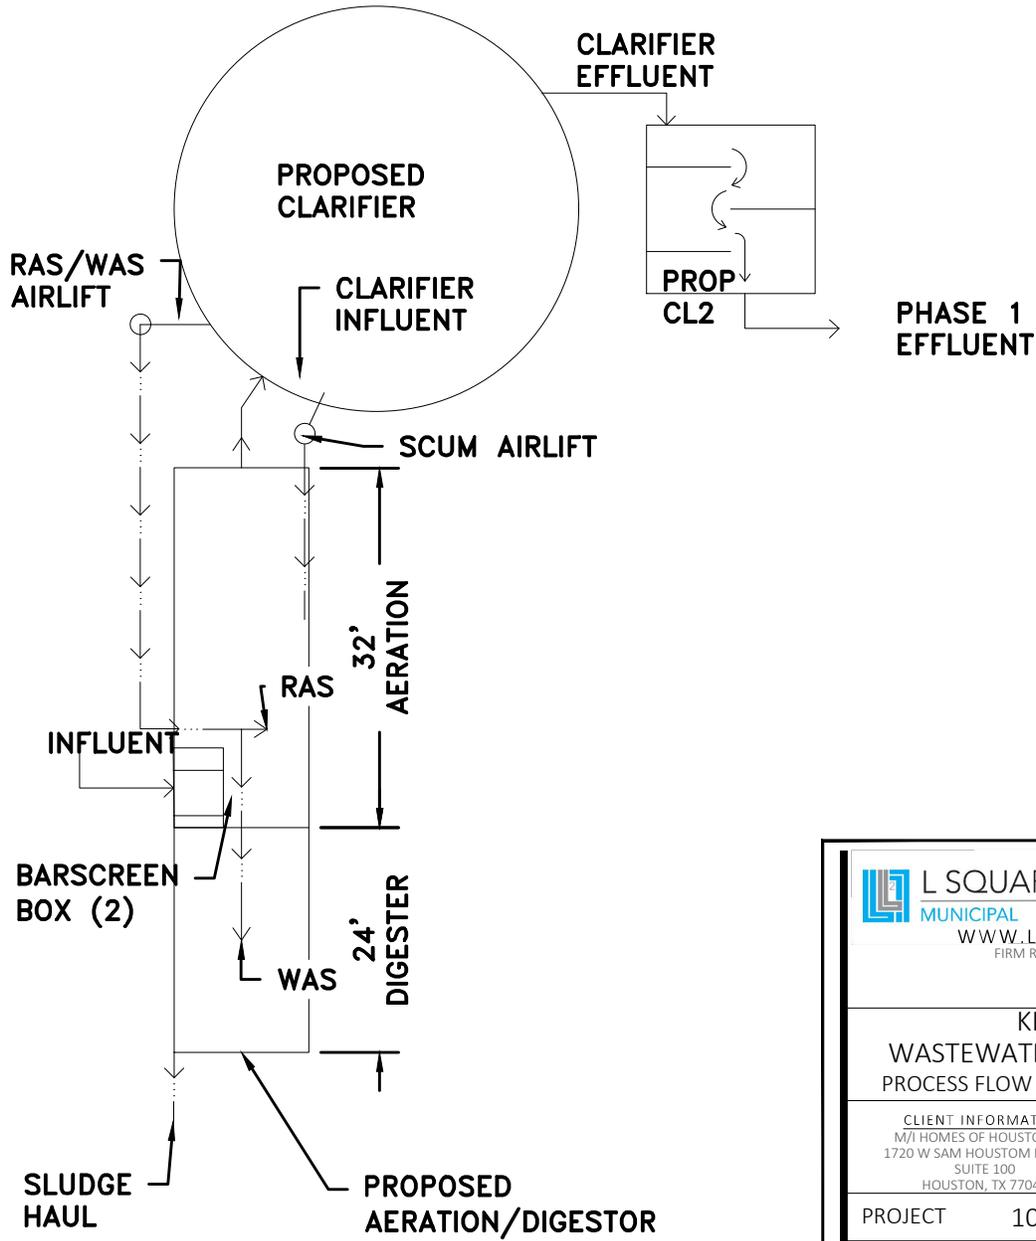

L SQUARED ENGINEERING
 MUNICIPAL COMMERCIAL RESIDENTIAL
 WWW.L2ENGINEERING.COM
 FIRM REGISTRATION NUMBER 11235
 3307 W. DAVIS ST.
 CONROE, TEXAS 77304
 OFFICE: 936-647-0420

**KINKAID ROAD
 WASTEWATER TREATMENT PLANT
 PROCESS FLOW DIAGRAM DETAIL PHASE -1**

CLIENT INFORMATION M/I HOMES OF HOUSTON LLC 1720 W SAM HOUSTON PKWY N. SUITE 100 HOUSTON, TX 77043	PROJECT ADDRESS 19971 FM 2854 RD MONTGOMERY, TX 77064
---	--


PROJECT	10989	DATE	9/13/2024
SCALE	N.T.S	SHEET	EXHIBIT L

THIS DOCUMENT IS RELEASED FOR THE PURPOSE OF INTERIM REVIEW UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
 OR
 JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
 NOT FOR CONSTRUCTION

L:\SHARED\L2 ENGINEERING PROJECTS\ENGINEERING PROJECTS\10989-HOME PLACE\03 CAD\DESIGN SET\WWTP\WWTP EXHIBITS-10989.DWG Sep. 13, 2024-7:23 AM

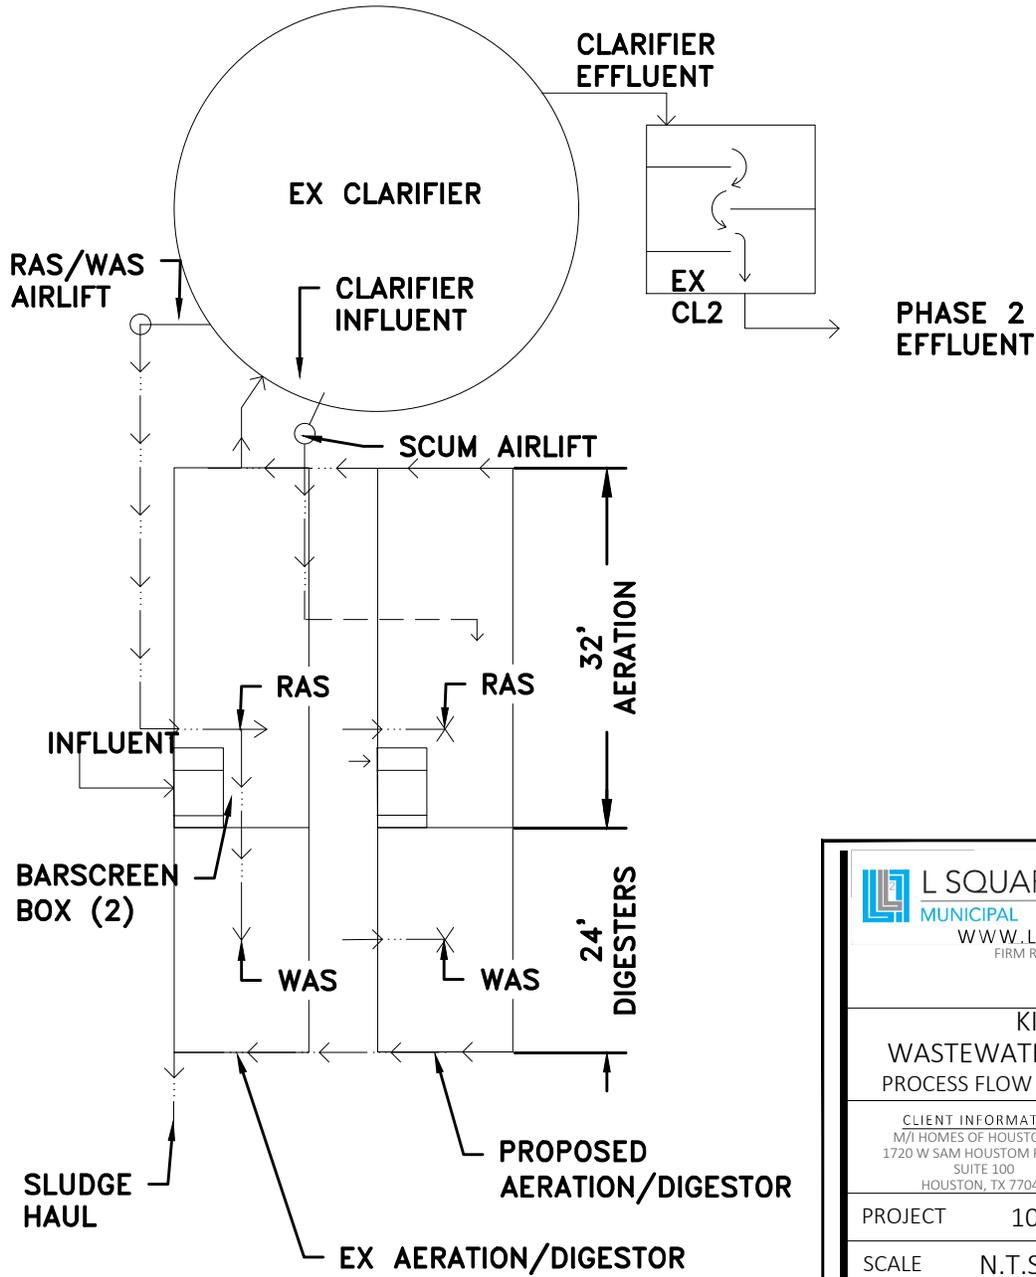

L SQUARED ENGINEERING
 MUNICIPAL COMMERCIAL RESIDENTIAL

WWW.L2ENGINEERING.COM
 FIRM REGISTRATION NUMBER 11235

3307 W. DAVIS ST.
 CONROE, TEXAS 77304
 OFFICE: 936-647-0420

**KINKAID ROAD
 WASTEWATER TREATMENT PLANT
 PROCESS FLOW DIAGRAM DETAIL PHASE -2**

CLIENT INFORMATION
 M/I HOMES OF HOUSTON LLC
 1720 W SAM HOUSTON PKWY N.
 SUITE 100
 HOUSTON, TX 77043

PROJECT ADDRESS
 19971 FM 2854 RD
 MONTGOMERY, TX 77064

PROJECT	10989	DATE	9/13/2024
SCALE	N.T.S	SHEET	EXHIBIT O

THIS DOCUMENT IS RELEASED FOR THE PURPOSE OF INTERIM REVIEW UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
 OR
 JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
 NOT FOR CONSTRUCTION

9/13/2024

Attachment H – Design Calculations

**TECHNICAL DESIGN REPORT
FOR
Kinkaid Road WWTP**

1. **PURPOSE** The purpose of this report is to present the basis of design and summary of unit sizing and hydraulic calculations for the Sewage Treatment Plant.
2. **DESCRIPTION OF PROPERTY** The project under development is a residential community
3. **POPULATION SERVED** The location of the proposed facility is shown in the site drawings. Plans. The population flow is based on 65 gallons per capita per day after Final Completion
4. **INFLUENT QUALITY CHARACTERISTICS** The raw sewage quality characteristics used for design are estimates based on past experience and on State Design Criteria and are as follows:

<u>PARAMETER</u>	<u>CONCENTRATION - MG/L</u>	<u>PER CAPITA CONTRIBUTION - LB/DA\</u>
BOD5	300	188
TSS	300	188

5. **INFLUENT FLOW CHARACTERISTICS** The hydraulic design of the plant must be conservative to insure that the plant will operate under the most extreme conditions anticipated. Future enlargement to the plant will be based on actual influent flow data. The plant process and hydraulic design for this phase are based on the following flows:

	First Phase	
Average Daily Flow (Qav)	37,500 GPD	27 GPM
Peak 2-Hr. Flow (Qpk) 4	150,000 GPD	105 GPM
	Final Phase	
Average Daily Flow (Qav)	75,000 GPD	53 GPM
Peak 2-Hr. Flow (Qpk) 4	300,000 GPD	209 GPM

Refer to Attachment "A" - Process Design Calculations, Hydraulic Profile Calculations, Process Flow Diagrams, and Plant Discharge relationship for the 100 year flood.

6. **PROCESS DESIGN** The Sewage Treatment Plant has been designed to produce an effluent in compliance with permitted parameters of: BOD5 = 10 mg/l, TSS = 15 mg/l, and Chlorine Residual = 2mg/l after 20 minutes contact

Compressed air will be supplied to the process units by multiple blowers.

7. **FLOOD HAZARD ANALYSIS** The 100 Year Flood Elevation is 250.52 feet and is confined to flood control and drainage, which has a bank elevation of 253+- feet. The plant is capable of discharging at peak flow against the 100 year flood elevation.

8. **SLUDGE DISPOSAL**

Digester..... Aerobic
Transportation..... Contract Hauler
Final Disposition To be Determined by Contract Hauler

WWTP Phase I Design Calculations

The design calculations are based on the following influent raw sewage characteristics"

<u>Parameter</u>	<u>Concentration</u>		
BOD ₅	300	mg/L	
TSS	300	mg/L	
<u>Flow</u>	<u>MGD</u>	<u>Gallons Per Day</u>	<u>Gallons Per Min</u>
ADF (Q _{ave})	0.0375	37500	27
Peak 2-hr Flow (Q _{pk})	0.15	150000	105
<u>Loading</u>	<u>Pounds Per Day (lb/day)</u>		
BOD ₅	94		
TSS	94		
NH ₃ -N =	45		

The facility will be designed to produce an effluent quality in compliance with the limits mentioned in the TPDES Permit:

CBOD ₅ =	10	mg/L
TSS =	15	mg/L
NH ₃ -N =	3	mg/L
DO =	2	mg/L
CL ₂ =	1	to 4 mg/L after 20 minutes detention time at peak flow

To meet the TPDES permit limits, the conventional activated sludge process with nitrification will be used. The lowest seven day mean reactor temperature as assumed to be between > than 15°C. Hence, a maximum organic loading rate of 35 lbs BOD/day/1000ft³ was chosen for the activated sludge system design.

Aeration Basin

	<u>TCEQ Requires</u>	<u>Actual Provided</u>
Max. Organic Loading rate (lbs/day/1000ft ³)	35	34
Total Aeration Volume (ft ³)	2,686	2,736
<u>Proposed 0.035 MGD Train:</u>		
Aeration Basin Volume =	2736 ft ³	

	<u>TCEQ Requires</u>	<u>Actual Provided</u>
Oxygen Required (lb O ₂ /lb BOD ₅)	2.2	2.2
Oxygen Required (lb/day)	207	207
Air Provided (SCFM)	283	283

Per Chapter 217.155 "Aeration Equipment Sizing" Equation F.4

$$RAF = \frac{(PPD BOD_5) \times (O_2/lb BOD_5)}{WOTE \times 0.23 \times 0.075 \times 1440}$$

Where:
 RAF = Required Airflowrate (standard cubic feet per minute (SCFM))
 PPD BOD₅ = Influent Organic Load in Pounds per Day
 0.23 = lb O₂/lb air @ 20° C
 1440 = minutes/day
 0.075 = lb air/cubic foot (cf)
 WOTE = Wastewater Oxygen Transfer Efficiency (decimal)
 If the design inlet temperature is above 24° C, the specific weight of air must be adjusted to the specific weight at the intake temperature.

Clean water oxygen transfer efficiency =	0.85	% per ft of submergence
Correction factor for coarse bubble diffusers =	0.65	
Diffuser submergence (ft) =	9.00	
Therefore, WOTE =	0.0497	
Required air flow rate (RAF) =	167.43	SCFM
RAF Correction Factor for 9 feet of submergence =	1.69	
Corrected Required Airflow Rate =	283	SCFM

Clarifier (To Service Phase I & II)Max. Surface Loading Rate (Q_{pk}) (gallons/day/ft²)TCEQ Requires

1200

Actual Provided

955

Surface Area (ft²)

125

314.2

Diameter (ft)

12.6

20

Proposed .075 MGD Train:

Clarifier dia = 20

Detention Time (hr)

1.8

1.8

Volume (ft³)

1504.0

785.4

Min. Side Water Depth (ft)

10

10

Chlorine Contact Basin (To Service Phase I & II)Detention Time (Q_{pk}) (minutes)TCEQ Requires

20

Actual Provided

69

Volume (ft³)

557.0

955

Proposed .075 MGD Train:Chlorine Contact Basin Volume = 955 ft³**Aerobic Digester**

MCRT at 20°C (days)

TCEQ Requires

40

Actual Provided

41

WAS Solids Production (lb/day)

Not Specified

75.2

Digester Sludge Solids Production (lb/day)

Not Specified

41.36

Required Solids Digesters (lbs)

Not Specified

1695.76

Digester Influent VSS Loading Rate (lbs/CF*d)

Not Specified

0.025

Reduction in VSS (%)

Not Specified

50%

Digester Volume (ft³)

Not Specified

1880

Aeration Requirements (SCFM/1,000CF)

30

30

Air Flow Rate (SCFM)

325.8

167.43

WWTP Phase II Design Calculations

The design calculations are based on the following influent raw sewage characteristics"

<u>Parameter</u>	<u>Concentration</u>		
BOD ₅	300	mg/L	
TSS	300	mg/L	
<u>Flow</u>	<u>MGD</u>	<u>Gallons Per Day</u>	<u>Gallons Per Min</u>
ADF (Q _{ave})	0.075	75000	53
Peak 2-hr Flow (Q _{pk})	0.3	300000	209
<u>Loading</u>	<u>Pounds Per Day (lb/day)</u>		
BOD ₅	188		
TSS	188		
NH ₃ -N =	45		

The facility will be designed to produce an effluent quality in compliance with the limits mentioned in the TPDES Permit:

CBOD ₅ =	10	mg/L
TSS =	15	mg/L
NH ₃ -N =	3	mg/L
DO =	2	mg/L
Cl ₂ =	1	to 4 mg/L after 20 minutes detention time at peak flow

To meet the TPDES permit limits, the conventional activated sludge process with nitrification will be used. The lowest seven day mean reactor temperature as assumed to be between > than 15°C. Hence, a maximum organic loading rate of 35 lbs BOD/day/1000ft³ was chosen for the activated sludge system design.

<u>Aeration Basin</u>	<u>TCEQ Requires</u>	<u>Actual Provided</u>
Max. Organic Loading rate (lbs/day/1000ft ³)	35	34
Total Aeration Volume (ft ³)	2,686	2,736
<u>Proposed 0.0375 MGD Train:</u>		
Aeration Basin Volume =	2736	ft ³
<u>Existing 0.0375 MGD Train:</u>		
Aeration Basin Volume =	2736	ft ³

	<u>TCEQ Requires</u>	<u>Actual Provided</u>
Oxygen Required (lb O ₂ /lb BOD ₅)	2.2	2.2
Oxygen Required (lb/day)	207	207
Air Provided (SCFM)	283	283

Per Chapter 217.155 "Aeration Equipment Sizing" Equation F.4

$$RAF = \frac{PPD \text{ BOD}_5 \times (O_2/\text{lb BOD}_5)}{WOTE \times 0.23 \times 0.075 \times 1440}$$

Where:
 RAF = Required Airflowrate (standard cubic feet per minute (SCFM))
 PPD BOD₅ = Influent Organic Load in Pounds per Day
 0.23 = lb O₂/lb air @ 20° C
 1440 = minutes/day
 0.075 = lb air/cubic foot (cf)
 WOTE = Wastewater Oxygen Transfer Efficiency (decimal)
 If the design inlet temperature is above 24° C, the specific weight of air must be adjusted to the specific weight at the intake temperature.

Clean water oxygen transfer efficiency =	0.85	% per ft of submergence
Correction factor for coarse bubble diffusers =	0.65	
Diffuser submergence (ft) =	9.00	
Therefore, WOTE =	0.0497	
Required air flow rate (RAF) =	167.43	SCFM
RAF Correction Factor for 9 feet of submergence =	1.69	
Corrected Required Airflow Rate =	283	SCFM

<u>Aerobic Digester (Phase I & II)</u>	<u>TCEQ Requires</u>	<u>Actual Provided</u>
MCRT at 20°C (days)	40	41
WAS Solids Production (lb/day)	Not Specified	150.4
Digester Sludge Solids Production (lb/day)	Not Specified	82.72
Required Solids Digesters (lbs)	Not Specified	3391.52
Digester Influent VSS Loading Rate (lbs/CF*d)	Not Specified	0.025
Reduction in VSS (%)	Not Specified	50%
Digester Volume (ft ³)	Not Specified	3760
Aeration Requirements (SCFM/1,000CF)	30	30
Air Flow Rate (SCFM)	325.8	167.43

Attachment I – Solids Management Plan

SLUDGE PRODUCTION RATES

Sludge Management Plan Calculations (Phase I)

Influent Design Flow =	0.0375 MGD	
Influent BOD Concentration =	300 mg/L	
Aerobic Digester Volume (proposed) =	1880 ft ³	14063 Gallons
Aeration Basin MLSS =	2000 to 3000 mg/L	
WAS Sludge Concentration =	8000 mg/L	

Sludge Production				
Solids Generated	100% Flow	75% Flow	50% Flow	25% Flow
Pounds of Influent BOD5 (lb/day)	94.0	71.0	47.0	24.0
Pounds of digested dry sludge (lb/day)*	41.4	31.0	20.7	10.0
Pounds of wet sludge produced**	2068.0	1551.0	1034.0	517.0
Gallons of wet sludge produced	248.0	186.0	124.0	62.0

* Assuming 0.8 lbs of dry sludge produced per pound of influent BOD consumed; and 45% reduction of VS.

** 2.0% solids concentration in the digester

Sludge Removal Schedule				
Solids Generated	100% Flow	75% Flow	50% Flow	25% Flow
Days between Sludge Removal	41	55	82	170

The digested sludge will be removed from the digester for disposal on a regular basis as required.

The calculated mean cell residence time for the provided digester volume at 100% capacity is = 41 days

The annual average sludge production at 100% capacity will be = 41.36 lb/day (dry)

Once the digester is full of thickened solids, the contents will be hauled by **the contracted sludge hauler** to one of the approved land application sites.

The sludge hauler will supply sludge hauling manifests showing volumes and concentration of sludge removed from the plant.

SLUDGE PRODUCTION RATES

Sludge Management Plan Calculations (Phase I & II)

Influent Design Flow =	0.075 MGD	
Influent BOD Concentration =	300 mg/L	
Aerobic Digester Volume (existing + proposed only) =	3760 ft ³	28127 Gallons
Aeration Basin MLSS =	2000 to 3000 mg/L	
WAS Sludge Concentration =	8000 mg/L	

Sludge Production				
Solids Generated	100% Flow	75% Flow	50% Flow	25% Flow
Pounds of Influent BOD5 (lb/day)	188.0	141.0	94.0	47.0
Pounds of digested dry sludge (lb/day)*	82.7	62.0	41.4	21.0
Pounds of wet sludge produced**	4136.0	3102.0	2068.0	1034.0
Gallons of wet sludge produced	495.9	372.0	248.0	124.0

* Assuming 0.8 lbs of dry sludge produced per pound of influent BOD consumed; and 45% reduction of VS.

** 2.0% solids concentration in the digester

Sludge Removal Schedule				
Solids Generated	100% Flow	75% Flow	50% Flow	25% Flow
Days between Sludge Removal	41	55	82	162

The digested sludge will be removed from the digester for disposal on a regular basis as required.

The calculated mean cell residence time for the provided digester volume at 100% capacity is = 41 days

The annual average sludge production at 100% capacity will be = 82.72 lb/day (dry)

Once the digester is full of thickened solids, the contents will be hauled by **the contracted sludge hauler** to one of the approved land application sites.

The sludge hauler will supply sludge hauling manifests showing volumes and concentration of sludge removed from the plant.


Attachment J – Wind Rose

WIND ROSE PLOT:

Station #12960 - HOUSTON/INTERCONTINENTAL ARPT, TX

DISPLAY:

Wind Speed
Direction (blowing from)

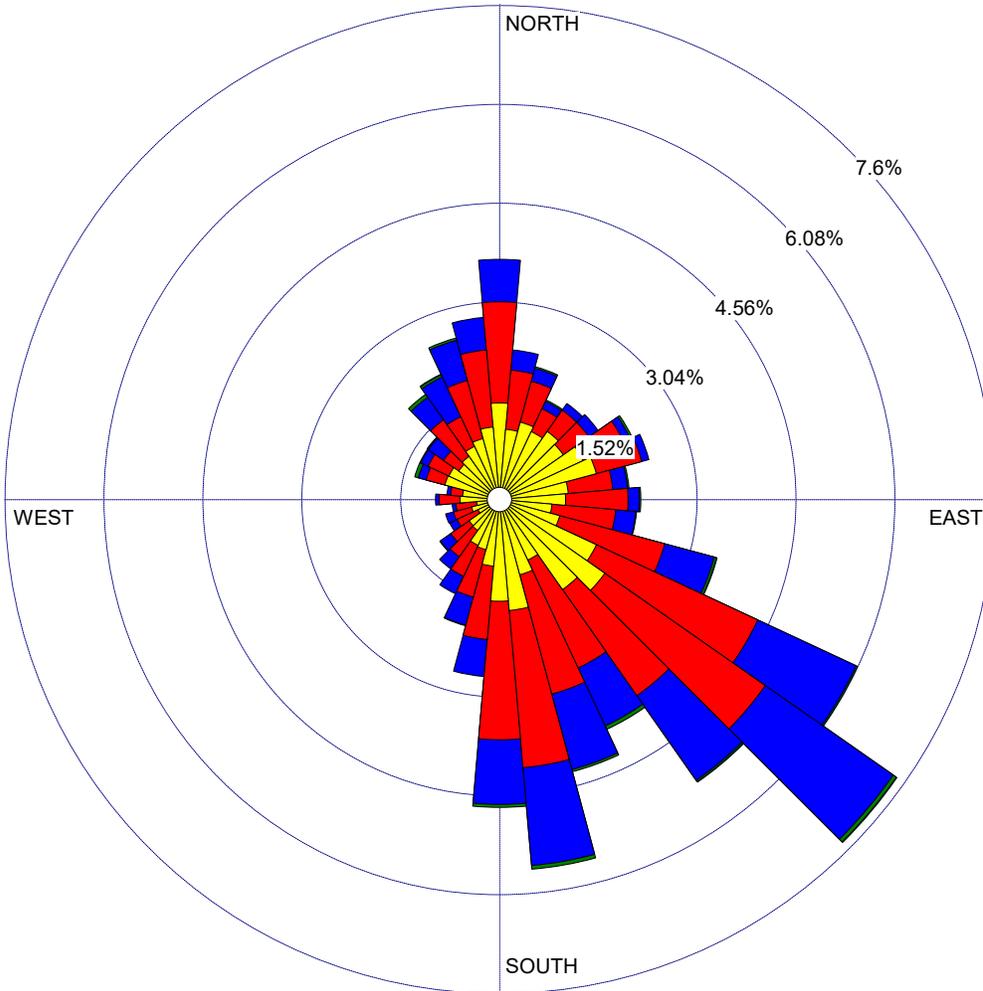

WIND SPEED
(m/s)

- >= 11.10
 - 8.80 - 11.10
 - 5.70 - 8.80
 - 3.60 - 5.70
 - 2.10 - 3.60
 - 0.50 - 2.10
- Calms: 8.23%

COMMENTS:

DATA PERIOD:

Start Date: 1/1/1990 - 00:00
End Date: 12/31/1990 - 23:00

COMPANY NAME:

MODELER:

CALM WINDS:

8.23%

TOTAL COUNT:

8759 hrs.

AVG. WIND SPEED:

3.70 m/s


DATE:

5/16/2024

PROJECT NO.:

Attachment K – Adjacent Land Owner List and Map

L:\SHARED\12 ENGINEERING PROJECTS\10989-HOME PLACE\03 CAD\DESIGN SET\WWTP\WWTP EXHIBITS-10989.DWG Sep. 13, 2024-7:24 AM

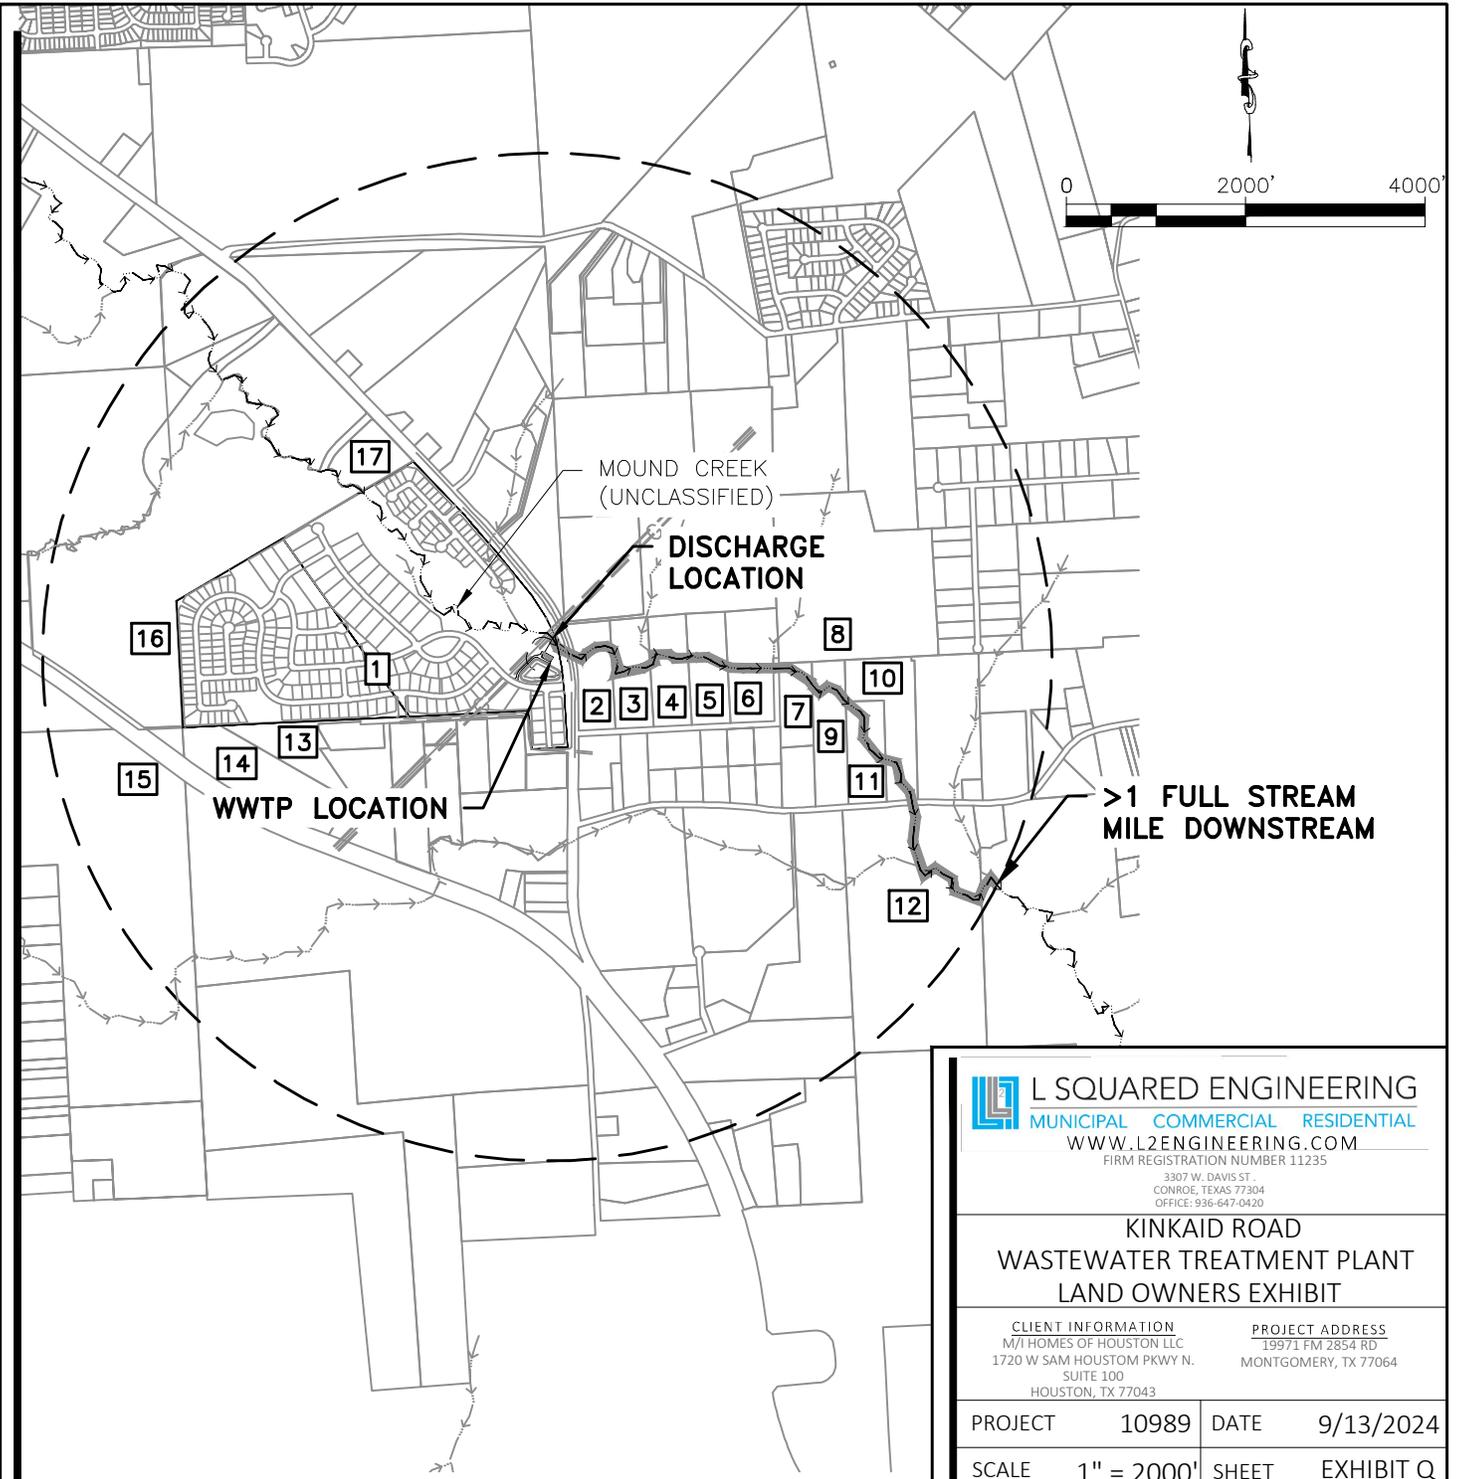

L SQUARED ENGINEERING
MUNICIPAL COMMERCIAL RESIDENTIAL
WWW.L2ENGINEERING.COM
FIRM REGISTRATION NUMBER 11235
3307 W. DAVIS ST.
CONROE, TEXAS 77304
OFFICE: 936-647-0420

**KINKAID ROAD
WASTEWATER TREATMENT PLANT
LAND OWNERS EXHIBIT**

CLIENT INFORMATION M/I HOMES OF HOUSTON LLC 1720 W SAM HOUSTON PKWY N. SUITE 100 HOUSTON, TX 77043	PROJECT ADDRESS 19971 FM 2854 RD MONTGOMERY, TX 77064
---	--

PROJECT 10989	DATE 9/13/2024
SCALE 1" = 2000'	SHEET EXHIBIT Q

THIS DOCUMENT IS RELEASED FOR THE PURPOSE OF INTERIM REVIEW UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
OR
JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
NOT FOR CONSTRUCTION

9/13/2024

Kinkaid Road Development WWTP-OWNER LIST				
NUMBER	PROPERTY ID	OWNER NAME	OWNER MAILING ADDRESS	LEGAL DESCRIPTION
	R293492, R34683, R293492, R391984, R261185, R363788	M/I Homes of Houston	1720 W Sam Houston Parkway N. Suite 100 Houston, TX 77064	A0033 ROGERS RALEIGH, TRACT 14-D (SPLIT FOR AG), ACRES 2.323, TRACT 14, ACRES 57.519, TRACT 14-F, ACRES 18.690, TRACT 14-E, ACRES 1, TRACT 14-E (SPLIT FOR AG), ACRES 3, TRACT 14-E, ACRES 2
1	R107762	COOMBS, PAUL D	18648 KINKAID RD EMONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 17, ACRES 9.570
2	R107763	COOMBS, PAUL D	18648 KINKAID RD EMONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 18, ACRES 10.070
3	R107764	COOMBS, PAUL D	18648 KINKAID RD EMONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 19, ACRES 10.230
4	R107766	COOMBS, PAUL D	18648 KINKAID RD EMONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 20 (SPLIT FOR AG), ACRES 0.340
5	R107767	COOMBS, PAUL D	18648 KINKAID RD EMONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 21, ACRES 12.960
6	R30426	AVONNI LLC	PO BOX 1820 MONTGOMERY, TX 77356-1856	A0003 - Atkins Wm, TRACT 9-B, ACRES 6.983
7	R278162	LAKE CREEK RANCH LTD	906 SERENE CT ERIE, CO 80516-2455	A0003 ATKINS WM, TRACT 66-A, ACRES 5.430
8	R30424	AVONNI LLC	PO BOX 1820SPRING, TX 77393-2679	A0003 - Atkins Wm, TRACT 9, ACRES 1
9	R30427	REED, JOE E & JANE L	18830 RABON CHAPEL RD MONTGOMERY, TX 77316-4126	A0003 ATKINS WM, TRACT 9-A, ACRES 14.25
10	R210002	REED, JOE E & JANE L	18830 RABON CHAPEL RDMONTGOMERY, TX 77316-4126	A0003 ATKINS WM, TRACT 9A-1, ACRES 9.75
11	R39458	MAYER, MARTHA	18507 RABON CHAPEL RDMONTGOMERY, TX 77316-4021	A0126 - Cartwright Matthew, TRACT 1 PT SPLIT FOR AG, ACRES 86.64
12	R474346	HILL, MATTHEW & CRYSTAL	13077 KINKAID RD WMONTGOMERY, TX 77316-4096	5643400 - Kinkaid Farms, Lot 33C-1, ACRES 5.25
13	R541300	HILL, MATTHEW & CRYSTAL	13077 KINKAID RD WMONTGOMERY, TX 77316-4096	5643400 - Kinkaid Farms, Lot 33B-1, 33C2, ACRES 20.13
14	R34691	MCCANTS FOREST LAND LIMITED	PARTNERSHIP 14717 RED RIVER DR CRP CHRISTI, TX 78410-5626	A0033 ROGERS RALEIGH, TRACT 16, 17, 18, 20, 43, ACRES 473.500
15	R396488	MONTGOMERY ISD	PO BOX 1475 MONTGOMERY, TX 77356-1475	A0033 - Rogers Raleigh, TRACT 14B-1, 14B-2, 14C-1, 15-A, 14A-1, 14A-2, 15-C ACRES 123.392
16	R34682	HOMEPLACE LANDS LLC	2001 KIRBY DR#STE 610HOUSTON, TX 77019-6093	A0033 - Rogers Raleigh, TRACT 14-B, 14B1-A, ACRES 31.4018
17				

Kinkaid Road Development WWTP-OWNER LIST

NUMBER	PROPERTY ID	OWNER NAME	OWNER MAILING ADDRESS	LEGAL DESCRIPTION
1	R293492, R34683, R293492, R391984, R261185, R363788	M/I Homes of Houston	1720 W Sam Houston Parkway N. Suite 100 Houston, TX 77064	A0033 ROGERS RALEIGH, TRACT 14-D (SPLIT FOR AG), ACRES 2.323, TRACT 14, ACRES 57.519, TRACT 14-F, ACRES 18.690, TRACT 14-E, ACRES 1, TRACT 14-E (SPLIT FOR AG), ACRES 3, TRACT 14-E, ACRES 2
2	R107762	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 17, ACRES 9.570
3	R107763	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 18, ACRES 10.070
4	R107764	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 19, ACRES 10.230
5	R107766	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 20 (SPLIT FOR AG), ACRES 0.340
6	R107767	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 21, ACRES 12.960
7	R30426	AVONNI LLC	PO BOX 1820 MONTGOMERY, TX 77356-1856	A0003 - Atkins Wm, TRACT 9-B, ACRES 6.983
8	R278162	LAKE CREEK RANCH LTD	906 SERENE CT ERIE, CO 80516-2455	A0003 ATKINS WM, TRACT 66-A, ACRES 5.430
9	R30424	AVONNI LLC	PO BOX 1820 SPRING, TX 77393-2679	A0003 - Atkins Wm, TRACT 9, ACRES 1
10	R30427	REED, JOE E & JANE L	18830 RABON CHAPEL RD MONTGOMERY, TX 77316-4126	A0003 ATKINS WM, TRACT 9-A, ACRES 14.25
11	R210002	REED, JOE E & JANE L	18830 RABON CHAPEL RDMONTGOMERY, TX 77316-4126	A0003 ATKINS WM, TRACT 9A-1, ACRES 9.75
12	R39458	MAYER, MARTHA	18507 RABON CHAPEL RD MONTGOMERY, TX 77316-4021	A0126 - Cartwright Matthew, TRACT 1 PT SPLIT FOR AG, ACRES 86.64
13	R474346	HILL, MATTHEW & CRYSTAL	19077 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33C-1, ACRES 5.25
14	R541300	HILL, MATTHEW & CRYSTAL	19077 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33B-1, 33C2, ACRES 20.13
15	R34691	MCCANTS FOREST LAND LIMITED	PARTNERSHIP 14717 RED RIVER DR CRP CHRISTI, TX 78410-5626	A0033 ROGERS RALEIGH, TRACT 16, 17, 18, 20, 43, ACRES 473.500
16	R396488	MONTGOMERY ISD	PO BOX 1475 MONTGOMERY, TX 77356-1475	A0033 - Rogers Raleigh, TRACT 14B-1, 14B-2, 14C-1,15-A, 14A-1, 14A-2, 15-C ACRES 123.392
17	R34682	HOMEPLACE LANDS LLC	2001 KIRBY DR #STE 610 HOUSTON, TX 77019-6093	A0033 - Rogers Raleigh, TRACT 14-B, 14B1-A, ACRES 31.4018

Coombs, Paul D
18648 Kinkaid Rd E
Montgomery, Tx 77316-4111

Avonni Llc
Po Box 1820
Spring, Tx 77393-2679

Hill, Matthew & Crystal
19077 Kinkaid Rd W
Montgomery, Tx 77316-4096

Homeplace Lands Llc
2001 Kirby Dr #Ste 610
Houston, Tx 77019-6093

Avonni Llc
Po Box 1820
Montgomery, Tx 77356-1856

Reed, Joe E & Jane L
18830 Rabon Chapel Rd
Montgomery, Tx 77316-4126

Mccants Forest Land Limited
Partnership 14717 Red River Dr
Crp Christi, Tx 78410-5626

Lake Creek Ranch Ltd
906 Serene Ct
Erie, Co 80516-2455

Mayer, Martha
18507 Rabon Chapel Rd
Montgomery, Tx 77316-4021

Montgomery Isd
Po Box 1475
Montgomery, Tx 77356-1475

Attachment L – Buildout Schedule

Kinkaid Road Estimated Schedule of Buildout

<u>Year</u>	<u>Phase</u>	<u>Number of months for buildout</u>
2025	Phase 1 Construction	12
2027	Phase 2 Construction	12

Monthly growth of LUE's=	8.58	12.58
Gal. Per day per connection =	103	151
	(Phase 1)	(Phase 2)

Estimated time for implementation of all phases

<u>Year</u>	<u>GPD</u>	<u>Sub Total GPD</u>	<u>Number of LUE's</u>
2025	25,750	25,750	103
2027	37,750	63,500	254

Total GPD 75,000

Requesting 75,000 to allow for the 75%/90% rule


<u>Year</u>	<u>GPD</u>	<u>Loading Percentages</u>
2025	25,750	68.67%
2027	63,500	84.67%

Attachment M – USGS Map Showing Site Location

Attachment N – Operator Information

Attachment O – Original Photographs

L:\SHARED\L2 ENGINEERING PROJECTS\ENGINEERING PROJECTS\10989-HOME PLACE\03 CAD\DESIGN SET\WWTP\WWTP EXHIBITS-10989.DWG Sep. 13, 2024-7:23 AM

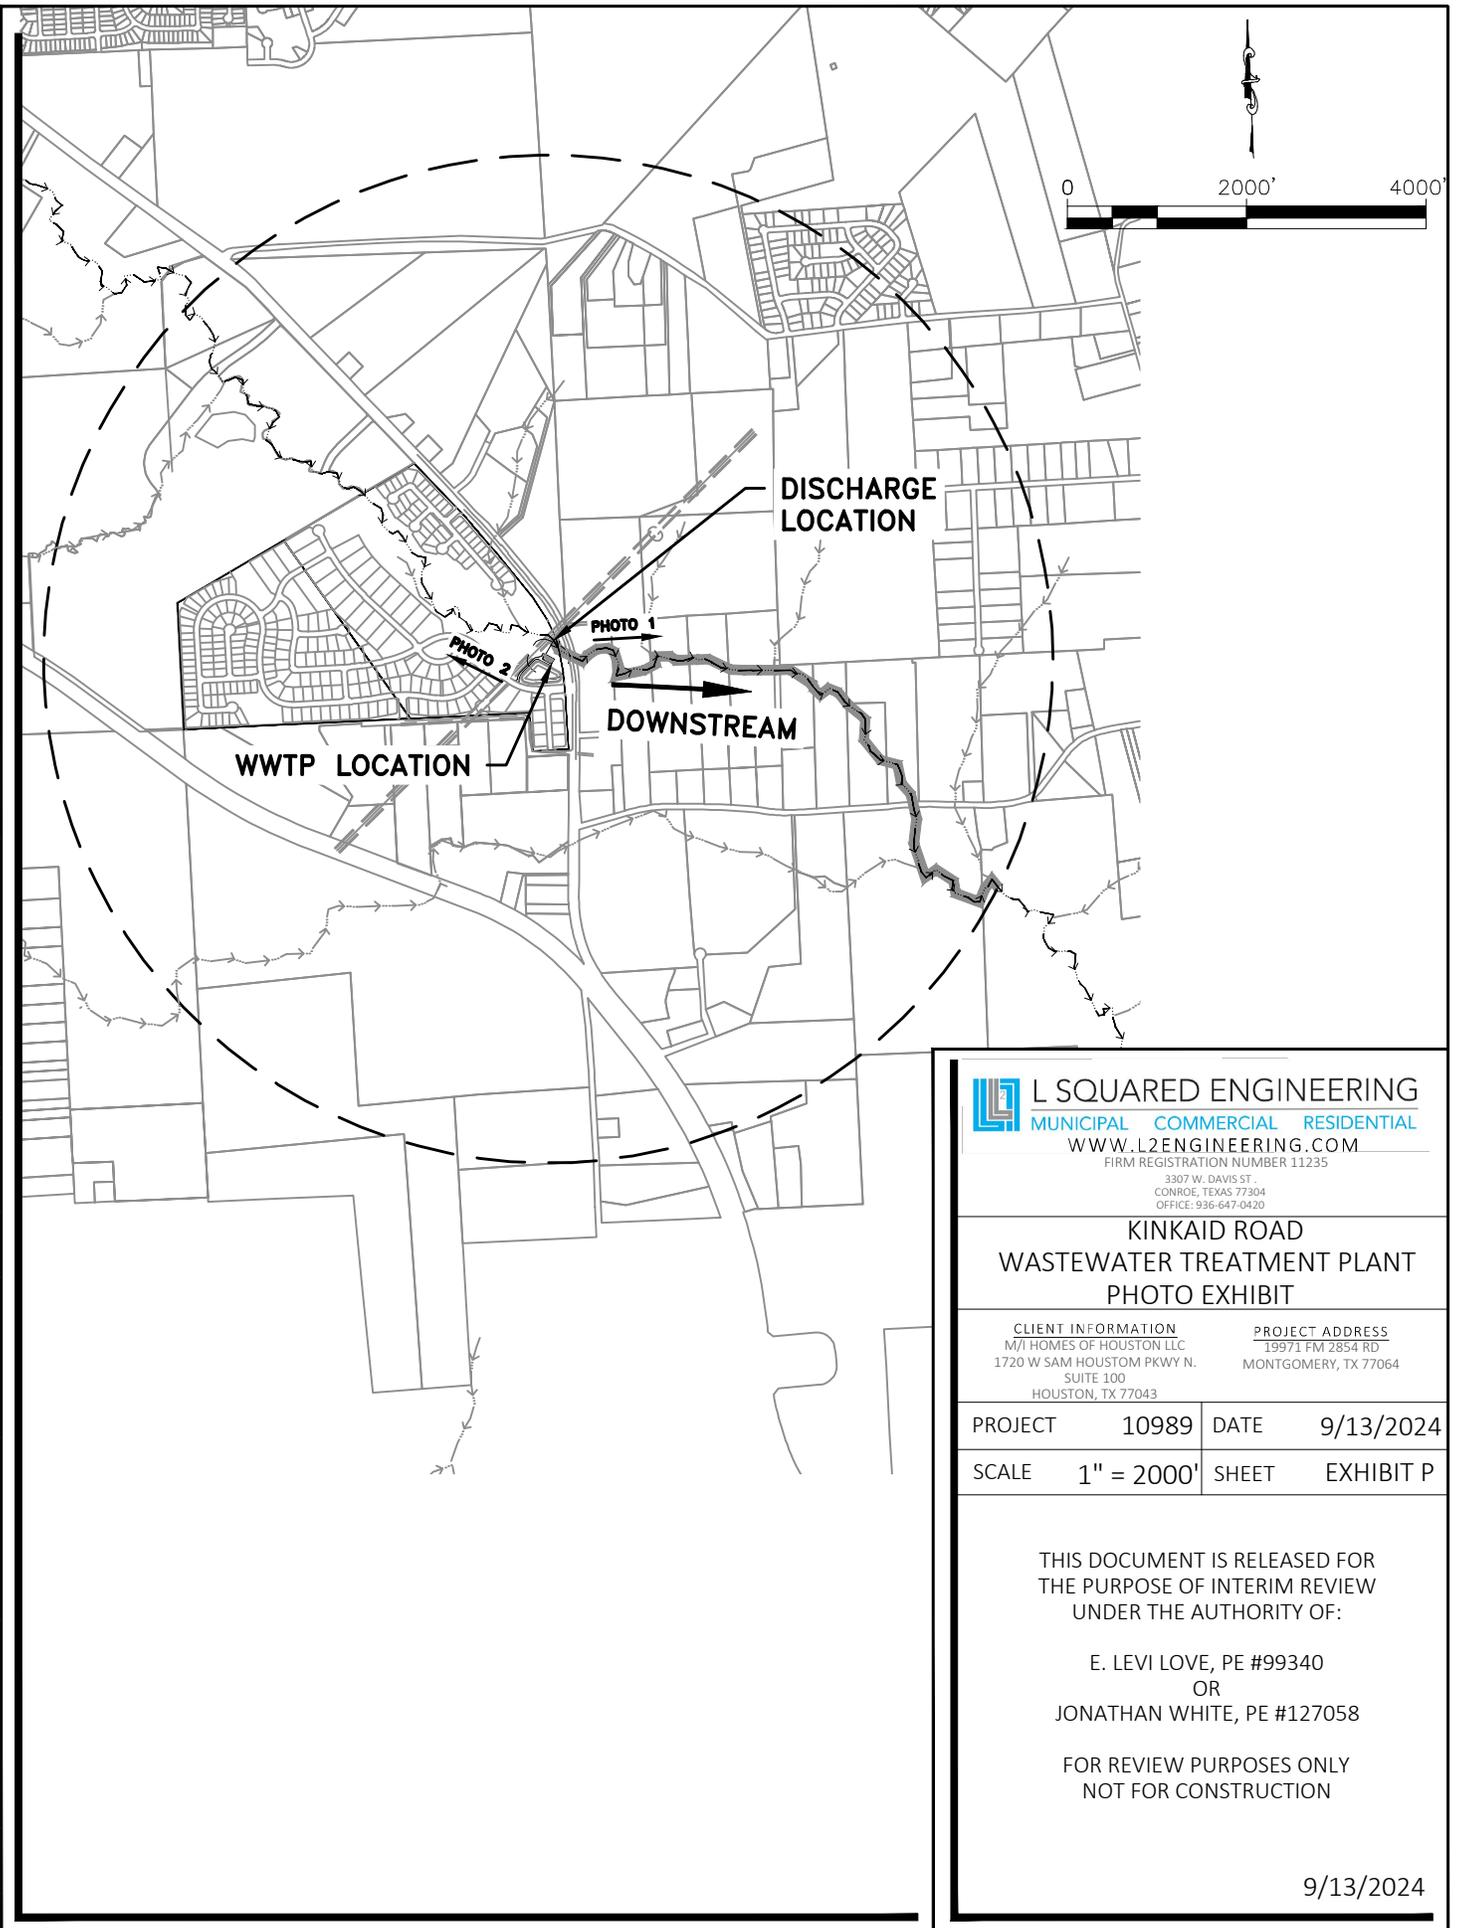

L SQUARED ENGINEERING
MUNICIPAL COMMERCIAL RESIDENTIAL
WWW.L2ENGINEERING.COM
FIRM REGISTRATION NUMBER 11235
3307 W. DAVIS ST.
CONROE, TEXAS 77304
OFFICE: 936-647-0420

**KINKAID ROAD
WASTEWATER TREATMENT PLANT
PHOTO EXHIBIT**

CLIENT INFORMATION	PROJECT ADDRESS
M/I HOMES OF HOUSTON LLC 1720 W SAM HOUSTON PKWY N. SUITE 100 HOUSTON, TX 77043	19971 FM 2854 RD MONTGOMERY, TX 77064

PROJECT	10989	DATE	9/13/2024
SCALE	1" = 2000'	SHEET	EXHIBIT P

THIS DOCUMENT IS RELEASED FOR
THE PURPOSE OF INTERIM REVIEW
UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
OR
JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
NOT FOR CONSTRUCTION

9/13/2024



PHOTO 1



PHOTO 2



Attachment P – Adjacent WWTP Facilities

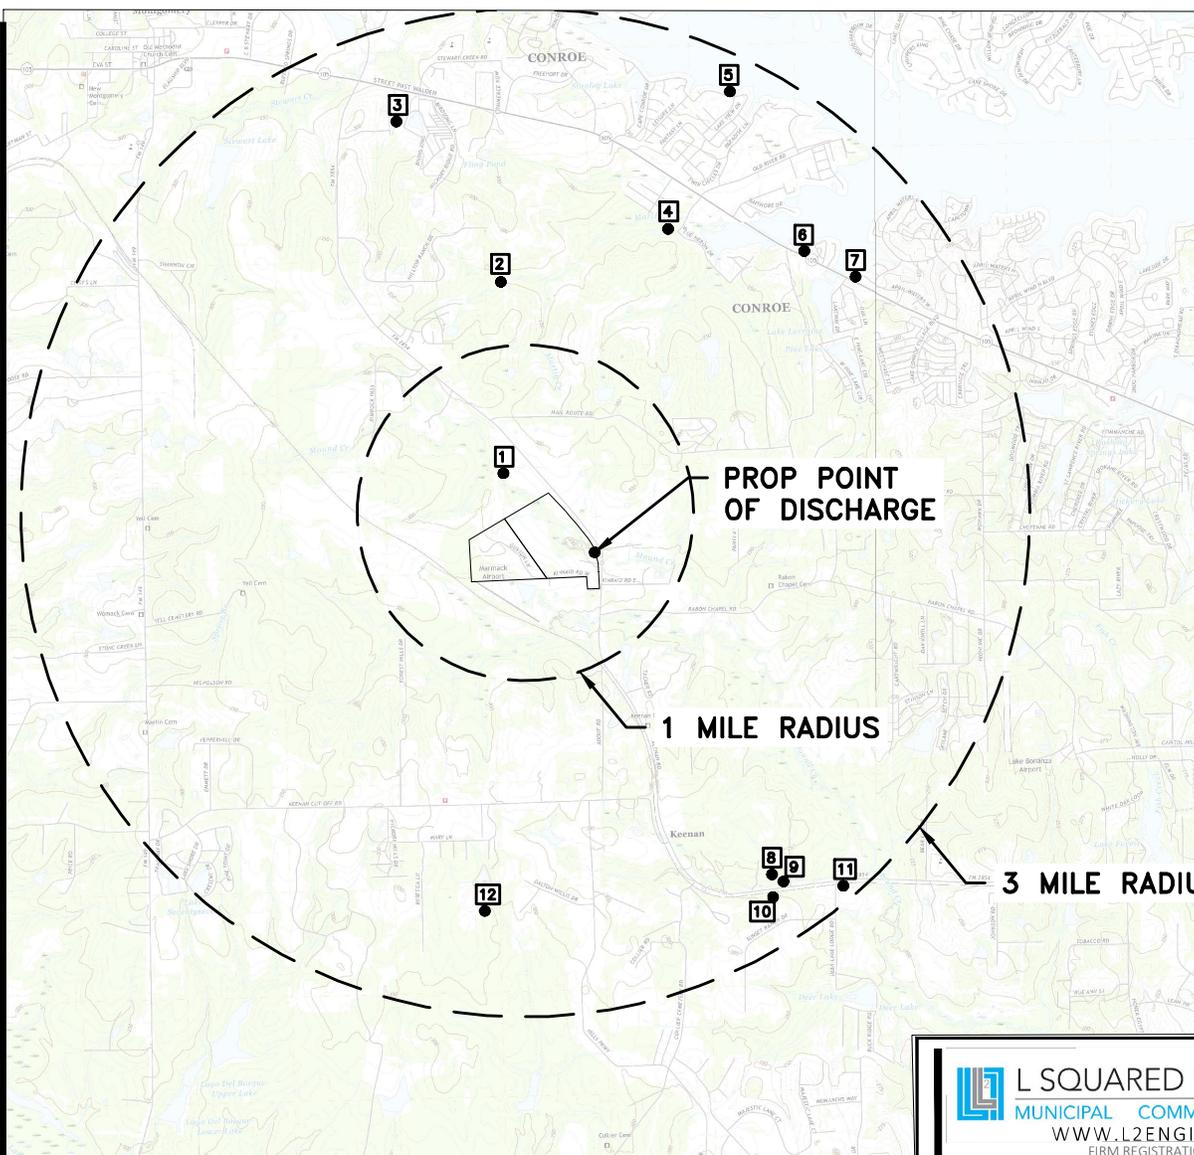

Kinkaid Road Nearby Wastewater Facility List		
#	Owners Name	Permit Number
1	MSEC WASTE WATER INC	WQ0015341001
2	MONTGOMERY COUNTY MUNICIPAL UTILITY DISTRICT NO 166	WQ0015740001
3	MONTGOMERY COUNTY MUNICIPAL UTILITY DISTRICT NO 150	WQ0015372001
4	UA HOLDINGS 1994-5 LP	WQ0014468001
5	STANLEY LAKE MUD	WQ0011367001
6	SPORT HARBOUR LLC	WQ0011693001
7	AQUA TEXAS INC	WQ0014114001
8	MSEC WASTE WATER INC	WQ0014638001
9	A & M INTERESTS INC	WQ0015819001
10	MSEC WASTE WATER INC	WQ0016075001
11	CRANE CO	WQ0012456002
12	MTX MATERIALS LP	WQ0005337000

L SQUARED ENGINEERING
MUNICIPAL COMMERCIAL RESIDENTIAL
WWW.L2ENGINEERING.COM
FIRM REGISTRATION NUMBER 11235

3307 W. DAVIS ST.
CONROE, TEXAS 77304
OFFICE: 936-647-0420

**KINKAID ROAD
WASTEWATER TREATMENT PLANT
PERMITEE MAP**

CLIENT INFORMATION	PROJECT ADDRESS
M/I HOMES OF HOUSTON LLC 1720 W SAM HOUSTON PKWY N. SUITE 100 HOUSTON, TX 77043	19971 FM 2854 RD MONTGOMERY, TX 77064

PROJECT	10989	DATE	9/13/2024
SCALE	1" = 6000'	SHEET	EXHIBIT R

THIS DOCUMENT IS RELEASED FOR
THE PURPOSE OF INTERIM REVIEW
UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
OR
JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
NOT FOR CONSTRUCTION

9/13/2024

Kinkaid Road Nearby Wastewater Facility List

#	Owners Name	Permit Number
1	MSEC WASTE WATER INC	WQ0015341001
2	MONTGOMERY COUNTY MUNICIPAL UTILITY DISTRICT NO 166	WQ0015740001
3	MONTGOMERY COUNTY MUNICIPAL UTILITY DISTRICT NO 150	WQ0015372001
4	UA HOLDINGS 1994-5 LP	WQ0014468001
5	STANLEY LAKE MUD	WQ0011367001
6	SPORT HARBOUR LLC	WQ0011693001
7	AQUA TEXAS INC	WQ0014114001
8	MSEC WASTE WATER INC	WQ0014638001
9	A & M INTERESTS INC	WQ0015819001
10	MSEC WASTE WATER INC	WQ0016075001
11	CRANE CO	WQ0012456002
12	MTX MATERIALS LP	WQ0005337000

Address

P.O. Box 970 Navasota, Texas 77868
 3200 Southwest Fwy Houston, Tx 77027
 1750 West 43rd Street Houston, TX 77018
 8765 Spring Cypress Rd Ste L173 Spring, Tx 77379
 875 Lake View Dr, Montgomery, TX 77356
 17742 Highway 105 W Montgomery, TX 77356-5621
 1106 Clayton Lane, Suite 400W Austin, Texas 78723
 P.O. Box 970 Navasota, Texas 77868
 1519 North Frazier Street Conroe, Texas 77301
 P.O. Box 970 Navasota, Texas 77868
 9860 Johnson Rd, Montgomery Tx 77316
 7720 Westview Dr Houston, Tx 77055



August 8, 2024

Stanley Lake Mud
 875 Lake View Dr,
 Montgomery, TX 77356

RE: TCEQ Wastewater Capacity Request (Permits - WQ0011367001)

Dear permittee:

We are writing to you on behalf of M/I Homes of Houston, LLC regarding a proposed wastewater treatment facility project to serve a proposed development in Montgomery County, site is located approximately 3.5-mile South of the intersection of HWY 105 W and FM 2854 Road, Montgomery County, TX. We are in the process of applying for a new TCEQ Wastewater Discharge Permit for 75,000 gallons per day (GPD) to serve this development.

We are required to contact all existing TCEQ Wastewater Discharge Permittees within a 3-mile radius of the project to inquire if an existing permit holder is willing to provide the wastewater treatment capacity needed. According to TCEQ records, you are a permittee having an existing WWTP located within 3 miles of the project and have a TCEQ Waste Discharge Permit. If there is a WWTP within 3 miles that has the capacity available or will expand their facility to make it available, there will be a conducted feasibility study to determine if it is cost effective to obtain service from them.

We would appreciate receiving a response from you indicating if 75,000 GPD of wastewater treatment capacity in your facility is available, and if so, under what terms. A handwritten reply on a copy of this letter will be adequate. You may email your response to me at jwhite@L2Engineering.com or fax it to (936) 647-2366. Please feel free to call me at (936) 647-0420 if you have any questions. Thank you for your assistance.

Thank you,
 Jonathan White, PE

Attachments: 1) 3-Mile Radius Map

Date of Reply: 8/12/24
 Name Of Permittee: Stanley Lake Mud
 Capacity Available (Yes/No)? NO
 Terms (if Available): _____

Reply

Signature: Michael Sullivan
 Printed Name: Michael Sullivan, P.E.
 Title: General Manager
 Address: 875 Lake View Drive
Montgomery 77316
 Telephone: 936-582-1010
 Email: msullivan@slmud.com



SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

MSEC Waste Water Inc.
 P.O. Box 970
 Navasota TX 77868



9590 9402 6860 1104 3865 99

2. Article Number (Transfer from service label)

7019 1640 0001 6345 6771

COMPLETE THIS SECTION ON DELIVERY

A. Signature
 [Handwritten Signature]

Agent
 Addressee

B. Received by (Printed Name)
Heather Fenner

C. Date of Delivery

D. Is delivery address different from item 1? Yes
 If YES, enter delivery address below: No



3. Service Type
- Adult Signature
 - Adult Signature Restricted Delivery
 - Certified Mail®
 - Certified Mail Restricted Delivery
 - Collect on Delivery
 - Collect on Delivery Restricted Delivery
 - Priority Mail Express®
 - Registered Mail™
 - Registered Mail Restricted Delivery
 - Signature Confirmation™
 - Signature Confirmation Restricted Delivery

Mail Restricted Delivery (0)

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

MTX MATERIALS LP.
7720 Westview Dr.
Houston TX 77055



9590-9402 6860 1104 3868 65

2. Article Number (Transfer from service label)

7019 1640 0001 6345 6764

COMPLETE THIS SECTION ON DELIVERY

A. Signature
X 

Agent
 Addressee

B. Received by (Printed Name)
Tom Bui

C. Date of Delivery

D. Is delivery address different from item 1?
If YES, enter delivery address below: Yes No

3. Service Type

- Adult Signature
- Adult Signature Restricted Delivery
- Certified Mail®
- Certified Mail Restricted Delivery
- Collect on Delivery
- Collect on Delivery Restricted Delivery
- Priority Mail Express®
- Registered Mail™
- Registered Mail Restricted Delivery
- Signature Confirmation™
- Signature Confirmation Restricted Delivery

Mail
Mail Restricted Delivery
(00)

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Stanley Lake MUD
 875 Lake View Dr.
 Montgomery TX 77356



9590 9402 6860 1104 3868 03

2. Article Number (Transfer from service label)

7019 1640 0001 6345 6719

COMPLETE THIS SECTION ON DELIVERY

A. Signature

Agent
 Addressee

B. Received by (Printed Name)

Stanley Lake MUD
Victor

C. Date of Delivery

8-12-24

D. Is delivery address different from item 1? Yes
 If YES, enter delivery address below: No

3. Service Type

- | | |
|--|---|
| <input type="checkbox"/> Adult Signature | <input type="checkbox"/> Priority Mail Express® |
| <input type="checkbox"/> Adult Signature Restricted Delivery | <input type="checkbox"/> Registered Mail™ |
| <input type="checkbox"/> Certified Mail® | <input type="checkbox"/> Registered Mail Restricted Delivery |
| <input type="checkbox"/> Certified Mail Restricted Delivery | <input type="checkbox"/> Signature Confirmation™ |
| <input type="checkbox"/> Collect on Delivery | <input type="checkbox"/> Signature Confirmation Restricted Delivery |
| <input type="checkbox"/> Collect on Delivery Restricted Delivery | |
| <input type="checkbox"/> Mail | |
| <input type="checkbox"/> Mail Restricted Delivery | |

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

A + M Interests Inc.
 1519 N. Frazer Street
 Conroe TX 77301



9590 9402 6860 1104 3868 34

2. Article Number (Transfer from service label)

7019 1640 0001 6345 6740

COMPLETE THIS SECTION ON DELIVERY

A. Signature Agent
 X *[Signature]* Addressee

B. Received by (Printed Name) Date of Delivery
 DAVIS, PATTI 02/13/19

D. Is delivery address different from item 1? Yes No
 If YES, enter delivery address below:

3. Service Type

- Adult Signature
- Adult Signature Restricted Delivery
- Certified Mail®
- Certified Mail Restricted Delivery
- Collect on Delivery
- Collect on Delivery/ Restricted Delivery
- Priority Mail Express®
- Registered Mail™
- Registered Mail Restricted Delivery
- Signature Confirmation™
- Signature Confirmation Restricted Delivery

Mail
 Restricted Delivery
 00

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

UA Holdings PPA4-5 LP
 8705 Spring Cypress Rd Ste 113
 Spring TX 77379

9590 9402 6860 1104 3868 10



2. Article Number (Transfer from service label)

7 214 2307 0005
 8019 0440 0000 1575H 702

COMPLETE THIS SECTION ON DELIVERY

- A. Signature Agent
- B. Received by (Printed Name) Addressee
- C. Date of Delivery

D. Is delivery address different from item 1? Yes
 If YES, enter delivery address below: NO

3. Service Type

<input type="checkbox"/> Adult Signature	<input type="checkbox"/> Priority Mail Express®
<input type="checkbox"/> Adult Signature Restricted Delivery	<input type="checkbox"/> Registered Mail™
<input type="checkbox"/> Certified Mail®	<input type="checkbox"/> Registered Mail Restricted Delivery
<input type="checkbox"/> Certified Mail Restricted Delivery	<input type="checkbox"/> Signature Confirmation™
<input type="checkbox"/> Collect on Delivery	<input type="checkbox"/> Signature Confirmation Restricted Delivery
<input type="checkbox"/> Collect on Delivery Restricted Delivery	
<input type="checkbox"/> Mail Restricted Delivery	

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Sport Harbour LLC
 17742 Highway 105 W
 Montgomery TX 77356

9590 9402 6860 1104 3868 27



2. Article Number (Transfer from service label)

7019 1640 0001 6345 6726

COMPLETE THIS SECTION ON DELIVERY

A. Signature
 [Handwritten Signature]

Agent
 Addressee

B. Received by (Printed Name)
 812/24 Lane Bldg

C. Date of Delivery
 8/12/24

D. Is delivery address different from item 1?
 If YES, enter delivery address below: Yes No

3. Service Type

- Adult Signature
- Adult Signature Restricted Delivery
- Certified Mail®
- Certified Mail Restricted Delivery
- Collect on Delivery
- Collect on Delivery Restricted Delivery

- Priority Mail Express®
- Registered Mail™
- Registered Mail Restricted Delivery
- Signature Confirmation™
- Signature Confirmation Restricted Delivery

Mail
 Mail Restricted Delivery

00)

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

AQUA TEXAS INC.
 1100 Clayton Lane Suite 400W
 Austin TX 78723



9590 9402 6860 1104 3868 41

2. Article Number (Transfer from service label)

7019 1640 0001 6345 6733

COMPLETE THIS SECTION ON DELIVERY

A. Signature Agent
 [Signature] Addressee

B. Received by (Printed Name) C. Date of Delivery
SCOT POITZ

D. Is delivery address different from item 1? Yes
 If YES, enter delivery address below: No

3. Service Type
- Adult Signature
 - Adult Signature Restricted Delivery
 - Certified Mail®
 - Certified Mail Restricted Delivery
 - Collect on Delivery
 - Collect on Delivery Restricted Delivery
 - Priority Mail Express®
 - Registered Mail™
 - Registered Mail Restricted Delivery
 - Signature Confirmation™
 - Signature Confirmation Restricted Delivery

Mail
 Mail Restricted Delivery
 00)

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

North Hempstead Utilities LLC.
250 HWY 290 NORTH
Hempstead TX 77445



9590 9402 6860 1104 3865 68

2. Article Number (Transfer from service label)

7019 1640 0001 6345 7327

COMPLETE THIS SECTION ON DELIVERY

- A. Signature
 Marcia VanderPeak Agent
- B. Received by (Printed Name) Addressee
Marcia VanderPeak
- C. Date of Delivery Addressee
05/29/2021
- D. Is delivery address different from item 1? Yes
If YES, enter delivery address below: No

3. Service Type

- | | |
|--|---|
| <input type="checkbox"/> Adult Signature | <input type="checkbox"/> Priority Mail Express® |
| <input type="checkbox"/> Adult Signature Restricted Delivery | <input type="checkbox"/> Registered Mail™ |
| <input type="checkbox"/> Certified Mail® | <input type="checkbox"/> Registered Mail Restricted Delivery |
| <input type="checkbox"/> Certified Mail Restricted Delivery | <input type="checkbox"/> Signature Confirmation™ |
| <input type="checkbox"/> Collect on Delivery | <input type="checkbox"/> Signature Confirmation Restricted Delivery |
| <input type="checkbox"/> Collect on Delivery Restricted Delivery | |

Mail Restricted Delivery
00)

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Montgomery County MUD No: 1142
3700 Southwest Fwy
Houston TX 77027

9590 9402 6860 1104 3866 05



2. Article Number (Transfer from service label)

7019 1640 0001 6345 6689

COMPLETE THIS SECTION ON DELIVERY

A. Signature
 X Seylon I. McPhoy Agent

B. Received **Aug 19 2024** Addressee

C. Date of Delivery

D. Is delivery address different from item 1? Yes
If YES, enter delivery address below: No

3. Service Type
- | | |
|--|---|
| <input type="checkbox"/> Adult Signature | <input type="checkbox"/> Priority Mail Express® |
| <input type="checkbox"/> Adult Signature Restricted Delivery | <input type="checkbox"/> Registered Mail™ |
| <input type="checkbox"/> Certified Mail® | <input type="checkbox"/> Registered Mail Restricted Delivery |
| <input type="checkbox"/> Certified Mail Restricted Delivery | <input type="checkbox"/> Signature Confirmation™ |
| <input type="checkbox"/> Collect on Delivery | <input type="checkbox"/> Signature Confirmation Restricted Delivery |
| <input type="checkbox"/> Collect on Delivery Restricted Delivery | |

Mail
Mail Restricted Delivery (0)

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3.
 - Print your name and address on the reverse so that we can return the card to you.
 - Attach this card to the back of the mailpiece, or on the front if space permits.
1. Article Addressed to:

Montgomery County MUD No: 150
1750 West 43rd Street
Houston TX 77018

9590 9402 6860 1104 3866 12



2. Article Number (Transfer from service label)

7019 1640 0001 6345 6696

COMPLETE THIS SECTION ON DELIVERY

- A. Signature
- B. Received by (Printed Name)
- C. Date of Delivery
- D. Is delivery address different from item 1? Yes No
If YES, enter delivery address below:

3. Service Type

- | | |
|--|---|
| <input type="checkbox"/> Adult Signature | <input type="checkbox"/> Priority Mail Express® |
| <input type="checkbox"/> Adult Signature Restricted Delivery | <input type="checkbox"/> Registered Mail™ |
| <input type="checkbox"/> Certified Mail® | <input type="checkbox"/> Registered Mail Restricted Delivery |
| <input type="checkbox"/> Certified Mail Restricted Delivery | <input type="checkbox"/> Signature Confirmation™ |
| <input type="checkbox"/> Collect on Delivery | <input type="checkbox"/> Signature Confirmation Restricted Delivery |
| <input type="checkbox"/> Collect on Delivery Restricted Delivery | |
| Mail | |
| 00) Mail Restricted Delivery | |

Leah Whallon

From: Jerry Barnes <jbarnes@l2engineering.com>
Sent: Wednesday, October 16, 2024 3:44 PM
To: Leah Whallon
Cc: Jonathan White, P.E.
Subject: Re: Application for Proposed Permit No. WQ0016629001; M/I Homes of Houston, LLC; Kinkaid Road WWTP
Attachments: K - Land Owner Address Labels.docx; WWTP EXHIBITS-10989-LAND OWNERS EXHIBIT Rev.pdf
Follow Up Flag: Follow up
Flag Status: Flagged

Good afternoon Leah,

Please see attached! Let me know if you have any additional concerns.


Thank you,

On Tue, Oct 15, 2024 at 4:01 PM Leah Whallon <Leah.Whallon@tceq.texas.gov> wrote:

Thank you, Jerry.

I've reviewed the response and it looks like there may still be some landowners missing from the map and list. All properties adjacent to the applicant should be shown, including across the roadway on the northeast boundary. The only exception to this is for divided highways (doesn't appear to be the case here), railroads, and canals. Would you be able to make these updates and resend the landowners map, list, and mailing labels? Please let me know if you have any questions or need additional time beyond October 17th.

IGN SET\WWTP\WWTP_EXHIBITS-10989.DWG Oct. 10, 2024-10:55 AM

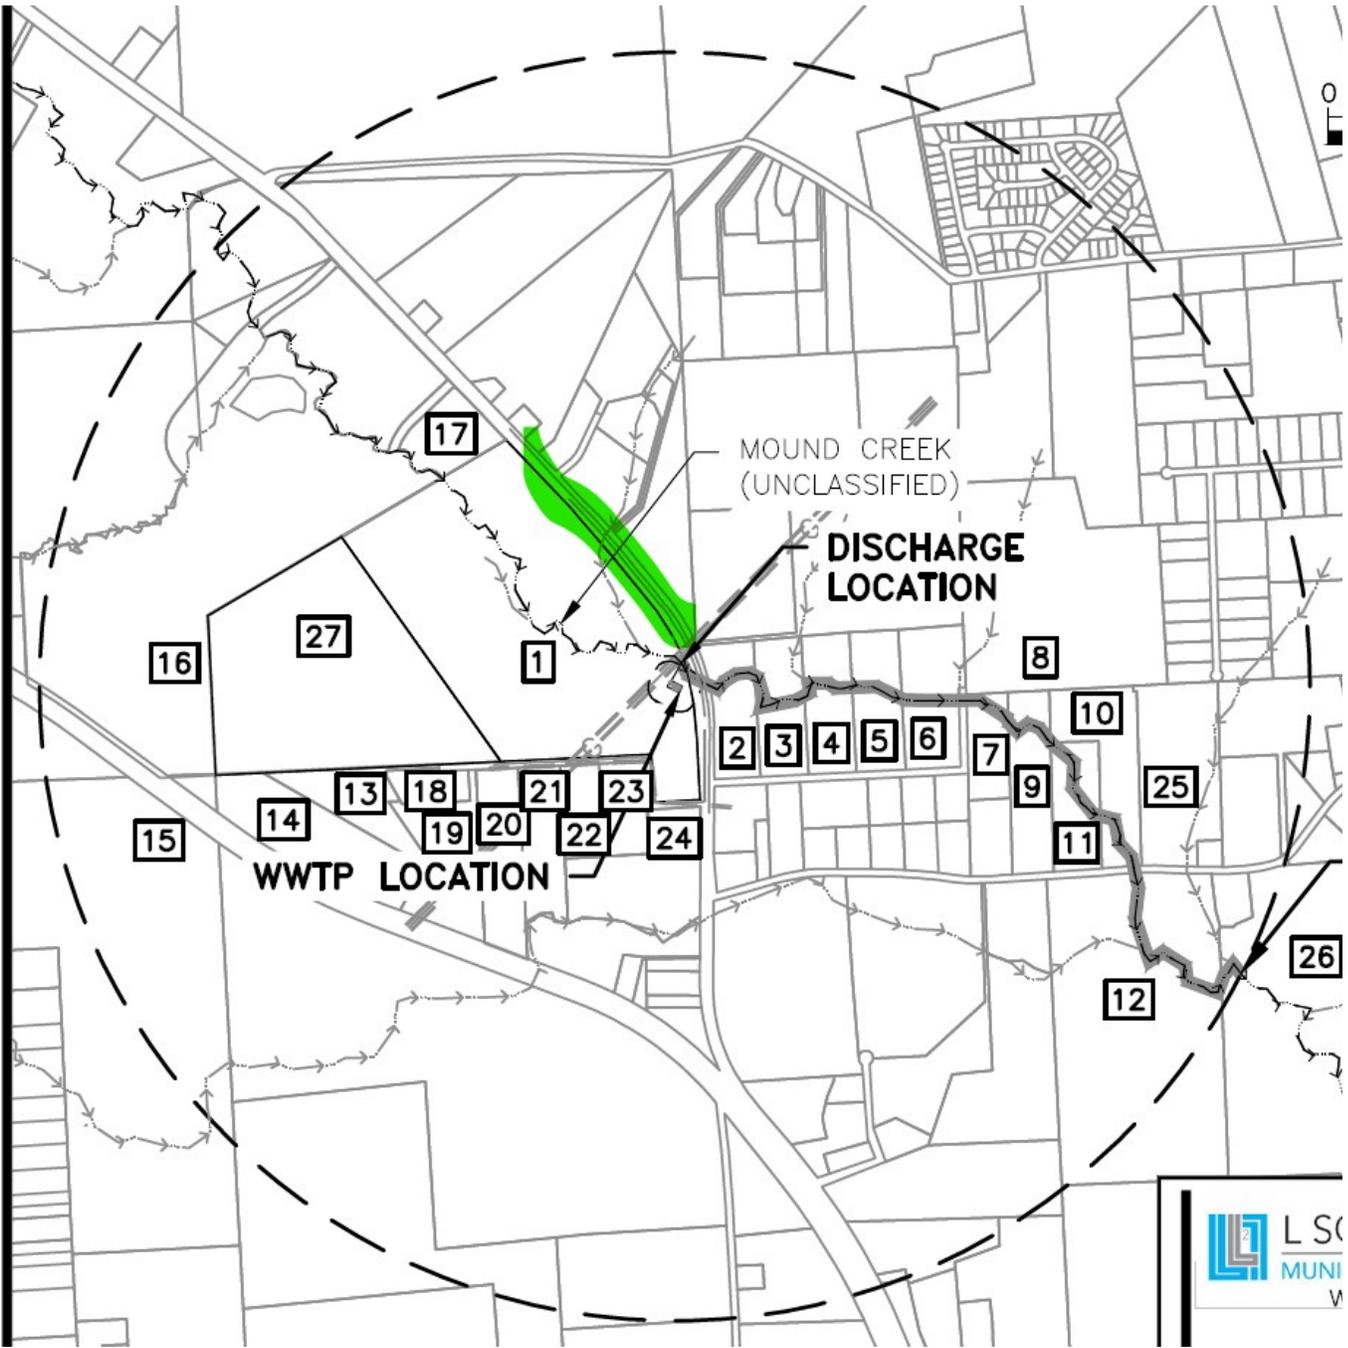

Thank you,



Leah Whallon

Texas Commission on Environmental Quality

Water Quality Division

512-239-0084
leah.whallon@tceq.texas.gov

How is our customer service? Fill out our online customer satisfaction survey at
www.tceq.texas.gov/customersurvey

From: Jerry Barnes <jbarnes@l2engineering.com>
Sent: Thursday, October 10, 2024 12:17 PM
To: Leah Whallon <Leah.Whallon@Tceq.Texas.Gov>
Cc: Jonathan White, P.E. <jwhite@l2engineering.com>
Subject: Re: Application for Proposed Permit No. WQ0016629001; M/I Homes of Houston, LLC; Kinkaid Road WWTP

Good afternoon Leah,

Please see attached. If you have any additional comments, please let us know.

From: Leah Whallon <Leah.Whallon@tceq.texas.gov>
Date: Thu, Oct 3, 2024 at 3:42 PM
Subject: Application for Proposed Permit No. WQ0016629001; M/I Homes of Houston, LLC; Kinkaid Road WWTP
To: bboozer@mihomes.com <bboozer@mihomes.com>, jwhite@l2engineering.com <jwhite@l2engineering.com>

Good Afternoon,

Please see the attached Notice of Deficiency letter dated October 3, 2024 requesting additional information needed to declare the application administratively complete. Please send the complete response by October 17, 2024.

Please let me know if you have any questions.

Thank you,

Leah Whallon



Texas Commission on Environmental Quality

Water Quality Division

512-239-0084

leah.whallon@tceq.texas.gov

How is our customer service? Fill out our online customer satisfaction survey at www.tceq.texas.gov/customersurvey

--

Jerry Barnes

jbarnes@l2engineering.com

O: 936.647.0420

L Squared Engineering
3307 West Davis Street, Suite 100
Conroe, TX 77304



CONFIDENTIALITY: This message and accompanying documents are covered by the Federal Electronic Communications Privacy Act, 18 U.S.C., Sections 2510 - 2521, and contains information intended for the specified individual(s) only. This information is confidential. If you are not the intended recipient or an agent responsible for delivering it to the intended recipient, you are hereby notified that you have received this document in error and that any review, dissemination, copying, or the taking of any action based on the contents of this information is strictly prohibited and may subject you to prosecution. If you have received this communication in error, please notify by e-mail, and delete this message.

--

Jerry Barnes

jbarnes@l2engineering.com

O: 936.647.0420

L Squared Engineering


3307 West Davis Street, Suite 100

Conroe, TX 77304



CONFIDENTIALITY: This message and accompanying documents are covered by the Federal Electronic Communications Privacy Act, 18 U.S.C., Sections 2510 - 2521, and contains information intended for the specified individual(s) only. This information is confidential. If you are not the intended recipient or an agent responsible for delivering it to the intended recipient, you are hereby notified that you have received this document in error and that any review, dissemination, copying, or the taking of any action based on the contents of this information is strictly prohibited and may subject you to prosecution. If you have received this communication in error, please notify by e-mail, and delete this message.

L:\SHARED\12 ENGINEERING PROJECTS\ENGINEERING PROJECTS\10989-HOME PLACE\03 CAD\DESIGN SET\WWTP\WWTP EXHIBITS-10989.DWG Oct. 16, 2024-3:35 PM

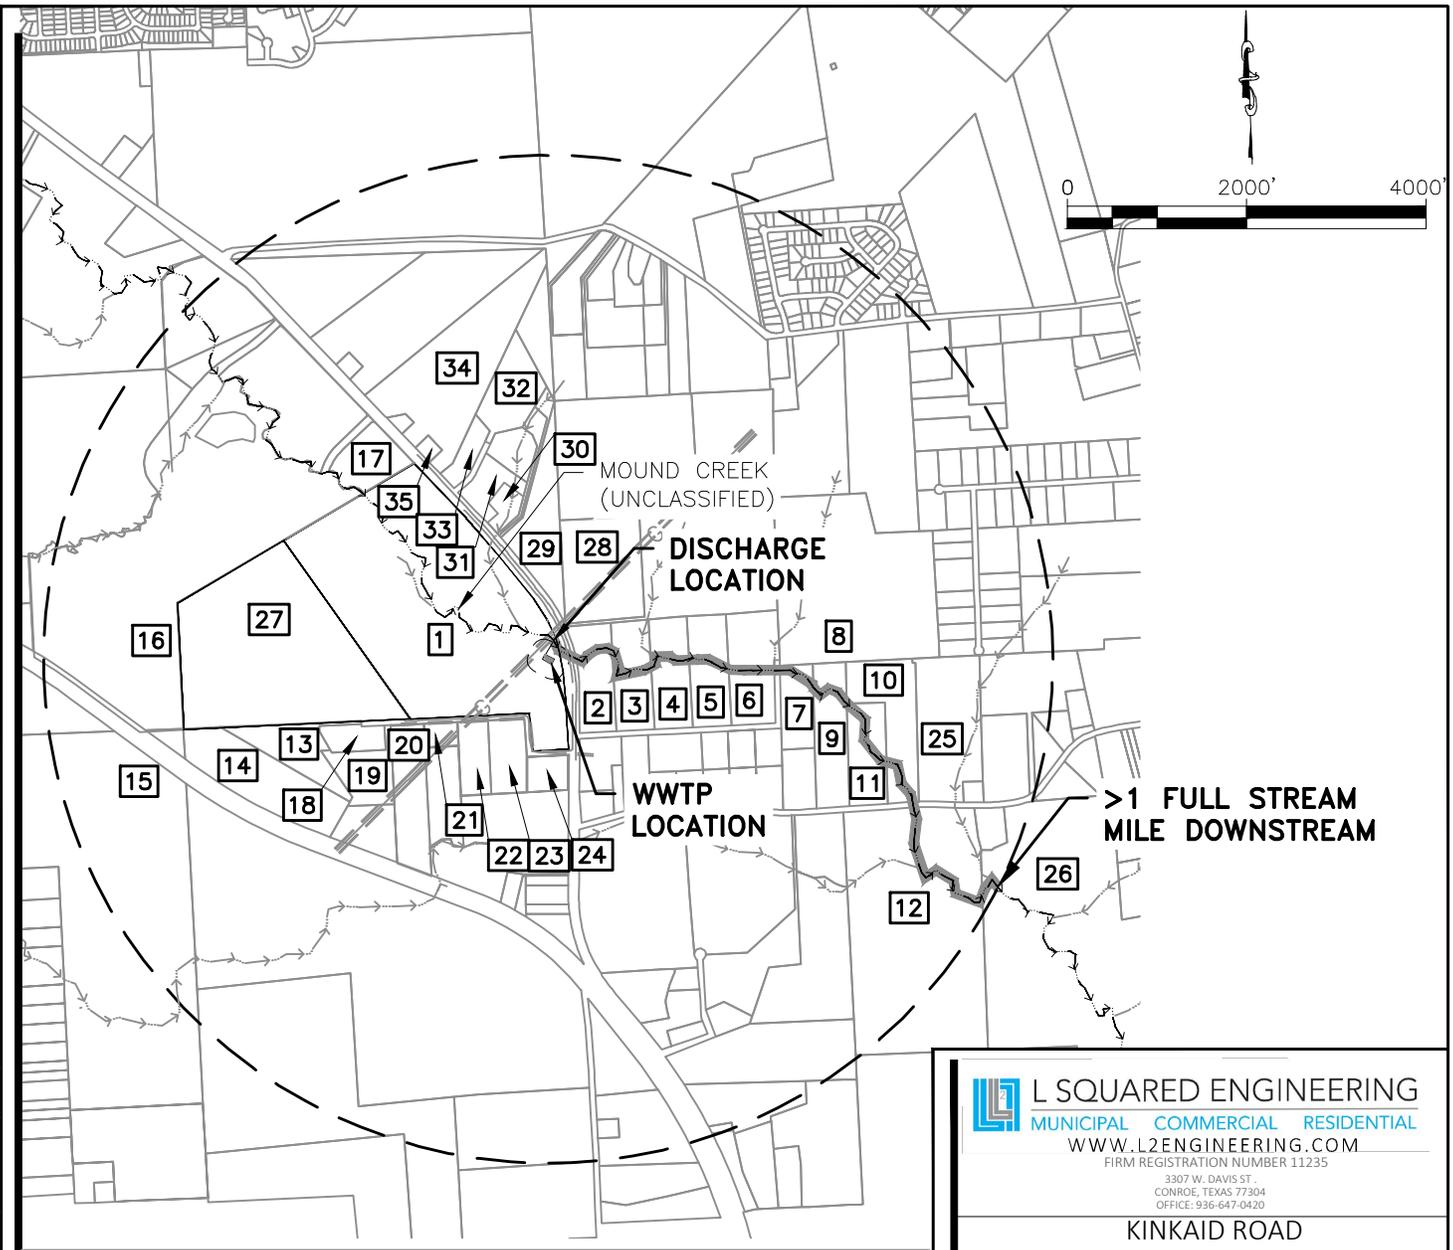

> 1 FULL STREAM MILE DOWNSTREAM

Kinkaid Road Development WWTP-OWNER LIST

NUMBER	PROPERTY ID	OWNER NAME	OWNER MAILING ADDRESS	LEGAL DESCRIPTION
1	R293492, R34683, R34677	M/I Homes of Houston	1720 W Sam Houston Parkway N, Suite 100 Houston, TX 77064	A0033 ROGERS RALEIGH, TRACT 14-D (SPLIT FOR AG), ACRES 2.223, TRACT 14, ACRES 57.519, TRACT 14F, ACRES 18.690
2	R107762	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 17, ACRES 9.570
3	R107763	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 18, ACRES 10.070
4	R107764	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 19, ACRES 10.290
5	R107766	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 20 (SPLIT FOR AG), ACRES 0.340
6	R107767	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 21, ACRES 12.960
7	R19026	AVONNI LLC	PO BOX 1510 MONTGOMERY, TX 77356-1806	A0001 - Atkins Wm, TRACT 6-B, ACRES 6.983
8	R278162	LAKE CREEK RANCH LTD	906 SERENE CT ERIE, CO 80516-2455	A0001 ATKINS WM, TRACT 66-A, ACRES 5.430
9	R30424	AVONNI LLC	PO BOX 1510 SPRING, TX 77389-2679	A0001 - Atkins Wm, TRACT 9, ACRES 1
10	R30427	REED, JOE E & JANE L	13830 RABON CHAPEL RD MONTGOMERY, TX 77316-4126	A0001 ATKINS WM, TRACT 9-A, ACRES 14.25
11	R210002	REED, JOE E & JANE L	13830 RABON CHAPEL RD MONTGOMERY, TX 77316-4126	A0001 ATKINS WM, TRACT 9A-1, ACRES 9.75
12	R39458	MAYER, MARTHA	18507 RABON CHAPEL RD MONTGOMERY, TX 77316-4021	A0126 - Cartwright Matthew, TRACT 1 PT SPLIT FOR AG, ACRES 86.64
13	R574346	HILL, MATTHEW & CRYSTAL	19077 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33C-1, ACRES 5.25
14	R541300	HILL, MATTHEW & CRYSTAL	19077 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33B-1, 33C2, ACRES 20.13
15	R34691	MCCANTS FOREST LAND LIMITED	14717 RED RIVER DR CORPUS CHRISTI, TX 78410-5626	A0033 ROGERS RALEIGH, TRACT 16, 17, 18, 20, 43, ACRES 473.500
16	R296488	MONTGOMERY RD	PO BOX 1475 MONTGOMERY, TX 77356-1475	A0033 - Rogers Raleigh, TRACT 14B-1, 14B-2, 14C-1, 15-A, 14A-1, 14A-2, 15-C ACRES 123.392
17	R34682	HOMEPLACE LANDS LLC	2001 KIRBY DR STE 610 HOUSTON, TX 77019-6093	A0033 - Rogers Raleigh, TRACT 14-B, 14B-1A, ACRES 31.4018
18	R28967	ALCANTAR, CESAR & CRISTINE	10075 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33-A, ACRES 3.091
19	R496887	JAM HOLDINGS LTD	PO BOX 1290 MONTGOMERY, TX 77356-1290 USA	S643400 - Kinkaid Farms, Lot 33-C, ACRES 7.609
20	R107778	LAMBAR, WILLIAM & CANDACE	19053 KINKAID RD W # W MONTGOMERY, TX 77316-4096	KINKAID FARMS TR 31 (SPLIT FOR AG), ACRES 1.000
21	R527214	JOHNSON, BOBBY	18931 KINKAID RD W MONTGOMERY, TX 77316-4019	KINKAID FARMS, LOT 30-A, ACRES 2.000
22	R52924	MORRIS, JEFFREY & CANDICE	40026 EUREKA RD MAGNOLIA, TX 77354-4663	S643400 - Kinkaid Farms, Lot 29-B, ACRES 0.929
23	R107774	REDWINE, TOBIN D & SHANNA R	18843 KINKAID RD W MONTGOMERY, TX 77316-4095	NOT AVAILABLE
24	R107771	MCDOWELL, EDWARD & MARGARET	PO BOX 873 MONTGOMERY, TX 77356-0873	S643400 - Kinkaid Farms, Lot 27 - 27, 28-B, 29-A, ACRES 18.431
25	R30442	FISCHER, MARK W & CHERYL	18838 RABON CHAPEL RD MONTGOMERY TX 77316-4126	A0003 - Atkins Wm, TRACT 24, ACRES 2.941
26	R39463	CARTWRIGHT, JASPER DUNCAN	4884 CARTWRIGHT RD MONTGOMERY, TX 77316-4026	A0126 - Cartwright Matthew, TRACT 3, ACRES 2
27	R363288	KEEP HOLDINGS UNLIMITED LLC	18430 GUYTON LN MONTGOMERY TX 77316-4170	A0033 - Rogers Raleigh, TRACT 14-E, ACRES 1
28	R30421	HOFFART REVOCABLE LIVING TR	20088 FM 2854 RD MONTGOMERY TX 77316-3152	A0001 - Atkins Wm, TRACT 5,6, ACRES 1
29	R353064	AUSTIN, GREG	20210 FM 2854 RD MONTGOMERY TX 77316-3184	A0033 - Rogers Raleigh, TRACT 11-A,12-C (SPLIT FOR AG), ACRES 1
30	R522133	FM 2854 HOLDINGS LLC	PO BOX 887 MIDLAND TX 79708-8487	SCHROEDER RUM TR 1.0000 LOT RES 8
31	R526001	SOUTH MONTGOMERY DEVELOPMENT GROUP INC	136 LINDSEY DR MONTGOMERY TX USA 77316-6824	SCHROEDER RUM LOT RES 8-2
32	R522111	MCDONALD, JORDAN	20256 FM 2854 RD MONTGOMERY TX 77316-3184	S855001 - Schroeder Rum, Block 1, Lot 1
33	R522132	SCHROEDER, CLAYTON	20577 FM 2854 RD MONTGOMERY TX 77316-3153	S855001 - Schroeder Rum, RES A, ACRES 3.5
34	R34674	TOMCZAK, ANTHONY & RENNA H	1130 MOONEY RD HOUSTON TX 77057-3414	A0033 - Rogers Raleigh, TRACT 11, 12, ACRES 34.266
35	R281808	TOMCZAK, ANTHONY & RENNA H	1111 MOONEY RD HOUSTON TX 77037-3414	A0033 ROGERS RALEIGH, TRACT 12-A, ACRES 1.000

L SQUARED ENGINEERING
MUNICIPAL COMMERCIAL RESIDENTIAL
WWW.L2ENGINEERING.COM
FIRM REGISTRATION NUMBER 11235
3307 W. DAVIS ST.
CONROE, TEXAS 77304
OFFICE: 936-647-0420

**KINKAID ROAD
WASTEWATER TREATMENT PLANT
LAND OWNERS EXHIBIT**

CLIENT INFORMATION
M/I HOMES OF HOUSTON LLC
1720 W SAM HOUSTON PKWY N.
SUITE 100
HOUSTON, TX 77043

PROJECT ADDRESS
19971 FM 2854 RD
MONTGOMERY, TX 77064

PROJECT	10989	DATE	10/16/2024
SCALE	1" = 2000'	SHEET	EXHIBIT Q

THIS DOCUMENT IS RELEASED FOR THE PURPOSE OF INTERIM REVIEW UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
OR
JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
NOT FOR CONSTRUCTION

10/16/2024

Kinkaid Road Development WWTP-OWNER LIST				
NUMBER	PROPERTY ID	OWNER NAME	OWNER MAILING ADDRESS	LEGAL DESCRIPTION
1	R293492, R34683, R34677	M/I Homes of Houston	1720 W Sam Houston Parkway N. Suite 100 Houston, TX 77064	A0033 ROGERS RALEIGH, TRACT 14-D (SPLIT FOR AG), ACRES 2.323, TRACT 14, ACRES 57.519, TRACT 14-F, ACRES 18.690
2	R107762	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 17, ACRES 9.570
3	R107763	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 18, ACRES 10.070
4	R107764	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 19, ACRES 10.230
5	R107766	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 20 (SPLIT FOR AG), ACRES 0.340
6	R107767	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 21, ACRES 12.960
7	R30426	AVONNI LLC	PO BOX 1820 MONTGOMERY, TX 77356-1856	A0003 - Atkins Wm, TRACT 9-B, ACRES 6.983
8	R278162	LAKE CREEK RANCH LTD	906 SERENE CT ERIE, CO 80516-2455	A0003 ATKINS WM, TRACT 66-A, ACRES 5.430
9	R30424	AVONNI LLC	PO BOX 1820 SPRING, TX 77393-2679	A0003 - Atkins Wm, TRACT 9, ACRES 1
10	R30427	REED, JOE E & JANE L	18830 RABON CHAPEL RD MONTGOMERY, TX 77316-4126	A0003 ATKINS WM, TRACT 9-A, ACRES 14.25
11	R210002	REED, JOE E & JANE L	18830 RABON CHAPEL RD MONTGOMERY, TX 77316-4126	A0003 ATKINS WM, TRACT 9A-1, ACRES 9.75
12	R39458	MAYER, MARTHA	18507 RABON CHAPEL RD MONTGOMERY, TX 77316-4021	A0126 - Cartwright Matthew, TRACT 1 PT SPLIT FOR AG, ACRES 86.64
13	R474346	HILL, MATTHEW & CRYSTAL	19077 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33C-1, ACRES 5.25
14	R541300	HILL, MATTHEW & CRYSTAL	19077 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33B-1, 33C2, ACRES 20.13
15	R34691	MCCANTS FOREST LAND LIMITED	14717 RED RIVER DR CORPUS CHRISTI, TX 78410-5626	A0033 ROGERS RALEIGH, TRACT 16, 17, 18, 20, 43, ACRES 473.500
16	R396488	MONTGOMERY ISD	PO BOX 1475 MONTGOMERY, TX 77356-1475	A0033 - Rogers Raleigh, TRACT 14B-1, 14B-2, 14C-1, 15-A, 14A-1, 14A-2, 15-C ACRES 123.392
17	R34682	HOMEPLACE LANDS LLC	2001 KIRBY DR #STE 610 HOUSTON, TX 77019-6093	A0033 - Rogers Raleigh, TRACT 14-B, 14B1-A, ACRES 31.4018
18	R289467	ALCANTAR, CESAR & CRISTINE	19075 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33-A, ACRES 3.991
19	R496887	JAM HOLDINGS LTD	PO BOX 1290 MONTGOMERY, TX 77356-1290 USA	S643400 - Kinkaid Farms, Lot 33-C, ACRES 7.609
20	R107778	LAMBARD, WILLIAM & CANDACE	19053 KINKAID RD W # W MONTGOMERY, TX 77316-4096	KINKAID FARMS TR 31 (SPLIT FOR AG), ACRES 1.000
21	R252714	JOHNSON, BOBBY	18931 KINKAID RD W MONTGOMERY, TX 77316-4019	KINKAID FARMS, LOT 30-A, ACRES 2.000
22	R522624	MORRIS, JEFFREY & CANDICE	40026 EUREKA RD MAGNOLIA, TX 77354-4663	S643400 - Kinkaid Farms, Lot 29-B, ACRES 0.929
23	R107774	REDWINE, TOBIN D & SHANNA R	18843 KINKAID RD W MONTGOMERY, TX 77316-4095	NOT AVAILABLE
24	R107771	MCDOWELL, EDWARD & MARGARET	PO BOX 873 MONTGOMERY, TX 77356-0873	S643400 - Kinkaid Farms, Lot 22 - 27, 28-B, 29-A, ACRES 18.431
25	R30442	FISCHER, MARK W & CHERYL	18838 RABON CHAPEL RD MONTGOMERY TX 77316-4126	A0003 - Atkins Wm, TRACT 24, ACRES 2.341
26	R39463	CARTWRIGHT, JASPER DUNCAN	4884 CARTWRIGHT RD MONTGOMERY, TX 77316-4026	A0126 - Cartwright Matthew, TRACT 3, ACRES 2
27	R363788	KEEP HOLDINGS UNLIMITED LLC	18430 GUYTON LN MONTGOMERY TX 77316-4170	A0033 - Rogers Raleigh, TRACT 14-E, ACRES 1
28	R30421	HOFFART REVOCABLE LIVING TR	20068 FM 2854 RD MONTGOMERY TX 77316-3152	A0003 - Atkins Wm, TRACT 5,6, ACRES 1
29	R353064	AUSTIN, GREG	20210 FM 2854 RD MONTGOMERY TX 77316-3184	A0033 - Rogers Raleigh, TRACT 11-A, 12-C (SPLIT FOR AG), ACRES 1
30	R522113	FM 2854 HOLDINGS LLC	PO BOX 8487 MIDLAND TX 79708-8487	SCHROEDER RUN TR 1.0000 LOT RES B
31	R526901	SOUTH MONTGOMERY DEVELOPMENT GROUP INC	136 LYNDESEY DR MONTGOMERY TX USA 77316-6824	SCHROEDER RUN LOT RES B-2
32	R522111	MCDONALD, JORDAN	20256 FM 2854 RD MONTGOMERY TX 77316-3184	S855001 - Schroeder Run, BLOCK 1, Lot 1
33	R522112	SCHROEDER, CLAYTON	20374 FM 2854 RD MONTGOMERY TX 77316-3153	S855001 - Schroeder Run, RES A, ACRES 3.5
34	R34674	TOMCZAK, ANTHONY & RENA H	1110 MOONEY RD HOUSTON TX 77037-3414	A0033 - Rogers Raleigh, TRACT 11, 12, ACRES 34.266
35	R281808	TOMCZAK, ANTHONY & RENA H	1111 MOONEY RD HOUSTON TX 77037-3414	A0033 ROGERS RALEIGH, TRACT 12-A, ACRES 1.000

Coombs, Paul D 18648 Kinkaid Rd E Montgomery, Tx 77316-4111 Avonni Llc Po Box 1820 Spring, Tx 77393-2679 Hill, Matthew & Crystal 19077 Kinkaid Rd W Montgomery, Tx 77316-4096 Homeplace Lands Llc 2001 Kirby Dr #Ste 610 Houston, Tx 77019-6093 Lambard, William & Candace 19053 Kinkaid Rd W # W Montgomery, Tx 77316-4096 Redwine, Tobin D & Shanna R 18843 Kinkaid Rd W Montgomery, Tx 77316-4095 Cartwright, Jasper Duncan 4884 Cartwright Rd Montgomery, Tx 77316-4026	Avonni Llc Po Box 1820 Montgomery, Tx 77356-1856 Reed, Joe E & Jane L 18830 Rabon Chapel Rd Montgomery, Tx 77316-4126 Mccants Forest Land Limited 14717 Red River Dr Crp Christi, Tx 78410-5626 Alcantar, Cesar & Cristine 19075 Kinkaid Rd W Montgomery, Tx 77316-4096 Johnson, Bobby 18931 Kinkaid Rd W Montgomery, Tx 77316-4019 Mcdowell, Edward & Margaret Po Box 873 Montgomery, Tx 77356- 0873 Keep Holdings Unlimited Llc 18430 Guyton Ln Montgomery Tx 77316-4170	Lake Creek Ranch Ltd 906 Serene Ct Erie, Co 80516-2455 Mayer, Martha 18507 Rabon Chapel Rd Montgomery, Tx 77316-4021 Montgomery Isd Po Box 1475 Montgomery, Tx 77356-1475 Jam Holdings Ltd Po Box 1290 Montgomery, Tx 77356- 1290 Morris, Jeffrey & Candice 40026 Eureka Rd Magnolia, Tx 77354- 4663 Fischer, Mark W & Cheryl 18838 Rabon Chapel Rd Montgomery Tx 77316-4126 Hoffart Revocable Living Tr 20068 Fm 2854 Rd Montgomery Tx 77316-3152
---	--	--

Austin, Greg 20210 Fm 2854 Rd Montgomery Tx 77316-3184 Mcdonald, Jordan 20256 Fm 2854 Rd Montgomery Tx 77316-3184	Fm 2854 Holdings Llc Po Box 8487 Midland Tx 79708-8487 Schroeder, Clayton 20374 Fm 2854 Rd Montgomery Tx 77316-3153	South Montgomery Development Group Inc 136 Lyndsey Dr Montgomery Tx Usa 77316-6824 Tomczak, Anthony & Rena H 1110 Mooney Rd Houston Tx 77037-3414
--	---	---



To: Texas Commission on Environmental Quality
From: Jonathan White, PE
Date: October 7, 2024
Re: Application for Proposed Permit No.: WQ0016629001 (EPA I.D. No. TX0146633)

Please find your list of comments with our explanation or description of revision in **bold underline** below:

Plan Review:

1. properties adjacent to the applicant's property boundaries or for the full one mile downstream of the outfall. Please provide an updated affected landowner map that clearly labels all adjacent and downstream parcels.

Please also provide an updated cross-reference landowner list and the landowner list formatted for mailing labels in a Microsoft Word document.

Response: Attachment K has been updated to reflect the applicants property information and an microsoft word file has been provided in this resubmittal.

2. The following is a portion of the NORI which contains information relevant to your application. Please read it carefully and indicate if it contains any errors or omissions. The complete notice will be sent to you once the application is declared administratively complete.


APPLICATION. M/I Homes of Houston, LLC, 1720 West Sam Houston Parkway North, Suite 100, Houston, Texas 77043, has applied to the Texas Commission on Environmental Quality (TCEQ) proposed Texas Pollutant Discharge Elimination System (TPDES) Permit No. WQ0016629001 (EPA I.D. No. TX0146633) to authorize the discharge of treated wastewater at a volume not to exceed a daily average flow of 75,000 gallons per day. The domestic wastewater facility will be located at 19971 Farm-to-Market Road 2854, near the city of Montgomery, in Montgomery County, Texas 77316. The discharge route will be from the plant site to Mound Creek, thence to Lake Creek. TCEQ received this application on September 23, 2024. The permit application will be available for viewing and copying at Montgomery County Public Library, 104 Interstate 45 North, Conroe, in Montgomery County, Texas prior to the date this notice is published in the newspaper. The application, including any updates, and associated notices are available electronically at the following webpage: <https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>. This link to an electronic map of the site or facility's general location is provided as a public courtesy and not part of the application or notice. For the exact location, refer to the application. <https://gisweb.tceq.texas.gov/LocationMapper/?marker=-95.652777,30.346666&level=18>

Further information may also be obtained from M/I Homes of Houston, LLC at the address stated above or by calling Mr. Jonathan White, P.E., L Squared Engineering, at 936-647-0420

Response: The provided portion of the Nori is correct.

3. The application indicates that public notices in Spanish are required. After confirming the portion of the NORI above does not contain any errors or omissions, please use the attached template to translate the NORI into Spanish. Only the first and last paragraphs are unique to this application and require translation. Please provide the translated Spanish NORI in a Microsoft Word Document.

Response: The Spanish NORI will be provided in resubmittal.

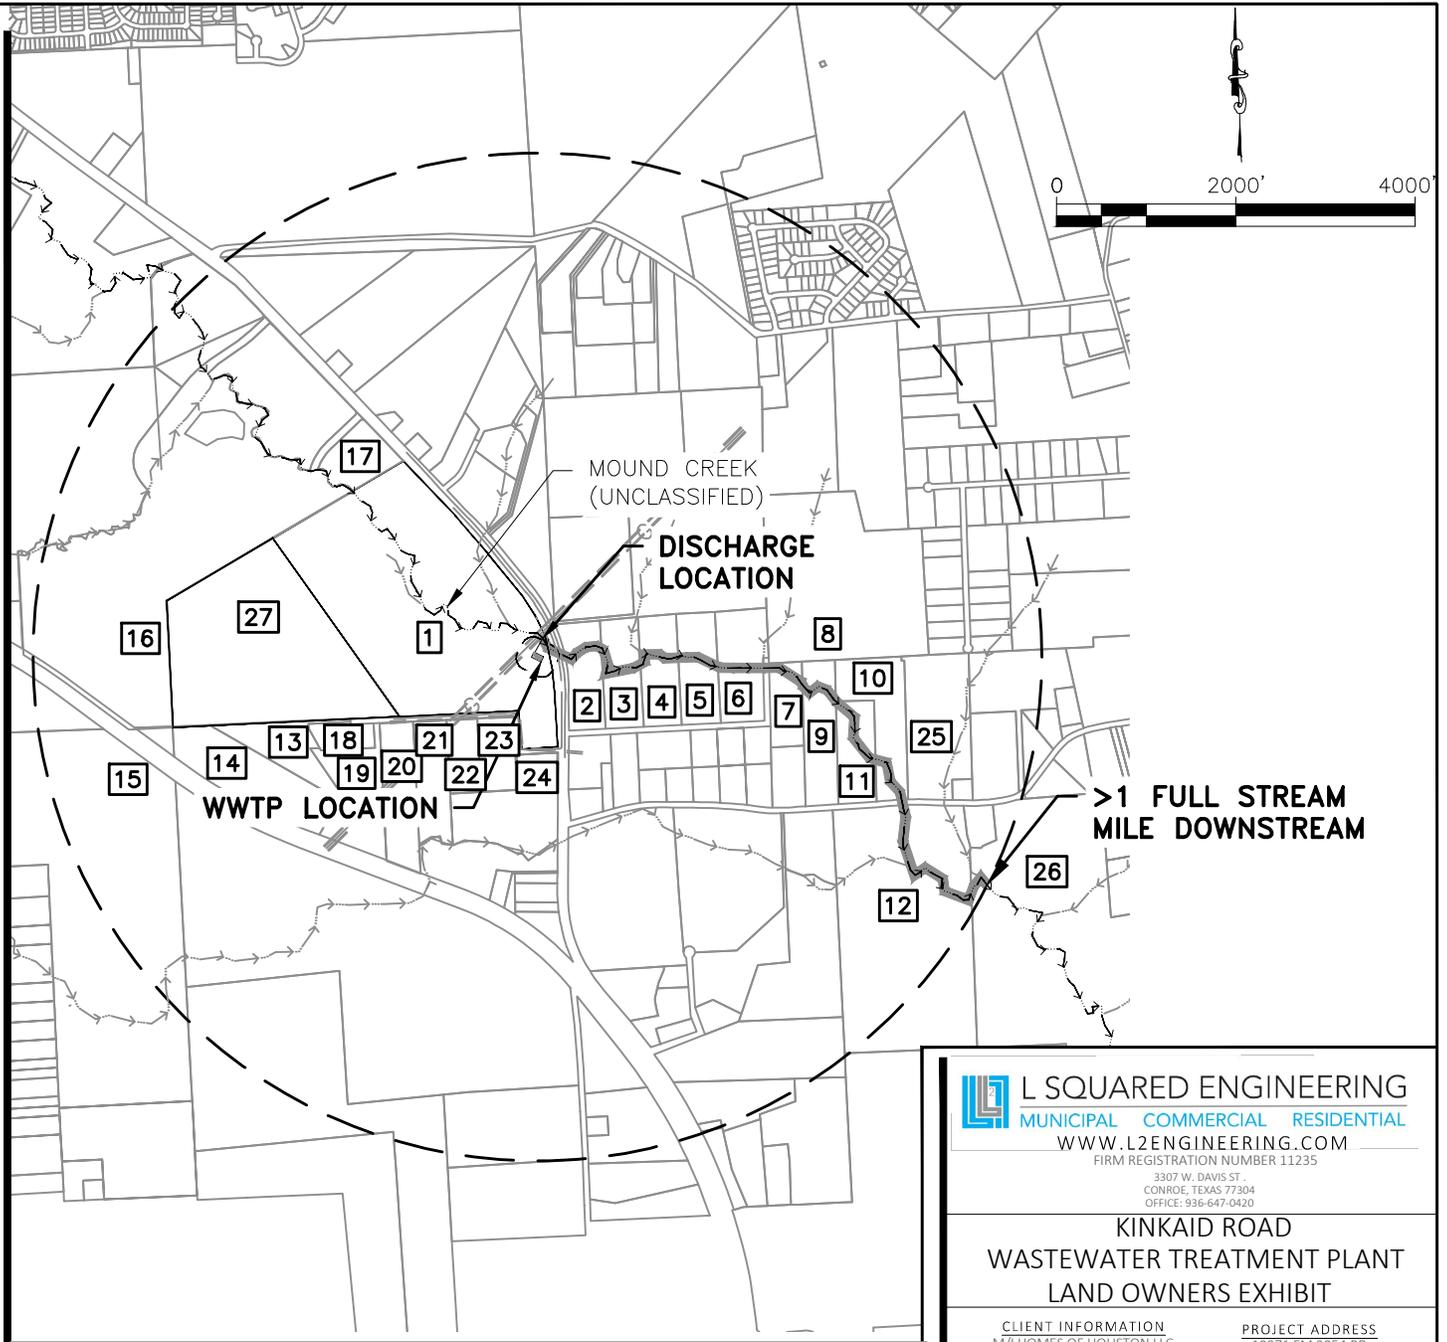

L SQUARED ENGINEERING
 MUNICIPAL COMMERCIAL RESIDENTIAL
 WWW.L2ENGINEERING.COM
 FIRM REGISTRATION NUMBER 11235
 3307 W. DAVIS ST.
 CONROE, TEXAS 77304
 OFFICE: 936-647-0420

**KINKAID ROAD
 WASTEWATER TREATMENT PLANT
 LAND OWNERS EXHIBIT**

CLIENT INFORMATION
 M/I HOMES OF HOUSTON LLC
 1720 W SAM HOUSTON PKWY N.
 SUITE 100
 HOUSTON, TX 77043

PROJECT ADDRESS
 19971 FM 2854 RD
 MONTGOMERY, TX 77064

PROJECT 10989 **DATE** 10/10/2024
SCALE 1" = 2000' **SHEET** EXHIBIT Q

THIS DOCUMENT IS RELEASED FOR THE PURPOSE OF INTERIM REVIEW UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
 OR
 JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
 NOT FOR CONSTRUCTION

10/10/2024

Kinkaid Road Development WWTP-OWNER LIST				
NUMBER	PROPERTY ID	OWNER NAME	OWNER MAILING ADDRESS	LEGAL DESCRIPTION
1	R293492, R34683, R34677	M/I Homes of Houston	1720 W Sam Houston Parkway N, Suite 100 Houston, TX 77064	AD035 ROGERS RALEIGH, TRACT 14-D (SPLIT FOR AG), ACRES 2.325, TRACT 14, ACRES 57.518, TRACT 14C, ACRES 38.609
2	R107762	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 17, ACRES 5.520
3	R107763	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 18, ACRES 10.070
4	R107764	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 19, ACRES 10.230
5	R107766	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 20 (SPLIT FOR AG), ACRES 0.340
6	R107767	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 21, ACRES 17.960
7	R39426	AVONNII LLC	PO BOX 1820 MONTGOMERY, TX 77356-1806	AD0001 - Atkins Wm, Tract 9-A, ACRES 6.983
8	R278162	LAKE CREEK RANCH LTD	RD5 SERENE CT ERIE, CO 80516-2455	AD001 ATKINS WMM, TRACT 66-A, ACRES 5.430
9	R30424	AVONNII LLC	PO BOX 1820 SPRING, TX 77993-2679	AD0001 - Atkins Wm, Tract 9, ACRES 3
10	R30422	REED, JOE E & JANE L	18830 RABON CHAPEL RD MONTGOMERY, TX 77316-4126	AD0001 ATKINS WMM, TRACT 9-A, ACRES 14.25
11	R212002	REED, JOE E & JANE L	18830 RABON CHAPEL RD MONTGOMERY, TX 77316-4126	AD0001 ATKINS WMM, TRACT 9A-1, ACRES 9.75
12	R30438	MAYER, MARTHA	18507 RABON CHAPEL RD MONTGOMERY, TX 77316-4021	AD126 - Cartwright Matthew, TRACT 1 PT SPLIT FOR AG, ACRES 86.64
13	R47436	HILL, MATTHEW & CRYSTAL	19077 KINKAID RD W MONTGOMERY, TX 77316-4096	5643400 - Kinkaid Farms, Lot 33C-1, ACRES 5.25
14	R541300	HILL, MATTHEW & CRYSTAL	19077 KINKAID RD W MONTGOMERY, TX 77316-4096	5643400 - Kinkaid Farms, Lot 33B-1, 33C2, ACRES 20.13
15	R34691	MCCANTS FOREST LAND LIMITED	14717 RED RIVER DR CORPUS CHRISTI, TX 78410-5626	AD035 ROGERS RALEIGH, TRACT 16, 17, 18, 20, 43, ACRES 473.500
16	R396488	MONTGOMERY ISD	PO BOX 1475 MONTGOMERY, TX 77356-1475	AD033 - Rogers Raleigh, TRACT 14B-1, 14B-2, 14C-1, 15-A, 14A-1, 14A-2, 15-C ACRES 123.302
17	R34682	HOMELAND LANDS LLC	2001 KIRBY DR #STE 610 HOUSTON, TX 77019-6093	AD033 - Rogers Raleigh, TRACT 14-B, 14B1-A, ACRES 31.4018
18	R289467	ALCANTARA, CESAR & CRISTINE	19075 KINKAID RD W MONTGOMERY, TX 77316-4096	5643400 - Kinkaid Farms, Lot 33B-1, ACRES 3.391
19	R496887	JAM HOLDINGS LTD	PO BOX 1290 MONTGOMERY, TX 77356-1290 USA	5643400 - Kinkaid Farms, Lot 33-C, ACRES 7.609
20	R107778	LAMBARO, WILLIAM & CANDACE	18953 KINKAID RD W # W MONTGOMERY, TX 77316-4096	KINKAID FARMS TR 31 (SPLIT FOR AG), ACRES 1.000
21	R252714	JOHNSON, BOBBY	18931 KINKAID RD W MONTGOMERY, TX 77316-4019	KINKAID FARMS, LOT 30-A, ACRES 2.000
22	R522624	MORRIS, JEFFREY & CANDICE	40026 EUREKA RD MAGNOLIA, TX 77354-4663	5643400 - Kinkaid Farms, Lot 29-B, ACRES 0.929
23	R107774	REDWINE, TOBIN D & SHANNA R	18844 KINKAID RD W MONTGOMERY, TX 77316-4095	NOT AVAILABLE
24	R107771	MCDOWELL, EDWARD & MARGARET	PO BOX 823 MONTGOMERY, TX 77356-0873	5643400 - Kinkaid Farms, Lot 22 - 27, 28-B, 29-A, ACRES 18.431
25	R30442	FISCHER, MARK W & CHERYL	18838 RABON CHAPEL RD MONTGOMERY TX 77316-4126	AD0001 - Atkins Wm, Tract 24, ACRES 2.341
26	R39463	CARTWRIGHT, JASPER DUNCAN	4884 CARTWRIGHT RD MONTGOMERY, TX 77316-4026	AD126 - Cartwright Matthew, TRACT 3, ACRES 2
27	R363788	KEEP HOLDINGS UNLIMITED LLC	18430 GUYTON LN MONTGOMERY TX 77316-4170	AD033 - Rogers Raleigh, TRACT 14-E, ACRES 1

Kinkaid Road Development WWTP-OWNER LIST

NUMBER	PROPERTY ID	OWNER NAME	OWNER MAILING ADDRESS	LEGAL DESCRIPTION
1	R293492, R34683, R34677	M/I Homes of Houston	1720 W Sam Houston Parkway N. Suite 100 Houston, TX 77064	A0033 ROGERS RALEIGH, TRACT 14-D (SPLIT FOR AG), ACRES 2.323, TRACT 14, ACRES 57.519, TRACT 14-F, ACRES 18.690
2	R107762	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 17, ACRES 9.570
3	R107763	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 18, ACRES 10.070
4	R107764	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 19, ACRES 10.230
5	R107766	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 20 (SPLIT FOR AG), ACRES 0.340
6	R107767	COOMBS, PAUL D	18648 KINKAID RD E MONTGOMERY, TX 77316-4111	KINKAID FARMS, LOT 21, ACRES 12.960
7	R30426	AVONNI LLC	PO BOX 1820 MONTGOMERY, TX 77356-1856	A0003 - Atkins Wm, TRACT 9-B, ACRES 6.983
8	R278162	LAKE CREEK RANCH LTD	906 SERENE CT ERIE, CO 80516-2455	A0003 ATKINS WM, TRACT 66-A, ACRES 5.430
9	R30424	AVONNI LLC	PO BOX 1820 SPRING, TX 77393-2679	A0003 - Atkins Wm, TRACT 9, ACRES 1
10	R30427	REED, JOE E & JANE L	18830 RABON CHAPEL RD MONTGOMERY, TX 77316-4126	A0003 ATKINS WM, TRACT 9-A, ACRES 14.25
11	R210002	REED, JOE E & JANE L	18830 RABON CHAPEL RD MONTGOMERY, TX 77316-4126	A0003 ATKINS WM, TRACT 9A-1, ACRES 9.75
12	R39458	MAYER, MARTHA	18507 RABON CHAPEL RD MONTGOMERY, TX 77316-4021	A0126 - Cartwright Matthew, TRACT 1 PT SPLIT FOR AG, ACRES 86.64
13	R474346	HILL, MATTHEW & CRYSTAL	19077 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33C-1, ACRES 5.25
14	R541300	HILL, MATTHEW & CRYSTAL	19077 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33B-1, 33C2, ACRES 20.13
15	R34691	BICCANTS FOREST LAND LIMITED	14717 RED RIVER DR CORPUS CHRISTI, TX 78410-5626	A0033 ROGERS RALEIGH, TRACT 16, 17, 18, 20, 43, ACRES 473.500
16	R396488	MONTGOMERY ISD	PO BOX 1475 MONTGOMERY, TX 77356-1475	A0033 - Rogers Raleigh, TRACT 14B-1, 14B-2, 14C-1,15-A, 14A-1, 14A-2, 15-C ACRES 123.392
17	R34682	HOMEPLACE LANDS LLC	2001 KIRBY DR #STE 610 HOUSTON, TX 77019-6093	A0033 - Rogers Raleigh, TRACT 14-B, 14B1-A, ACRES 31.4018
18	R289467	ALCANTAR, CESAR & CRISTINE	19075 KINKAID RD W MONTGOMERY, TX 77316-4096	S643400 - Kinkaid Farms, Lot 33-A, ACRES 3.991
19	R496887	JAM HOLDINGS LTD	PO BOX 1290 MONTGOMERY, TX 77356-1290 USA	S643400 - Kinkaid Farms, Lot 33-C, ACRES 7.609
20	R107778	LAMBARD, WILLIAM & CANDACE	19053 KINKAID RD W # W MONTGOMERY, TX 77316-4096	KINKAID FARMS TR 31 (SPLIT FOR AG), ACRES 1.000
21	R252714	JOHNSON, BOBBY	18931 KINKAID RD W MONTGOMERY, TX 77316-4019	KINKAID FARMS, LOT 30-A, ACRES 2.000
22	R522624	MORRIS, JEFFREY & CANDICE	40026 EUREKA RD MAGNOLIA, TX 77354-4663	S643400 - Kinkaid Farms, Lot 29-B, ACRES 0.929
23	R107774	REDWINE, TOBIN D & SHANNA R	18843 KINKAID RD W MONTGOMERY, TX 77316-4095	NOT AVAILABLE
24	R107771	MCDOWELL, EDWARD & MARGARET	PO BOX 873 MONTGOMERY, TX 77356-0873	S643400 - Kinkaid Farms, Lot 22 - 27, 28-B, 29-A, ACRES 18.431
25	R30442	FISCHER, MARK W & CHERYL	18838 RABON CHAPEL RD MONTGOMERY TX 77316-4126	A0003 - Atkins Wm, TRACT 24, ACRES 2.341
26	R39463	CARTWRIGHT, JASPER DUNCAN	4884 CARTWRIGHT RD MONTGOMERY, TX 77316-4026	A0126 - Cartwright Matthew, TRACT 3, ACRES 2
27	R363788	KEEP HOLDINGS UNLIMITED LLC	18430 GUYTON LN MONTGOMERY TX 77316-4170	A0033 - Rogers Raleigh, TRACT 14-E, ACRES 1

Comisión de Calidad Ambiental del Estado de Texas



AVISO DE RECIBO DE LA SOLICITUD Y EL INTENTO DE OBTENER PERMISO PARA LA CALIDAD DEL AGUA

PERMISO PROPUESTO NO. WQ00_____

SOLICITUD. M/I Homes of Houston, LLC, 1720 West Sam Houston Parkway North, Suite 100, Houston, Texas 77043, ha solicitado a la Comisión de Calidad Ambiental del Estado de Texas (TCEQ) para el propuesto Permiso No. WQ0016629001 (EPA I.D. No. TX0146633) del Sistema de Eliminación de Descargas de Contaminantes de Texas (TPDES) para autorizar la descarga de aguas residuales tratadas en un volumen que no sobrepasa un flujo promedio diario de 75,000 galones por día. La planta está ubicada 19971 Farm-to-Market Road 2854, cerca de la ciudad de Montgomery, en el Condado de Montgomery, Texas 77316. La ruta de descarga será desde el sitio de la planta hasta Mound Creek y luego hasta Lake Creek. La TCEQ recibió esta solicitud el 23 de septiembre de 2024. La solicitud de permiso estará disponible para ver y copiar en la Biblioteca Pública del Condado de Montgomery, 104 Interstate 45 North, Conroe, en el condado de Montgomery, Texas, antes de la fecha de publicación de este aviso en el periódico. Este enlace a un mapa electrónico de la ubicación general del sitio o de la instalación es proporcionado como una cortesía y no es parte de la solicitud o del aviso. Para la ubicación exacta, consulte la solicitud.

<https://www.tceq.texas.gov/permitting/wastewater/pending-permits/tpdes-applications>

[Include the following non-italicized sentence if the facility is located in the Coastal Management Program boundary. The Coastal Management Program boundary is the area along the Texas Coast of the Gulf of México as depicted on the map in 31 TAC §503.1 and includes part or all of the following counties: Cameron, Willacy, Kenedy, Kleberg, Nueces, San Patricio, Aransas, Refugio, Calhoun, Victoria, Jackson, Matagorda, Brazoria, Galveston, Harris, Chambers, Jefferson y Orange.] El Director Ejecutivo de la TCEQ ha revisado esta medida para ver si está de acuerdo con los objetivos y las regulaciones del Programa de Administración Costero de Texas (CMP) de acuerdo con las regulaciones del Consejo Coordinador de la Costa (CCC) y ha determinado que la acción es conforme con las metas y regulaciones pertinentes del CMP.

AVISO ADICIONAL. El Director Ejecutivo de la TCEQ ha determinado que la solicitud es administrativamente completa y conducirá una revisión técnica de la solicitud. Después de completar la revisión técnica, el Director Ejecutivo puede preparar un borrador del permiso y emitirá una Decisión Preliminar sobre la solicitud. **El aviso de la solicitud y la decisión preliminar serán publicados y enviado a los que están en la lista de correo de las personas a lo largo del condado que desean recibir los avisos y los que están en la lista de correo que desean recibir avisos de esta solicitud. El aviso dará la fecha límite para someter comentarios públicos.**

COMENTARIO PUBLICO / REUNION PUBLICA. Usted puede presentar

comentarios públicos o pedir una reunión pública sobre esta solicitud. El propósito de una reunión pública es dar la oportunidad de presentar comentarios o hacer preguntas acerca de la solicitud. La TCEQ realiza una reunión pública si el Director Ejecutivo determina que hay un grado de interés público suficiente en la solicitud o si un legislador local lo pide. Una reunión pública no es una audiencia administrativa de lo contencioso.

OPORTUNIDAD DE UNA AUDIENCIA ADMINISTRATIVA DE LO CONTENCIOSO.

Después del plazo para presentar comentarios públicos, el Director Ejecutivo considerará todos los comentarios apropiados y preparará una respuesta a todo los comentarios públicos esenciales, pertinentes, o significativos. **A menos que la solicitud haya sido referida directamente a una audiencia administrativa de lo contencioso, la respuesta a los comentarios y la decisión del Director Ejecutivo sobre la solicitud serán enviados por correo a todos los que presentaron un comentario público y a las personas que están en la lista para recibir avisos sobre esta solicitud. Si se reciben comentarios, el aviso también proveerá instrucciones para pedir una reconsideración de la decisión del Director Ejecutivo y para pedir una audiencia administrativa de lo contencioso.** Una audiencia administrativa de lo contencioso es un procedimiento legal similar a un procedimiento legal civil en un tribunal de distrito del estado.

PARA SOLICITAR UNA AUDIENCIA DE CASO IMPUGNADO, USTED DEBE INCLUIR EN SU SOLICITUD LOS SIGUIENTES DATOS: su nombre, dirección, y número de teléfono; el nombre del solicitante y número del permiso; la ubicación y distancia de su propiedad/actividad con respecto a la instalación; una descripción específica de la forma cómo usted sería afectado adversamente por el sitio de una manera no común al público en general; una lista de todas las cuestiones de hecho en disputa que usted presente durante el período de comentarios; y la declaración "[Yo/nosotros] solicito/solicitamos una audiencia de caso impugnado". Si presenta la petición para una audiencia de caso impugnado de parte de un grupo o asociación, debe identificar una persona que representa al grupo para recibir correspondencia en el futuro; identificar el nombre y la dirección de un miembro del grupo que sería afectado adversamente por la planta o la actividad propuesta; proveer la información indicada anteriormente con respecto a la ubicación del miembro afectado y su distancia de la planta o actividad propuesta; explicar cómo y porqué el miembro sería afectado; y explicar cómo los intereses que el grupo desea proteger son pertinentes al propósito del grupo.

Después del cierre de todos los períodos de comentarios y de petición que aplican, el Director Ejecutivo enviará la solicitud y cualquier petición para reconsideración o para una audiencia de caso impugnado a los Comisionados de la TCEQ para su consideración durante una reunión programada de la Comisión. La Comisión sólo puede conceder una solicitud de una audiencia de caso impugnado sobre los temas que el solicitante haya presentado en sus comentarios oportunos que no fueron retirados posteriormente. Si se concede una audiencia, el tema de la audiencia estará limitado a cuestiones de hecho en disputa o cuestiones mixtas de hecho y de derecho relacionadas a intereses pertinentes y materiales de calidad del agua que se hayan presentado durante el período de comentarios.

LISTA DE CORREO. Si somete comentarios públicos, un pedido para una audiencia administrativa de lo contencioso o una reconsideración de la decisión del Director Ejecutivo, la Oficina del Secretario Principal enviará por correo los avisos públicos en relación con la solicitud. Además, puede pedir que la TCEQ ponga su nombre en una o más de las listas

correos siguientes (1) la lista de correo permanente para recibir los avisos de el solicitante indicado por nombre y número del permiso específico y/o (2) la lista de correo de todas las solicitudes en un condado específico. Si desea que se agrega su nombre en una de las listas designe cual lista(s) y envia por correo su pedido a la Oficina del Secretario Principal de la TCEQ.

CONTACTOS E INFORMACIÓN A LA AGENCIA. Todos los comentarios públicos y solicitudes deben ser presentadas electrónicamente vía

<http://www14.tceq.texas.gov/epic/eComment/> o por escrito dirigidos a la Comisión de Texas de Calidad Ambiental, Oficial de la Secretaría (Office of Chief Clerk), MC-105, P.O. Box 13087, Austin, Texas 78711-3087. Tenga en cuenta que cualquier información personal que usted proporcione, incluyendo su nombre, número de teléfono, dirección de correo electrónico y dirección física pasarán a formar parte del registro público de la Agencia. Para obtener más información acerca de esta solicitud de permiso o el proceso de permisos, llame al programa de educación pública de la TCEQ, gratis, al 1-800-687-4040. Si desea información en Español, puede llamar al 1-800-687-4040.

También se puede obtener más información de M/I Homes of Houston, LLC en la dirección indicado anteriormente o llamando al Sr. Jonathan White, P.E., L Squared Engineering, al 936-647-0420.

Fecha de emisión _____ *[Date notice issued]*



TPDES PERMIT NO. WQ0016629001
[For TCEQ office use only - EPA I.D.
No. TX0146633]

TEXAS COMMISSION ON ENVIRONMENTAL QUALITY
P.O. Box 13087
Austin, Texas 78711-3087

PERMIT TO DISCHARGE WASTES
under provisions of
Section 402 of the Clean Water Act
and Chapter 26 of the Texas Water Code

M/I Homes of Houston, LLC

whose mailing address is

1720 West Sam Houston Parkway North, Suite 100
Houston, Texas 77043

is authorized to treat and discharge wastes from the Kinkaid Road Wastewater Treatment Facility, SIC Code 6552

located at 19971 Farm-to-Market Road 2854, in Montgomery County, Texas 77316

to Mound Creek, thence to Lake Creek in Segment No. 1015 of the San Jacinto River Basin

only according to effluent limitations, monitoring requirements, and other conditions set forth in this permit, as well as the rules of the Texas Commission on Environmental Quality (TCEQ), the laws of the State of Texas, and other orders of the TCEQ. The issuance of this permit does not grant to the permittee the right to use private or public property for conveyance of wastewater along the discharge route described in this permit. This includes, but is not limited to, property belonging to any individual, partnership, corporation, or other entity. Neither does this permit authorize any invasion of personal rights nor any violation of federal, state, or local laws or regulations. It is the responsibility of the permittee to acquire property rights as may be necessary to use the discharge route.

This permit shall expire at midnight, **five years from the date of issuance.**

ISSUED DATE:

For the Commission

INTERIM EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

Outfall Number 001

1. During the period beginning upon the date of issuance and lasting through the completion of expansion to the 0.075 million gallons per day (MGD) facility, the permittee is authorized to discharge subject to the following effluent limitations:

The daily average flow of effluent shall not exceed 0.0375 million gallons per day (MGD), nor shall the average discharge during any two-hour period (2-hour peak) exceed 104 gallons per minute.

<u>Effluent Characteristic</u>	<u>Discharge Limitations</u>				<u>Min. Self-Monitoring Requirements</u>	
	Daily Avg mg/l (lbs/day)	7-day Avg mg/l	Daily Max mg/l	Single Grab mg/l	Report Daily Avg. & Max. Measurement Frequency	Sample Type
Flow, MGD	Report	N/A	Report	N/A	Continuous	Totalizing Meter
Carbonaceous Biochemical Oxygen Demand (5-day)	10 (3.1)	15	25	35	One/week	Grab
Total Suspended Solids	15 (4.7)	25	40	60	One/week	Grab
Ammonia Nitrogen	3 (0.94)	6	10	15	One/week	Grab
<i>E. coli</i> , colony-forming units or most probable number per 100 ml	63	N/A	N/A	200	One/quarter	Grab

2. The effluent shall contain a total chlorine residual of at least 1.0 mg/l and shall not exceed a total chlorine residual of 4.0 mg/l after a detention time of at least 20 minutes (based on peak flow), and shall be monitored five times per week by grab sample. An equivalent method of disinfection may be substituted only with prior approval of the Executive Director.
3. The pH shall not be less than 6.0 standard units nor greater than 9.0 standard units and shall be monitored once per month by grab sample.
4. There shall be no discharge of floating solids or visible foam in other than trace amounts and no discharge of visible oil.
5. Effluent monitoring samples shall be taken at the following location(s): Following the final treatment unit.
6. The effluent shall contain a minimum dissolved oxygen of 4.0 mg/l and shall be monitored once per week by grab sample.

FINAL EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

Outfall Number 001

1. During the period beginning upon the completion of expansion to the 0.075 million gallons per day (MGD) facility and lasting through the date of expiration, the permittee is authorized to discharge subject to the following effluent limitations:

The daily average flow of effluent shall not exceed 0.075 million gallons per day (MGD), nor shall the average discharge during any two-hour period (2-hour peak) exceed 208 gallons per minute.

<u>Effluent Characteristic</u>	<u>Discharge Limitations</u>				<u>Min. Self-Monitoring Requirements</u>	
	Daily Avg mg/l (lbs/day)	7-day Avg mg/l	Daily Max mg/l	Single Grab mg/l	Report Daily Avg. & Max. Single Grab Measurement Frequency	Sample Type
Flow, MGD	Report	N/A	Report	N/A	Continuous	Totalizing Meter
Carbonaceous Biochemical Oxygen Demand (5-day)	10 (6.3)	15	25	35	One/week	Grab
Total Suspended Solids	15 (9.4)	25	40	60	One/week	Grab
Ammonia Nitrogen	3 (1.9)	6	10	15	One/week	Grab
<i>E. coli</i> , colony-forming units or most probable number per 100 ml	63	N/A	N/A	200	One/quarter	Grab

2. The effluent shall contain a total chlorine residual of at least 1.0 mg/l and shall not exceed a total chlorine residual of 4.0 mg/l after a detention time of at least 20 minutes (based on peak flow), and shall be monitored five times per week by grab sample. An equivalent method of disinfection may be substituted only with prior approval of the Executive Director.
3. The pH shall not be less than 6.0 standard units nor greater than 9.0 standard units and shall be monitored once per month by grab sample.
4. There shall be no discharge of floating solids or visible foam in other than trace amounts and no discharge of visible oil.
5. Effluent monitoring samples shall be taken at the following location(s): Following the final treatment unit.
6. The effluent shall contain a minimum dissolved oxygen of 4.0 mg/l and shall be monitored once per week by grab sample.

DEFINITIONS AND STANDARD PERMIT CONDITIONS

As required by Title 30 Texas Administrative Code (TAC) Chapter 305, certain regulations appear as standard conditions in waste discharge permits. 30 TAC § 305.121 - 305.129 (relating to Permit Characteristics and Conditions) as promulgated under the Texas Water Code (TWC) §§ 5.103 and 5.105, and the Texas Health and Safety Code (THSC) §§ 361.017 and 361.024(a), establish the characteristics and standards for waste discharge permits, including sewage sludge, and those sections of 40 Code of Federal Regulations (CFR) Part 122 adopted by reference by the Commission. The following text includes these conditions and incorporates them into this permit. All definitions in TWC § 26.001 and 30 TAC Chapter 305 shall apply to this permit and are incorporated by reference. Some specific definitions of words or phrases used in this permit are as follows:

1. Flow Measurements

- a. Annual average flow - the arithmetic average of all daily flow determinations taken within the preceding 12 consecutive calendar months. The annual average flow determination shall consist of daily flow volume determinations made by a totalizing meter, charted on a chart recorder and limited to major domestic wastewater discharge facilities with one million gallons per day or greater permitted flow.
- b. Daily average flow - the arithmetic average of all determinations of the daily flow within a period of one calendar month. The daily average flow determination shall consist of determinations made on at least four separate days. If instantaneous measurements are used to determine the daily flow, the determination shall be the arithmetic average of all instantaneous measurements taken during that month. Daily average flow determination for intermittent discharges shall consist of a minimum of three flow determinations on days of discharge.
- c. Daily maximum flow - the highest total flow for any 24-hour period in a calendar month.
- d. Instantaneous flow - the measured flow during the minimum time required to interpret the flow measuring device.
- e. 2-hour peak flow (domestic wastewater treatment plants) - the maximum flow sustained for a two-hour period during the period of daily discharge. The average of multiple measurements of instantaneous maximum flow within a two-hour period may be used to calculate the 2-hour peak flow.
- f. Maximum 2-hour peak flow (domestic wastewater treatment plants) - the highest 2-hour peak flow for any 24-hour period in a calendar month.

2. Concentration Measurements

- a. Daily average concentration - the arithmetic average of all effluent samples, composite or grab as required by this permit, within a period of one calendar month, consisting of at least four separate representative measurements.
 - i. For domestic wastewater treatment plants - When four samples are not available in a calendar month, the arithmetic average (weighted by flow) of all values in the previous four consecutive month period consisting of at least four measurements shall be utilized as the daily average concentration.

- ii. For all other wastewater treatment plants - When four samples are not available in a calendar month, the arithmetic average (weighted by flow) of all values taken during the month shall be utilized as the daily average concentration.
- b. 7-day average concentration - the arithmetic average of all effluent samples, composite or grab as required by this permit, within a period of one calendar week, Sunday through Saturday.
- c. Daily maximum concentration - the maximum concentration measured on a single day, by the sample type specified in the permit, within a period of one calendar month.
- d. Daily discharge - the discharge of a pollutant measured during a calendar day or any 24-hour period that reasonably represents the calendar day for purposes of sampling. For pollutants with limitations expressed in terms of mass, the daily discharge is calculated as the total mass of the pollutant discharged over the sampling day. For pollutants with limitations expressed in other units of measurement, the daily discharge is calculated as the average measurement of the pollutant over the sampling day.

The daily discharge determination of concentration made using a composite sample shall be the concentration of the composite sample. When grab samples are used, the daily discharge determination of concentration shall be the arithmetic average (weighted by flow value) of all samples collected during that day.

- e. Bacteria concentration (*E. coli* or Enterococci) - Colony Forming Units (CFU) or Most Probable Number (MPN) of bacteria per 100 milliliters effluent. The daily average bacteria concentration is a geometric mean of the values for the effluent samples collected in a calendar month. The geometric mean shall be determined by calculating the n th root of the product of all measurements made in a calendar month, where n equals the number of measurements made; or, computed as the antilogarithm of the arithmetic mean of the logarithms of all measurements made in a calendar month. For any measurement of bacteria equaling zero, a substituted value of one shall be made for input into either computation method. If specified, the 7-day average for bacteria is the geometric mean of the values for all effluent samples collected during a calendar week.
 - f. Daily average loading (lbs/day) - the arithmetic average of all daily discharge loading calculations during a period of one calendar month. These calculations must be made for each day of the month that a parameter is analyzed. The daily discharge, in terms of mass (lbs/day), is calculated as (Flow, MGD x Concentration, mg/l x 8.34).
 - g. Daily maximum loading (lbs/day) - the highest daily discharge, in terms of mass (lbs/day), within a period of one calendar month.
3. Sample Type
- a. Composite sample - For domestic wastewater, a composite sample is a sample made up of a minimum of three effluent portions collected in a continuous 24-hour period or during the period of daily discharge if less than 24 hours, and combined in volumes proportional to flow, and collected at the intervals required by 30 TAC § 319.9 (a). For industrial wastewater, a composite sample is a sample made up of a minimum of three effluent portions collected in a continuous 24-hour period or during the period of daily discharge if less than 24 hours, and combined in volumes proportional to flow, and collected at the intervals required by 30 TAC § 319.9 (b).

- b. Grab sample - an individual sample collected in less than 15 minutes.
4. Treatment Facility (facility) - wastewater facilities used in the conveyance, storage, treatment, recycling, reclamation and/or disposal of domestic sewage, industrial wastes, agricultural wastes, recreational wastes, or other wastes including sludge handling or disposal facilities under the jurisdiction of the Commission.
5. The term "sewage sludge" is defined as solid, semi-solid, or liquid residue generated during the treatment of domestic sewage in 30 TAC Chapter 312. This includes the solids that have not been classified as hazardous waste separated from wastewater by unit processes.
6. The term "biosolids" is defined as sewage sludge that has been tested or processed to meet Class A, Class AB, or Class B pathogen standards in 30 TAC Chapter 312 for beneficial use.
7. Bypass - the intentional diversion of a waste stream from any portion of a treatment facility.

MONITORING AND REPORTING REQUIREMENTS

1. Self-Reporting

Monitoring results shall be provided at the intervals specified in the permit. Unless otherwise specified in this permit or otherwise ordered by the Commission, the permittee shall conduct effluent sampling and reporting in accordance with 30 TAC §§ 319.4 - 319.12. Unless otherwise specified, effluent monitoring data shall be submitted each month, to the Enforcement Division (MC 224), by the 20th day of the following month for each discharge which is described by this permit whether or not a discharge is made for that month. Monitoring results must be submitted online using the NetDMR reporting system available through the TCEQ website unless the permittee requests and obtains an electronic reporting waiver. Monitoring results must be signed and certified as required by Monitoring and Reporting Requirements No. 10.

As provided by state law, the permittee is subject to administrative, civil and criminal penalties, as applicable, for negligently or knowingly violating the Clean Water Act (CWA); TWC §§ 26, 27, and 28; and THSC § 361, including but not limited to knowingly making any false statement, representation, or certification on any report, record, or other document submitted or required to be maintained under this permit, including monitoring reports or reports of compliance or noncompliance, or falsifying, tampering with or knowingly rendering inaccurate any monitoring device or method required by this permit or violating any other requirement imposed by state or federal regulations.

2. Test Procedures

- a. Unless otherwise specified in this permit, test procedures for the analysis of pollutants shall comply with procedures specified in 30 TAC §§ 319.11 - 319.12. Measurements, tests, and calculations shall be accurately accomplished in a representative manner.
- b. All laboratory tests submitted to demonstrate compliance with this permit must meet the requirements of 30 TAC § 25, Environmental Testing Laboratory Accreditation and Certification.

3. Records of Results

- a. Monitoring samples and measurements shall be taken at times and in a manner so as to

be representative of the monitored activity.

- b. Except for records of monitoring information required by this permit related to the permittee's sewage sludge use or biosolids and disposal activities, which shall be retained for a period of at least five years (or longer as required by 40 CFR Part 503), monitoring and reporting records, including strip charts and records of calibration and maintenance, copies of all records required by this permit, records of all data used to complete the application for this permit, and the certification required by 40 CFR § 264.73(b)(9) shall be retained at the facility site, or shall be readily available for review by a TCEQ representative for a period of three years from the date of the record or sample, measurement, report, application or certification. This period shall be extended at the request of the Executive Director.
- c. Records of monitoring activities shall include the following:
 - i. date, time and place of sample or measurement;
 - ii. identity of individual who collected the sample or made the measurement.
 - iii. date and time of analysis;
 - iv. identity of the individual and laboratory who performed the analysis;
 - v. the technique or method of analysis; and
 - vi. the results of the analysis or measurement and quality assurance/quality control records.

The period during which records are required to be kept shall be automatically extended to the date of the final disposition of any administrative or judicial enforcement action that may be instituted against the permittee.

4. Additional Monitoring by Permittee

If the permittee monitors any pollutant at the location(s) designated herein more frequently than required by this permit using approved analytical methods as specified above, all results of such monitoring shall be included in the calculation and reporting of the values submitted on the approved self-report form. Increased frequency of sampling shall be indicated on the self-report form.

5. Calibration of Instruments

All automatic flow measuring or recording devices and all totalizing meters for measuring flows shall be accurately calibrated by a trained person at plant start-up and as often thereafter as necessary to ensure accuracy, but not less often than annually unless authorized by the Executive Director for a longer period. Such person shall verify in writing that the device is operating properly and giving accurate results. Copies of the verification shall be retained at the facility site and/or shall be readily available for review by a TCEQ representative for a period of three years.

6. Compliance Schedule Reports

Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of the permit shall be submitted no later

than 14 days following each schedule date to the Regional Office and the Enforcement Division (MC 224).

7. Noncompliance Notification

- a. In accordance with 30 TAC § 305.125(9) any noncompliance which may endanger human health or safety, or the environment shall be reported by the permittee to the TCEQ. Except as allowed by 30 TAC § 305.132, report of such information shall be provided orally or by facsimile transmission (FAX) to the Regional Office within 24 hours of becoming aware of the noncompliance. A written submission of such information shall also be provided by the permittee to the Regional Office and the Enforcement Division (MC 224) within five working days of becoming aware of the noncompliance. For Publicly Owned Treatment Works (POTWs), effective December 21, 2025, the permittee must submit the written report for unauthorized discharges and unanticipated bypasses that exceed any effluent limit in the permit using the online electronic reporting system available through the TCEQ website unless the permittee requests and obtains an electronic reporting waiver. The written submission shall contain a description of the noncompliance and its cause; the potential danger to human health or safety, or the environment; the period of noncompliance, including exact dates and times; if the noncompliance has not been corrected, the time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent recurrence of the noncompliance, and to mitigate its adverse effects.
 - b. The following violations shall be reported under Monitoring and Reporting Requirement 7.a.:
 - i. Unauthorized discharges as defined in Permit Condition 2(g).
 - ii. Any unanticipated bypass that exceeds any effluent limitation in the permit.
 - iii. Violation of a permitted maximum daily discharge limitation for pollutants listed specifically in the Other Requirements section of an Industrial TPDES permit.
 - c. In addition to the above, any effluent violation which deviates from the permitted effluent limitation by more than 40% shall be reported by the permittee in writing to the Regional Office and the Enforcement Division (MC 224) within 5 working days of becoming aware of the noncompliance.
 - d. Any noncompliance other than that specified in this section, or any required information not submitted or submitted incorrectly, shall be reported to the Enforcement Division (MC 224) as promptly as possible. For effluent limitation violations, noncompliances shall be reported on the approved self-report form.
8. In accordance with the procedures described in 30 TAC §§ 35.301 - 35.303 (relating to Water Quality Emergency and Temporary Orders) if the permittee knows in advance of the need for a bypass, it shall submit prior notice by applying for such authorization.
9. Changes in Discharges of Toxic Substances

All existing manufacturing, commercial, mining, and silvicultural permittees shall notify the Regional Office, orally or by facsimile transmission within 24 hours, and both the Regional Office and the Enforcement Division (MC 224) in writing within five (5) working days, after becoming aware of or having reason to believe:

- a. That any activity has occurred or will occur which would result in the discharge, on a routine or frequent basis, of any toxic pollutant listed at 40 CFR Part 122, Appendix D, Tables II and III (excluding Total Phenols) which is not limited in the permit, if that discharge will exceed the highest of the following “notification levels”:
 - i. One hundred micrograms per liter (100 µg/L);
 - ii. Two hundred micrograms per liter (200 µg/L) for acrolein and acrylonitrile; five hundred micrograms per liter (500 µg/L) for 2,4-dinitrophenol and for 2-methyl-4,6-dinitrophenol; and one milligram per liter (1 mg/L) for antimony;
 - iii. Five (5) times the maximum concentration value reported for that pollutant in the permit application; or
 - iv. The level established by the TCEQ.
- b. That any activity has occurred or will occur which would result in any discharge, on a nonroutine or infrequent basis, of a toxic pollutant which is not limited in the permit, if that discharge will exceed the highest of the following “notification levels”:
 - i. Five hundred micrograms per liter (500 µg/L);
 - ii. One milligram per liter (1 mg/L) for antimony;
 - iii. Ten (10) times the maximum concentration value reported for that pollutant in the permit application; or
 - iv. The level established by the TCEQ.

10. Signatories to Reports

All reports and other information requested by the Executive Director shall be signed by the person and in the manner required by 30 TAC § 305.128 (relating to Signatories to Reports).

11. All POTWs must provide adequate notice to the Executive Director of the following:

- a. Any new introduction of pollutants into the POTW from an indirect discharger which would be subject to CWA § 301 or § 306 if it were directly discharging those pollutants;
- b. Any substantial change in the volume or character of pollutants being introduced into that POTW by a source introducing pollutants into the POTW at the time of issuance of the permit; and
- c. For the purpose of this paragraph, adequate notice shall include information on:
 - i. The quality and quantity of effluent introduced into the POTW; and
 - ii. Any anticipated impact of the change on the quantity or quality of effluent to be discharged from the POTW.

PERMIT CONDITIONS

1. General

- a. When the permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in an application or in any report to the Executive Director, it shall promptly submit such facts or information.
- b. This permit is granted on the basis of the information supplied and representations made by the permittee during action on an application, and relying upon the accuracy and completeness of that information and those representations. After notice and opportunity for a hearing, this permit may be modified, suspended, or revoked, in whole or in part, in accordance with 30 TAC Chapter 305, Subchapter D, during its term for good cause including, but not limited to, the following:
 - i. Violation of any terms or conditions of this permit;
 - ii. Obtaining this permit by misrepresentation or failure to disclose fully all relevant facts; or
 - iii. A change in any condition that requires either a temporary or permanent reduction or elimination of the authorized discharge.
- c. The permittee shall furnish to the Executive Director, upon request and within a reasonable time, any information to determine whether cause exists for amending, revoking, suspending or terminating the permit. The permittee shall also furnish to the Executive Director, upon request, copies of records required to be kept by the permit.

2. Compliance

- a. Acceptance of the permit by the person to whom it is issued constitutes acknowledgment and agreement that such person will comply with all the terms and conditions embodied in the permit, and the rules and other orders of the Commission.
- b. The permittee has a duty to comply with all conditions of the permit. Failure to comply with any permit condition constitutes a violation of the permit and the Texas Water Code or the Texas Health and Safety Code, and is grounds for enforcement action, for permit amendment, revocation, or suspension, or for denial of a permit renewal application or an application for a permit for another facility.
- c. It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of the permit.
- d. The permittee shall take all reasonable steps to minimize or prevent any discharge or sludge use or disposal or other permit violation that has a reasonable likelihood of adversely affecting human health or the environment.
- e. Authorization from the Commission is required before beginning any change in the permitted facility or activity that may result in noncompliance with any permit requirements.
- f. A permit may be amended, suspended and reissued, or revoked for cause in accordance

with 30 TAC §§ 305.62 and 305.66 and TWC§ 7.302. The filing of a request by the permittee for a permit amendment, suspension and reissuance, or termination, or a notification of planned changes or anticipated noncompliance, does not stay any permit condition.

- g. There shall be no unauthorized discharge of wastewater or any other waste. For the purpose of this permit, an unauthorized discharge is considered to be any discharge of wastewater into or adjacent to water in the state at any location not permitted as an outfall or otherwise defined in the Other Requirements section of this permit.
- h. In accordance with 30 TAC § 305.535(a), the permittee may allow any bypass to occur from a TPDES permitted facility which does not cause permitted effluent limitations to be exceeded or an unauthorized discharge to occur, but only if the bypass is also for essential maintenance to assure efficient operation.
- i. The permittee is subject to administrative, civil, and criminal penalties, as applicable, under TWC §§ 7.051 - 7.075 (relating to Administrative Penalties), 7.101 - 7.111 (relating to Civil Penalties), and 7.141 - 7.202 (relating to Criminal Offenses and Penalties) for violations including, but not limited to, negligently or knowingly violating the federal CWA §§ 301, 302, 306, 307, 308, 318, or 405, or any condition or limitation implementing any sections in a permit issued under the CWA § 402, or any requirement imposed in a pretreatment program approved under the CWA §§ 402 (a)(3) or 402 (b)(8).

3. Inspections and Entry

- a. Inspection and entry shall be allowed as prescribed in the TWC Chapters 26, 27, and 28, and THSC § 361.
- b. The members of the Commission and employees and agents of the Commission are entitled to enter any public or private property at any reasonable time for the purpose of inspecting and investigating conditions relating to the quality of water in the state or the compliance with any rule, regulation, permit or other order of the Commission. Members, employees, or agents of the Commission and Commission contractors are entitled to enter public or private property at any reasonable time to investigate or monitor or, if the responsible party is not responsive or there is an immediate danger to public health or the environment, to remove or remediate a condition related to the quality of water in the state. Members, employees, Commission contractors, or agents acting under this authority who enter private property shall observe the establishment's rules and regulations concerning safety, internal security, and fire protection, and if the property has management in residence, shall notify management or the person then in charge of his presence and shall exhibit proper credentials. If any member, employee, Commission contractor, or agent is refused the right to enter in or on public or private property under this authority, the Executive Director may invoke the remedies authorized in TWC § 7.002. The statement above, that Commission entry shall occur in accordance with an establishment's rules and regulations concerning safety, internal security, and fire protection, is not grounds for denial or restriction of entry to any part of the facility, but merely describes the Commission's duty to observe appropriate rules and regulations during an inspection.

4. Permit Amendment and/or Renewal

- a. The permittee shall give notice to the Executive Director as soon as possible of any planned physical alterations or additions to the permitted facility if such alterations or additions would require a permit amendment or result in a violation of permit requirements. Notice shall also be required under this paragraph when:
 - i. The alteration or addition to a permitted facility may meet one of the criteria for determining whether a facility is a new source in accordance with 30 TAC § 305.534 (relating to New Sources and New Dischargers); or
 - ii. The alteration or addition could significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants that are subject neither to effluent limitations in the permit, nor to notification requirements in Monitoring and Reporting Requirements No. 9; or
 - iii. The alteration or addition results in a significant change in the permittee's sludge use or disposal practices, and such alteration, addition, or change may justify the application of permit conditions that are different from or absent in the existing permit, including notification of additional use or disposal sites not reported during the permit application process or not reported pursuant to an approved land application plan.
- b. Prior to any facility modifications, additions, or expansions that will increase the plant capacity beyond the permitted flow, the permittee must apply for and obtain proper authorization from the Commission before commencing construction.
- c. The permittee must apply for an amendment or renewal at least 180 days prior to expiration of the existing permit in order to continue a permitted activity after the expiration date of the permit. If an application is submitted prior to the expiration date of the permit, the existing permit shall remain in effect until the application is approved, denied, or returned. If the application is returned or denied, authorization to continue such activity shall terminate upon the effective date of the action. If an application is not submitted prior to the expiration date of the permit, the permit shall expire and authorization to continue such activity shall terminate.
- d. Prior to accepting or generating wastes which are not described in the permit application or which would result in a significant change in the quantity or quality of the existing discharge, the permittee must report the proposed changes to the Commission. The permittee must apply for a permit amendment reflecting any necessary changes in permit conditions, including effluent limitations for pollutants not identified and limited by this permit.
- e. In accordance with the TWC § 26.029(b), after a public hearing, notice of which shall be given to the permittee, the Commission may require the permittee, from time to time, for good cause, in accordance with applicable laws, to conform to new or additional conditions.
- f. If any toxic effluent standard or prohibition (including any schedule of compliance specified in such effluent standard or prohibition) is promulgated under CWA § 307(a) for a toxic pollutant which is present in the discharge and that standard or prohibition is more stringent than any limitation on the pollutant in this permit, this permit shall be modified or revoked and reissued to conform to the toxic effluent standard or

prohibition. The permittee shall comply with effluent standards or prohibitions established under CWA § 307(a) for toxic pollutants within the time provided in the regulations that established those standards or prohibitions, even if the permit has not yet been modified to incorporate the requirement.

5. Permit Transfer

- a. Prior to any transfer of this permit, Commission approval must be obtained. The Commission shall be notified in writing of any change in control or ownership of facilities authorized by this permit. Such notification should be sent to the Applications Review and Processing Team (MC 148) of the Water Quality Division.
- b. A permit may be transferred only according to the provisions of 30 TAC § 305.64 (relating to Transfer of Permits) and 30 TAC § 50.133 (relating to Executive Director Action on Application or WQMP update).

6. Relationship to Hazardous Waste Activities

This permit does not authorize any activity of hazardous waste storage, processing, or disposal that requires a permit or other authorization pursuant to the Texas Health and Safety Code.

7. Relationship to Water Rights

Disposal of treated effluent by any means other than discharge directly to water in the state must be specifically authorized in this permit and may require a permit pursuant to TWC Chapter 11.

8. Property Rights

A permit does not convey any property rights of any sort, or any exclusive privilege.

9. Permit Enforceability

The conditions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstances, is held invalid, the application of such provision to other circumstances, and the remainder of this permit, shall not be affected thereby.

10. Relationship to Permit Application

The application pursuant to which the permit has been issued is incorporated herein; provided, however, that in the event of a conflict between the provisions of this permit and the application, the provisions of the permit shall control.

11. Notice of Bankruptcy

- a. Each permittee shall notify the Executive Director, in writing, immediately following the filing of a voluntary or involuntary petition for bankruptcy under any chapter of Title 11 (Bankruptcy) of the United States Code (11 USC) by or against:
 - i. the permittee;
 - ii. an entity (as that term is defined in 11 USC, § 101(14)) controlling the permittee or listing the permit or permittee as property of the estate; or

- iii. an affiliate (as that term is defined in 11 USC, § 101(2)) of the permittee.
- b. This notification must indicate:
 - i. the name of the permittee;
 - ii. the permit number(s);
 - iii. the bankruptcy court in which the petition for bankruptcy was filed; and
 - iv. the date of filing of the petition.

OPERATIONAL REQUIREMENTS

1. The permittee shall at all times ensure that the facility and all of its systems of collection, treatment, and disposal are properly operated and maintained. This includes, but is not limited to, the regular, periodic examination of wastewater solids within the treatment plant by the operator in order to maintain an appropriate quantity and quality of solids inventory as described in the various operator training manuals and according to accepted industry standards for process control. Process control, maintenance, and operations records shall be retained at the facility site, or shall be readily available for review by a TCEQ representative, for a period of three years.
2. Upon request by the Executive Director, the permittee shall take appropriate samples and provide proper analysis in order to demonstrate compliance with Commission rules. Unless otherwise specified in this permit or otherwise ordered by the Commission, the permittee shall comply with all applicable provisions of 30 TAC Chapter 312 concerning sewage sludge or biosolids use and disposal and 30 TAC §§ 319.21 - 319.29 concerning the discharge of certain hazardous metals.
3. Domestic wastewater treatment facilities shall comply with the following provisions:
 - a. The permittee shall notify the Municipal Permits Team, Wastewater Permitting Section (MC 148) of the Water Quality Division, in writing, of any facility expansion at least 90 days prior to conducting such activity.
 - b. The permittee shall submit a closure plan for review and approval to the Municipal Permits Team, Wastewater Permitting Section (MC 148) of the Water Quality Division, for any closure activity at least 90 days prior to conducting such activity. Closure is the act of permanently taking a waste management unit or treatment facility out of service and includes the permanent removal from service of any pit, tank, pond, lagoon, surface impoundment and/or other treatment unit regulated by this permit.
4. The permittee is responsible for installing prior to plant start-up, and subsequently maintaining, adequate safeguards to prevent the discharge of untreated or inadequately treated wastes during electrical power failures by means of alternate power sources, standby generators, and/or retention of inadequately treated wastewater.
5. Unless otherwise specified, the permittee shall provide a readily accessible sampling point and, where applicable, an effluent flow measuring device or other acceptable means by which effluent flow may be determined.

6. The permittee shall remit an annual water quality fee to the Commission as required by 30 TAC Chapter 21. Failure to pay the fee may result in revocation of this permit under TWC § 7.302(b)(6).
7. Documentation

For all written notifications to the Commission required of the permittee by this permit, the permittee shall keep and make available a copy of each such notification under the same conditions as self-monitoring data are required to be kept and made available. Except for information required for TPDES permit applications, effluent data, including effluent data in permits, draft permits and permit applications, and other information specified as not confidential in 30 TAC §§ 1.5(d), any information submitted pursuant to this permit may be claimed as confidential by the submitter. Any such claim must be asserted in the manner prescribed in the application form or by stamping the words confidential business information on each page containing such information. If no claim is made at the time of submission, information may be made available to the public without further notice. If the Commission or Executive Director agrees with the designation of confidentiality, the TCEQ will not provide the information for public inspection unless required by the Texas Attorney General or a court pursuant to an open records request. If the Executive Director does not agree with the designation of confidentiality, the person submitting the information will be notified.

8. Facilities that generate domestic wastewater shall comply with the following provisions; domestic wastewater treatment facilities at permitted industrial sites are excluded.
 - a. Whenever flow measurements for any domestic sewage treatment facility reach 75% of the permitted daily average or annual average flow for three consecutive months, the permittee must initiate engineering and financial planning for expansion and/or upgrading of the domestic wastewater treatment and/or collection facilities. Whenever the flow reaches 90% of the permitted daily average or annual average flow for three consecutive months, the permittee shall obtain necessary authorization from the Commission to commence construction of the necessary additional treatment and/or collection facilities. In the case of a domestic wastewater treatment facility which reaches 75% of the permitted daily average or annual average flow for three consecutive months, and the planned population to be served or the quantity of waste produced is not expected to exceed the design limitations of the treatment facility, the permittee shall submit an engineering report supporting this claim to the Executive Director of the Commission.

If in the judgment of the Executive Director the population to be served will not cause permit noncompliance, then the requirement of this section may be waived. To be effective, any waiver must be in writing and signed by the Director of the Enforcement Division (MC 219) of the Commission, and such waiver of these requirements will be reviewed upon expiration of the existing permit; however, any such waiver shall not be interpreted as condoning or excusing any violation of any permit parameter.

- b. The plans and specifications for domestic sewage collection and treatment works associated with any domestic permit must be approved by the Commission and failure to secure approval before commencing construction of such works or making a discharge is a violation of this permit and each day is an additional violation until approval has been

secured.

- c. Permits for domestic wastewater treatment plants are granted subject to the policy of the Commission to encourage the development of area-wide waste collection, treatment, and disposal systems. The Commission reserves the right to amend any domestic wastewater permit in accordance with applicable procedural requirements to require the system covered by this permit to be integrated into an area-wide system, should such be developed; to require the delivery of the wastes authorized to be collected in, treated by or discharged from said system, to such area-wide system; or to amend this permit in any other particular to effectuate the Commission's policy. Such amendments may be made when the changes required are advisable for water quality control purposes and are feasible on the basis of waste treatment technology, engineering, financial, and related considerations existing at the time the changes are required, exclusive of the loss of investment in or revenues from any then existing or proposed waste collection, treatment or disposal system.
9. Domestic wastewater treatment plants shall be operated and maintained by sewage plant operators holding a valid certificate of competency at the required level as defined in 30 TAC Chapter 30.
 10. For Publicly Owned Treatment Works (POTWs), the 30-day average (or monthly average) percent removal for BOD and TSS shall not be less than 85%, unless otherwise authorized by this permit.
 11. Facilities that generate industrial solid waste as defined in 30 TAC § 335.1 shall comply with these provisions:
 - a. Any solid waste, as defined in 30 TAC § 335.1 (including but not limited to such wastes as garbage, refuse, sludge from a waste treatment, water supply treatment plant or air pollution control facility, discarded materials, discarded materials to be recycled, whether the waste is solid, liquid, or semisolid), generated by the permittee during the management and treatment of wastewater, must be managed in accordance with all applicable provisions of 30 TAC Chapter 335, relating to Industrial Solid Waste Management.
 - b. Industrial wastewater that is being collected, accumulated, stored, or processed before discharge through any final discharge outfall, specified by this permit, is considered to be industrial solid waste until the wastewater passes through the actual point source discharge and must be managed in accordance with all applicable provisions of 30 TAC Chapter 335.
 - c. The permittee shall provide written notification, pursuant to the requirements of 30 TAC § 335.8(b)(1), to the Corrective Action Section (MC 127) of the Remediation Division informing the Commission of any closure activity involving an Industrial Solid Waste Management Unit, at least 90 days prior to conducting such an activity.
 - d. Construction of any industrial solid waste management unit requires the prior written notification of the proposed activity to the Registration and Reporting Section (MC 129) of the Permitting and Registration Support Division. No person shall dispose of industrial solid waste, including sludge or other solids from wastewater treatment processes, prior to fulfilling the deed recordation requirements of 30 TAC § 335.5.

- e. The term “industrial solid waste management unit” means a landfill, surface impoundment, waste-pile, industrial furnace, incinerator, cement kiln, injection well, container, drum, salt dome waste containment cavern, or any other structure vessel, appurtenance, or other improvement on land used to manage industrial solid waste.
- f. The permittee shall keep management records for all sludge (or other waste) removed from any wastewater treatment process. These records shall fulfill all applicable requirements of 30 TAC § 335 and must include the following, as it pertains to wastewater treatment and discharge:
 - i. Volume of waste and date(s) generated from treatment process;
 - ii. Volume of waste disposed of on-site or shipped off-site;
 - iii. Date(s) of disposal;
 - iv. Identity of hauler or transporter;
 - v. Location of disposal site; and
 - vi. Method of final disposal.

The above records shall be maintained on a monthly basis. The records shall be retained at the facility site, or shall be readily available for review by authorized representatives of the TCEQ for at least five years.

- 12. For industrial facilities to which the requirements of 30 TAC § 335 do not apply, sludge and solid wastes, including tank cleaning and contaminated solids for disposal, shall be disposed of in accordance with THSC § 361.

TCEQ Revision 06/2020

SLUDGE PROVISIONS

The permittee is authorized to dispose of sludge or biosolids only at a Texas Commission on Environmental Quality (TCEQ) authorized land application site, co-disposal landfill, wastewater treatment facility, or facility that further processes sludge. **The disposal of sludge or biosolids by land application on property owned, leased or under the direct control of the permittee is a violation of the permit unless the site is authorized with the TCEQ. This provision does not authorize Distribution and Marketing of Class A or Class AB Biosolids. This provision does not authorize the permittee to land apply biosolids on property owned, leased or under the direct control of the permittee.**

SECTION I. REQUIREMENTS APPLYING TO ALL SEWAGE SLUDGE OR BIOSOLIDS LAND APPLICATION

A. General Requirements

1. The permittee shall handle and dispose of sewage sludge or biosolids in accordance with 30 TAC § 312 and all other applicable state and federal regulations in a manner that protects public health and the environment from any reasonably anticipated adverse effects due to any toxic pollutants that may be present in the sludge or biosolids.
2. In all cases, if the person (permit holder) who prepares the sewage sludge supplies the sewage sludge to another person for land application use or to the owner or lease holder of the land, the permit holder shall provide necessary information to the parties who receive the sludge to assure compliance with these regulations.
3. The land application of processed or unprocessed chemical toilet waste, grease trap waste, grit trap waste, milk solids, or similar non-hazardous municipal or industrial solid wastes, or any of the wastes listed in this provision combined with biosolids, WTP residuals or domestic septage is prohibited unless the grease trap waste is added at a fats, oil and grease (FOG) receiving facility as part of an anaerobic digestion process.

B. Testing Requirements

1. Sewage sludge or biosolids shall be tested once during the term of this permit in accordance with the method specified in both 40 CFR Part 261, Appendix II and 40 CFR Part 268, Appendix I [Toxicity Characteristic Leaching Procedure (TCLP)] or other method that receives the prior approval of the TCEQ for the contaminants listed in 40 CFR Part 261.24, Table 1. Sewage sludge or biosolids failing this test shall be managed according to RCRA standards for generators of hazardous waste, and the waste's disposition must be in accordance with all applicable requirements for hazardous waste processing, storage, or disposal. Following failure of any TCLP test, the management or disposal of sewage sludge or biosolids at a facility other than an authorized hazardous waste processing, storage, or disposal facility shall be prohibited until such time as the permittee can demonstrate the sewage sludge or biosolids no longer exhibits the hazardous waste toxicity characteristics (as demonstrated by the results of the TCLP tests). A written report shall be provided to both the TCEQ Registration and Reporting Section (MC 129) of the Permitting and Registration Support Division and the Regional Director (MC Region 12) within seven (7) days after failing the TCLP Test.

The report shall contain test results, certification that unauthorized waste management has stopped, and a summary of alternative disposal plans that comply with RCRA standards for the management of hazardous waste. The report shall be addressed to: Director, Permitting and Registration Support Division (MC 129), Texas Commission on Environmental Quality, P.O. Box 13087, Austin, Texas 78711-3087. In addition, the permittee shall prepare an annual report on the results of all sludge toxicity testing. The permittee must submit this annual report by September 30th of each year, using the online electronic reporting system available through TCEQ's website. If the permittee requests and obtains an electronic reporting waiver, the annual report can be submitted in hard copy to the TCEQ Regional Office (MC Region 12) and the Enforcement Division (MC 224).

2. Biosolids shall not be applied to the land if the concentration of the pollutants exceeds the pollutant concentration criteria in Table 1. The frequency of testing for pollutants in Table 1 is found in Section I.C. of this permit.

TABLE 1

<u>Pollutant</u>	<u>Ceiling Concentration</u> <u>(Milligrams per kilogram)*</u>
Arsenic	75
Cadmium	85
Chromium	3000
Copper	4300
Lead	840
Mercury	57
Molybdenum	75
Nickel	420
PCBs	49
Selenium	100
Zinc	7500

* Dry weight basis

3. Pathogen Control

All sewage sludge that is applied to agricultural land, forest, a public contact site, or a reclamation site must be treated by one of the following methods to ensure that the sludge meets either the Class A, Class AB or Class B biosolids pathogen requirements.

- a. For sewage sludge to be classified as Class A biosolids with respect to pathogens, the density of fecal coliform in the sewage sludge must be less than 1,000 most probable number (MPN) per gram of total solids (dry weight basis), or the density of *Salmonella* sp. bacteria in the sewage sludge must be less than three MPN per four grams of total solids (dry weight basis) at the time the sewage sludge is used or disposed. In addition, one of the alternatives listed below must be met:

Alternative 1 - The temperature of the sewage sludge that is used or disposed shall be maintained at or above a specific value for a period of time. See 30 TAC § 312.82(a)(3)(A) for specific information;

Alternative 5 (PFRP) - Sewage sludge that is used or disposed of must be treated in one of the Processes to Further Reduce Pathogens (PFRP) described in 40 CFR Part 503, Appendix B. PFRP include composting, heat drying, heat treatment, and thermophilic aerobic digestion; or

Alternative 6 (PFRP Equivalent) - Sewage sludge that is used or disposed of must be treated in a process that has been approved by the U. S. Environmental Protection Agency as being equivalent to those in Alternative 5.

- b. For sewage sludge to be classified as Class AB biosolids with respect to pathogens, the density of fecal coliform in the sewage sludge must be less than 1,000 MPN per gram of total solids (dry weight basis), or the density of *Salmonella* sp. bacteria in the sewage sludge be less than three MPN per four grams of total solids (dry weight basis) at the time the sewage sludge is used or disposed. In addition, one of the alternatives listed below must be met:

Alternative 2 - The pH of the sewage sludge that is used or disposed shall be raised to above 12 std. units and shall remain above 12 std. units for 72 hours.

The temperature of the sewage sludge shall be above 52° Celsius for 12 hours or longer during the period that the pH of the sewage sludge is above 12 std. units.

At the end of the 72-hour period during which the pH of the sewage sludge is above 12 std. units, the sewage sludge shall be air dried to achieve a percent solids in the sewage sludge greater than 50%; or

Alternative 3 - The sewage sludge shall be analyzed for enteric viruses prior to pathogen treatment. The limit for enteric viruses is less than one Plaque-forming Unit per four grams of total solids (dry weight basis) either before or following pathogen treatment. See 30 TAC § 312.82(a)(2)(C)(i-iii) for specific information. The sewage sludge shall be analyzed for viable helminth ova prior to pathogen treatment. The limit for viable helminth ova is less than one per four grams of total solids (dry weight basis) either before or following pathogen treatment. See 30 TAC § 312.82(a)(2)(C)(iv-vi) for specific information; or

Alternative 4 - The density of enteric viruses in the sewage sludge shall be less than one Plaque-forming Unit per four grams of total solids (dry weight basis) at the time the sewage sludge is used or disposed. The density of viable helminth ova in the sewage sludge shall be less than one per four grams of total solids (dry weight basis) at the time the sewage sludge is used or disposed.

- c. Sewage sludge that meets the requirements of Class AB biosolids may be classified a Class A biosolids if a variance request is submitted in writing that is supported by substantial documentation demonstrating equivalent methods for reducing odors and written approval is granted by the executive director. The executive director may deny the variance request or revoke that approved variance if it is determined that the variance may potentially endanger human health or the environment, or create nuisance odor conditions.
- d. Three alternatives are available to demonstrate compliance with Class B biosolids

criteria.

Alternative 1

- i. A minimum of seven random samples of the sewage sludge shall be collected within 48 hours of the time the sewage sludge is used or disposed of during each monitoring episode for the sewage sludge.
- ii. The geometric mean of the density of fecal coliform in the samples collected shall be less than either 2,000,000 MPN per gram of total solids (dry weight basis) or 2,000,000 Colony Forming Units per gram of total solids (dry weight basis).

Alternative 2 - Sewage sludge that is used or disposed of shall be treated in one of the Processes to Significantly Reduce Pathogens (PSRP) described in 40 CFR Part 503, Appendix B, so long as all of the following requirements are met by the generator of the sewage sludge.

- i. Prior to use or disposal, all the sewage sludge must have been generated from a single location, except as provided in paragraph v. below;
- ii. An independent Texas Licensed Professional Engineer must make a certification to the generator of a sewage sludge that the wastewater treatment facility generating the sewage sludge is designed to achieve one of the PSRP at the permitted design loading of the facility. The certification need only be repeated if the design loading of the facility is increased. The certification shall include a statement indicating the design meets all the applicable standards specified in Appendix B of 40 CFR Part 503;
- iii. Prior to any off-site transportation or on-site use or disposal of any sewage sludge generated at a wastewater treatment facility, the chief certified operator of the wastewater treatment facility or other responsible official who manages the processes to significantly reduce pathogens at the wastewater treatment facility for the permittee, shall certify that the sewage sludge underwent at least the minimum operational requirements necessary in order to meet one of the PSRP. The acceptable processes and the minimum operational and record keeping requirements shall be in accordance with established U.S. Environmental Protection Agency final guidance;
- iv. All certification records and operational records describing how the requirements of this paragraph were met shall be kept by the generator for a minimum of three years and be available for inspection by commission staff for review; and
- v. If the sewage sludge is generated from a mixture of sources, resulting from a person who prepares sewage sludge from more than one wastewater treatment facility, the resulting derived product shall meet one of the PSRP, and shall meet the certification, operation, and record keeping requirements of this paragraph.

Alternative 3 - Sewage sludge shall be treated in an equivalent process that has been approved by the U.S. Environmental Protection Agency, so long as all of the following requirements are met by the generator of the sewage sludge.

- i. Prior to use or disposal, all the sewage sludge must have been generated from a

single location, except as provided in paragraph v. below;

- ii. Prior to any off-site transportation or on-site use or disposal of any sewage sludge generated at a wastewater treatment facility, the chief certified operator of the wastewater treatment facility or other responsible official who manages the processes to significantly reduce pathogens at the wastewater treatment facility for the permittee, shall certify that the sewage sludge underwent at least the minimum operational requirements necessary in order to meet one of the PSRP. The acceptable processes and the minimum operational and record keeping requirements shall be in accordance with established U.S. Environmental Protection Agency final guidance;
- iii. All certification records and operational records describing how the requirements of this paragraph were met shall be kept by the generator for a minimum of three years and be available for inspection by commission staff for review;
- iv. The Executive Director will accept from the U.S. Environmental Protection Agency a finding of equivalency to the defined PSRP; and
- v. If the sewage sludge is generated from a mixture of sources resulting from a person who prepares sewage sludge from more than one wastewater treatment facility, the resulting derived product shall meet one of the Processes to Significantly Reduce Pathogens, and shall meet the certification, operation, and record keeping requirements of this paragraph.

In addition to the Alternatives 1 – 3, the following site restrictions must be met if Class B biosolids are land applied:

- i. Food crops with harvested parts that touch the biosolids /soil mixture and are totally above the land surface shall not be harvested for 14 months after application of biosolids.
- ii. Food crops with harvested parts below the surface of the land shall not be harvested for 20 months after application of biosolids when the biosolids remain on the land surface for 4 months or longer prior to incorporation into the soil.
- iii. Food crops with harvested parts below the surface of the land shall not be harvested for 38 months after application of biosolids when the biosolids remain on the land surface for less than 4 months prior to incorporation into the soil.
- iv. Food crops, feed crops, and fiber crops shall not be harvested for 30 days after application of biosolids.
- v. Domestic livestock shall not be allowed to graze on the land for 30 days after application of biosolids.
- vi. Turf grown on land where biosolids are applied shall not be harvested for 1 year after application of the biosolids when the harvested turf is placed on either land with a high potential for public exposure or a lawn.
- vii. Public access to land with a high potential for public exposure shall be restricted for 1 year after application of biosolids.

viii. Public access to land with a low potential for public exposure shall be restricted for 30 days after application of biosolids.

ix. Land application of biosolids shall be in accordance with the buffer zone requirements found in 30 TAC § 312.44.

4. Vector Attraction Reduction Requirements

All bulk sewage sludge that is applied to agricultural land, forest, a public contact site, or a reclamation site shall be treated by one of the following Alternatives 1 through 10 for vector attraction reduction.

Alternative 1 - The mass of volatile solids in the sewage sludge shall be reduced by a minimum of 38%.

Alternative 2 - If Alternative 1 cannot be met for an anaerobically digested sludge, demonstration can be made by digesting a portion of the previously digested sludge anaerobically in the laboratory in a bench-scale unit for 40 additional days at a temperature between 30° and 37° Celsius. Volatile solids must be reduced by less than 17% to demonstrate compliance.

Alternative 3 - If Alternative 1 cannot be met for an aerobically digested sludge, demonstration can be made by digesting a portion of the previously digested sludge with percent solids of two percent or less aerobically in the laboratory in a bench-scale unit for 30 additional days at 20° Celsius. Volatile solids must be reduced by less than 15% to demonstrate compliance.

Alternative 4 - The specific oxygen uptake rate (SOUR) for sewage sludge treated in an aerobic process shall be equal to or less than 1.5 milligrams of oxygen per hour per gram of total solids (dry weight basis) at a temperature of 20° Celsius.

Alternative 5 - Sewage sludge shall be treated in an aerobic process for 14 days or longer. During that time, the temperature of the sewage sludge shall be higher than 40° Celsius and the average temperature of the sewage sludge shall be higher than 45° Celsius.

Alternative 6 - The pH of sewage sludge shall be raised to 12 or higher by alkali addition and, without the addition of more alkali shall remain at 12 or higher for two hours and then remain at a pH of 11.5 or higher for an additional 22 hours at the time the sewage sludge is prepared for sale or given away in a bag or other container.

Alternative 7 - The percent solids of sewage sludge that does not contain unstabilized solids generated in a primary wastewater treatment process shall be equal to or greater than 75% based on the moisture content and total solids prior to mixing with other materials. Unstabilized solids are defined as organic materials in sewage sludge that have not been treated in either an aerobic or anaerobic treatment process.

Alternative 8 - The percent solids of sewage sludge that contains unstabilized solids generated in a primary wastewater treatment process shall be equal to or greater than 90% based on the moisture content and total solids prior to mixing with other materials at the time the sludge is used. Unstabilized solids are defined as organic materials in sewage sludge that have not been treated in either an aerobic or anaerobic treatment process.

Alternative 9 -

- i. Biosolids shall be injected below the surface of the land.
- ii. No significant amount of the biosolids shall be present on the land surface within one hour after the biosolids are injected.
- iii. When sewage sludge that is injected below the surface of the land is Class A or Class AB with respect to pathogens, the biosolids shall be injected below the land surface within eight hours after being discharged from the pathogen treatment process.

Alternative 10-

- i. Biosolids applied to the land surface or placed on a surface disposal site shall be incorporated into the soil within six hours after application to or placement on the land.
- ii. When biosolids that is incorporated into the soil is Class A or Class AB with respect to pathogens, the biosolids shall be applied to or placed on the land within eight hours after being discharged from the pathogen treatment process.

C. Monitoring Requirements

Toxicity Characteristic Leaching Procedure (TCLP) Test	- once during the term of this permit
PCBs	- once during the term of this permit

All metal constituents and fecal coliform or *Salmonella* sp. bacteria shall be monitored at the appropriate frequency shown below, pursuant to 30 TAC § 312.46(a)(1):

<u>Amount of biosolids (*) metric tons per 365-day period</u>	<u>Monitoring Frequency</u>
0 to less than 290	Once/Year
290 to less than 1,500	Once/Quarter
1,500 to less than 15,000	Once/Two Months
15,000 or greater	Once/Month

(*) *The amount of bulk biosolids applied to the land (dry wt. basis).*

Representative samples of sewage sludge shall be collected and analyzed in accordance with the methods referenced in 30 TAC § 312.7

Identify each of the analytic methods used by the facility to analyze enteric viruses, fecal coliforms, helminth ova, *Salmonella* sp., and other regulated parameters.

Identify in the following categories (as applicable) the sewage sludge or biosolids treatment process or processes at the facility: preliminary operations (e.g., sludge or biosolids grinding and degritting), thickening (concentration), stabilization, anaerobic digestion, aerobic digestion, composting, conditioning, disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization), dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons), heat drying, thermal reduction, and methane or biogas capture and recovery.

Identify the nature of material generated by the facility (such as a biosolid for beneficial use or land-farming, or sewage sludge or biosolids for disposal at a monofill) and whether the material is ultimately conveyed off-site in bulk or in bags.

SECTION II. REQUIREMENTS SPECIFIC TO BULK SEWAGE SLUDGE FOR APPLICATION TO THE LAND MEETING CLASS A, CLASS AB or B BIOSOLIDS PATHOGEN REDUCTION AND THE CUMULATIVE LOADING RATES IN TABLE 2, OR CLASS B PATHOGEN REDUCTION AND THE POLLUTANT CONCENTRATIONS IN TABLE 3

For those permittees meeting Class A, Class AB or B pathogen reduction requirements and that meet the cumulative loading rates in Table 2 below, or the Class B pathogen reduction requirements and contain concentrations of pollutants below listed in Table 3, the following conditions apply:

A. Pollutant Limits

Table 2

<u>Pollutant</u>	Cumulative Pollutant Loading Rate (pounds per acre)*
Arsenic	36
Cadmium	35
Chromium	2677
Copper	1339
Lead	268
Mercury	15
Molybdenum	Report Only
Nickel	375
Selenium	89
Zinc	2500

Table 3

<u>Pollutant</u>	Monthly Average Concentration (milligrams per kilogram)*
Arsenic	41
Cadmium	39
Chromium	1200
Copper	1500
Lead	300
Mercury	17
Molybdenum	Report Only
Nickel	420
Selenium	36
Zinc	2800

*Dry weight basis

B. Pathogen Control

All bulk sewage sludge that is applied to agricultural land, forest, a public contact site, a reclamation site, shall be treated by either Class A, Class AB or Class B biosolids pathogen reduction requirements as defined above in Section I.B.3.

C. Management Practices

1. Bulk biosolids shall not be applied to agricultural land, forest, a public contact site, or a reclamation site that is flooded, frozen, or snow-covered so that the bulk biosolids enters a wetland or other waters in the State.
2. Bulk biosolids not meeting Class A biosolids requirements shall be land applied in a manner which complies with Applicability in accordance with 30 TAC §312.41 and the Management Requirements in accordance with 30 TAC § 312.44.
3. Bulk biosolids shall be applied at or below the agronomic rate of the cover crop.
4. An information sheet shall be provided to the person who receives bulk Class A or AB biosolids sold or given away. The information sheet shall contain the following information:
 - a. The name and address of the person who prepared the Class A or AB biosolids that are sold or given away in a bag or other container for application to the land.
 - b. A statement that application of the biosolids to the land is prohibited except in accordance with the instruction on the label or information sheet.
 - c. The annual whole sludge application rate for the biosolids application rate for the biosolids that does not cause any of the cumulative pollutant loading rates in Table 2 above to be exceeded, unless the pollutant concentrations in Table 3 found in Section II above are met.

D. Notification Requirements

1. If bulk biosolids are applied to land in a State other than Texas, written notice shall be provided prior to the initial land application to the permitting authority for the State in which the bulk biosolids are proposed to be applied. The notice shall include:
 - a. The location, by street address, and specific latitude and longitude, of each land application site.
 - b. The approximate time period bulk biosolids will be applied to the site.
 - c. The name, address, telephone number, and National Pollutant Discharge Elimination System permit number (if appropriate) for the person who will apply the bulk biosolids.

E. Record Keeping Requirements

The documents will be retained at the facility site and/or shall be readily available for review by a TCEQ representative. The person who prepares bulk sewage sludge or a biosolids material shall develop the following information and shall retain the information at the facility site and/or shall be readily available for review by a TCEQ representative for a period of five years. If the permittee supplies the sludge to another person who land applies the sludge, the permittee shall notify the land applier of the requirements for record keeping found in 30 TAC § 312.47 for persons who land apply.

1. The concentration (mg/kg) in the sludge of each pollutant listed in Table 3 above and the applicable pollutant concentration criteria (mg/kg), or the applicable cumulative pollutant loading rate and the applicable cumulative pollutant loading rate limit (lbs/ac) listed in Table 2 above.
2. A description of how the pathogen reduction requirements are met (including site restrictions for Class AB and Class B biosolids, if applicable).
3. A description of how the vector attraction reduction requirements are met.
4. A description of how the management practices listed above in Section II.C are being met.
5. The following certification statement:

“I certify, under penalty of law, that the applicable pathogen requirements in 30 TAC § 312.82(a) or (b) and the vector attraction reduction requirements in 30 TAC § 312.83(b) have been met for each site on which bulk biosolids are applied. This determination has been made under my direction and supervision in accordance with the system designed to ensure that qualified personnel properly gather and evaluate the information used to determine that the management practices have been met. I am aware that there are significant penalties for false certification including fine and imprisonment.”
6. The recommended agronomic loading rate from the references listed in Section II.C.3. above, as well as the actual agronomic loading rate shall be retained. The person who applies bulk biosolids shall develop the following information and shall retain the information at the facility site and/or shall be readily available for review by a TCEQ representative indefinitely. If the permittee supplies the sludge to another person who land applies the sludge, the permittee shall notify the land applier of the requirements for record keeping found in 30 TAC § 312.47 for persons who land apply:
 - a. A certification statement that all applicable requirements (specifically listed) have been met, and that the permittee understands that there are significant penalties for false certification including fine and imprisonment. See 30 TAC § 312.47(a)(4)(A)(ii) or 30 TAC § 312.47(a)(5)(A)(ii), as applicable, and to the permittee’s specific sludge treatment activities.
 - b. The location, by street address, and specific latitude and longitude, of each site on which biosolids is applied.
 - c. The number of acres in each site on which bulk biosolids are applied.
 - d. The date and time biosolids are applied to each site.
 - e. The cumulative amount of each pollutant in pounds/acre listed in Table 2 applied to each site.
 - f. The total amount of biosolids applied to each site in dry tons.

The above records shall be maintained on-site on a monthly basis and shall be made available to the Texas Commission on Environmental Quality upon request.

F. Reporting Requirements

The permittee must submit this annual report by September 30th of each year, using the online electronic reporting system available through TCEQ's website. If the permittee requests and obtains an electronic reporting waiver, the annual report can be submitted in hard copy to the TCEQ Regional Office (MC Region 12) and the Enforcement Division ((MC 224).

1. Identify in the following categories (as applicable) the sewage sludge or biosolids treatment process or processes at the facility: preliminary operations (e.g., sludge or biosolids grinding and degritting), thickening (concentration), stabilization, anaerobic digestion, aerobic digestion, composting, conditioning, disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization), dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons), heat drying, thermal reduction, and methane or biogas capture and recovery.
2. Identify the nature of material generated by the facility (such as a biosolid for beneficial use or land-farming, or sewage sludge for disposal at a monofill) and whether the material is ultimately conveyed off-site in bulk or in bags.
3. Results of tests performed for pollutants found in either Table 2 or 3 as appropriate for the permittee's land application practices.
4. The frequency of monitoring listed in Section I.C. that applies to the permittee.
5. Toxicity Characteristic Leaching Procedure (TCLP) results.
6. PCB concentration in sludge or biosolids in mg/kg.
7. Identity of hauler(s) and TCEQ transporter number.
8. Date(s) of transport.
9. Texas Commission on Environmental Quality registration number, if applicable.
10. Amount of sludge or biosolids disposal dry weight (lbs/acre) at each disposal site.
11. The concentration (mg/kg) in the sludge of each pollutant listed in Table 1 (defined as a monthly average) as well as the applicable pollutant concentration criteria (mg/kg) listed in Table 3 above, or the applicable pollutant loading rate limit (lbs/acre) listed in Table 2 above if it exceeds 90% of the limit.
12. Level of pathogen reduction achieved (Class A, Class AB or Class B).
13. Alternative used as listed in Section I.B.3.(a. or b.). Alternatives describe how the pathogen reduction requirements are met. If Class B biosolids, include information on how site restrictions were met.
14. Identify each of the analytic methods used by the facility to analyze enteric viruses, fecal coliforms, helminth ova, *Salmonella* sp., and other regulated parameters.
15. Vector attraction reduction alternative used as listed in Section I.B.4.
16. Amount of sludge or biosolids transported in dry tons/year.
17. The certification statement listed in either 30 TAC § 312.47(a)(4)(A)(ii) or 30 TAC §

312.47(a)(5)(A)(ii) as applicable to the permittee's sludge or biosolids treatment activities, shall be attached to the annual reporting form.

18. When the amount of any pollutant applied to the land exceeds 90% of the cumulative pollutant loading rate for that pollutant, as described in Table 2, the permittee shall report the following information as an attachment to the annual reporting form.

- a. The location, by street address, and specific latitude and longitude.
- b. The number of acres in each site on which bulk biosolids are applied.
- c. The date and time bulk biosolids are applied to each site.
- d. The cumulative amount of each pollutant (i.e., pounds/acre) listed in Table 2 in the bulk biosolids applied to each site.
- e. The amount of biosolids (i.e., dry tons) applied to each site.

The above records shall be maintained on a monthly basis and shall be made available to the Texas Commission on Environmental Quality upon request.

SECTION III. REQUIREMENTS APPLYING TO ALL SEWAGE SLUDGE OR BIOSOLIDS DISPOSED IN A MUNICIPAL SOLID WASTE LANDFILL

- A. The permittee shall handle and dispose of sewage sludge or biosolids in accordance with 30 TAC § 330 and all other applicable state and federal regulations to protect public health and the environment from any reasonably anticipated adverse effects due to any toxic pollutants that may be present. The permittee shall ensure that the sewage sludge or biosolids meets the requirements in 30 TAC § 330 concerning the quality of the sludge disposed in a municipal solid waste landfill.
- B. If the permittee generates sewage sludge or biosolids and supplies that sewage sludge or biosolids to the owner or operator of a municipal solid waste landfill (MSWLF) for disposal, the permittee shall provide to the owner or operator of the MSWLF appropriate information needed to be in compliance with the provisions of this permit.
- C. Sewage sludge or biosolids shall be tested once during the term of this permit in accordance with the method specified in both 40 CFR Part 261, Appendix II and 40 CFR Part 268, Appendix I (Toxicity Characteristic Leaching Procedure) or other method, which receives the prior approval of the TCEQ for contaminants listed in Table 1 of 40 CFR § 261.24. Sewage sludge or biosolids failing this test shall be managed according to RCRA standards for generators of hazardous waste, and the waste's disposition must be in accordance with all applicable requirements for hazardous waste processing, storage, or disposal.

Following failure of any TCLP test, the management or disposal of sewage sludge or biosolids at a facility other than an authorized hazardous waste processing, storage, or disposal facility shall be prohibited until such time as the permittee can demonstrate the sewage sludge or biosolids no longer exhibits the hazardous waste toxicity characteristics (as demonstrated by the results of the TCLP tests). A written report shall be provided to both the TCEQ Registration and Reporting Section (MC 129) of the Permitting and Registration Support Division and the Regional Director (MC Region 12) of the appropriate TCEQ field office within 7 days after failing the TCLP Test.

The report shall contain test results, certification that unauthorized waste management has stopped, and a summary of alternative disposal plans that comply with RCRA standards for the management of hazardous waste. The report shall be addressed to: Director, Permitting and Registration Support Division (MC 129), Texas Commission on Environmental Quality, P. O. Box 13087, Austin, Texas 78711-3087. In addition, the permittee shall prepare an annual report on the results of all sludge toxicity testing. This annual report shall be submitted to the TCEQ Regional Office (MC Region 12) and the Enforcement Division (MC 224) of the by September 30th of each year.

- D. Sewage sludge or biosolids shall be tested as needed, in accordance with the requirements of 30 TAC Chapter 330.
- E. Record Keeping Requirements

The permittee shall develop the following information and shall retain the information for five years.

1. The description (including procedures followed and the results) of all liquid Paint Filter Tests performed.
2. The description (including procedures followed and results) of all TCLP tests performed.

The above records shall be maintained on-site on a monthly basis and shall be made available to the Texas Commission on Environmental Quality upon request.

F. Reporting Requirements

The permittee shall submit the following information in an annual report to the TCEQ by September 30th of each year. The permittee must submit this annual report using the online electronic reporting system available through TCEQ's website. If the permittee requests and obtains an electronic reporting waiver, the annual report can be submitted in hard copy to the TCEQ Regional Office (MC Region 12) and the Enforcement Division (MC 224).

1. Identify in the following categories (as applicable) the sewage sludge or biosolids treatment process or processes at the facility: preliminary operations (e.g., sludge or biosolids grinding and dewatering), thickening (concentration), stabilization, anaerobic digestion, aerobic digestion, composting, conditioning, disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization), dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons), heat drying, thermal reduction, and methane or biogas capture and recovery.
2. Toxicity Characteristic Leaching Procedure (TCLP) results.
3. Annual sludge or biosolids production in dry tons/year.
4. Amount of sludge or biosolids disposed in a municipal solid waste landfill in dry tons/year.
5. Amount of sludge or biosolids transported interstate in dry tons/year.
6. A certification that the sewage sludge or biosolids meets the requirements of 30 TAC § 330 concerning the quality of the sludge disposed in a municipal solid waste landfill.
7. Identity of hauler(s) and transporter registration number.
8. Owner of disposal site(s).
9. Location of disposal site(s).
10. Date(s) of disposal.

The above records shall be maintained on-site on a monthly basis and shall be made available to the Texas Commission on Environmental Quality upon request.

SECTION IV. REQUIREMENTS APPLYING TO SLUDGE OR BIOSOLIDS TRANSPORTED TO ANOTHER FACILITY FOR FURTHER PROCESSING

These provisions apply to sludge or biosolids that is transported to another wastewater treatment facility or facility that further processes sludge or biosolids. These provisions are intended to allow transport of sludge or biosolids to facilities that have been authorized to accept sludge or biosolids. These provisions do not limit the ability of the receiving facility to determine whether to accept the sludge or biosolids, nor do they limit the ability of the receiving facility to request additional testing or documentation.

A. General Requirements

1. The permittee shall handle and dispose of sewage sludge or biosolids in accordance with 30 TAC Chapter 312 and all other applicable state and federal regulations in a manner that protects public health and the environment from any reasonably anticipated adverse effects due to any toxic pollutants that may be present in the sludge.
2. Sludge or biosolids may only be transported using a registered transporter or using an approved pipeline.

B. Record Keeping Requirements

1. For sludge or biosolids transported by an approved pipeline, the permittee must maintain records of the following:
 - a. the amount of sludge or biosolids transported;
 - b. the date of transport;
 - c. the name and TCEQ permit number of the receiving facility or facilities;
 - d. the location of the receiving facility or facilities;
 - e. the name and TCEQ permit number of the facility that generated the waste; and
 - f. copy of the written agreement between the permittee and the receiving facility to accept sludge or biosolids.
2. For sludge transported by a registered transporter, the permittee must maintain records of the completed trip tickets in accordance with 30 TAC § 312.145(a)(1)-(7) and amount of sludge or biosolids transported.
3. The above records shall be maintained on-site on a monthly basis and shall be made available to the TCEQ upon request. These records shall be retained for at least five years.

C. Reporting Requirements

The permittee shall submit the following information in an annual report to the TCEQ by September 30th of each year. The permittee must submit this annual report using the online electronic reporting system available through TCEQ's website. If the permittee requests and obtains an electronic reporting waiver, the annual report can be submitted in hard copy to the TCEQ Regional Office (MC Region 12) and the Enforcement Division (MC 224).

1. Identify in the following categories (as applicable) the sewage sludge or biosolids treatment process or processes at the facility: preliminary operations (e.g., sludge or biosolids grinding and degritting), thickening (concentration), stabilization, anaerobic digestion, aerobic digestion, composting, conditioning, disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization), dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons), heat drying, thermal reduction, and methane or biogas capture and recovery.
2. the annual sludge or biosolids production;
3. the amount of sludge or biosolids transported;
4. the owner of each receiving facility;
5. the location of each receiving facility; and
6. the date(s) of disposal at each receiving facility.

OTHER REQUIREMENTS

1. The permittee shall employ or contract with one or more licensed wastewater treatment facility operators or wastewater system operations companies holding a valid license or registration according to the requirements of 30 TAC Chapter 30, Occupational Licenses and Registrations, and in particular 30 TAC Chapter 30, Subchapter J, Wastewater Operators and Operations Companies.


This Category C facility must be operated by a chief operator or an operator holding a Class C license or higher. The facility must be operated a minimum of five days per week by the licensed chief operator or an operator holding the required level of license or higher. The licensed chief operator or operator holding the required level of license or higher must be available by telephone or pager seven days per week. Where shift operation of the wastewater treatment facility is necessary, each shift that does not have the on-site supervision of the licensed chief operator must be supervised by an operator in charge who is licensed not less than one level below the category for the facility.

2. The facility is not located in the Coastal Management Program boundary.
3. The permittee shall comply with the requirements of 30 TAC § 309.13(a) through (d). The permittee shall comply with the requirements of 30 TAC § 309.13(a) through (d). The permittee shall comply with the requirements of 30 TAC § 309.13(e) by ownership of the south, west, and part of north and east side of the buffer zone area as well as via right-of-way on the north-east side of the buffer zone area. See Attachment A.
4. The permittee shall provide facilities for the protection of its wastewater treatment facility from a 100-year flood.
5. The permittee shall comply with 30 TAC § 311.36, which requires the permittees of all domestic wastewater treatment facilities discharging into the Lake Houston Watershed to install dual-feed chlorination systems capable of automatically changing from one cylinder to another if gaseous chlorination is used for disinfection.
6. In accordance with 30 TAC § 319.9, a permittee that has at least twelve months of uninterrupted compliance with its bacteria limit may notify the commission in writing of its compliance and request a less frequent measurement schedule. To request a less frequent schedule, the permittee shall submit a written request to the TCEQ Wastewater Permitting Section (MC 148) for each phase that includes a different monitoring frequency. The request must contain all of the reported bacteria values (Daily Avg. and Daily Max/Single Grab) for the twelve consecutive months immediately prior to the request. If the Executive Director finds that a less frequent measurement schedule is protective of human health and the environment, the permittee may be given a less frequent measurement schedule. For this permit, one/quarter may be reduced to one/six months in the Interim phase and the Final phase. **A violation of any bacteria limit by a facility that has been granted a less frequent measurement schedule will require the permittee to return to the standard frequency schedule and submit written notice to the TCEQ Wastewater Permitting Section (MC 148).** The permittee may not apply for another reduction in measurement frequency for at least 24 months from the date of the last violation. The Executive Director may establish a more frequent measurement schedule if necessary to protect human health or the environment.
7. Prior to construction of the treatment facility, the permittee shall submit to the TCEQ Wastewater Permitting Section (MC 148) a summary transmittal letter in accordance with the requirements in 30 TAC § 217.6(d). If requested by the Wastewater Permitting Section, the permittee shall submit plans and specifications and a final engineering design report which comply with 30 TAC Chapter 217, Design Criteria for Domestic Wastewater Systems. The permittee shall clearly show how the treatment system will meet the permitted effluent limitations required on Pages 2 and 2a of this

permit. A copy of the summary transmittal letter shall be available at the plant site for inspection by authorized representatives of the TCEQ.

8. Reporting requirements according to 30 TAC §§ 319.1-319.11 and any additional effluent reporting requirements contained in this permit are suspended from the effective date of the permit until plant startup or discharge from the facility described by this permit, whichever occurs first. The permittee shall provide written notice to the TCEQ Regional Office (MC Region 12) and the Applications Review and Processing Team (MC 148) of the Water Quality Division, in writing at least forty-five days prior to plant startup or anticipated discharge, whichever occurs first, and prior to completion of each additional phase on Notification of Completion Form 20007.

Attachment A – Buffer Zone Map
M/I Homes of Houston, LLC
TPDES Permit No. WQ0016629001

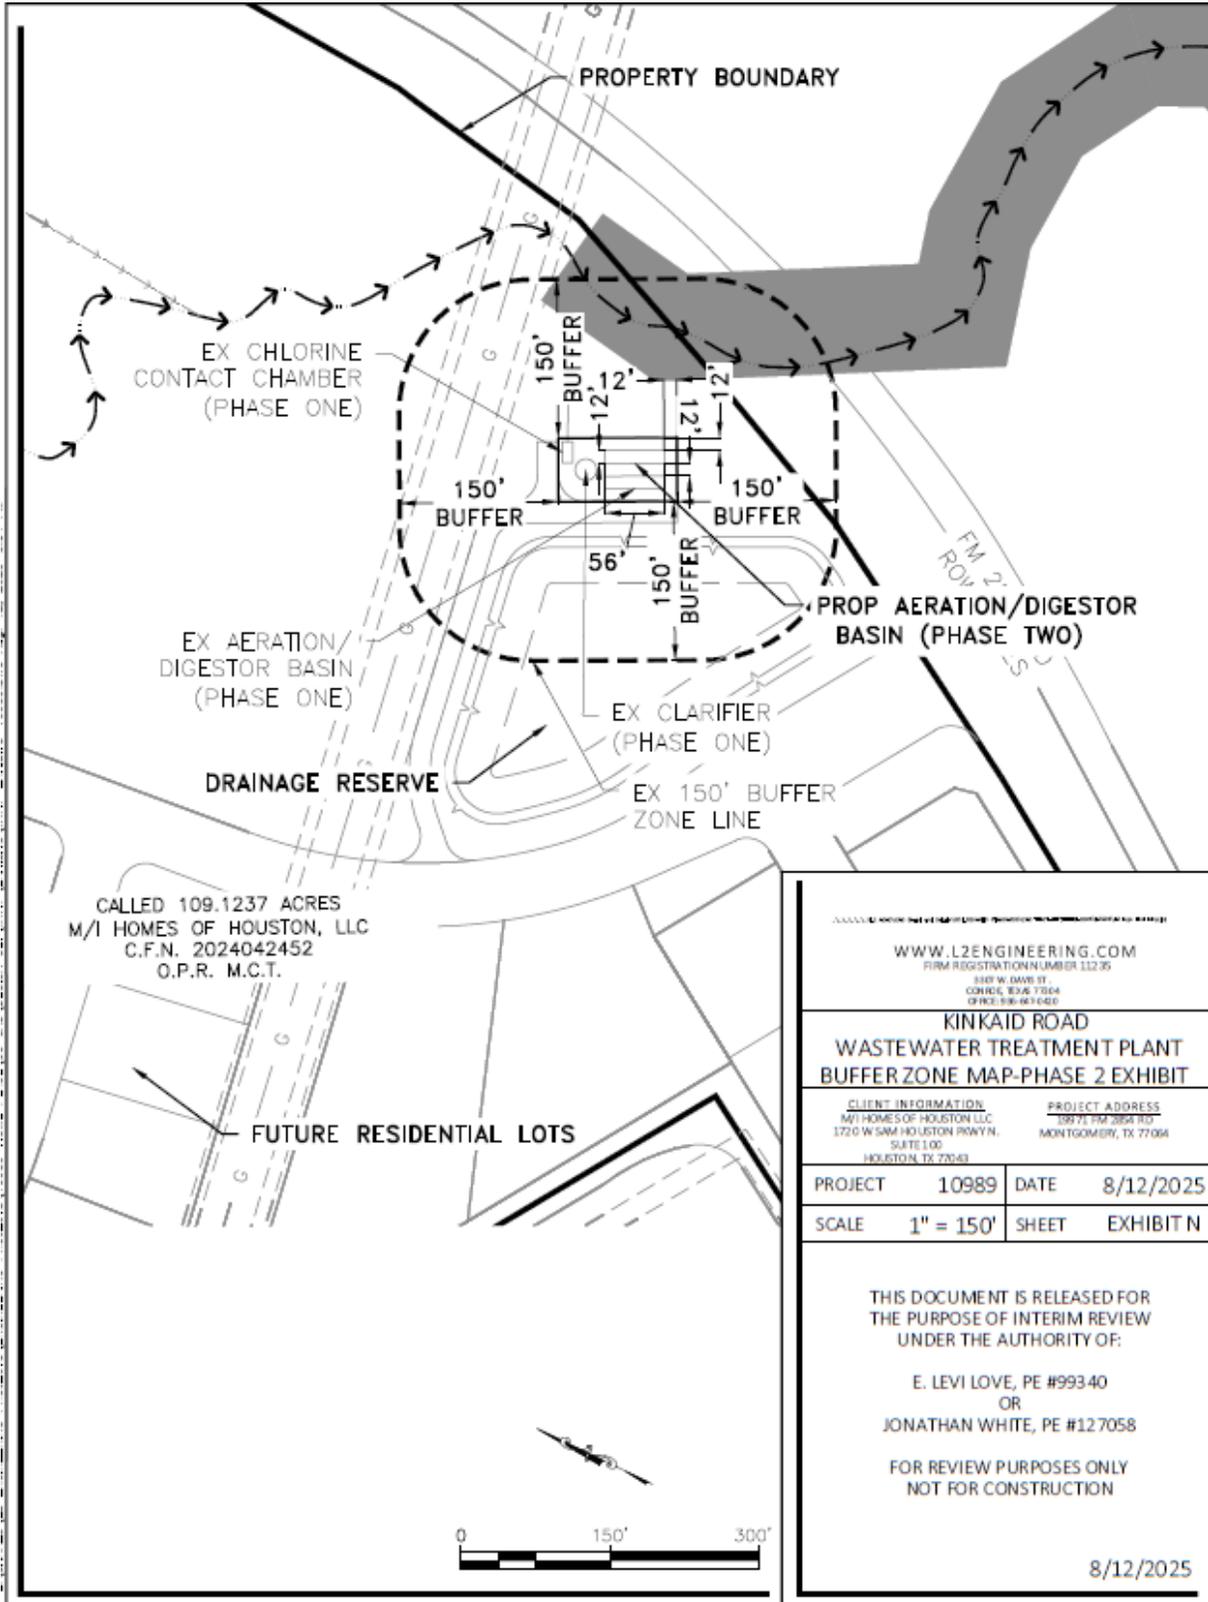

CALLED 109.1237 ACRES
M/I HOMES OF HOUSTON, LLC
C.F.N. 2024042452
O.P.R. M.C.T.

<p>WWW.L2ENGINEERING.COM FIRM REGISTRATION NUMBER 11235 SEP 16 DATE 07 CON REG. EX# 1504 OFFICE 936-631-0400</p>	
<p>KINKAID ROAD WASTEWATER TREATMENT PLANT BUFFER ZONE MAP-PHASE 2 EXHIBIT</p>	
<p>CLIENT INFORMATION: M/I HOMES OF HOUSTON LLC 1720 W SAM HOUSTON PKWY N. SUITE 100 HOUSTON, TX 77061</p>	<p>PROJECT ADDRESS 15971 FM 2854 RD MONTGOMERY, TX 77064</p>
<p>PROJECT 10989</p>	<p>DATE 8/12/2025</p>
<p>SCALE 1" = 150'</p>	<p>SHEET EXHIBIT N</p>

THIS DOCUMENT IS RELEASED FOR
THE PURPOSE OF INTERIM REVIEW
UNDER THE AUTHORITY OF:

E. LEVI LOVE, PE #99340
OR
JONATHAN WHITE, PE #127058

FOR REVIEW PURPOSES ONLY
NOT FOR CONSTRUCTION

8/12/2025

**STATEMENT OF BASIS/TECHNICAL SUMMARY
AND EXECUTIVE DIRECTOR'S PRELIMINARY DECISION**

DESCRIPTION OF APPLICATION

Applicant: M/I Homes of Houston, LLC;
Texas Pollutant Discharge Elimination System (TPDES) Permit No.
WQ0016629001, EPA I.D. No. TX0146633

Regulated Activity: Domestic Wastewater Permit

Type of Application: New Permit

Request: New Permit

Authority: Federal Clean Water Act (CWA) § 402; Texas Water Code § 26.027; 30
Texas Administrative Code (TAC) Chapters 30, 305, 307, 309, 312, and
319; Commission policies; and United States Environmental Protection
Agency (EPA) guidelines.

EXECUTIVE DIRECTOR RECOMMENDATION

The Executive Director has made a preliminary decision that this permit, if issued, meets all statutory and regulatory requirements. The draft permit includes an expiration date of **five years from the date of issuance**.

REASON FOR PROJECT PROPOSED

The applicant has applied to the Texas Commission on Environmental Quality (TCEQ) for a new permit to authorize the discharge of treated domestic wastewater at a daily average flow not to exceed 0.0375 million gallons per day (MGD) in the Interim phase and a daily average flow not to exceed 0.075 MGD in the Final phase. The proposed wastewater treatment facility will serve a residential subdivision at FM 2854 and Kinkaid Road.

PROJECT DESCRIPTION AND LOCATION

The Kinkaid Road Wastewater Treatment Facility will be an activated sludge process plant operated in the complete mix mode with single stage nitrification. Treatment units in the Interim phase will include an aeration basin, a final clarifier, a sludge digester, and a chlorine contact chamber. Treatment units in the Final phase will include two aeration basins, a final clarifier, two sludge digesters, and a chlorine contact chamber. The facility has not been constructed.

The draft permit authorizes the disposal of sludge at a TCEQ-authorized land application site, co-disposal landfill, wastewater treatment facility, or facility that further processes sludge.

The plant site will be located at 19971 Farm-to-Market Road 2854, in Montgomery County, Texas 77316.

Outfall Location:

Outfall Number	Latitude	Longitude
001	30.346572 N	95.652747 W

The treated effluent will be discharged to Mound Creek, thence to Lake Creek in Segment No. 1015 of

the San Jacinto River Basin. The unclassified receiving water uses are minimal aquatic life use for Mound Creek (upstream of Appendix D section) and high aquatic life use for Mound Creek (Appendix D section). The designated uses for Segment No. 1015 are primary contact recreation, public water supply, and high aquatic life use. The effluent limitations in the draft permit will maintain and protect the existing instream uses. In accordance with 30 Texas Administrative Code §307.5 and TCEQ's *Procedures to Implement the Texas Surface Water Quality Standards* (June 2010), an antidegradation review of the receiving waters was performed. A Tier 1 antidegradation review has preliminarily determined that existing water quality uses will not be impaired by this permit action. Numerical and narrative criteria to protect existing uses will be maintained. A Tier 2 review has preliminarily determined that no significant degradation of water quality is expected in Mound Creek (Appendix D section), which has been identified as having high aquatic life use. Existing uses will be maintained and protected. The preliminary determination can be reexamined and may be modified if new information is received.

Effluent limitations for the conventional effluent parameters (i.e., Five-Day Biochemical Oxygen Demand or Five-Day Carbonaceous Biochemical Oxygen Demand, Ammonia Nitrogen, etc.) are based on stream standards and waste load allocations for water-quality limited streams as established in the Texas Surface Water Quality Standards (TSWQS) and the State of Texas Water Quality Management Plan (WQMP).

In a case such as this, end-of-pipe compliance with pH limits between 6.0 and 9.0 standard units reasonably assures instream compliance with the TSWQS for pH when the discharge authorized is from a minor facility. This technology-based approach reasonably assures instream compliance with TSWQS criteria due to the relatively smaller discharge volumes authorized by these permits. This conservative assumption is based on TCEQ sampling conducted throughout the state which indicates that instream buffering quickly restores pH levels to ambient conditions. Similarly, this approach has been historically applied within EPA issued NPDES general permits where technology-based pH limits were established to be protective of water quality criteria.

The effluent limitations in the draft permit have been reviewed for consistency with the WQMP. The proposed effluent limitations are not contained in the approved WQMP. However, these limits will be included in the next WQMP update.

The discharge from this permit action is not expected to have an effect on any federal endangered or threatened aquatic or aquatic-dependent species or proposed species or their critical habitat. This determination is based on the United States Fish and Wildlife Service's (USFWS) biological opinion on the State of Texas authorization of the TPDES (September 14, 1998; October 21, 1998 update). To make this determination for TPDES permits, TCEQ and EPA only considered aquatic or aquatic-dependent species occurring in watersheds of critical concern or high priority as listed in Appendix A of the USFWS biological opinion. The determination is subject to reevaluation due to subsequent updates or amendments to the biological opinion. The permit does not require EPA review with respect to the presence of endangered or threatened species.

Segment No. 1015 is not currently listed on the state's inventory of impaired and threatened waters (the 2022 CWA § 303(d) list).

Two finalized Total Maximum Daily Load (TMDL) Projects are available for this segment: *Seven Total Maximum Daily Loads for Indicator Bacteria in Lake Houston, East Fork San Jacinto River, West Fork San Jacinto River, and Crystal Creek Watersheds Segments: 1002, 1003, 1004, and 1004D* (Project No. 82B); and *Addendum One to Seven Total Maximum Daily Loads for Indicator Bacteria in Lake Houston, East Fork San Jacinto River, West Fork San Jacinto River, and Crystal Creek Watersheds Segments: 1002, 1003, 1004, and 1004D* (Project No. 82C).

On August 24, 2016, the Texas Commission on Environmental Quality (TCEQ) adopted Seven Total Maximum Daily Loads for Indicator Bacteria in Lake Houston, East Fork San Jacinto River, West Fork San Jacinto River, and Crystal Creek Watersheds. The U.S. Environmental Protection Agency (USEPA) approved the TMDL on October 7, 2016. The total maximum daily load (TMDL) addresses elevated levels of bacteria in multiple segments and assessment units in these watersheds. The waste load allocation (WLA) for wastewater treatment facilities was established as the permitted flow for each facility multiplied by one-half the geometric mean criterion for bacteria. Future growth from existing or new permitted sources is not limited by these TMDLs as long as the sources do not exceed the limits of one-half the bacteria geometric mean criterion for *E. coli*. To ensure that effluent limitations for this discharge are consistent with the WLAs provided in the TMDL, a concentration-based effluent limitation for *Escherichia coli* (*E. coli*) of 63 MPN per 100 ml has been included in the draft permit.

SUMMARY OF EFFLUENT DATA

Self-reporting data is not available since the facility is not in operation.

DRAFT PERMIT CONDITIONS

The draft permit authorizes a discharge of treated domestic wastewater at an Interim volume not to exceed a daily average flow of 0.0375 MGD and a Final volume not to exceed a daily average flow of 0.075 MGD.

The effluent limitations in the Interim and Final phases of the draft permit, based on a 30-day average, are 10 mg/l five-day carbonaceous biochemical oxygen demand (CBOD₅), 15 mg/l total suspended solids (TSS), 3 mg/l ammonia-nitrogen (NH₃-N), 63 colony forming units (CFU) or MPN of *E. coli* per 100 ml, and 4.0 mg/l minimum dissolved oxygen (DO). The effluent shall contain a total chlorine residual of at least 1.0 mg/l and shall not exceed a total chlorine residual of 4.0 mg/l after a detention time of at least 20 minutes based on peak flow.

The permittee shall comply with the requirements of 30 TAC § 309.13(a) through (d). The permittee shall comply with the requirements of 30 TAC § 309.13(a) through (d). The permittee shall comply with the requirements of 30 TAC § 309.13(e) by ownership of the south, west, and part of north and east side of the buffer zone area as well as via right-of-way on the north-east side of the buffer zone area.

The draft permit includes Sludge Provisions according to the requirements of 30 TAC Chapter 312, Sludge Use, Disposal, and Transportation. The draft permit authorizes the disposal of sludge at a TCEQ-authorized land application site, co-disposal landfill, wastewater treatment facility, or facility that further processes sludge.

SUMMARY OF CHANGES FROM APPLICATION

The applicant requested effluent limitations, based on a 30-day average, of 2.0 mg/l minimum DO. However, effluent limitations in both Interim and Final phases of the draft permit, based on a 30-day average is 4.0 mg/l minimum DO.

BASIS FOR DRAFT PERMIT

The following items were considered in developing the draft permit:

1. Application received on September 23, 2024, and additional information received on August 13, 2025.

2. The effluent limitations and conditions in the draft permit comply with EPA-approved portions of the 2018 Texas Surface Water Quality Standards (TSWQS), 30 TAC §§ 307.1 - 307.10, effective March 1, 2018; 2014 TSWQS, effective March 6, 2014; 2010 TSWQS, effective July 22, 2010; and 2000 TSWQS, effective July 26, 2000. The effluent limitations and conditions in the draft permit comply with the requirements in 30 TAC Chapter 311: Watershed Protection; Subchapter D: Water Quality Management within Lake Houston Watershed.
3. The effluent limitations in the draft permit meet the requirements for secondary treatment and the requirements for disinfection according to 30 TAC Chapter 309, Subchapter A: Effluent Limitations.
4. Interoffice Memoranda from the Water Quality Assessment Section of the TCEQ Water Quality Division.
5. Consistency with the Coastal Management Plan: The facility is not located in the Coastal Management Program boundary.
6. *Procedures to Implement the Texas Surface Water Quality Standards (IP)*, Texas Commission on Environmental Quality, June 2010, as approved by EPA, and the IP, January 2003, for portions of the 2010 IP not approved by EPA.
7. Texas 2022 Clean Water Act Section 303(d) List, Texas Commission on Environmental Quality, June 1, 2022; approved by the U.S. Environmental Protection Agency on July 7, 2022.
9. Texas Natural Resource Conservation Commission, Guidance Document for Establishing Monitoring Frequencies for Domestic and Industrial Wastewater Discharge Permits, Document No. 98-001.000-OWR-WQ, May 1998.
10. TMDL Project No.82B: *Seven Total Maximum Daily Loads for Indicator Bacteria in Lake Houston, East Fork San Jacinto River, West Fork San Jacinto River, and Crystal Creek Watersheds Segments: 1002, 1003, 1004, and 1004D.*

TMDL Project No.82C: Addendum One to Seven Total Maximum Daily Loads for Indicator Bacteria in Lake Houston, East Fork San Jacinto River, West Fork San Jacinto River, and Crystal Creek Watersheds Segments: 1002, 1003, 1004, and 1004D.

PROCEDURES FOR FINAL DECISION

When an application is declared administratively complete, the Chief Clerk sends a letter to the applicant advising the applicant to publish the Notice of Receipt of Application and Intent to Obtain Permit in the newspaper. In addition, the Chief Clerk instructs the applicant to place a copy of the application in a public place for review and copying in the county where the facility is or will be located. This application will be in a public place throughout the comment period. The Chief Clerk also mails this notice to any interested persons and, if required, to landowners identified in the permit application. This notice informs the public about the application and provides that an interested person may file comments on the application or request a contested case hearing or a public meeting.

Once a draft permit is completed, it is sent, along with the Executive Director's preliminary decision, as contained in the technical summary or fact sheet, to the Chief Clerk. At that time, the Notice of Application and Preliminary Decision will be mailed to the same people and published in the same newspaper as the prior notice. This notice sets a deadline for making public comments. The applicant must place a copy of the Executive Director's preliminary decision and draft permit in the public place

with the application.

Any interested person may request a public meeting on the application until the deadline for filing public comments. A public meeting is intended for the taking of public comment and is not a contested case proceeding.

After the public comment deadline, the Executive Director prepares a response to all significant public comments on the application or the draft permit raised during the public comment period. The Chief Clerk then mails the Executive Director's response to comments and final decision to people who have filed comments, requested a contested case hearing, or requested to be on the mailing list. This notice provides that if a person is not satisfied with the Executive Director's response and decision, they can request a contested case hearing or file a request to reconsider the Executive Director's decision within 30 days after the notice is mailed.

The Executive Director will issue the permit unless a written hearing request or request for reconsideration is filed within 30 days after the Executive Director's response to comments and final decision is mailed. If a hearing request or request for reconsideration is filed, the Executive Director will not issue the permit and will forward the application and request to the TCEQ Commissioners for their consideration at a scheduled Commission meeting. If a contested case hearing is held, it will be a legal proceeding similar to a civil trial in state district court.

If the Executive Director calls a public meeting or the Commission grants a contested case hearing as described above, the Commission will give notice of the date, time, and place of the meeting or hearing. If a hearing request or request for reconsideration is made, the Commission will consider all public comments in making its decision and shall either adopt the Executive Director's response to public comments or prepare its own response.

For additional information about this application, contact Sujata Sinha at (512) 239-1963.

Sujata Sinha

Sujata Sinha
Municipal Permits Team
Wastewater Permitting Section (MC 148)

8/14/2025

Date