

FEDERAL OPERATING PERMIT

A FEDERAL OPERATING PERMIT IS HEREBY ISSUED TO
Chevron Phillips Chemical Company, LP

AUTHORIZING THE OPERATION OF
Sweeny Old Ocean Facilities
Sweeny Complex, Olefins and NGL Assets
All Other Basic Organic Chemical Manufacturing

LOCATED AT
Brazoria County, Texas
Latitude 29° 4' 53" Longitude 95° 44' 32"
Regulated Entity Number: RN100825249


This permit is issued in accordance with and subject to the Texas Clean Air Act (TCAA), Chapter 382 of the Texas Health and Safety Code and Title 30 Texas Administrative Code Chapter 122 (30 TAC Chapter 122), Federal Operating Permits. Under 30 TAC Chapter 122, this permit constitutes the permit holder's authority to operate the site and emission units listed in this permit. Operations of the site and emission units listed in this permit are subject to all additional rules or amended rules and orders of the Commission pursuant to the TCAA.

This permit does not relieve the permit holder from the responsibility of obtaining New Source Review authorization for new, modified, or existing facilities in accordance with 30 TAC Chapter 116, Control of Air Pollution by Permits for New Construction or Modification.

The site and emission units authorized by this permit shall be operated in accordance with 30 TAC Chapter 122, the general terms and conditions, special terms and conditions, and attachments contained herein.

This permit shall expire five years from the date of issuance. The renewal requirements specified in 30 TAC § 122.241 must be satisfied in order to renew the authorization to operate the site and emission units.

Permit No: 02151 Issuance Date: May 5, 2021



For the Commission

Table of Contents

Section	Page
General Terms and Conditions	1
Special Terms and Conditions:	1
Emission Limitations and Standards, Monitoring and Testing, and Recordkeeping and Reporting.....	1
Additional Monitoring Requirements	13
New Source Review Authorization Requirements	14
Compliance Requirements.....	14
Risk Management Plan	16
Protection of Stratospheric Ozone	16
Alternative Requirements.....	17
Permit Location	17
Permit Shield (30 TAC § 122.148)	17
Attachments	18
Applicable Requirements Summary.....	19
Additional Monitoring Requirements	474
Permit Shield	499
New Source Review Authorization References	514
Alternative Requirement.....	526
Appendix A.....	544
Acronym List	545
Appendix B.....	546

General Terms and Conditions

The permit holder shall comply with all terms and conditions contained in 30 TAC § 122.143 (General Terms and Conditions), 30 TAC § 122.144 (Recordkeeping Terms and Conditions), 30 TAC § 122.145 (Reporting Terms and Conditions), and 30 TAC § 122.146 (Compliance Certification Terms and Conditions).

In accordance with 30 TAC § 122.144(1), records of required monitoring data and support information required by this permit, or any applicable requirement codified in this permit, are required to be maintained for a period of five years from the date of the monitoring report, sample, or application unless a longer data retention period is specified in an applicable requirement. The five year record retention period supersedes any less stringent retention requirement that may be specified in a condition of a permit identified in the New Source Review Authorization attachment.

If the permit holder chooses to demonstrate that this permit is no longer required, a written request to void this permit shall be submitted to the Texas Commission on Environmental Quality (TCEQ) by the Responsible Official in accordance with 30 TAC § 122.161(e). The permit holder shall comply with the permit's requirements, including compliance certification and deviation reporting, until notified by the TCEQ that this permit is voided.

The permit holder shall comply with 30 TAC Chapter 116 by obtaining a New Source Review authorization prior to new construction or modification of emission units located in the area covered by this permit.

All reports required by this permit must include in the submittal a cover letter which identifies the following information: company name, TCEQ regulated entity number, air account number (if assigned), site name, area name (if applicable), and Air Permits Division permit number(s).

Special Terms and Conditions:

Emission Limitations and Standards, Monitoring and Testing, and Recordkeeping and Reporting

1. Permit holder shall comply with the following requirements:
 - A. Emission units (including groups and processes) in the Applicable Requirements Summary attachment shall meet the limitations, standards, equipment specifications, monitoring, recordkeeping, reporting, testing, and other requirements listed in the Applicable Requirements Summary attachment to assure compliance with the permit.
 - B. The textual description in the column titled "Textual Description" in the Applicable Requirements Summary attachment is not enforceable and is not deemed as a substitute for the actual regulatory language. The Textual Description is provided for information purposes only.
 - C. A citation listed on the Applicable Requirements Summary attachment, which has a notation [G] listed before it, shall include the referenced section and subsection for all commission rules, or paragraphs for all federal and state regulations and all subordinate paragraphs, subparagraphs and clauses, subclauses, and items contained within the referenced citation as applicable requirements.
 - D. When a grouped citation, notated with a [G] in the Applicable Requirements Summary, contains multiple compliance options, the permit holder must keep records of when each compliance option was used.
 - E. Emission units subject to 40 CFR Part 63, Subparts A, F, G, H, YY, FFFF, ZZZZ, or DDDDD as identified in the attached Applicable Requirements Summary table are

subject to 30 TAC Chapter 113, Subchapter C, §§ 113.100, 113.110, 113.120, 113.130, 113.560, 113.890, 113.1090, or 113.1130, respectively, which incorporate the 40 CFR Part 63 Subparts by reference.

- F. For the purpose of generating emission reduction credits through 30 TAC Chapter 101, Subchapter H, Division 1 (Emission Credit Banking and Trading), the permit holder shall comply with the following requirements:
- (i) Title 30 TAC § 101.302 (relating to General Provisions)
 - (ii) Title 30 TAC § 101.303 (relating to Emission Reduction Credit Generation Certification)
 - (iii) Title 30 TAC § 101.304 (relating to Mobile Emission Reduction Credit Generation and Certification)
 - (iv) Title 30 TAC § 101.309 (relating to Emission Credit Banking and Trading)
 - (v) The terms and conditions by which the emission limits are established to generate the reduction credit are applicable requirements of this permit
- G. The permit holder shall comply with the following 30 TAC Chapter 101, Subchapter H, Division 3 (Mass Emission Cap and Trade Program) Requirements:
- (i) Title 30 TAC § 101.352 (relating to General Provisions)
 - (ii) Title 30 TAC § 101.353 (relating to Allocation of Allowances)
 - (iii) Title 30 TAC § 101.354 (relating to Allowance Deductions)
 - (iv) Title 30 TAC § 101.356 (relating to Allowance Banking and Trading)
 - (v) Title 30 TAC § 101.359 (relating to Reporting)
 - (vi) Title 30 TAC § 101.360 (relating to Level of Activity Certification)
 - (vii) The terms and conditions by which the emission limits are established to meet or exceed the cap are applicable requirements of this permit
- H. For the purpose of generating discrete emission reduction credits through 30 TAC Chapter 101, Subchapter H, Division 4 (Discrete Emission Credit Banking and Trading), the permit holder shall comply with the following requirements:
- (i) Title 30 TAC § 101.372 (relating to General Provisions)
 - (ii) Title 30 TAC § 101.373 (relating to Discrete Emission Reduction Credit Generation and Certification)
 - (iii) Title 30 TAC § 101.374 (relating to Mobile Discrete Emission Reduction Credit Generation and Certification)
 - (iv) Title 30 TAC § 101.378 (relating to Discrete Emission Credit Banking and Trading)

- (v) The terms and conditions by which the emission limits are established to generate the discrete reduction credit are applicable requirements of this permit
- I. The permit holder shall comply with the following 30 TAC Chapter 101, Subchapter H, Division 6 (Highly Reactive Volatile Organic Compound Emissions Cap and Trade Program) requirements:
 - (i) Title 30 TAC § 101.392 (relating to Exemptions)
 - (ii) Title 30 TAC § 101.401 (relating to Level of Activity Certification)
- 2. The permit holder shall comply with the following sections of 30 TAC Chapter 101 (General Air Quality Rules):
 - A. Title 30 TAC § 101.1 (relating to Definitions), insofar as the terms defined in this section are used to define the terms used in other applicable requirements
 - B. Title 30 TAC § 101.3 (relating to Circumvention)
 - C. Title 30 TAC § 101.8 (relating to Sampling), if such action has been requested by the TCEQ
 - D. Title 30 TAC § 101.9 (relating to Sampling Ports), if such action has been requested by the TCEQ
 - E. Title 30 TAC § 101.10 (relating to Emissions Inventory Requirements)
 - F. Title 30 TAC § 101.201 (relating to Emission Event Reporting and Recordkeeping Requirements)
 - G. Title 30 TAC § 101.211 (relating to Scheduled Maintenance, Start-up, and Shutdown Reporting and Recordkeeping Requirements)
 - H. Title 30 TAC § 101.221 (relating to Operational Requirements)
 - I. Title 30 TAC § 101.222 (relating to Demonstrations)
 - J. Title 30 TAC § 101.223 (relating to Actions to Reduce Excessive Emissions)
- 3. Permit holder shall comply with the following requirements of 30 TAC Chapter 111:
 - A. Visible emissions from stationary vents with a flow rate of less than 100,000 actual cubic feet per minute that are not listed in the Applicable Requirements Summary attachment for 30 TAC Chapter 111, Subchapter A, Division 1, shall not exceed 20% opacity averaged over a six minute period. The permit holder shall comply with the following requirements for stationary vents at the site subject to this standard:
 - (i) Title 30 TAC § 111.111(a)(1)(B) (relating to Requirements for Specified Sources)
 - (ii) Title 30 TAC § 111.111(a)(1)(E)
 - (iii) Title 30 TAC § 111.111(a)(1)(F)(i), (ii), (iii), or (iv)
 - (iv) For emission units with vent emissions subject to 30 TAC § 111.111(a)(1)(B), complying with 30 TAC § 111.111(a)(1)(F)(ii), (iii), or (iv), and capable of

producing visible emissions from, but not limited to, particulate matter, acid gases and NO_x, the permit holder shall also comply with the following periodic monitoring requirements for the purpose of annual compliance certification under 30 TAC § 122.146. These periodic monitoring requirements do not apply to vents that are not capable of producing visible emissions such as vents that emit only colorless VOCs; vents from non-fuming liquids; vents that provide passive ventilation, such as plumbing vents; or vent emissions from any other source that does not obstruct the transmission of light. Vents, as specified in the "Applicable Requirements Summary" attachment, that are subject to the emission limitation of 30 TAC § 111.111(a)(1)(B) are not subject to the following periodic monitoring requirements:

- (1) An observation of stationary vents from emission units in operation shall be conducted at least once during each calendar quarter unless the emission unit is not operating for the entire quarter.
- (2) For stationary vents from a combustion source, if an alternative to the normally fired fuel is fired for a period greater than or equal to 24 consecutive hours, the permit holder shall conduct an observation of the stationary vent for each such period to determine if visible emissions are present. If such period is greater than 3 months, observations shall be conducted once during each quarter. Supplementing the normally fired fuel with natural gas or fuel gas to increase the net heating value to the minimum required value does not constitute creation of an alternative fuel.
- (3) Records of all observations shall be maintained.
- (4) Visible emissions observations of emission units operated during daylight hours shall be conducted no earlier than one hour after sunrise and no later than one hour before sunset. Visible emissions observations of emission units operated only at night must be made with additional lighting and the temporary installation of contrasting backgrounds. Visible emissions observations shall be made during times when the activities described in 30 TAC § 111.111(a)(1)(E) are not taking place. Visible emissions shall be determined with each stationary vent in clear view of the observer. The observer shall be at least 15 feet, but not more than 0.25 mile, away from each stationary vent during the observation. For outdoor locations, the observer shall select a position where the sun is not directly in the observer's eyes. When condensed water vapor is present within the plume, as it emerges from the emissions outlet, observations must be made beyond the point in the plume at which condensed water vapor is no longer visible. When water vapor within the plume condenses and becomes visible at a distance from the emissions outlet, the observation shall be evaluated at the outlet prior to condensation of water vapor. A certified opacity reader is not required for visible emissions observations.
- (5) Compliance Certification:
 - (a) If visible emissions are not present during the observation, the RO may certify that the source is in compliance with the applicable opacity requirement in 30 TAC § 111.111(a)(1) and (a)(1)(B).

- (b) However, if visible emissions are present during the observation, the permit holder shall either list this occurrence as a deviation on the next deviation report as required under 30 TAC § 122.145(2) or conduct the appropriate opacity test specified in 30 TAC § 111.111(a)(1)(F) as soon as practicable, but no later than 24 hours after observing visible emissions to determine if the source is in compliance with the opacity requirements. If an opacity test is performed and the source is determined to be in compliance, the RO may certify that the source is in compliance with the applicable opacity requirement. However, if an opacity test is performed and the source is determined to be out of compliance, the permit holder shall list this occurrence as a deviation on the next deviation report as required under 30 TAC § 122.145(2). The opacity test must be performed by a certified opacity reader.
- (c) Some vents may be subject to multiple visible emission or monitoring requirements. All credible data must be considered when certifying compliance with this requirement even if the observation or monitoring was performed to demonstrate compliance with a different requirement.

B. For visible emissions from a building, enclosed facility, or other structure; the permit holder shall comply with the following requirements:

- (i) Title 30 TAC § 111.111(a)(7)(A) (relating to Requirements for Specified Sources)
- (ii) Title 30 TAC § 111.111(a)(7)(B)(i) or (ii)
- (iii) For a building containing an air emission source, enclosed facility, or other structure containing or associated with an air emission source subject to 30 TAC § 111.111(a)(7)(A), complying with 30 TAC § 111.111(a)(7)(B)(i) or (ii), and capable of producing visible emissions from, but not limited to, particulate matter, acid gases and NO_x, the permit holder shall also comply with the following periodic monitoring requirements for the purpose of annual compliance certification under 30 TAC § 122.146:
 - (1) An observation of visible emissions from a building containing an air emission source, enclosed facility, or other structure containing or associated with an air emission source which is required to comply with 30 TAC § 111.111(a)(7)(A) shall be conducted at least once during each calendar quarter unless the air emission source or enclosed facility is not operating for the entire quarter.
 - (2) Records of all observations shall be maintained.
 - (3) Visible emissions observations of air emission sources or enclosed facilities operated during daylight hours shall be conducted no earlier than one hour after sunrise and no later than one hour before sunset. Visible emissions observations of air emission sources or enclosed facilities operated only at night must be made with additional lighting and the temporary installation of contrasting backgrounds. Visible emissions shall be determined with each emissions outlet in clear view of the observer. The observer shall be at least 15 feet, but not more than 0.25 mile, away from each emissions outlet during the observation. For outdoor locations, the observer shall select a position where the sun is

not directly in the observer's eyes. When condensed water vapor is present within the plume, as it emerges from the emissions outlet, observations must be made beyond the point in the plume at which condensed water vapor is no longer visible. When water vapor within the plume condenses and becomes visible at a distance from the emissions outlet, the observation shall be evaluated at the outlet prior to condensation of water vapor. A certified opacity reader is not required for visible emissions observations.

(4) Compliance Certification:

- (a) If visible emissions are not present during the observation, the RO may certify that the source is in compliance with the applicable opacity requirement in 30 TAC § 111.111(a)(7) and (a)(7)(A).
- (b) However, if visible emissions are present during the observation, the permit holder shall either list this occurrence as a deviation on the next deviation report as required under 30 TAC § 122.145(2) or conduct the appropriate opacity test specified in 30 TAC § 111.111(a)(7)(B) as soon as practicable, but no later than 24 hours after observing visible emissions to determine if the source is in compliance with the opacity requirements. If an opacity test is performed and the source is determined to be in compliance, the RO may certify that the source is in compliance with the applicable opacity requirement. However, if an opacity test is performed and the source is determined to be out of compliance, the permit holder shall list this occurrence as a deviation on the next deviation report as required under 30 TAC § 122.145(2). The opacity test must be performed by a certified opacity reader.

C. For visible emissions from all other sources not specified in 30 TAC § 111.111(a)(1), (4), or (7); the permit holder shall comply with the following requirements:

- (i) Title 30 TAC § 111.111(a)(8)(A) (relating to Requirements for Specified Sources)
- (ii) Title 30 TAC § 111.111(a)(8)(B)(i) or (ii)
- (iii) For a source subject to 30 TAC § 111.111(a)(8)(A), complying with 30 TAC § 111.111(a)(8)(B)(i) or (ii), and capable of producing visible emissions from, but not limited to, particulate matter, acid gases and NO_x, the permit holder shall also comply with the following periodic monitoring requirements for the purpose of annual compliance certification under 30 TAC § 122.146:
 - (1) An observation of visible emissions from a source which is required to comply with 30 TAC § 111.111(a)(8)(A) shall be conducted at least once during each calendar quarter unless the source is not operating for the entire quarter.
 - (2) Records of all observations shall be maintained.
 - (3) Visible emissions observations of sources operated during daylight hours shall be conducted no earlier than one hour after sunrise and no later than one hour before sunset. Visible emissions observations of sources

operated only at night must be made with additional lighting and the temporary installation of contrasting backgrounds. Visible emissions shall be determined with each source in clear view of the observer. The observer shall be at least 15 feet, but not more than 0.25 mile, away from each source during the observation. For outdoor locations, the observer shall select a position where the sun is not directly in the observer's eyes. When condensed water vapor is present within the plume, as it emerges from the emissions outlet, observations must be made beyond the point in the plume at which condensed water vapor is no longer visible. When water vapor within the plume condenses and becomes visible at a distance from the emissions outlet, the observation shall be evaluated at the outlet prior to condensation of water vapor. A certified opacity reader is not required for visible emissions observations.

(4) Compliance Certification:

- (a) If visible emissions are not present during the observation, the RO may certify that the source is in compliance with the applicable opacity requirement in 30 TAC § 111.111(a)(8) and (a)(8)(A)
- (b) However, if visible emissions are present during the observation, the permit holder shall either list this occurrence as a deviation on the next deviation report as required under 30 TAC § 122.145(2) or conduct the appropriate opacity test specified in 30 TAC § 111.111(a)(8)(B) as soon as practicable, but no later than 24 hours after observing visible emissions to determine if the source is in compliance with the opacity requirements. If an opacity test is performed and the source is determined to be in compliance, the RO may certify that the source is in compliance with the applicable opacity requirement. However, if an opacity test is performed and the source is determined to be out of compliance, the permit holder shall list this occurrence as a deviation on the next deviation report as required under 30 TAC § 122.145(2). The opacity test must be performed by a certified opacity reader.

- D. For emission units with contributions from uncombined water, the permit holder shall comply with the requirements of 30 TAC § 111.111(b).
- E. Emission limits on nonagricultural processes, except for the steam generators specified in 30 TAC § 111.153, shall comply with the following requirements:
 - (i) Emissions of PM from any source may not exceed the allowable rates as required in 30 TAC § 111.151(a) (relating to Allowable Emissions Limits)
 - (ii) Sources with an effective stack height (h_e) less than the standard effective stack height (H_e), must reduce the allowable emission level by multiplying it by $[h_e/H_e]^2$ as required in 30 TAC § 111.151(b)
 - (iii) Effective stack height shall be calculated by the equation specified in 30 TAC § 111.151(c)

4. For storage vessels maintaining working pressure as specified in 30 TAC Chapter 115, Subchapter B, Division 1: Storage of Volatile Organic Compounds, the permit holder shall comply with the requirements of 30 TAC § 115.112(e)(1).
5. For industrial wastewater specified in 30 TAC Chapter 115, Subchapter B, the permit holder shall comply with the following requirements for wastewater drains, junction boxes, lift stations and weirs:
 - A. Title 30 TAC § 115.142 (relating to Control Requirements)
 - B. Title 30 TAC § 115.142(1)(A) - (D) (relating to Control Requirements)
 - C. Title 30 TAC § 115.142(1)(E) and (F) (relating to Control Requirements)
 - D. Title 30 TAC § 115.142(1)(G) and (H) (relating to Control Requirements)
 - E. Title 30 TAC § 115.144(1), (5), and (6) (relating to Inspection and Monitoring Requirements)
 - F. Title 30 TAC § 115.145 (relating to Approved Test Methods)
 - G. Title 30 TAC § 115.146 (relating to Recordkeeping Requirements)
 - H. Title 30 TAC § 115.148 (relating to Determination of Wastewater Characteristics)
6. The permit holder shall comply with the following 30 TAC Chapter 115, Subchapter F requirements (relating to Cutback Asphalt Requirements):
 - A. Title 30 TAC § 115.512(1) (relating to Control Requirements)
 - B. Title 30 TAC § 115.512(2) (relating to Control Requirements)
 - C. Title 30 TAC § 115.512(3) (relating to Control Requirements)
 - D. Title 30 TAC § 115.515 (relating to Testing Requirements)
7. The permit holder shall comply with the following requirements for units subject to any subpart of 40 CFR Part 60, unless otherwise stated in the applicable subpart:
 - A. Title 40 CFR § 60.7 (relating to Notification and Recordkeeping)
 - B. Title 40 CFR § 60.8 (relating to Performance Tests)
 - C. Title 40 CFR § 60.11 (relating to Compliance with Standards and Maintenance Requirements)
 - D. Title 40 CFR § 60.12 (relating to Circumvention)
 - E. Title 40 CFR § 60.13 (relating to Monitoring Requirements)
 - F. Title 40 CFR § 60.14 (relating to Modification)
 - G. Title 40 CFR § 60.15 (relating to Reconstruction)
 - H. Title 40 CFR § 60.19 (relating to General Notification and Reporting Requirements)

8. The permit holder shall comply with the following requirements for units subject to any subpart of 40 CFR Part 61, unless otherwise stated in the applicable subpart:
 - A. Title 40 CFR § 61.05 (relating to Prohibited Activities)
 - B. Title 40 CFR § 61.07 (relating to Application for Approval of Construction or Modification)
 - C. Title 40 CFR § 61.09 (relating to Notification of Start-up)
 - D. Title 40 CFR § 61.10 (relating to Source Reporting and Request Waiver)
 - E. Title 40 CFR § 61.12 (relating to Compliance with Standards and Maintenance Requirements)
 - F. Title 40 CFR § 61.13 (relating to Emissions Tests and Waiver of Emission Tests)
 - G. Title 40 CFR § 61.14 (relating to Monitoring Requirements)
 - H. Title 40 CFR § 61.15 (relating to Modification)
 - I. Title 40 CFR § 61.19 (relating to Circumvention)
9. For facilities where total annual benzene quantity from waste is greater than or equal to 10 megagrams per year and subject to emission standards in 40 CFR Part 61, Subpart FF, the permit holder shall comply with the following requirements:
 - A. Title 40 CFR § 61.342(c)(1)(i) - (iii) (relating to Standards: General)
 - B. Title 40 CFR § 61.342(e)(1) (relating to Standards: General)
 - C. Title 40 CFR § 61.342(e)(2)(i) - (ii) (relating to Standards: General)
 - D. Title 40 CFR § 61.342(f)(1), and (2) (relating to Standards: General)
 - E. Title 40 CFR § 61.342(g) (relating to Standards: General)
 - F. Title 40 CFR § 61.350(a) and (b) (relating to Standards: Delay of Repair)
 - G. Title 40 CFR § 61.355(a)(1)(iii), (a)(2), (a)(6), (b), and (c)(1) - (3) (relating to Test Methods, Procedures, and Compliance Provisions)
 - H. Title 40 CFR § 61.355(k)(1) - (6), and (7)(i) - (iv) (relating to Test Methods, Procedures, and Compliance Provisions), for calculation procedures
 - I. Title 40 CFR § 61.356(a) (relating to Recordkeeping Requirements)
 - J. Title 40 CFR § 61.356(b), and (b)(1) (relating to Recordkeeping Requirements)
 - K. Title 40 CFR § 61.356(b)(4) (relating to Recordkeeping Requirements)
 - L. Title 40 CFR § 61.356(b)(5) (relating to Recordkeeping Requirements)
 - M. Title 40 CFR § 61.356(c) (relating to Recordkeeping Requirements)

- N. Title 40 CFR § 61.357(a), (d)(1), (d)(2) (d)(6) and (d)(8) (relating to Reporting Requirements)
 - O. Title 40 CFR § 61.357(d)(5) (relating to Reporting Requirements)
10. For facilities with containers subject to emission standards in 40 CFR Part 61, Subpart FF, the permit holder shall comply with the following requirements:
 - A. Title 40 CFR § 61.345(a)(1) - (3), (b), and (c) (relating to Standards: Containers)
 - B. Title 40 CFR § 61.355(h) (relating to Test Methods, Procedures and Compliance Provisions)
 - C. Title 40 CFR § 61.356(g) (relating to Recordkeeping Requirements)
 - D. Title 40 CFR § 61.356(h) (relating to Recordkeeping Requirements)
 11. For facilities with individual drain systems subject to emission standards in 40 CFR Part 61, Subpart FF, the permit holder shall comply with the following requirements:
 - A. Title 40 CFR § 61.346(b)(1), (2), (2)(i), (3), (4)(i) - (iv), and (5) (relating to Standards: Individual Drain Systems)
 - B. Title 40 CFR § 61.346(b)(2)(ii)(A) (relating to Standards: Individual Drain Systems), for junction boxes
 12. The permit holder shall comply with the requirements of 30 TAC Chapter 113, Subchapter C, § 113.100 for units subject to any subpart of 40 CFR Part 63, unless otherwise stated in the applicable subpart.
 13. For the chemical manufacturing process specified in 40 CFR Part 63, Subpart F, the permit holder shall comply with 40 CFR § 63.103(a) (relating to General Compliance, Reporting, and Recordkeeping Provisions) (Title 30 TAC Chapter 113, Subchapter C, § 113.110 incorporated by reference).
 14. For the chemical manufacturing facilities with a 40 CFR Part 63, Subpart G Group 1 or Group 2 wastewater streams that are also subject to 40 CFR Part 61, Subpart FF, the permit holder shall comply with the following requirements (Title 30 TAC Chapter 113, Subchapter C, § 113.120 incorporated by reference):
 - A. Title 40 CFR § 63.110(e)(1) (relating to Applicability), for 40 CFR Part 63, Subpart G applicability to Group 1 or 2 Wastewater Streams
 15. For the transfer of Group 1 wastewater streams or residuals from Group 1 wastewater streams the permit holder shall comply with the following requirements:
 - A. Title 40 CFR § 63.132(g) (relating to Process Wastewater Provisions - General)
 - B. Title 40 CFR § 63.152(b)(5) and (c)(4)(iv) (relating to General Reporting and Continuous Records)
 16. For the chemical manufacturing facilities subject to leak detection requirements in 40 CFR Part 63, Subpart G, the permit holder shall comply with the following requirements (Title 30 TAC Chapter 113, Subchapter C, § 113.120 incorporated by reference):

- A. General Leak Detection Requirements:
 - (i) Title 40 CFR § 63.148(d)(1) - (3), and (e) (relating to Leak Inspection Provisions)
 - (ii) Title 40 CFR § 63.148(c), (g), (g)(2), (h), and (h)(2) (relating to Leak Inspection Provisions), for monitoring and testing requirements
 - (iii) Title 40 CFR §§ 63.148(g)(2), (h)(2), (i)(1) - (2), (i)(4)(i) - (viii), (i)(5), and 63.152(a)(1) - (5), for recordkeeping requirements
 - (iv) Title 40 CFR §§ 63.148(j), 63.151(a)(6)(i) - (iii), (b)(1) - (2), (j)(1) - (3), 63.152(a)(1) - (5), (b), (b)(1)(i) - (ii), and (b)(4), for reporting requirements
- B. For closed vent system or vapor collection systems constructed of hard piping:
 - (i) Title 40 CFR § 63.148(b)(1)(ii) (relating to Leak Inspection Provisions), for monitoring and testing requirements
 - (ii) Title 40 CFR § 63.148(i)(6) (relating to Leak Inspection Provisions), for recordkeeping requirements
- 17. For the chemical manufacturing facilities subject to wastewater operations requirements in 40 CFR Part 63, Subpart G, the permit holder shall comply with the following requirements (Title 30 TAC Chapter 113, Subchapter C, § 113.120 incorporated by reference):
 - A. Title 40 CFR § 63.135(a) - (f) (relating to Process Wastewater Provisions - Containers)
 - B. Title 40 CFR § 63.136(a) (relating to Process Wastewater Provisions - Individual Drain Systems)
 - C. Title 40 CFR § 63.136(e) - (g) (relating to Process Wastewater Provisions - Individual Drain Systems)
- 18. For transfer of waste from ethylene production facilities subject to 40 CFR Part 63, Subpart YY the permit holder shall comply with the following requirements (Title 30 TAC Chapter 113, Subchapter C, § 113.560 incorporated by reference):
 - A. Title 40 CFR § 63.1096(a) - (d) (Title 30 TAC Chapter 113, Subchapter C, § 113.550 incorporated by reference)
 - B. Title 40 CFR § 63.1109(a) and (c)
- 19. For benzene laden waste streams from ethylene process facilities subject to 40 CFR Part 63, Subpart YY with total annual benzene quantity from the facility of 10 megagrams per year or more the permit holder shall comply with the following requirements as specified in 40 CFR § 63.1095(b)(2) (Title 30 TAC Chapter 113, Subchapter C, § 113.560 incorporated by reference):
 - A. For facilities with waste managed in containers the permit holder shall comply with the following requirements:
 - (i) Title 40 CFR § 61.355(h) (relating to Test Methods, Procedures and Compliance Provisions)
 - (ii) Title 40 CFR § 61.356(g) (relating to Recordkeeping Requirements)

- (iii) Title 40 CFR § 61.356(h) (relating to Recordkeeping Requirements)
 - B. For facilities with waste managed in individual drain systems the permit holder shall comply with the following requirements:
 - (i) Title 40 CFR § 61.346(b)(1), (2), (2)(i), (3), (4)(i) - (iv), and (5) (relating to Standards: Individual Drain Systems)
 - (ii) Title 40 CFR § 61.346(b)(2)(ii)(A) (relating to Standards: Individual Drain Systems), for junction boxes
 - (iii) Title 40 CFR § 61.356(g) (relating to Recordkeeping Requirements)
- 20. For miscellaneous chemical process facilities subject to maintenance wastewater requirements as specified in 40 CFR § 63.2485, Table 7, the permit holder shall comply with the requirements of 40 CFR § 63.105 (relating to Maintenance Wastewater Requirements) (Title 30 TAC Chapter 113, Subchapter C, § 113.890 incorporated by reference).
- 21. For the transfer of Group 1 wastewater streams or residuals from Group 1 wastewater streams subject to the requirements in 40 CFR § 63.2485, Table 7 the permit holder shall comply with the following requirements (Title 30 TAC Chapter 113, Subchapter C, § 113.670 incorporated by reference):
 - A. Title 40 CFR § 63.132(g) and (g)(1) (relating to Process Wastewater Provisions - General)
 - B. Title 40 CFR § 63.132(g)(2) (relating to Process Wastewater Provisions - General)
 - C. Title 40 CFR § 63.2485(i)(1), for transfer offsite to a facility meeting the requirements of § 63.138(h)
- 22. For the miscellaneous chemical process facilities subject to process wastewater operations requirements as specified in 40 CFR § 63.2485, Table 7, the permit holder shall comply with the following requirements or 40 CFR Part 63, Subpart G (Title 30 TAC Chapter 113, Subchapter C, § 113.890 incorporated by reference).
 - A. Title 40 CFR § 63.135(a) - (f) (relating to Process Wastewater Provisions - Container)
 - B. Title 40 CFR § 63.136(a) (relating to Process Wastewater Provisions - Individual Drain Systems)
 - C. Title 40 CFR § 63.136(e) - (g) (relating to Process Wastewater Provisions - Individual Drain Systems)
- 23. The permit holder shall comply with certified registrations submitted to the TCEQ for purposes of establishing federally enforceable emission limits. A copy of the certified registration shall be maintained with the permit. Records sufficient to demonstrate compliance with the established limits shall be maintained. The certified registration and records demonstrating compliance shall be provided, on request, to representatives of the appropriate TCEQ regional office and any local air pollution control agency having jurisdiction over the site. The permit holder shall submit updated certified registrations when changes at the site require establishment of new emission limits. If changes result in emissions that do not remain below major source thresholds, the permit holder shall submit a revision application to codify the appropriate requirements in the permit.

Additional Monitoring Requirements

24. Unless otherwise specified, the permit holder shall comply with the compliance assurance monitoring requirements as specified in the attached "CAM Summary" upon issuance of the permit. In addition, the permit holder shall comply with the following:
- A. The permit holder shall comply with the terms and conditions contained in 30 TAC § 122.147 (General Terms and Conditions for Compliance Assurance Monitoring).
 - B. The permit holder shall report, consistent with the averaging time identified in the "CAM Summary," deviations as defined by the deviation limit in the "CAM Summary." Any monitoring data below a minimum limit or above a maximum limit, that is collected in accordance with the requirements specified in 40 CFR § 64.7(c), shall be reported as a deviation. Deviations shall be reported according to 30 TAC § 122.145 (Reporting Terms and Conditions).
 - C. The permit holder may elect to collect monitoring data on a more frequent basis and average the data, consistent with the averaging time or minimum frequency specified in the "CAM Summary," for purposes of determining whether a deviation has occurred. However, the additional data points must be collected on a regular basis. In no event shall data be collected and used in particular instances in order to avoid reporting deviations. All monitoring data shall be collected in accordance with the requirements specified in 40 CFR § 64.7(c).
 - D. The permit holder shall operate the monitoring, identified in the attached "CAM Summary," in accordance with the provisions of 40 CFR § 64.7.
 - E. The permit holder shall comply with either of the following requirements for any capture system associated with the VOC control device subject to CAM. If the results of the following inspections indicate that the capture system is not working properly, the permit holder shall promptly take necessary corrective actions:
 - (i) Once a year the permit holder shall inspect the capture system in compliance of CAM for leaks in accordance with 40 CFR Part 60, Appendix A, Test Method 21. Leaks shall be indicated by an instrument reading greater than or equal to 500 ppm above background or as defined by the underlying applicable requirement; or
 - (ii) Once a month, the permit holder shall conduct a visual, audible, and/or olfactory inspection of the capture system in compliance of CAM to detect leaking components.
 - F. The permit holder shall comply with the requirements of 40 CFR § 70.6(a)(3)(ii)(A) and 30 TAC § 122.144(1)(A)-(F) for documentation of all required inspections.
25. The permit holder shall comply with the periodic monitoring requirements as specified in the attached "Periodic Monitoring Summary" upon issuance of the permit. Except for, as applicable, monitoring malfunctions, associated repairs, and required quality assurance or control activities (including, as applicable, calibration checks and required zero and span adjustments), the permit holder shall conduct all monitoring in continuous operation (or shall collect data at all required intervals) at all times that the pollutant-specific emissions unit is operating. The permit holder may elect to collect monitoring data on a more frequent basis and average the data, consistent with the averaging time or minimum frequency specified in the "Periodic Monitoring Summary," for purposes of determining whether a deviation has occurred. However, the additional data points

must be collected on a regular basis. In no event shall data be collected and used in particular instances to avoid reporting deviations. Deviations shall be reported according to 30 TAC § 122.145 (Reporting Terms and Conditions).

New Source Review Authorization Requirements

26. Permit holder shall comply with the requirements of New Source Review authorizations issued or claimed by the permit holder for the permitted area, including permits, permits by rule (including the terms, conditions, monitoring, recordkeeping, and reporting identified in registered PBRs and permits by rule identified in the PBR Supplemental Tables dated December 6, 2023 in the application for project 34858), standard permits, flexible permits, special permits, permits for existing facilities including Voluntary Emissions Reduction Permits and Electric Generating Facility Permits issued under 30 TAC Chapter 116, Subchapter I, or special exemptions referenced in the New Source Review Authorization References attachment. These requirements:
 - A. Are incorporated by reference into this permit as applicable requirements
 - B. Shall be located with this operating permit
 - C. Are not eligible for a permit shield
27. The permit holder shall comply with the general requirements of 30 TAC Chapter 106, Subchapter A or the general requirements, if any, in effect at the time of the claim of any PBR.
28. The permit holder shall maintain records to demonstrate compliance with any emission limitation or standard that is specified in a permit by rule (PBR) or Standard Permit listed in the New Source Review Authorizations attachment. The records shall yield reliable data from the relevant time period that are representative of the emission unit's compliance with the PBR or Standard Permit. These records may include, but are not limited to, production capacity and throughput, hours of operation, safety data sheets (SDS), chemical composition of raw materials, speciation of air contaminant data, engineering calculations, maintenance records, fugitive data, performance tests, capture/control device efficiencies, direct pollutant monitoring (CEMS, COMS, or PEMS), or control device parametric monitoring. These records shall be made readily accessible and available as required by 30 TAC § 122.144. Any monitoring or recordkeeping data indicating noncompliance with the PBR or Standard Permit shall be considered and reported as a deviation according to 30 TAC § 122.145 (Reporting Terms and Conditions).
29. The permit holder shall comply with the following requirements for Air Quality Standard Permits:
 - A. Registration requirements listed in 30 TAC § 116.611, unless otherwise provided for in an Air Quality Standard Permit
 - B. General Conditions listed in 30 TAC § 116.615, unless otherwise provided for in an Air Quality Standard Permit
 - C. Requirements of the non-rule Air Quality Standard Permit for Pollution Control Projects

Compliance Requirements

30. The permit holder shall certify compliance in accordance with 30 TAC § 122.146. The permit holder shall comply with 30 TAC § 122.146 using at a minimum, but not limited to, the continuous or intermittent compliance method data from monitoring, recordkeeping, reporting, or testing required by the permit and any other credible evidence or information. The certification period

may not exceed 12 months and the certification must be submitted within 30 days after the end of the period being certified.

31. Permit holder shall comply with the following 30 TAC Chapter 117 requirements:
 - A. The permit holder shall comply with the compliance schedules and submit written notification to the TCEQ Executive Director as required in 30 TAC Chapter 117, Subchapter H, Division 1:
 - (i) For sources in the Houston-Galveston-Brazoria Nonattainment area, 30 TAC § 117.9020:
 - (1) Title 30 TAC § 117.9020(2)(A), (C), and (D)
 - B. The permit holder shall comply with the Initial Control Plan unit listing requirement in 30 TAC § 117.350(c) and (c)(1).
 - C. The permit holder shall comply with the requirements of 30 TAC § 117.354 for Final Control Plan Procedures for Attainment Demonstration Emission Specifications and 30 TAC § 117.356 for Revision of Final Control Plan.
32. Use of Emission Credits to comply with applicable requirements:
 - A. Unless otherwise prohibited, the permit holder may use emission credits to comply with the following applicable requirements listed elsewhere in this permit:
 - (i) Title 30 TAC Chapter 115
 - (ii) Title 30 TAC Chapter 117
 - (iii) Offsets for Title 30 TAC Chapter 116
 - B. The permit holder shall comply with the following requirements in order to use the emission credits to comply with the applicable requirements:
 - (i) The permit holder must notify the TCEQ according to 30 TAC § 101.306(c)-(d)
 - (ii) The emission credits to be used must meet all the geographic, timeliness, applicable pollutant type, and availability requirements listed in 30 TAC Chapter 101, Subchapter H, Division 1
 - (iii) The executive director has approved the use of the credit according to 30 TAC § 101.306(c)-(d)
 - (iv) The permit holder keeps records of the use of credits towards compliance with the applicable requirements in accordance with 30 TAC § 101.302(g) and 30 TAC Chapter 122
 - (v) Title 30 TAC § 101.305 (relating to Emission Reductions Achieved Outside the United States)
33. Use of Discrete Emission Credits to comply with the applicable requirements:
 - A. Unless otherwise prohibited, the permit holder may use discrete emission credits to comply with the following applicable requirements listed elsewhere in this permit:

- (i) Title 30 TAC Chapter 115
 - (ii) Title 30 TAC Chapter 117
 - (iii) If applicable, offsets for Title 30 TAC Chapter 116
 - (iv) Temporarily exceed state NSR permit allowables
- B. The permit holder shall comply with the following requirements in order to use the credit to comply with the applicable requirements:
- (i) The permit holder must notify the TCEQ according to 30 TAC § 101.376(d)
 - (ii) The discrete emission credits to be used must meet all the geographic, timeliness, applicable pollutant type, and availability requirements listed in 30 TAC Chapter 101, Subchapter H, Division 4
 - (iii) The executive director has approved the use of the discrete emission credits according to 30 TAC § 101.376(d)(1)(A)
 - (iv) The permit holder keeps records of the use of credits towards compliance with the applicable requirements in accordance with 30 TAC § 101.372(h) and 30 TAC Chapter 122
 - (v) Title 30 TAC § 101.375 (relating to Emission Reductions Achieved Outside the United States)

Risk Management Plan

34. For processes subject to 40 CFR Part 68 and specified in 40 CFR § 68.10, the permit holder shall comply with the requirements of the Accidental Release Prevention Provisions in 40 CFR Part 68. The permit holder shall submit to the appropriate agency either a compliance schedule for meeting the requirements of 40 CFR Part 68 by the date provided in 40 CFR § 68.10(a), or as part of the compliance certification submitted under this permit, a certification statement that the source is in compliance with all requirements of 40 CFR Part 68, including the registration and submission of a risk management plan.

Protection of Stratospheric Ozone

35. Permit holders at a site subject to Title VI of the FCAA Amendments shall meet the following requirements for protection of stratospheric ozone:
- A. Any on site servicing, maintenance, and repair on refrigeration and nonmotor vehicle air-conditioning appliances using ozone-depleting refrigerants or non-exempt substitutes shall be conducted in accordance with 40 CFR Part 82, Subpart F. Permit holders shall ensure that repairs on or refrigerant removal from refrigeration and nonmotor vehicle air-conditioning appliances using ozone-depleting refrigerants are performed only by properly certified technicians using certified equipment. Records shall be maintained as required by 40 CFR Part 82, Subpart F.
 - B. The permit holder shall comply with 40 CFR Part 82, Subpart H related to Halon Emissions Reduction requirements as specified in 40 CFR § 82.250 - § 82.270 and the applicable Part 82 Appendices.

Alternative Requirements

36. The permit holder shall comply with the approved alternative means of control (AMOC); alternative monitoring, recordkeeping, or reporting requirements; or requirements determined to be equivalent to an otherwise applicable requirement contained in the Alternative Requirements attachment of this permit. Units complying with an approved alternative requirement have reference to the approval in the Applicable Requirements summary listing for the unit. The permit holder shall maintain the original documentation, from the TCEQ Executive Director, demonstrating the method or limitation utilized. Documentation shall be maintained and made available in accordance with 30 TAC § 122.144.

Permit Location

37. The permit holder shall maintain a copy of this permit and records related to requirements listed in this permit on site.

Permit Shield (30 TAC § 122.148)

38. A permit shield is granted for the emission units, groups, or processes specified in the attached "Permit Shield." Compliance with the conditions of the permit shall be deemed compliance with the specified potentially applicable requirements or specified potentially applicable state-only requirements listed in the attachment "Permit Shield." Permit shield provisions shall not be modified by the executive director until notification is provided to the permit holder. No later than 90 days after notification of a change in a determination made by the executive director, the permit holder shall apply for the appropriate permit revision to reflect the new determination. Provisional terms are not eligible for this permit shield. Any term or condition, under a permit shield, shall not be protected by the permit shield if it is replaced by a provisional term or condition or the basis of the term and condition changes.

Attachments

Applicable Requirements Summary

Additional Monitoring Requirements

Permit Shield

New Source Review Authorization References

Alternative Requirement

Applicable Requirements Summary

Unit Summary 20

Applicable Requirements Summary 50

Note: A “none” entry may be noted for some emission sources in this permit’s “Applicable Requirements Summary” under the heading of “Monitoring and Testing Requirements” and/or “Recordkeeping Requirements” and/or “Reporting Requirements.” Such a notation indicates that there are no requirements for the indicated emission source as identified under the respective column heading(s) for the stated portion of the regulation when the emission source is operating under the conditions of the specified SOP Index Number. However, other relevant requirements pursuant to 30 TAC Chapter 122 including Recordkeeping Terms and Conditions (§ 122.144), Reporting Terms and Conditions (§ 122.145), and Compliance Certification Terms and Conditions (§ 122.146) continue to apply.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
10.1-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-<5wt	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
10.1-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
10.1-0-0	FUGITIVE EMISSION UNITS	N/A	60VV-ALL	40 CFR Part 60, Subpart VV	Title 40 CFR Part 60, Subpart VV Fugitive Unit Description = Some fugitive components are routed to the flare and complying with the applicable provisions of 60.18.
10.1-0-0	FUGITIVE EMISSION UNITS	N/A	60VV-ALL-FFFF	40 CFR Part 60, Subpart VV	Title 40 CFR Part 60, Subpart VV Fugitive Unit Description = Some fugitive components are routed to the flare and complying with the applicable provisions of MACT Subpart FFFF.
10.1-0-0	FUGITIVE EMISSION UNITS	N/A	60VV-ALL-YY	40 CFR Part 60, Subpart VV	Title 40 CFR Part 60, Subpart VV Fugitive Unit Description = Some fugitive components are routed to the flare and complying with the applicable provisions of Ethylene MACT (Subpart YY).
10.1-0-0	FUGITIVE EMISSION UNITS	N/A	63FFFF-FUG	40 CFR Part 63, Subpart FFFF	No changing attributes.
10.2-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
10.2-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
10.2-0-0	FUGITIVE EMISSION UNITS	N/A	63FFFF-FUG	40 CFR Part 63, Subpart FFFF	No changing attributes.
10.3-0-0	FUGITIVE EMISSION	N/A	R5780-<5wt	30 TAC Chapter 115,	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	UNITS			HRVOC Fugitive Emissions	
10.3-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
10.3-0-0	FUGITIVE EMISSION UNITS	N/A	63FFFF-FUG	40 CFR Part 63, Subpart FFFF	No changing attributes.
10ABC-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5720-194	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
10ABC-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-12	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
10D-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5720-194	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
10D-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-12	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
12-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
12-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
12-0-0	FUGITIVE EMISSION UNITS	N/A	63YY-FUG	40 CFR Part 63, Subpart YY	No changing attributes.
12-95-61	LOADING/UNLOADING OPERATIONS	N/A	R5211-096	30 TAC Chapter 115, Loading and Unloading of VOC	No changing attributes.
12-95-61	STORAGE TANKS/VESSELS	N/A	R5112-7	30 TAC Chapter 115, Storage of VOCs	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
12-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5720-194	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
12-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-12	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
12OWSENG_1	SRIC ENGINES	N/A	R7300-011	30 TAC Chapter 117, Subchapter B	No changing attributes.
12OWSENG_1	SRIC ENGINES	N/A	60III-11	40 CFR Part 60, Subpart III	No changing attributes.
12OWSENG_1	SRIC ENGINES	N/A	63ZZZZ-11	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
12OWSENG_2	SRIC ENGINES	N/A	R7300-011	30 TAC Chapter 117, Subchapter B	No changing attributes.
12OWSENG_2	SRIC ENGINES	N/A	60III-11	40 CFR Part 60, Subpart III	No changing attributes.
12OWSENG_2	SRIC ENGINES	N/A	63ZZZZ-11	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
18-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
18-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
18-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5720-194	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
18-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121-12	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
21-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
21-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
21-0-0	FUGITIVE EMISSION UNITS	N/A	63FFFF-FUG	40 CFR Part 63, Subpart FFFF	No changing attributes.
21-95-006	CHEMICAL MANUFACTURING PROCESS	N/A	63FFFF- G1BPVa4F	40 CFR Part 63, Subpart FFFF	No changing attributes.
21-95-19	LOADING/UNLOADING OPERATIONS	N/A	R5211-096	30 TAC Chapter 115, Loading and Unloading of VOC	No changing attributes.
21-95-19	STORAGE TANKS/VESSELS	N/A	R5112-10	30 TAC Chapter 115, Storage of VOCs	Alternate Control Requirement = Not using an alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria., Control Device Type = Flare
21-95-19	STORAGE TANKS/VESSELS	N/A	R5112- 10AMOC145	30 TAC Chapter 115, Storage of VOCs	Alternate Control Requirement = Using alternate method for demonstrating and documenting continuous compliance with applicable control requirements or exemption criteria, and demonstrating substantially equivalent reduction efficiencies approved by the TCEQ executive director.
21-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5720194AMOC1 45	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
21-PV	EMISSION	N/A	R5121-	30 TAC Chapter 115, Vent	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	POINTS/STATIONARY VENTS/PROCESS VENTS		12AMOC145	Gas Controls	
22-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
22-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
22-0-0	FUGITIVE EMISSION UNITS	N/A	63YY-FUG	40 CFR Part 63, Subpart YY	No changing attributes.
22-16-120	STATIONARY TURBINES	N/A	R7300-1	30 TAC Chapter 117, Subchapter B	No changing attributes.
22-36-9	PROCESS HEATERS/FURNACES	N/A	R7300-9	30 TAC Chapter 117, Subchapter B	No changing attributes.
22-36-9	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
22-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5720194AMOC1 45	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
22-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121- 12AMOC145	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
22OWSENG	SRIC ENGINES	N/A	R7300-011	30 TAC Chapter 117, Subchapter B	No changing attributes.
22OWSENG	SRIC ENGINES	N/A	60III-11	40 CFR Part 60, Subpart III	No changing attributes.
22OWSENG	SRIC ENGINES	N/A	63ZZZZ-11	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
24-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
24-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
24-0-0	FUGITIVE EMISSION UNITS	N/A	60VV-ALL	40 CFR Part 60, Subpart VV	Title 40 CFR Part 60, Subpart VV Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of 60.18.
24-0-0	FUGITIVE EMISSION UNITS	N/A	60VV-ALL-YY	40 CFR Part 60, Subpart VV	Title 40 CFR Part 60, Subpart VV Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of Ethylene MACT (Subpart YY).
24-0-0	FUGITIVE EMISSION UNITS	N/A	63YY-FUG	40 CFR Part 63, Subpart YY	No changing attributes.
24-36-7	PROCESS HEATERS/FURNACES	N/A	R7300-011	30 TAC Chapter 117, Subchapter B	No changing attributes.
24-36-7	PROCESS HEATERS/FURNACES	N/A	63DDDDDD-EU	40 CFR Part 63, Subpart DDDDDD	No changing attributes.
24-36-8	PROCESS HEATERS/FURNACES	N/A	R7300-002	30 TAC Chapter 117, Subchapter B	No changing attributes.
24-36-8	PROCESS HEATERS/FURNACES	N/A	63DDDDDD-EU	40 CFR Part 63, Subpart DDDDDD	No changing attributes.
24-95-314	LOADING/UNLOADING OPERATIONS	N/A	R5211-096	30 TAC Chapter 115, Loading and Unloading of VOC	No changing attributes.
24-95-314	STORAGE TANKS/VESSELS	N/A	R5112-7	30 TAC Chapter 115, Storage of VOCs	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
24-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5720194AMOC1 45	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
24-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121- 12AMOC145	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
24.1-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-<5wt	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
24.1-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
24.1-0-0	FUGITIVE EMISSION UNITS	N/A	63H-ALL	40 CFR Part 63, Subpart H	Title 40 CFR Part 63, Subpart H Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of 63.11.
24.1-0-0	FUGITIVE EMISSION UNITS	N/A	63H-ALL-YY	40 CFR Part 63, Subpart H	Title 40 CFR Part 63, Subpart H Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of Ethylene MACT (Subpart YY).
24AIR3	SRIC ENGINES	N/A	R7300-600	30 TAC Chapter 117, Subchapter B	No changing attributes.
24AIR3	SRIC ENGINES	N/A	60III-13	40 CFR Part 60, Subpart III	No changing attributes.
24AIR3	SRIC ENGINES	N/A	63ZZZZ-600	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
24AIR4	SRIC ENGINES	N/A	R7300-600	30 TAC Chapter 117, Subchapter B	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
24AIR4	SRIC ENGINES	N/A	60III-13	40 CFR Part 60, Subpart IIII	No changing attributes.
24AIR4	SRIC ENGINES	N/A	63ZZZZ-600	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
24EMGGEN	SRIC ENGINES	N/A	R7300-003	30 TAC Chapter 117, Subchapter B	No changing attributes.
24EMGGEN	SRIC ENGINES	N/A	60III-6	40 CFR Part 60, Subpart IIII	No changing attributes.
24EMGGEN	SRIC ENGINES	N/A	63ZZZZ-215	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
24EMGGENTK	LOADING/UNLOADING OPERATIONS	N/A	R5211-002	30 TAC Chapter 115, Loading and Unloading of VOC	No changing attributes.
24EMGGENTK	STORAGE TANKS/VESSELS	N/A	R5112-3	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
24OWSENG	SRIC ENGINES	N/A	R7300-010	30 TAC Chapter 117, Subchapter B	No changing attributes.
24OWSENG	SRIC ENGINES	N/A	60III-10	40 CFR Part 60, Subpart IIII	No changing attributes.
24OWSENG	SRIC ENGINES	N/A	63ZZZZ-10	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
33-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
33-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
33-0-0	FUGITIVE EMISSION UNITS	N/A	60VV-ALL	40 CFR Part 60, Subpart VV	Title 40 CFR Part 60, Subpart VV Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of 60.18.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
33-0-0	FUGITIVE EMISSION UNITS	N/A	60VV-ALL-YY	40 CFR Part 60, Subpart VV	Title 40 CFR Part 60, Subpart VV Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of Ethylene MACT (Subpart YY).
33-0-0	FUGITIVE EMISSION UNITS	N/A	63YY-FUG	40 CFR Part 63, Subpart YY	No changing attributes.
33-36-10	PROCESS HEATERS/FURNACES	N/A	R7300-242	30 TAC Chapter 117, Subchapter B	No changing attributes.
33-36-10	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
33-95-10	LOADING/UNLOADING OPERATIONS	N/A	R5211-096	30 TAC Chapter 115, Loading and Unloading of VOC	No changing attributes.
33-95-10	STORAGE TANKS/VESSELS	N/A	R5112-7	30 TAC Chapter 115, Storage of VOCs	No changing attributes.
33-95-14	LOADING/UNLOADING OPERATIONS	N/A	R5211-002	30 TAC Chapter 115, Loading and Unloading of VOC	No changing attributes.
33-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5720194AMOC1 45	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
33-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	N/A	R5121- 12AMOC145	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
33.1-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
33.1-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
33.1-0-0	FUGITIVE EMISSION UNITS	N/A	60VV-ALL	40 CFR Part 60, Subpart VV	Title 40 CFR Part 60, Subpart VV Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of 60.18.
33.1-0-0	FUGITIVE EMISSION UNITS	N/A	60VV-ALL-YY	40 CFR Part 60, Subpart VV	Title 40 CFR Part 60, Subpart VV Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of Ethylene MACT (Subpart YY).
33AIR5	SRIC ENGINES	N/A	R7300-003	30 TAC Chapter 117, Subchapter B	No changing attributes.
33AIR5	SRIC ENGINES	N/A	60III-14	40 CFR Part 60, Subpart III	No changing attributes.
33AIR5	SRIC ENGINES	N/A	63ZZZZ-215	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
54-22-12	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-296	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
54-22-12	INDUSTRIAL PROCESS COOLING TOWERS	N/A	63FFFF-CT	40 CFR Part 63, Subpart FFFF	No changing attributes.
54-22-12	INDUSTRIAL PROCESS COOLING TOWERS	N/A	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
54-22-13	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-296	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
54-22-13	INDUSTRIAL PROCESS	N/A	63YY	40 CFR Part 63, Subpart YY	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	COOLING TOWERS				
54-22-17	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-296	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
54-22-17	INDUSTRIAL PROCESS COOLING TOWERS	N/A	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
54-22-5	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-296	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
54-22-6	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-022	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
54-22-6	INDUSTRIAL PROCESS COOLING TOWERS	N/A	63FFFF-CT	40 CFR Part 63, Subpart FFFF	No changing attributes.
54-22-7	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-022	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
54-22-7	INDUSTRIAL PROCESS COOLING TOWERS	N/A	63FFFF-CT	40 CFR Part 63, Subpart FFFF	No changing attributes.
54-22-9	INDUSTRIAL PROCESS COOLING TOWERS	N/A	R5760-296	30 TAC Chapter 115, HRVOC Cooling Towers	No changing attributes.
54-22-9	INDUSTRIAL PROCESS COOLING TOWERS	N/A	63FFFF-CT	40 CFR Part 63, Subpart FFFF	No changing attributes.
56-61-10	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
56-61-10	FLARES	N/A	R5720-145-AMOC	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
56-61-10	FLARES	N/A	60A-4	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-10	FLARES	N/A	60A-5	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-10	FLARES	N/A	60A-6	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-10	FLARES	N/A	63A-4	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-10	FLARES	N/A	63A-5	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-10	FLARES	N/A	63A-6	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm).
56-61-10	FLARES	N/A	60A-4-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-10	FLARES	N/A	60A-5-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-10	FLARES	N/A	60A-6-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-10	FLARES	N/A	63A-4-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-10	FLARES	N/A	63A-5-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-10	FLARES	N/A	63A-6-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-10	CLOSED VENT SYSTEM AND CONTROL DEVICE	N/A	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
56-61-12	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
56-61-12	FLARES	N/A	R5720-145-AMOC	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
56-61-12	FLARES	N/A	60A-4	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-12	FLARES	N/A	60A-5	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-12	FLARES	N/A	60A-6	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-12	FLARES	N/A	63A-4	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-12	FLARES	N/A	63A-5	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-12	FLARES	N/A	63A-6	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm).
56-61-12	FLARES	N/A	60A-4-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-12	FLARES	N/A	60A-5-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-12	FLARES	N/A	60A-6-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-12	FLARES	N/A	63A-4-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-12	FLARES	N/A	63A-5-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-12	FLARES	N/A	63A-6-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-12	CLOSED VENT SYSTEM AND CONTROL DEVICE	N/A	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
56-61-14	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
56-61-14	FLARES	N/A	R5720-145-AMOC	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
56-61-14	FLARES	N/A	60A-3	40 CFR Part 60, Subpart A	No changing attributes.
56-61-14	FLARES	N/A	63A-3	40 CFR Part 63, Subpart A	No changing attributes.
56-61-14	FLARES	N/A	60A-3-YY	40 CFR Part 63, Subpart YY	No changing attributes
56-61-14	FLARES	N/A	63A-3-YY	40 CFR Part 63, Subpart YY	No changing attributes
56-61-14	CLOSED VENT SYSTEM AND CONTROL DEVICE	N/A	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
56-61-20	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
56-61-20	FLARES	N/A	R5720-145-AMOC	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
56-61-20	FLARES	N/A	60A-3	40 CFR Part 60, Subpart A	No changing attributes.
56-61-20	FLARES	N/A	63A-3	40 CFR Part 63, Subpart A	No changing attributes.
56-61-20	FLARES	N/A	60A-3-YY	40 CFR Part 63, Subpart YY	No changing attributes
56-61-20	FLARES	N/A	63A-3-YY	40 CFR Part 63, Subpart YY	No changing attributes
56-61-20	CLOSED VENT SYSTEM AND CONTROL DEVICE	N/A	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
56-61-22	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
56-61-22	FLARES	N/A	R5720-145-AMOC	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
56-61-22	FLARES	N/A	60A-4	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-22	FLARES	N/A	60A-5	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-22	FLARES	N/A	60A-6	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-22	FLARES	N/A	63A-4	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-22	FLARES	N/A	63A-5	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-22	FLARES	N/A	63A-6	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm).
56-61-22	FLARES	N/A	60A-4-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-22	FLARES	N/A	60A-5-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-22	FLARES	N/A	60A-6-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-22	FLARES	N/A	63A-4-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-22	FLARES	N/A	63A-5-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-22	FLARES	N/A	63A-6-YY	40 CFR Part 63, Subpart YY	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-22	CLOSED VENT SYSTEM AND CONTROL DEVICE	N/A	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
56-61-4	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
56-61-4	FLARES	N/A	R5720-145	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
56-61-4	FLARES	N/A	60A-4	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-4	FLARES	N/A	60A-5	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-4	FLARES	N/A	60A-6	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-4	FLARES	N/A	63A-4	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-4	FLARES	N/A	63A-5	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-4	FLARES	N/A	63A-6	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm).
56-61-4	FLARES	N/A	60A-4-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-4	FLARES	N/A	60A-5-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-4	FLARES	N/A	60A-6-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-4	FLARES	N/A	63A-4-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-4	FLARES	N/A	63A-5-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-4	FLARES	N/A	63A-6-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-8	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
56-61-8	FLARES	N/A	R5720-145	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
56-61-8	FLARES	N/A	60A-4	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-8	FLARES	N/A	60A-5	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-8	FLARES	N/A	60A-6	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-8	FLARES	N/A	63A-4	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					m/sec)
56-61-8	FLARES	N/A	63A-5	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-8	FLARES	N/A	63A-6	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm).
56-61-8	FLARES	N/A	60A-4-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-8	FLARES	N/A	60A-5-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-8	FLARES	N/A	60A-6-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-8	FLARES	N/A	63A-4-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					m/sec)
56-61-8	FLARES	N/A	63A-5-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-8	FLARES	N/A	63A-6-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-9	FLARES	N/A	R1111-1	30 TAC Chapter 111, Visible Emissions	No changing attributes.
56-61-9	FLARES	N/A	R5720-145	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
56-61-9	FLARES	N/A	60A-4	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-9	FLARES	N/A	60A-5	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-9	FLARES	N/A	60A-6	40 CFR Part 60, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-9	FLARES	N/A	63A-4	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-9	FLARES	N/A	63A-5	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-9	FLARES	N/A	63A-6	40 CFR Part 63, Subpart A	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm).
56-61-9	FLARES	N/A	60A-4-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-9	FLARES	N/A	60A-5-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-9	FLARES	N/A	60A-6-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
					400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
56-61-9	FLARES	N/A	63A-4-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is less than 60 ft/s (18.3 m/sec)
56-61-9	FLARES	N/A	63A-5-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is less than or equal to 1000 Btu/scf (37.3 MJ/scm).
56-61-9	FLARES	N/A	63A-6-FFFF	40 CFR Part 63, Subpart FFFF	Flare Exit Velocity = Flare exit velocity is greater than or equal to 60 ft/s (18.3 m/sec) but less than 400 ft/s (122 m/sec)., Heating Value of Gas = Heating value is greater than 1000 Btu/scf (37.3 MJ/scm)
68.1-0-0	FUGITIVE EMISSION UNITS	N/A	R5780-ALL	30 TAC Chapter 115, HRVOC Fugitive Emissions	No changing attributes.
68.1-0-0	FUGITIVE EMISSION UNITS	N/A	R5352-ALL	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	No changing attributes.
68.1-0-0	FUGITIVE EMISSION UNITS	N/A	63FFFF-FUG	40 CFR Part 63, Subpart FFFF	No changing attributes.
68.1-0-0	FUGITIVE EMISSION UNITS	N/A	63H-ALL	40 CFR Part 63, Subpart H	Title 40 CFR Part 63, Subpart H Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of 63.11.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
68.1-0-0	FUGITIVE EMISSION UNITS	N/A	63H-ALL-FFFF	40 CFR Part 63, Subpart H	Title 40 CFR Part 63, Subpart H Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of MACT Subpart FFFF.
68.1-0-0	FUGITIVE EMISSION UNITS	N/A	63H-ALL-YY	40 CFR Part 63, Subpart H	Title 40 CFR Part 63, Subpart H Fugitive Unit Description = Site wide fugitives where fugitive components are routed to the flare and complying with the applicable provisions of Ethylene MACT (Subpart YY).
68.1-0-0	FUGITIVE EMISSION UNITS	N/A	63YY-FUG	40 CFR Part 63, Subpart YY	No changing attributes.
ADM_EMGGEN	SRIC ENGINES	N/A	R7300-003	30 TAC Chapter 117, Subchapter B	No changing attributes.
ADM_EMGGEN	SRIC ENGINES	N/A	60III-9	40 CFR Part 60, Subpart III	No changing attributes.
ADM_EMGGEN	SRIC ENGINES	N/A	63ZZZZ-215	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
BSENGINE	SRIC ENGINES	N/A	R7300-010	30 TAC Chapter 117, Subchapter B	No changing attributes.
BSENGINE	SRIC ENGINES	N/A	60III-12	40 CFR Part 60, Subpart III	No changing attributes.
BSENGINE	SRIC ENGINES	N/A	63ZZZZ-10	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
DTANK24	LOADING/UNLOADING OPERATIONS	N/A	R5211-002	30 TAC Chapter 115, Loading and Unloading of VOC	No changing attributes.
DTANK33	LOADING/UNLOADING	N/A	R5211-002	30 TAC Chapter 115,	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	OPERATIONS			Loading and Unloading of VOC	
GRP-22-36	PROCESS HEATERS/FURNACES	22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-6, 22-36-7, 22-36-8	R7300-107	30 TAC Chapter 117, Subchapter B	No changing attributes.
GRP-22-36	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-6, 22-36-7, 22-36-8	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
GRP-24-36	PROCESS HEATERS/FURNACES	24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-9	R7300-209	30 TAC Chapter 117, Subchapter B	No changing attributes.
GRP-24-36	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-9	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
GRP-33-36	PROCESS HEATERS/FURNACES	33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9	R7300-209	30 TAC Chapter 117, Subchapter B	No changing attributes.
GRP-33-36	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9	63YY	40 CFR Part 63, Subpart YY	No changing attributes.
GRP-LUBEOIL	STORAGE TANKS/VESSELS	10-95-328, 10-95- 357, 10-95-3572, 10-95-357A, 18-95-	R5112-3	30 TAC Chapter 115, Storage of VOCs	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
		54, 22-95-100, 22-95-101, 22-95-120, 22-95-130, 24-95-304, 24-95-305, 24-95-306, 24-95-307, 24-95-319, 24-95-320, 24-95-321, 33-95-15, 33-95-17, 33-95-19, 33-95-390, 33-95-392, 33-95-394			
GRP-SUMPS	CLOSED VENT SYSTEM AND CONTROL DEVICE	10.1-SUMP1, 12-SUMP1, 21/22-SUMP1, 24-SUMP3, 33-SUMP1, 33-SUMP2, 33-SUMP3, 33-SUMP4	61FF-530	40 CFR Part 61, Subpart FF	No changing attributes.
GRP24.1-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	24-95-219, 24-95-95	R5121- 21AMOC145	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
GRP24.1-PV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	24-95-219, 24-95-95	63GPV-4-YY	40 CFR Part 63, Subpart G	No changing attributes.
GRPHRVOCAN	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	10ABC-AV, 10D-AV, 12-AV, 18-AV, 21-AV, 22-AV, 24-AV, 33-AV	R5720-193	30 TAC Chapter 115, HRVOC Vent Gas	No changing attributes.
GRPHRVOCAN	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	10ABC-AV, 10D-AV, 12-AV, 18-AV, 21-AV, 22-AV, 24-AV, 33-AV	R5121-4	30 TAC Chapter 115, Vent Gas Controls	No changing attributes.
GRPMONBPV	CHEMICAL	10.1-95-057, 10.1-	63FFFF-G1BPV-	40 CFR Part 63, Subpart	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	MANUFACTURING PROCESS	95-152, 10.1-95- 157, 10.1-95-251, 10.2-95-305, 10.2- 95-344	4F	FFFF	
GRPMONCPV	EMISSION POINTS/STATIONARY VENTS/PROCESS VENTS	10.1-95-012, 10.1- 95-062, 10.1-95- 151.1, 10.1-95-258, 10.1-95-272, 10.2- 95-319, 10.2-95-327	63FFFF-G1CPV- 4F	40 CFR Part 63, Subpart FFFF	No changing attributes.
GTANKAG	LOADING/UNLOADING OPERATIONS	N/A	R5211-015	30 TAC Chapter 115, Loading and Unloading of VOC	No changing attributes.
LDUNLOAD	LOADING/UNLOADING OPERATIONS	N/A	R5211	30 TAC Chapter 115, Loading and Unloading of VOC	No changing attributes.
NGLEMGTK	LOADING/UNLOADING OPERATIONS	N/A	R5211-002	30 TAC Chapter 115, Loading and Unloading of VOC	No changing attributes.
NGLEMGEN	SRIC ENGINES	N/A	R7300-003	30 TAC Chapter 117, Subchapter B	No changing attributes.
NGLEMGEN	SRIC ENGINES	N/A	60III-7	40 CFR Part 60, Subpart III	No changing attributes.
NGLEMGEN	SRIC ENGINES	N/A	63ZZZZ-215	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
NGL_DITCH	SRIC ENGINES	N/A	R7300-011	30 TAC Chapter 117, Subchapter B	No changing attributes.
NGL_DITCH	SRIC ENGINES	N/A	60III-11	40 CFR Part 60, Subpart III	No changing attributes.
NGL_DITCH	SRIC ENGINES	N/A	63ZZZZ-11	40 CFR Part 63, Subpart ZZZZ	No changing attributes.
PRO-24DAC	CHEMICAL	N/A	63F-1	40 CFR Part 63, Subpart F	No changing attributes.

Unit Summary

Unit/Group/ Process ID No.	Unit Type	Group/Inclusive Units	SOP Index No.	Regulation	Requirement Driver
	MANUFACTURING PROCESS				

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
10.1-0-0	EU	R5780-<5wt	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						contains less than 10% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.			
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains contacting a fluid with TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		[G]§ 115.356(3)(C) § 115.356(5)	
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5)	No pressure relief valves contacting a fluid with TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355 § 115.357(1)	[G]§ 115.356(3)(C) § 115.356(5)	
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B)	No open-ended valves or lines contacting a fluid with TVP less than or equal to 0.044 psia	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	(heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2)	No valves contacting a fluid with TVP less than or equal to 0.044	§ 115.354(1) § 115.354(2) § 115.354(5)	§ 115.352(7) § 115.356 [G]§ 115.356(1)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2)	No flanges or other connectors contacting a fluid with TVP less	§ 115.354(1) § 115.354(11) § 115.354(3)	§ 115.352(7) § 115.356 [G]§ 115.356(1)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.1-0-0	EU	R5352-	VOC	30 TAC Chapter	§ 115.352(1)(A)	No agitators	[G]§ 115.355	§ 115.352(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL		115, Pet. Refinery & Petrochemicals	§ 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(8)	contacting a fluid with TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.357(1)	§ 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(8)	No agitators contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.1-0-0	EU	R5352-	VOC	30 TAC Chapter	§ 115.352(1)(B)	No compressor seals	[G]§ 115.355	§ 115.352(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL		115, Pet. Refinery & Petrochemicals	§ 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	in hydrogen service with and the hydrogen content can be expected to always exceed 50.0% by volume shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		§ 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals that are equipped with a shaft sealing system that prevents or detects emissions of VOCs from the seal shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						sound.			
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals contacting a fluid with TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						sound.			
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(iii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals that are equipped with a shaft sealing system that prevents or detects emissions of VOCs from the seal shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(iii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No pump seals contacting a fluid with TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						on sight, smell, or sound.			
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	If the owner or operator elects to use the alternative work practice in §115.358, no component shall be allowed to have a VOC leak, detected as defined in §115.358, for more than 15 days after discovery. This includes any leak detected using the alternative work practice on a component that is subject to the	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						requirements of this division but not specifically selected for alternative work practice monitoring.			
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Conservation vents or other devices on atmospheric storage tanks that are actuated either by a vacuum or a pressure of no more than 2.5 psig, pressure relief valves equipped with a rupture disk or venting to a control device, components in continuous vacuum service, and valves that are not externally regulated (such as in-line check valves) are exempt from the requirements of this division, except that each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						requirements of this division except §115.356(3)(C) of this title.			
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	For valves in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-3(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-3(b) § 60.482-3(c) § 60.482-3(d) § 60.482-3(e)(1) § 60.482-3(e)(2) § 60.482-3(f) § 60.482-3(g)(1) § 60.482-3(g)(2) § 60.482-3(h) [G]§ 60.482-3(i) § 60.482-3(j) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of VOC to the atmosphere, except as provided in §60.482-1(c) and paragraphs (h), (i), and (j) of this section.	§ 60.482-3(e)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60,	§ 60.482-2(b)(1)	If an instrument	§ 60.482-1(f)(1)	§ 60.482-1(g)	§ 60.487(a)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				Subpart VV	§ 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-2(b)(2) § 60.482-2(c)(1) [G]§ 60.482-2(c)(2) § 60.482-2(d) [G]§ 60.482-2(d)(1) § 60.482-2(d)(2) § 60.482-2(d)(3) [G]§ 60.482-2(d)(4) [G]§ 60.482-2(d)(5) [G]§ 60.482-2(d)(6) [G]§ 60.482-2(e) § 60.482-2(f) [G]§ 60.482-2(g) § 60.482-2(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	reading of 10,000 ppm or greater is measured for pumps in light liquid service, a leak is detected.	§ 60.482-1(f)(2) [G]§ 60.482-1(f)(3) [G]§ 60.482-2(a) [G]§ 60.482-2(b)(2) [G]§ 60.482-2(d)(4) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) [G]§ 60.486(h) § 60.486(j)	[G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-1(e) § 60.486(k)	Equipment that an owner or operator designates as being in VOC service less than 300 hours (hr)/yr is excluded from the requirements of §§ 60.482-2 through 60.482-10 if it is identified as required in §60.486(e)(6) and it meets any of the conditions specified in paragraphs (e)(1) through (3) of this section. §60.482-1(e)(1)-(3)	None	§ 60.486 [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(6) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-10(d) § 60.18 § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-10(m) § 60.486(k)	Flares used to comply with this subpart shall comply with the requirements of §60.18.	§ 60.482-10(e) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f) [G]§ 60.485(g)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For flanges and other connectors, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-10(g) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-10(f) § 60.482-10(h) § 60.482-10(i) [G]§ 60.482-10(j) [G]§ 60.482-10(k) § 60.482-10(m) § 60.486(k)	Leaks, as indicated by the specified instrument or by visual inspections, shall be repaired as soon as practicable except as provided in § 60.482-10(h). § 60.482-10(g)(1)-(2)	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.482-10(l) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2)	For pressure relief devices in light liquid or in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)				
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-7(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-7(d)(1) § 60.482-7(d)(2) [G]§ 60.482-7(e) [G]§ 60.482-7(f) [G]§ 60.482-7(g) [G]§ 60.482-7(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	If an instrument reading of 10,000 ppm or greater is measured for valves in gas/vapor service and in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) § 60.482-7(a)(1) [G]§ 60.482-7(a)(2) § 60.482-7(c)(1)(i) § 60.482-7(c)(1)(ii) § 60.482-7(c)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-6(a)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-6(a)(2) § 60.482-6(b) § 60.482-6(c) § 60.482-6(d) § 60.482-6(e) § 60.486(k)	Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in §60.482-1(c) and paragraphs (d) and (e) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-5(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-5(b) § 60.482-5(c) § 60.486(k)	Each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in §60.482-1(c) and	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						paragraph (c) of this section.			
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-4(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-4(b)(1) § 60.482-4(c) § 60.482-4(d)(1) § 60.482-4(d)(2) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in § 60.485(c).	§ 60.482-4(b)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(3) [G]§ 60.486(e)(4) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-1(d) § 60.486(k)	Equipment that is in vacuum service is excluded from the requirements of §60.482-2 to §60.482-10, if it is identified as required in §60.486(e)(5).	None	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(5) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	For pumps in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-7(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-7(d)(1) § 60.482-7(d)(2) [G]§ 60.482-7(e) [G]§ 60.482-7(f) [G]§ 60.482-7(g) [G]§ 60.482-7(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	If an instrument reading of 10,000 ppm or greater is measured for valves in gas/vapor service and in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) § 60.482-7(a)(1) [G]§ 60.482-7(a)(2) § 60.482-7(c)(1)(i) § 60.482-7(c)(1)(ii) § 60.482-7(c)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For pressure relief devices in light liquid or in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-4(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-4(b)(1) § 60.482-4(c) § 60.482-4(d)(1) § 60.482-4(d)(2) § 60.482-9(a) § 60.482-9(b)	Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm	§ 60.482-4(b)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(3) [G]§ 60.486(e)(4) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.486(k)	above background, as determined by the methods specified in § 60.485(c).			
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-10(g) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-10(f) § 60.482-10(h) § 60.482-10(i) [G]§ 60.482-10(j) [G]§ 60.482-10(k) § 60.482-10(m) § 60.486(k)	Leaks, as indicated by the specified instrument or by visual inspections, shall be repaired as soon as practicable except as provided in § 60.482-10(h). § 60.482-10(g)(1)-(2)	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.482-10(l) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-5(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-5(b) § 60.482-5(c) § 60.486(k)	Each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in §60.482-1(c) and paragraph (c) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For flanges and other connectors, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	For valves in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	[G]§ 63.2535(m) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-10(m) § 60.486(k) [G]§ 63.2450(e)(5) [G]§ 63.670 [G]§ 63.671	Flares subject to §60.18 or §63.11 and used as a control device for emission points subject to emission limits/work practice standards in 40 CFR Part 63, Subpart FFFF are required to comply only with §63.2450(e)(5).	§ 60.482-10(e) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f) [G]§ 60.485(g) [G]§ 63.670 [G]§ 63.671	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j) [G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-1(e) § 60.486(k)	Equipment that an owner or operator designates as being in VOC service less than 300 hours (hr)/yr is excluded from the requirements of §§ 60.482-2 through 60.482-10 if it is identified as required in §60.486(e)(6) and it	None	§ 60.486 [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(6) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						meets any of the conditions specified in paragraphs (e)(1) through (3) of this section. §60.482-1(e)(1)-(3)			
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-2(b)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-2(b)(2) § 60.482-2(c)(1) [G]§ 60.482-2(c)(2) § 60.482-2(d) [G]§ 60.482-2(d)(1) § 60.482-2(d)(2) § 60.482-2(d)(3) [G]§ 60.482-2(d)(4) [G]§ 60.482-2(d)(5) [G]§ 60.482-2(d)(6) [G]§ 60.482-2(e) § 60.482-2(f) [G]§ 60.482-2(g) § 60.482-2(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	If an instrument reading of 10,000 ppm or greater is measured for pumps in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) [G]§ 60.482-2(a) [G]§ 60.482-2(b)(2) [G]§ 60.482-2(d)(4) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-3(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-3(b) § 60.482-3(c) § 60.482-3(d) § 60.482-3(e)(1) § 60.482-3(e)(2)	Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of VOC to the atmosphere, except as provided in	§ 60.482-3(e)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-3(f) § 60.482-3(g)(1) § 60.482-3(g)(2) § 60.482-3(h) [G]§ 60.482-3(i) § 60.482-3(j) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	§60.482-1(c) and paragraphs (h), (i), and (j) of this section.		§ 60.486(j)	
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	For pumps in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-6(a)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-6(a)(2) § 60.482-6(b) § 60.482-6(c) § 60.482-6(d) § 60.482-6(e) § 60.486(k)	Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in §60.482-1(c) and paragraphs (d) and (e) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-FFFF	VOC	40 CFR Part 60, Subpart VV	§ 60.482-1(d) § 60.486(k)	Equipment that is in vacuum service is excluded from the requirements of §60.482-2 to §60.482-	None	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(5) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						10, if it is identified as required in §60.486(e)(5).			
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-10(g) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-10(f) § 60.482-10(h) § 60.482-10(i) [G]§ 60.482-10(j) [G]§ 60.482-10(k) § 60.482-10(m) § 60.486(k)	Leaks, as indicated by the specified instrument or by visual inspections, shall be repaired as soon as practicable except as provided in § 60.482-10(h). § 60.482-10(g)(1)-(2)	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.482-10(l) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 63.1100(g)(7) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-10(m) § 60.486(k) [G]§ 63.1103(e)(4) [G]§ 63.670	Flares subject to §60.18 or §63.11 and used as a control device for emission points subject to §63.1103(e) are required to comply only with §63.1103(e)(4).	§ 60.482-10(e) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f) [G]§ 60.485(g) [G]§ 63.671	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j) [G]§ 63.1109(e)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4)
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-1(e) § 60.486(k)	Equipment that an owner or operator designates as being in VOC service less than 300 hours (hr)/yr is excluded from the requirements of §§ 60.482-2 through 60.482-10 if it is identified as required in §60.486(e)(6) and it meets any of the conditions specified in paragraphs (e)(1) through (3) of this	None	§ 60.486 [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(6) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						section. §60.482-1(e)(1)-(3)			
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-2(b)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-2(b)(2) § 60.482-2(c)(1) [G]§ 60.482-2(c)(2) § 60.482-2(d) [G]§ 60.482-2(d)(1) § 60.482-2(d)(2) § 60.482-2(d)(3) [G]§ 60.482-2(d)(4) [G]§ 60.482-2(d)(5) [G]§ 60.482-2(d)(6) [G]§ 60.482-2(e) § 60.482-2(f) [G]§ 60.482-2(g) § 60.482-2(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	If an instrument reading of 10,000 ppm or greater is measured for pumps in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) [G]§ 60.482-2(a) [G]§ 60.482-2(b)(2) [G]§ 60.482-2(d)(4) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-3(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-3(b) § 60.482-3(c) § 60.482-3(d) § 60.482-3(e)(1) § 60.482-3(e)(2) § 60.482-3(f) § 60.482-3(g)(1) § 60.482-3(g)(2) § 60.482-3(h)	Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of VOC to the atmosphere, except as provided in §60.482-1(c) and paragraphs (h), (i), and (j) of this section.	§ 60.482-3(e)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 60.482-3(i) § 60.482-3(j) § 60.482-9(a) § 60.482-9(b) § 60.486(k)				
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	For valves in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	For pumps in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-1(d) § 60.486(k)	Equipment that is in vacuum service is excluded from the requirements of	None	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(5)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						§60.482-2 to §60.482-10, if it is identified as required in §60.486(e)(5).		§ 60.486(j)	
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-4(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-4(b)(1) § 60.482-4(c) § 60.482-4(d)(1) § 60.482-4(d)(2) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in § 60.485(c).	§ 60.482-4(b)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(3) [G]§ 60.486(e)(4) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-5(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-5(b) § 60.482-5(c) § 60.486(k)	Each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in §60.482-1(c) and paragraph (c) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-6(a)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-6(a)(2) § 60.482-6(b) § 60.482-6(c) § 60.482-6(d) § 60.482-6(e) § 60.486(k)	Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in §60.482-1(c) and paragraphs (d) and (e) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-7(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-7(d)(1) § 60.482-7(d)(2) [G]§ 60.482-7(e) [G]§ 60.482-7(f) [G]§ 60.482-7(g) [G]§ 60.482-7(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	If an instrument reading of 10,000 ppm or greater is measured for valves in gas/vapor service and in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) § 60.482-7(a)(1) [G]§ 60.482-7(a)(2) § 60.482-7(c)(1)(i) § 60.482-7(c)(1)(ii) § 60.482-7(c)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For pressure relief devices in light liquid or in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
10.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a)	For flanges and other connectors, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-9(b) § 60.486(k)				
10.1-0-0	EU	63FFFF-FUG	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2480(a) The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart FFFF
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	components.			
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer,	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.		§ 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above methane for all	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	components.			
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic	None	§ 115.786(e) § 115.786(g)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).			
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1)	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.		§ 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.787(g)				
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	
10.2-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material,	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	[G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(iii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(iii) § 115.352(2)(C)(iii) § 115.352(3)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10)	No component shall be allowed to have a VOC leak, for more	§ 115.354(1) § 115.354(11) § 115.354(13)(A)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10)	No process drains shall be allowed to have a VOC leak, for	§ 115.354(1) § 115.354(10) § 115.354(5)	§ 115.352(7) § 115.354(10) § 115.356	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(6) § 115.354(9) [G]§ 115.355	[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.			
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.			
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(A) § 115.352(1)	No valves shall be allowed to have a	§ 115.354(1) § 115.354(2)	§ 115.352(7) § 115.356	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(5)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						sound.			
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
10.2-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
10.2-0-0	EU	63FFFF-FUG	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2480(a) The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart FFFF
10.3-0-0	EU	R5780-<5wt	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(1) § 115.357(8)	process fluid based on sight, smell, or sound.			
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355 § 115.357(1)	[G]§ 115.356(3)(C) § 115.356(5)	
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						process fluid based on sight, smell, or sound.			
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10)	No valves shall be allowed to have a VOC leak, for more	§ 115.354(1) § 115.354(2) § 115.354(5)	§ 115.352(7) § 115.356 [G]§ 115.356(1)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(8)	methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(A) § 115.352(1)	No agitators shall be allowed to have a	§ 115.354(1) § 115.354(5)	§ 115.352(7) § 115.356	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						from the requirements of this division except §115.356(3)(C) of this title.			
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						title.			
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.358(h)	requirements of this division but not specifically selected for alternative work practice monitoring.			
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None
10.3-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10)	No pressure relief valves shall be allowed to have a	§ 115.354(1) § 115.354(2) § 115.354(4)	§ 115.352(7) § 115.356 [G]§ 115.356(1)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
10.3-0-0	EU	63FFFF-FUG	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2480(a) The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart FFFF
10ABC-PV	EP	R5720-194	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(f) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	All sites that are subject to this division and that are located in the Houston/Galveston/Brazoria area as defined in §115.10 of this title (relating to Definitions), excluding Harris County, are exempt from § 115.722(b) and (c)(2) of this title, except as provided in § 115.729(a)(3) of this	§ 115.725(n) ** See CAM Summary	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						title (relating to Counties and Compliance Schedules).			
10ABC-PV	EP	R5121-12	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(B) § 60.18	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(B) § 115.126(2) ** See CAM Summary	§ 115.126 § 115.126(1) § 115.126(1)(B) § 115.126(2)	None
10D-PV	EP	R5720-194	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(f) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	All sites that are subject to this division and that are located in the Houston/Galveston/Brazoria area as defined in §115.10 of this title (relating to Definitions), excluding Harris County, are exempt from § 115.722(b) and (c)(2) of this title, except as provided in § 115.729(a)(3) of this title (relating to Counties and Compliance Schedules).	§ 115.725(n) ** See CAM Summary	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
10D-PV	EP	R5121-12	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(B) § 60.18	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(B) § 115.126(2) ** See CAM Summary	§ 115.126 § 115.126(1) § 115.126(1)(B) § 115.126(2)	None
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.786(g)	
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	sealless pumps may be used to satisfy the requirements of this subsection.			
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	than 500 ppmv above background as methane for all components.		§ 115.786(g)	
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.788(g)				
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3)	Process drains within a petroleum refinery; synthetic organic chemical, polymer,	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.		§ 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
12-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
12-0-0	EU	R5352-	VOC	30 TAC Chapter	§ 115.352(1)(B)	No compressor seals	§ 115.354(1)	§ 115.352(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL		115, Pet. Refinery & Petrochemicals	§ 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(iii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.			
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.			
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(A) § 115.352(1)	No agitators shall be allowed to have a	§ 115.354(1) § 115.354(5)	§ 115.352(7) § 115.356	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(8)	above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
12-0-0	EU	R5352-	VOC	30 TAC Chapter	§ 115.352(1)(A)	No valves shall be	§ 115.354(1)	§ 115.352(7)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL		115, Pet. Refinery & Petrochemicals	§ 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	[G]§ 115.356(3)(C) § 115.356(5)	
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
12-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						on sight, smell, or sound.			
12-0-0	EU	63YY-FUG	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
12-95-61	EU	R5211-096	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.212(a)(3) § 115.212(a)(2) § 115.212(a)(3)(A) § 115.212(a)(3)(A)(i) § 115.212(a)(3)(B) [G]§ 115.212(a)(3)(C) § 115.212(a)(3)(D) § 115.214(a)(1)(B) § 115.214(a)(1)(C)	All land-based VOC transfer to or from transport vessels shall be conducted in the manner specified for leak-free operations.	§ 115.212(a)(3)(B) § 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.214(a)(1)(A)(ii) § 115.214(a)(1)(A)(iii)	§ 115.216 § 115.216(3)(A) § 115.216(3)(A)(i) § 115.216(3)(A)(iii)	None
12-95-61	EU	R5112-7	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.112(e)(1)	No person shall place, store, or hold VOC in any storage tank unless the storage tank is capable of maintaining working pressure sufficient at all times to prevent any vapor or gas loss to the atmosphere or is in compliance with the control requirements specified in Table 1 of this paragraph for VOC other than crude oil and condensate or	[G]§ 115.117 ** See Periodic Monitoring Summary	§ 115.118(a)(5) § 115.118(a)(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						Table 2 of subsection (a)(1) of this paragraph for crude oil and condensate.			
12-PV	EP	R5720-194	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(f) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	All sites that are subject to this division and that are located in the Houston/Galveston/Brazoria area as defined in §115.10 of this title (relating to Definitions), excluding Harris County, are exempt from § 115.722(b) and (c)(2) of this title, except as provided in § 115.729(a)(3) of this title (relating to Counties and Compliance Schedules).	§ 115.725(n) ** See CAM Summary	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)
12-PV	EP	R5121-12	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(B) § 60.18	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(B) § 115.126(2) ** See CAM Summary	§ 115.126 § 115.126(1) § 115.126(1)(B) § 115.126(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
12OWSENG_1	EU	R7300-011	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(B)	CO emissions must not exceed 3.0 g/hp-hr for stationary internal combustion engines.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.8000(b) § 117.8000(c) § 117.8000(c)(2) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
12OWSENG_1	EU	R7300-011	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(9)(E)(v)(III) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) [G]§ 117.310(f) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(2)(C) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.340(p)(2)(A) § 117.340(p)(2)(B) § 117.340(p)(2)(C) § 117.8000(b) § 117.8000(c) § 117.8000(c)(1) § 117.8000(c)(3)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(3)(B) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) § 117.340(p)(2)(D) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)		
12OWSENG _1	EU	60III-11	CO	40 CFR Part 60, Subpart III	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 37 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 5.0 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	§ 60.4209(b)	§ 60.4214(c)	None
12OWSENG _1	EU	60III-11	NMHC and NO _x	40 CFR Part 60, Subpart III	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 75 KW but less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2007	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						- 2013 model year must comply with an NMHC+NOx emission limit of 4.0 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102.			
12OWSENG_1	EU	60III-11	PM	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 75 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2007 - 2011 model year must comply with a PM emission limit of 0.30g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a).	§ 60.4209(b)	§ 60.4214(c)	None
12OWSENG_1	EU	60III-11	PM (Opacity)	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.113(a)(1) § 89.113(a)(2) § 89.113(a)(3)	Owners and operators of non-emergency stationary CI ICE with a displacement of less than 10 liters per cylinder and is not a constant-speed engine and is a 2007 model year and later must comply with the following opacity emission limits: 20% during the	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						acceleration mode, 15% during the lugging mode, and 50% during the peaks in either the acceleration or lugging modes as stated in 40 CFR 60.4201(a)-(c) and 40 CFR 89.113(a)(1)-(3) and 40 CFR 1039.105(b)(1)-(3).			
12OWSENG_1	EU	63ZZZZ-11	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(c)	Stationary RICE subject to Regulations under 40 CFR Part 60. An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines as applicable. No further requirements apply for such engines under this part.	None	None	None
12OWSENG_2	EU	R7300-011	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(B)	CO emissions must not exceed 3.0 g/hp-hr for stationary internal combustion	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						engines.	§ 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.8000(b) § 117.8000(c) § 117.8000(c)(2) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)	§ 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(9)	§ 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
12OWSENG_2	EU	R7300-011	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(9)(E)(v)(III) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) [G]§ 117.310(f) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(2)(C) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.340(p)(2)(A) § 117.340(p)(2)(B) § 117.340(p)(2)(C) § 117.8000(b) § 117.8000(c) § 117.8000(c)(1) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(3)(B) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) § 117.340(p)(2)(D) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)		
12OWSENG_2	EU	60IIII-11	CO	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 37 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 5.0 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	§ 60.4209(b)	§ 60.4214(c)	None
12OWSENG_2	EU	60IIII-11	NMHC and NO _x	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 75 KW but less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2007 - 2013 model year must comply with an NMHC+NO _x emission limit of 4.0 g/KW-hr as	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102.			
12OWSENG_2	EU	60III-11	PM	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 75 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2007 - 2011 model year must comply with a PM emission limit of 0.30g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a).	§ 60.4209(b)	§ 60.4214(c)	None
12OWSENG_2	EU	60III-11	PM (Opacity)	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.113(a)(1) § 89.113(a)(2) § 89.113(a)(3)	Owners and operators of non-emergency stationary CI ICE with a displacement of less than 10 liters per cylinder and is not a constant-speed engine and is a 2007 model year and later must comply with the following opacity emission limits: 20% during the acceleration mode, 15% during the lugging mode, and 50% during the peaks	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						in either the acceleration or lugging modes as stated in 40 CFR 60.4201(a)-(c) and 40 CFR 89.113(a)(1)-(3) and 40 CFR 1039.105(b)(1)-(3).			
12OWSENG_2	EU	63ZZZZ-11	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(c)	Stationary RICE subject to Regulations under 40 CFR Part 60. An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines as applicable. No further requirements apply for such engines under this part.	None	None	None
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	screening concentration greater than 500 ppmv above background as methane for all components.		§ 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.788(g)				
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive	None	§ 115.786(e) § 115.786(g)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).			
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	[G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i)	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	sealless pumps may be used to satisfy the requirements of this subsection.			
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3)	Compressor seals within a petroleum refinery; synthetic organic chemical,	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(g)(2) § 115.782(d)(2)	§ 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
18-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						weight are exempt from the requirements of this division except §115.356(3)(C) of this title.			
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						§115.356(3)(C) of this title.			
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.358(c)(1) [G]§ 115.358(h)	subject to the requirements of this division but not specifically selected for alternative work practice monitoring.			
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(A) § 115.352(1)	No agitators shall be allowed to have a	§ 115.354(1) § 115.354(10)	§ 115.352(7) § 115.354(10)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
18-0-0	EU	R5352-	VOC	30 TAC Chapter	§ 115.352(1)(A)	No valves shall be	§ 115.354(1)	§ 115.352(7)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL		115, Pet. Refinery & Petrochemicals	§ 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		§ 115.356(5)	
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						sound.			
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.357(1)	§ 115.356(5)	
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						sound.			
18-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
18-PV	EP	R5720-194	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(f) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	All sites that are subject to this division and that are located in the Houston/Galveston/Brazoria area as defined in §115.10 of this title (relating to Definitions), excluding Harris County, are exempt from § 115.722(b) and (c)(2) of this title, except as provided in § 115.729(a)(3) of this title (relating to Counties and Compliance Schedules).	§ 115.725(n) ** See CAM Summary	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)
18-PV	EP	R5121-12	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(B)	Vent gas streams affected by §115.121(a)(1) must	[G]§ 115.125 § 115.126(1) § 115.126(1)(B)	§ 115.126 § 115.126(1) § 115.126(1)(B)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.18	be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	§ 115.126(2) ** See CAM Summary	§ 115.126(2)	
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.787(g)				
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.782(d)(2)	§ 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	methane for all components.			
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.788(g)				
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c).	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.			
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)		
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							[G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)		
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
21-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.357(3) § 115.357(8)	dripping or exuding of process fluid based on sight, smell, or sound.			
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer,	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.			
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						§115.356(3)(C) of this title.			
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10)	No component shall be allowed to have a VOC leak, for more	§ 115.354(1) § 115.354(11) § 115.354(13)(A)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10)	No agitators shall be allowed to have a VOC leak, for more	§ 115.354(1) § 115.354(10) § 115.354(5)	§ 115.352(7) § 115.354(10) § 115.356	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(12) § 115.357(8)	above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(A) § 115.352(1)	No open-ended valves or lines shall	§ 115.354(1) § 115.354(10)	§ 115.352(7) § 115.354(10)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	[G]§ 115.356(3)(C) § 115.356(5)	
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						sound.			
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
21-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
21-0-0	EU	63FFFF-FUG	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2480(a) The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart FFFF
21-95-006	EP	63FFFF-G1BPVa4 F	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2460(a) § 63.2450(b) [G]§ 63.2450(e)(5) § 63.2460(a)-Table 2.1.c § 63.2460(b) § 63.2460(c)(7) [G]§ 63.2535(m) [G]§ 63.670 § 63.982(b) § 63.983(a)(1) § 63.983(a)(2) § 63.983(d)(1) § 63.983(d)(1)(i) [G]§ 63.983(d)(2) § 63.983(d)(3) § 63.987(a) § 63.997(b)(1) § 63.997(c)(3)	You must meet each emission limit in Table 2 to this subpart that applies to you, and you must meet each applicable requirement specified in §63.2460(b) and (c).	[G]§ 63.115(d)(2)(v) § 63.115(d)(3)(iii) § 63.2460(c)(2)(i) § 63.2460(c)(2)(ii) § 63.2460(c)(2)(vi) § 63.2460(c)(3) § 63.2460(c)(3)(i) § 63.2460(c)(4) § 63.2460(c)(6) [G]§ 63.671 § 63.983(b) [G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3) [G]§ 63.983(c)(1) § 63.983(c)(2) § 63.983(c)(3) § 63.983(d)(1) § 63.983(d)(1)(ii) § 63.987(c) § 63.997(b) § 63.997(b)(1) § 63.997(c)(2) § 63.997(c)(3) § 63.997(c)(3)(i) § 63.997(c)(3)(ii)	§ 63.2450(f)(2) § 63.2450(f)(2)(i) § 63.2450(f)(2)(ii) § 63.2460(c)(3)(ii) § 63.2460(c)(6) § 63.2525(g) [G]§ 63.2525(m) [G]§ 63.671 § 63.983(b) [G]§ 63.983(d)(2) § 63.987(c) § 63.998(a)(1)(ii) § 63.998(a)(1)(iii)(A) § 63.998(a)(1)(iii)(B) [G]§ 63.998(b)(1) [G]§ 63.998(b)(2) [G]§ 63.998(b)(3) [G]§ 63.998(b)(5) [G]§ 63.998(c)(1) [G]§ 63.998(d)(1) § 63.998(d)(3)(i) § 63.998(d)(3)(ii) § 63.998(d)(5)	§ 63.2450(f)(2)(ii) § 63.2450(q) § 63.2460(c)(3)(i) § 63.2520(d)(3) [G]§ 63.2520(e)(11) § 63.997(b)(1) § 63.997(c)(3) § 63.998(a)(1)(iii)(A) [G]§ 63.998(b)(3) [G]§ 63.999(a)(1) § 63.999(b)(5) § 63.999(c)(1) § 63.999(c)(2)(i) § 63.999(c)(3) § 63.999(c)(6) [G]§ 63.999(c)(6)(i) § 63.999(c)(6)(iv) [G]§ 63.999(d)(1) [G]§ 63.999(d)(2)
21-95-19	EU	R5211-096	VOC	30 TAC Chapter 115, Loading and	§ 115.212(a)(3) § 115.212(a)(2)	All land-based VOC transfer to or from	§ 115.212(a)(3)(B) § 115.214(a)(1)(A)	§ 115.216 § 115.216(3)(A)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				Unloading of VOC	§ 115.212(a)(3)(A) § 115.212(a)(3)(A)(i) § 115.212(a)(3)(B) [G]§ 115.212(a)(3)(C) § 115.212(a)(3)(D) § 115.214(a)(1)(B) § 115.214(a)(1)(C)	transport vessels shall be conducted in the manner specified for leak-free operations.	§ 115.214(a)(1)(A)(i) § 115.214(a)(1)(A)(ii) § 115.214(a)(1)(A)(iii)	§ 115.216(3)(A)(i) § 115.216(3)(A)(iii)	
21-95-19	EU	R5112-10	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.112(e)(1) § 115.112(e)(3) § 115.112(e)(3)(C) § 60.18	No person shall place, store, or hold VOC in any storage tank unless the storage tank is capable of maintaining working pressure sufficient at all times to prevent any vapor or gas loss to the atmosphere or is in compliance with the control requirements specified in Table 1 of this paragraph for VOC other than crude oil and condensate or Table 2 of subsection (a)(1) of this paragraph for crude oil and condensate.	§ 115.115(a) § 115.115(a)(6) § 115.116(a)(2) [G]§ 115.117	§ 115.118(a)(4) § 115.118(a)(4)(F) § 115.118(a)(5) § 115.118(a)(7)	None
21-95-19	EU	R5112-10AMOC145	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.113 § 115.910	Alternate means of compliance with the applicable control requirements or exemption criteria in this division may be approved per 30 TAC §115.910, if emission reductions are substantially equal.	** See Alternative Requirement	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
21-PV	EP	R5720194 AMOC145	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(f) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	All sites that are subject to this division and that are located in the Houston/Galveston/ Brazoria area as defined in §115.10 of this title (relating to Definitions), excluding Harris County, are exempt from § 115.722(b) and (c)(2) of this title, except as provided in § 115.729(a)(3) of this title (relating to Counties and Compliance Schedules).	§ 115.725(n) ** See CAM Summary ** See Alternative Requirement	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)
21-PV	EP	R5121-12AMOC145	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(B) § 60.18	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(B) § 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126 § 115.126(1) § 115.126(1)(B) § 115.126(2)	None
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3)	Agitators within a petroleum refinery; synthetic organic chemical, polymer,	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.		[G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) §	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	concentration greater than 500 ppmv above background as methane for all components.		§ 115.786(e) § 115.786(g)	
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways,	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	defined as a screening concentration greater than 500 ppmv above background as methane for all components.		§ 115.786(g) [G]§ 115.788(g)	
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							[G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)		
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	sealless pumps may be used to satisfy the requirements of this subsection.			
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii)	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
22-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		§ 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(12) § 115.357(8)	process fluid based on sight, smell, or sound.			
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.357(1)	§ 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						process fluid based on sight, smell, or sound.			
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2)	No valves shall be allowed to have a VOC leak, for more than 15 days after	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(1) § 115.357(8) § 115.357(9)	methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
22-0-0	EU	R5352-	VOC	30 TAC Chapter	§ 115.352(1)(A)	No process drains	§ 115.354(1)	§ 115.352(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL		115, Pet. Refinery & Petrochemicals	§ 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(C) § 115.352(1)	No component shall be allowed to have a	§ 115.354(1) § 115.354(11)	§ 115.352(7) § 115.354(13)(D)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						§115.356(3)(C) of this title.			
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
22-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
22-0-0	EU	63YY-FUG	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
22-16-120	EU	R7300-1	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.335(f)(3) § 117.335(g) § 117.340(a) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.8100(a)(5)(C)	§ 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
22-16-120	EU	R7300-1	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(10)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(2) § 117.335(g) § 117.340(a) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)		§ 117.8100(c)
22-36-9	EU	R7300-9	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							[G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)		
22-36-9	EU	R7300-9	NH ₃	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(2) § 117.310(c)(2)(B) § 117.340(f)(1)	For process heaters that inject urea or ammonia into the exhaust stream for NO _x control, ammonia emissions must not exceed 10 ppmv at 3.0% O ₂ , dry.	§ 117.335(a)(2) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(b)(1) § 117.340(b)(3) § 117.340(d) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8130 § 117.8130(4)	§ 117.345(a) § 117.345(f) § 117.345(f)(11) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
22-36-9	EU	R7300-9	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.8100(a)(5)(C)	§ 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
22-36-9	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
22-PV	EP	R5720194 AMOC145	Highly Reactive	30 TAC Chapter 115, HRVOC Vent	§ 115.727(f) § 115.722(d)	All sites that are subject to this division	** See Alternative Requirement	§ 115.726(d)(1) § 115.726(d)(2)	§ 115.725(n)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			VOC	Gas	§ 115.722(d)(1) § 115.722(d)(2)	and that are located in the Houston/Galveston/Brazoria area as defined in §115.10 of this title (relating to Definitions), excluding Harris County, are exempt from § 115.722(b) and (c)(2) of this title, except as provided in § 115.729(a)(3) of this title (relating to Counties and Compliance Schedules).	§ 115.725(n) ** See CAM Summary	§ 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	
22-PV	EP	R5121-12AMOC145	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(B) § 60.18	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(B) § 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126 § 115.126(1) § 115.126(1)(B) § 115.126(2)	None
22OWSENG	EU	R7300-011	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(B)	CO emissions must not exceed 3.0 g/hp-hr for stationary internal combustion engines.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(iii)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.340(a)(2)(C) § 117.340(h) § 117.8000(b) § 117.8000(c) § 117.8000(c)(2) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)	§ 117.345(f)(9)	§ 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
22OWSENG	EU	R7300-011	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(9)(E)(v)(III) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) [G]§ 117.310(f) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(2)(C) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.340(p)(2)(A) § 117.340(p)(2)(B) § 117.340(p)(2)(C) § 117.8000(b) § 117.8000(c) § 117.8000(c)(1) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(3)(B) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) § 117.340(p)(2)(D) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						methods specified in § 117.9800 to comply with § 117.320.	§ 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)		
22OWSENG	EU	60IIII-11	CO	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 37 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 5.0 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	§ 60.4209(b)	§ 60.4214(c)	None
22OWSENG	EU	60IIII-11	NMHC and NO _x	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 75 KW but less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2007 - 2013 model year must comply with an NMHC+NO _x emission limit of 4.0 g/KW-hr as stated in 40 CFR 60.4201(a) and 40	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						CFR 89.112(a) and 40 CFR 1039.102.			
22OWSENG	EU	60IIII-11	PM	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 75 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2007 - 2011 model year must comply with a PM emission limit of 0.30g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a).	§ 60.4209(b)	§ 60.4214(c)	None
22OWSENG	EU	60IIII-11	PM (Opacity)	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.113(a)(1) § 89.113(a)(2) § 89.113(a)(3)	Owners and operators of non-emergency stationary CI ICE with a displacement of less than 10 liters per cylinder and is not a constant-speed engine and is a 2007 model year and later must comply with the following opacity emission limits: 20% during the acceleration mode, 15% during the lugging mode, and 50% during the peaks in either the acceleration or	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						lugging modes as stated in 40 CFR 60.4201(a)-(c) and 40 CFR 89.113(a)(1)-(3) and 40 CFR 1039.105(b)(1)-(3).			
22OWSENG	EU	63ZZZZ-11	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(c)	Stationary RICE subject to Regulations under 40 CFR Part 60. An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines as applicable. No further requirements apply for such engines under this part.	None	None	None
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	than 500 ppmv above background as methane for all components.		§ 115.786(g)	
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(B)(iv)	component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)		
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i)	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	sealless pumps may be used to satisfy the requirements of this subsection.			
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	than 500 ppmv above background as methane for all components.		[G]§ 115.788(g)	
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						background as methane for all components.			
24-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)
24-0-0	EU	R5780-ALL	Highly Reactive	30 TAC Chapter 115, HRVOC	§ 115.781(b)(9) § 115.780(b)	Valves within a petroleum refinery;	§ 115.354(1) § 115.354(10)	§ 115.354(10) § 115.356	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			VOC	Fugitive Emissions	[G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(2) § 115.782(d)(2)	[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.357(12) § 115.357(8)	dripping or exuding of process fluid based on sight, smell, or sound.			
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.			
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						are exempt from the requirements of this division except §115.356(3)(C) of this title.			
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.357(1) § 115.357(8)	dripping or exuding of process fluid based on sight, smell, or sound.			
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2)	No agitators shall be allowed to have a VOC leak, for more than 15 days after	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(1)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(12) § 115.357(8)	process fluid based on sight, smell, or sound.			
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(9) [G]§ 115.355	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						on sight, smell, or sound.			
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2)	No open-ended valves or lines shall be allowed to have a VOC leak, for more	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
24-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(A) § 115.352(1)	No flanges or other connectors shall be	§ 115.354(1) § 115.354(10)	§ 115.352(7) § 115.354(10)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-3(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-3(b) § 60.482-3(c) § 60.482-3(d) § 60.482-3(e)(1) § 60.482-3(e)(2) § 60.482-3(f) § 60.482-3(g)(1) § 60.482-3(g)(2) § 60.482-3(h) [G]§ 60.482-3(i) § 60.482-3(j) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of VOC to the atmosphere, except as provided in §60.482-1(c) and paragraphs (h), (i), and (j) of this section.	§ 60.482-3(e)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-2(b)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-2(b)(2) § 60.482-2(c)(1)	If an instrument reading of 10,000 ppm or greater is measured for pumps in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) [G]§ 60.482-2(a) [G]§ 60.482-2(b)(2) [G]§ 60.482-2(d)(4)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 60.482-2(c)(2) § 60.482-2(d) [G]§ 60.482-2(d)(1) § 60.482-2(d)(2) § 60.482-2(d)(3) [G]§ 60.482-2(d)(4) [G]§ 60.482-2(d)(5) [G]§ 60.482-2(d)(6) [G]§ 60.482-2(e) § 60.482-2(f) [G]§ 60.482-2(g) § 60.482-2(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)		§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) [G]§ 60.486(h) § 60.486(j)	
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	For valves in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-1(e) § 60.486(k)	Equipment that an owner or operator designates as being in VOC service less than 300 hours (hr)/yr is excluded from the	None	§ 60.486 [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(6) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						requirements of §§ 60.482-2 through 60.482-10 if it is identified as required in §60.486(e)(6) and it meets any of the conditions specified in paragraphs (e)(1) through (3) of this section. §60.482-1(e)(1)-(3)			
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-10(d) § 60.18 § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-10(m) § 60.486(k)	Flares used to comply with this subpart shall comply with the requirements of §60.18.	§ 60.482-10(e) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f) [G]§ 60.485(g)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-7(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-7(d)(1) § 60.482-7(d)(2) [G]§ 60.482-7(e) [G]§ 60.482-7(f) [G]§ 60.482-7(g) [G]§ 60.482-7(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	If an instrument reading of 10,000 ppm or greater is measured for valves in gas/vapor service and in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) § 60.482-7(a)(1) [G]§ 60.482-7(a)(2) § 60.482-7(c)(1)(i) § 60.482-7(c)(1)(ii) § 60.482-7(c)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-10(g) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g)	Leaks, as indicated by the specified instrument or by visual inspections,	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.482-10(l) [G]§ 60.486(a) [G]§ 60.486(d)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 60.482-10(f) § 60.482-10(h) § 60.482-10(i) [G]§ 60.482-10(j) [G]§ 60.482-10(k) § 60.482-10(m) § 60.486(k)	shall be repaired as soon as practicable except as provided in § 60.482-10(h). § 60.482-10(g)(1)-(2)		§ 60.486(e) § 60.486(e)(1) § 60.486(j)	
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-5(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-5(b) § 60.482-5(c) § 60.486(k)	Each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in §60.482-1(c) and paragraph (c) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-4(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-4(b)(1) § 60.482-4(c) § 60.482-4(d)(1) § 60.482-4(d)(2) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in § 60.485(c).	§ 60.482-4(b)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(3) [G]§ 60.486(e)(4) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-1(d) § 60.486(k)	Equipment that is in vacuum service is excluded from the requirements of §60.482-2 to §60.482-10, if it is identified as required in	None	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(5) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						§60.486(e)(5).			
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For pressure relief devices in light liquid or in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	For pumps in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b)	For flanges and other connectors, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.486(k)				
24-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-6(a)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-6(a)(2) § 60.482-6(b) § 60.482-6(c) § 60.482-6(d) § 60.482-6(e) § 60.486(k)	Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in §60.482-1(c) and paragraphs (d) and (e) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-10(g) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-10(f) § 60.482-10(h) § 60.482-10(i) [G]§ 60.482-10(j) [G]§ 60.482-10(k) § 60.482-10(m) § 60.486(k)	Leaks, as indicated by the specified instrument or by visual inspections, shall be repaired as soon as practicable except as provided in § 60.482-10(h). § 60.482-10(g)(1)-(2)	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.482-10(l) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 63.1100(g)(7) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-10(m) § 60.486(k) [G]§ 63.1103(e)(4) [G]§ 63.670	Flares subject to §60.18 or §63.11 and used as a control device for emission points subject to §60.1103(e) are required to comply only with §60.1103(e)(4).	§ 60.482-10(e) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f) [G]§ 60.485(g) [G]§ 63.671	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j) [G]§ 63.1109(e)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-1(e) § 60.486(k)	Equipment that an owner or operator designates as being in VOC service less than 300 hours (hr)/yr is excluded from the	None	§ 60.486 [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(6) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						requirements of §§ 60.482-2 through 60.482-10 if it is identified as required in §60.486(e)(6) and it meets any of the conditions specified in paragraphs (e)(1) through (3) of this section. §60.482-1(e)(1)-(3)			
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	For valves in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-2(b)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-2(b)(2) § 60.482-2(c)(1) [G]§ 60.482-2(c)(2) § 60.482-2(d) [G]§ 60.482-2(d)(1) § 60.482-2(d)(2) § 60.482-2(d)(3) [G]§ 60.482-2(d)(4)	If an instrument reading of 10,000 ppm or greater is measured for pumps in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) [G]§ 60.482-2(a) [G]§ 60.482-2(b)(2) [G]§ 60.482-2(d)(4) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 60.482-2(d)(5) [G]§ 60.482-2(d)(6) [G]§ 60.482-2(e) § 60.482-2(f) [G]§ 60.482-2(g) § 60.482-2(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)				
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-3(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-3(b) § 60.482-3(c) § 60.482-3(d) § 60.482-3(e)(1) § 60.482-3(e)(2) § 60.482-3(f) § 60.482-3(g)(1) § 60.482-3(g)(2) § 60.482-3(h) [G]§ 60.482-3(i) § 60.482-3(j) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of VOC to the atmosphere, except as provided in §60.482-1(c) and paragraphs (h), (i), and (j) of this section.	§ 60.482-3(e)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d)	For pumps in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)				
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-1(d) § 60.486(k)	Equipment that is in vacuum service is excluded from the requirements of §60.482-2 to §60.482-10, if it is identified as required in §60.486(e)(5).	None	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(5) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-4(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-4(b)(1) § 60.482-4(c) § 60.482-4(d)(1) § 60.482-4(d)(2) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in § 60.485(c).	§ 60.482-4(b)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(3) [G]§ 60.486(e)(4) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-5(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-5(b) § 60.482-5(c) § 60.486(k)	Each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in §60.482-1(c) and paragraph (c) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-6(a)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-6(a)(2) § 60.482-6(b) § 60.482-6(c) § 60.482-6(d) § 60.482-6(e) § 60.486(k)	Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in §60.482-1(c) and paragraphs (d) and (e) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-7(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-7(d)(1) § 60.482-7(d)(2) [G]§ 60.482-7(e) [G]§ 60.482-7(f) [G]§ 60.482-7(g) [G]§ 60.482-7(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	If an instrument reading of 10,000 ppm or greater is measured for valves in gas/vapor service and in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) § 60.482-7(a)(1) [G]§ 60.482-7(a)(2) § 60.482-7(c)(1)(i) § 60.482-7(c)(1)(ii) § 60.482-7(c)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For pressure relief devices in light liquid or in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For flanges and other connectors, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
24-0-0	EU	63YY-FUG	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
24-36-7	EU	R7300-011	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)		[G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
24-36-7	EU	R7300-011	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(A)(i) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)		
24-36-7	EU	63DDDDD-EU	112(B) HAPS	40 CFR Part 63, Subpart DDDDD	§ 63.7505 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart DDDDD
24-36-8	EU	R7300-002	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(B) § 117.310(c)(3)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a) § 117.8000(b) § 117.8000(c) § 117.8000(c)(2) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) ** See Periodic Monitoring Summary	§ 117.345(a) § 117.345(f) § 117.345(f)(1) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
24-36-8	EU	R7300-002	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(A)(ii)	An owner or operator may not use the alternative methods	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b)	§ 117.345(a) § 117.345(f) § 117.345(f)(1)	§ 117.335(b) § 117.335(g) § 117.340(p)(2)(D)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(2)(C) § 117.340(p)(3)	specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.340(p)(2)(A) § 117.340(p)(2)(B) § 117.340(p)(2)(C) § 117.8000(b) § 117.8000(c) § 117.8000(c)(1) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d)	§ 117.345(f)(9)	[G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
24-36-8	EU	63DDDDD-EU	112(B) HAPS	40 CFR Part 63, Subpart DDDDD	§ 63.7505 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart DDDDD	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart DDDDD
24-95-314	EU	R5211-096	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.212(a)(3) § 115.212(a)(2) § 115.212(a)(3)(A) § 115.212(a)(3)(A)(i)	All land-based VOC transfer to or from transport vessels shall be conducted in the	§ 115.212(a)(3)(B) § 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.214(a)(1)(A)(ii)	§ 115.216 § 115.216(3)(A) § 115.216(3)(A)(i) § 115.216(3)(A)(iii)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.212(a)(3)(B) [G]§ 115.212(a)(3)(C) § 115.212(a)(3)(D) § 115.214(a)(1)(B) § 115.214(a)(1)(C)	manner specified for leak-free operations.	§ 115.214(a)(1)(A)(iii)		
24-95-314	EU	R5112-7	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.112(e)(1)	No person shall place, store, or hold VOC in any storage tank unless the storage tank is capable of maintaining working pressure sufficient at all times to prevent any vapor or gas loss to the atmosphere or is in compliance with the control requirements specified in Table 1 of this paragraph for VOC other than crude oil and condensate or Table 2 of subsection (a)(1) of this paragraph for crude oil and condensate.	[G]§ 115.117 ** See Periodic Monitoring Summary	§ 115.118(a)(5) § 115.118(a)(7)	None
24-PV	EP	R5720194 AMOC145	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(f) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	All sites that are subject to this division and that are located in the Houston/Galveston/ Brazoria area as defined in §115.10 of this title (relating to Definitions), excluding Harris County, are exempt from § 115.722(b) and	§ 115.725(n) ** See CAM Summary ** See Alternative Requirement	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						(c)(2) of this title, except as provided in § 115.729(a)(3) of this title (relating to Counties and Compliance Schedules).			
24-PV	EP	R5121-12AMOC145	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(B) § 60.18	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(B) § 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126 § 115.126(1) § 115.126(1)(B) § 115.126(2)	None
24.1-0-0	EU	R5780-<5wt	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		§ 115.356(5)	
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(9) [G]§ 115.355	§ 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(9)	on sight, smell, or sound.			
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2)	No agitators shall be allowed to have a VOC leak, for more than 15 days after	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(12)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(8)	process fluid based on sight, smell, or sound.			
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355 § 115.357(1)	[G]§ 115.356(3)(C) § 115.356(5)	
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(8)	on sight, smell, or sound.			
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	[G]§ 115.358(g)
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.			
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						division except §115.356(3)(C) of this title.			
24.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.162(e) § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h)	Equipment that is in organic HAP service less than 300 hours per year is excluded from the requirements of §§63.163 - 63.174 and §63.178 if it is identified as required in §63.181(j).	[G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i) § 63.181(j)	[G]§ 63.182(a) [G]§ 63.182(b)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.168 § 63.162(a) § 63.162(c) [G]§ 63.162(f)	Standards: Valves in gas/vapor service and in light liquid service. §63.168(a)-(j)	[G]§ 63.168 [G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175			§ 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7)	§ 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.165 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief device in gas/vapor service. §63.165(a)-(d)	[G]§ 63.165 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.166 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Sampling connection systems. §63.166(a)-(c)	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Valves in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c)	Standards: Connectors in heavy liquid service.	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	§63.169(a)-(d)		[G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.167 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Open-ended valves or lines. §63.167(a)-(e).	[G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.163 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176	Standards: Pumps in light liquid service. §63.163(a)-(j)	[G]§ 63.163 [G]§ 63.176 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) § 63.181(h)(8)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.172(a) [G]§ 63.172(h) § 63.172(i) § 63.172(j)(1) § 63.172(j)(2) § 63.172(m)	Owners/operators of closed-vent systems and control devices used to comply with provisions of this subpart shall comply with the provisions of this section, except as provided in §63.162(b).	[G]§ 63.172(f)(1) [G]§ 63.172(f)(2) § 63.172(g) [G]§ 63.172(h) § 63.172(j)(1) § 63.172(j)(2) [G]§ 63.172(k) [G]§ 63.172(l) [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.118(a)(3) § 63.172(j)(1) [G]§ 63.172(k) [G]§ 63.172(l) § 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(ii) [G]§ 63.181(g)(2) [G]§ 63.181(g)(3)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.174 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in gas/vapor service and in light liquid service. §63.174(a)-(j)	[G]§ 63.174 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.173 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators gas/vapor service and in light liquid service. §63.173(a)-(j).	[G]§ 63.173 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.172(d) § 63.11(b) § 63.172(e) [G]§ 63.172(h) § 63.172(m)	Flares used to comply with this subpart shall comply with the requirements of § 63.11(b) of 40 CFR 63, Subpart A.	§ 63.172(e) [G]§ 63.172(h) [G]§ 63.180(b) [G]§ 63.180(d) [G]§ 63.180(e)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(ii) § 63.181(g)(1)(iii) § 63.181(g)(1)(iv) [G]§ 63.181(g)(2)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.170 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Surge control vessels and bottom receivers.	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.164 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Compressors. §63.164(a)-(i)	[G]§ 63.164 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.162(e) § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h)	Equipment that is in organic HAP service less than 300 hours per year is excluded from the requirements of §§63.163 - 63.174 and §63.178 if it is identified as required in §63.181(j).	[G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i) § 63.181(j)	[G]§ 63.182(a) [G]§ 63.182(b)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.164 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g)	Standards: Compressors. §63.164(a)-(i)	[G]§ 63.164 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.162(h) [G]§ 63.171				[G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.165 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief device in gas/vapor service. §63.165(a)-(d)	[G]§ 63.165 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.166 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Sampling connection systems. §63.166(a)-(c)	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Valves in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.170 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Surge control vessels and bottom receivers.	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) § 63.172(e) [G]§ 63.172(h) § 63.172(m) [G]§ 63.670	Flares subject to §60.18 or §63.11 and used as a control device for emission points subject to §60.1103(e) are required to comply only with §60.1103(e)(4).	§ 63.172(e) [G]§ 63.172(h) [G]§ 63.180(b) [G]§ 63.180(d) [G]§ 63.180(e) [G]§ 63.671	[G]§ 63.1109(e) § 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(ii) § 63.181(g)(1)(iii) § 63.181(g)(1)(iv)	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
								[G]§ 63.181(g)(2)	
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.173 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators gas/vapor service and in light liquid service. §63.173(a)-(j).	[G]§ 63.173 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.174 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in gas/vapor service and in light liquid service. §63.174(a)-(j)	[G]§ 63.174 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.172(a) [G]§ 63.172(h) § 63.172(i) § 63.172(j)(1) § 63.172(j)(2) § 63.172(m)	Owners/operators of closed-vent systems and control devices used to comply with provisions of this subpart shall comply with the provisions of this section, except as provided in §63.162(b).	[G]§ 63.172(f)(1) [G]§ 63.172(f)(2) § 63.172(g) [G]§ 63.172(h) § 63.172(j)(1) § 63.172(j)(2) [G]§ 63.172(k) [G]§ 63.172(l) [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.118(a)(3) § 63.172(j)(1) [G]§ 63.172(k) [G]§ 63.172(l) § 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(ii) [G]§ 63.181(g)(2) [G]§ 63.181(g)(3)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.163 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176	Standards: Pumps in light liquid service. §63.163(a)-(j)	[G]§ 63.163 [G]§ 63.176 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
								§ 63.181(h)(7) § 63.181(h)(8)	
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.167 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Open-ended valves or lines. §63.167(a)-(e).	[G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.168 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Valves in gas/vapor service and in light liquid service. §63.168(a)-(j)	[G]§ 63.168 [G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
24AIR3	EU	R7300-600	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(C) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A)	§ 117.345(a) § 117.345(f) § 117.345(f)(10) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A) § 117.8140(a) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)		[G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
24AIR3	EU	R7300-600	NH ₃	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(2) § 117.310(c)(2)(A)	For unit types not specifically identified in § 117.310(c)(2) that inject urea or ammonia into the exhaust stream for NO _x control, ammonia emissions must not exceed 10 ppmv at 3.0% O ₂ , dry.	§ 117.335(a)(2) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(d) § 117.8000(b) § 117.8000(c) § 117.8000(c)(3) § 117.8000(c)(4) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8130 § 117.8130(3)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(11) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
24AIR3	EU	R7300-	NO _x	30 TAC Chapter	§ 117.310(d)(3)	An owner or operator	[G]§ 117.335(a)(1)	§ 117.345(a)	§ 117.335(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		600		117, Subchapter B	§ 117.310(a) § 117.310(a)(9)(E)(viii)(II)) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) [G]§ 117.310(f) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(2) § 117.335(g) § 117.340(a)(2)(C) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8140(a) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)	§ 117.345(f) § 117.345(f)(10) [G]§ 117.345(f)(2) § 117.345(f)(3) § 117.345(f)(3)(B) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
24AIR3	EU	60III-13	CO	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206	Owners and operators of non-emergency stationary CI ICE with a maximum engine	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 3.5 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039-Appendix I and 40 CFR 1039.102 and 40 CFR 1039.101.			
24AIR3	EU	60III-13	NO _x	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 56 KW but less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2014 model year and later must comply with a NO _x emission limit of 0.40 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	§ 60.4209(b)	§ 60.4214(c)	None
24AIR3	EU	60III-13	Nonmethane Hydrocarbons	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206	Owners and operators of non-emergency stationary CI ICE with a maximum engine	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	power greater than or equal to 56 KW but less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2014 model year and later must comply with an NMHC emission limit of 0.19 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.			
24AIR3	EU	60III-13	PM	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 130 KW and less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2011 model year and later must comply with a PM emission limit of 0.02 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	§ 60.4209(b)	§ 60.4214(c)	None
24AIR3	EU	63ZZZ-600	CO	40 CFR Part 63, Subpart ZZZZ	§ 63.6600(b)-Table 2a.3.a § 63.6595(c) § 63.6600(b)-Table 2b.1.a § 63.6600(b)-Table	For each new or reconstructed CI stationary RICE with a site rating of more than 500 brake HP located at a major	§ 63.6610(a) § 63.6610(b) § 63.6610(c) § 63.6615 § 63.6620(a) § 63.6620(a)-Table	§ 63.6620(i) § 63.6635(a) § 63.6635(c) § 63.6655(a) § 63.6655(a)(1) § 63.6655(a)(2)	§ 63.6620(i) § 63.6630(c) § 63.6640(b) § 63.6640(e) § 63.6645(a) § 63.6645(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					2b.1.b § 63.6605(a) § 63.6605(b) § 63.6625(h) § 63.6630(a) § 63.6630(b) § 63.6640(b)	source of HAP emissions, operating at 100% load plus or minus 10%, you must reduce CO emissions by 70% or more.	4.1.a.i § 63.6620(a)-Table 4.1.a.ii § 63.6620(a)-Table 4.1.a.iii § 63.6620(b) § 63.6620(b)(4) § 63.6620(d) § 63.6620(e)(1) [G]§ 63.6620(e)(2) [G]§ 63.6625(a) § 63.6630(a)-Table 5.5.a.i § 63.6630(a)-Table 5.5.a.ii § 63.6630(a)-Table 5.5.a.iii § 63.6635(a) § 63.6635(b) § 63.6640(a) § 63.6640(a)-Table 6.3.a.i § 63.6640(a)-Table 6.3.a.ii § 63.6640(a)-Table 6.3.a.iii § 63.6640(b)	§ 63.6655(a)(3) § 63.6655(a)(4) § 63.6655(a)(5) [G]§ 63.6655(b) § 63.6655(d) § 63.6660(a) § 63.6660(b) § 63.6660(c)	§ 63.6645(g) § 63.6645(h) § 63.6645(h)(1) § 63.6645(h)(2) § 63.6650(a) § 63.6650(a)-Table 7.1.a.i § 63.6650(a)-Table 7.1.b § 63.6650(a)-Table 7.1.c § 63.6650(b) § 63.6650(b)(1) § 63.6650(b)(2) § 63.6650(b)(3) § 63.6650(b)(4) [G]§ 63.6650(c) [G]§ 63.6650(e) § 63.6650(f)
24AIR4	EU	R7300-600	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a)(2)(C) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a)	§ 117.345(a) § 117.345(f) § 117.345(f)(10) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A) § 117.8140(a) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)		§ 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
24AIR4	EU	R7300-600	NH ₃	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(2) § 117.310(c)(2)(A)	For unit types not specifically identified in § 117.310(c)(2) that inject urea or ammonia into the exhaust stream for NO _x control, ammonia emissions must not exceed 10 ppmv at 3.0% O ₂ , dry.	§ 117.335(a)(2) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(d) § 117.8000(b) § 117.8000(c) § 117.8000(c)(3) § 117.8000(c)(4) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8130 § 117.8130(3)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(11) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24AIR4	EU	R7300-600	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(9)(E)(viii)(II)) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) [G]§ 117.310(f) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(2) § 117.335(g) § 117.340(a)(2)(C) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8140(a) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)	§ 117.345(a) § 117.345(f) § 117.345(f)(10) [G]§ 117.345(f)(2) § 117.345(f)(3) § 117.345(f)(3)(B) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
24AIR4	EU	60III-13	CO	40 CFR Part 60, Subpart III	§ 60.4204(b) § 1039.101 § 60.4201(a)	Owners and operators of non-emergency stationary CI ICE with	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	a maximum engine power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 3.5 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039-Appendix I and 40 CFR 1039.102 and 40 CFR 1039.101.			
24AIR4	EU	60IIII-13	NO _x	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 56 KW but less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2014 model year and later must comply with a NO _x emission limit of 0.40 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	§ 60.4209(b)	§ 60.4214(c)	None
24AIR4	EU	60IIII-13	Nonmethane Hydrocarbo	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a)	Owners and operators of non-emergency stationary CI ICE with	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			ns		§ 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	a maximum engine power greater than or equal to 56 KW but less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2014 model year and later must comply with an NMHC emission limit of 0.19 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.			
24AIR4	EU	60III-13	PM	40 CFR Part 60, Subpart III	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 130 KW and less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2011 model year and later must comply with a PM emission limit of 0.02 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	§ 60.4209(b)	§ 60.4214(c)	None
24AIR4	EU	63ZZZ-600	CO	40 CFR Part 63, Subpart ZZZZ	§ 63.6600(b)-Table 2a.3.a § 63.6595(c) § 63.6600(b)-Table 2b.1.a	For each new or reconstructed CI stationary RICE with a site rating of more than 500 brake HP	§ 63.6610(a) § 63.6610(b) § 63.6610(c) § 63.6615 § 63.6620(a)	§ 63.6620(i) § 63.6635(a) § 63.6635(c) § 63.6655(a) § 63.6655(a)(1)	§ 63.6620(i) § 63.6630(c) § 63.6640(b) § 63.6640(e) § 63.6645(a)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.6600(b)-Table 2b.1.b § 63.6605(a) § 63.6605(b) § 63.6625(h) § 63.6630(a) § 63.6630(b) § 63.6640(b)	located at a major source of HAP emissions, operating at 100% load plus or minus 10%, you must reduce CO emissions by 70% or more.	§ 63.6620(a)-Table 4.1.a.i § 63.6620(a)-Table 4.1.a.ii § 63.6620(a)-Table 4.1.a.iii § 63.6620(b) § 63.6620(b)(4) § 63.6620(d) § 63.6620(e)(1) [G]§ 63.6620(e)(2) [G]§ 63.6625(a) § 63.6630(a)-Table 5.5.a.i § 63.6630(a)-Table 5.5.a.ii § 63.6630(a)-Table 5.5.a.iii § 63.6635(a) § 63.6635(b) § 63.6640(a) § 63.6640(a)-Table 6.3.a.i § 63.6640(a)-Table 6.3.a.ii § 63.6640(a)-Table 6.3.a.iii § 63.6640(b)	§ 63.6655(a)(2) § 63.6655(a)(3) § 63.6655(a)(4) § 63.6655(a)(5) [G]§ 63.6655(b) § 63.6655(d) § 63.6660(a) § 63.6660(b) § 63.6660(c)	§ 63.6645(c) § 63.6645(g) § 63.6645(h) § 63.6645(h)(1) § 63.6645(h)(2) § 63.6650(a) § 63.6650(a)-Table 7.1.a.i § 63.6650(a)-Table 7.1.b § 63.6650(a)-Table 7.1.c § 63.6650(b) § 63.6650(b)(1) § 63.6650(b)(2) § 63.6650(b)(3) § 63.6650(b)(4) [G]§ 63.6650(c) [G]§ 63.6650(e) § 63.6650(f)
24EMGGEN	EU	R7300-003	Exempt	30 TAC Chapter 117, Subchapter B	[G]§ 117.303(a)(11) [G]§ 117.310(f)	Units exempted from the provisions of this division except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1) and 117.354(a)(5) include new, modified, reconstructed, or	None	§ 117.340(j) § 117.345(f) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						relocated stationary diesel engine placed into service on or after October 1, 2001, that operates less than 100 hours per year, based on a rolling 12-month average, in other than emergency situations; and meets the requirements for non-road engines as specified. §117.303(a)(11)(A)-(B)			
24EMGGEN	EU	60III-6	CO	40 CFR Part 60, Subpart III	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.112(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 3.5 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)
24EMGGEN	EU	60III-6	NMHC and NO _x	40 CFR Part 60, Subpart III	§ 60.4205(b) § 60.4202(a)(2) § 60.4206	Owners and operators of emergency stationary CI ICE, that	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.112(a)	are not fire pump engines, with a maximum engine power greater than 560 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with an NMHC+NOx emission limit of 6.4 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).			
24EMGGEN	EU	60III-6	PM	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.112(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a PM emission limit of 0.20 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)
24EMGGEN	EU	60III-6	PM (Opacity)	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2)	Emergency stationary CI ICE, that are not	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.113(a)(1) § 89.113(a)(2) § 89.113(a)(3)	fire pump engines, with displacement < 10 lpc and not constant-speed engines, with max engine power < 2237 KW and a 2007 model year and later or max engine power > 2237 KW and a 2011 model year and later, must comply with following opacity emission limits: 20% during acceleration, 15% during lugging, 50% during peaks in either acceleration or lugging modes as stated in §60.4202(a)(1)-(2), (b)(2) and §89.113(a)(1)-(3) and §1039.105(b)(1)-(3).			
24EMGGEN	EU	63ZZZZ-215	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(b)(1) § 63.6595(c) § 63.6640(f)(1) § 63.6640(f)(2) § 63.6640(f)(2)(i) § 63.6640(f)(3)	An affected source which meets either of the criteria in paragraphs §63.6590(b)(1)(i)-(ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of §63.6645(f).	None	None	§ 63.6645(f)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
24EMGGENTK	EU	R5211-002	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.217(a)(1) § 115.212(a)(2) § 115.214(a)(1)(B) § 115.214(a)(1)(D) § 115.214(a)(1)(D)(i)	Vapor pressure (at land-based operations). All land-based loading and unloading of VOC with a true vapor pressure less than 0.5 psia is exempt from the requirements of this division, except as specified.	§ 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.215 § 115.215(4)	§ 115.216 § 115.216(2) § 115.216(3)(B)	None
24EMGGENTK	EU	R5112-3	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.111(a)(1)	Except as provided in § 115.118, a storage tank storing VOC with a true vapor pressure less than 1.5 psia is exempt from the requirements of this division.	[G]§ 115.117	§ 115.118(a)(1) § 115.118(a)(5) § 115.118(a)(7)	None
24OWSENG	EU	R7300-010	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(B)	CO emissions must not exceed 3.0 g/hp-hr for stationary internal combustion engines.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.8000(b) § 117.8000(c) § 117.8000(c)(2) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							[G]§ 117.8140(a)(2)(B) § 117.8140(b)		
24OWSENG	EU	R7300-010	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(9)(E)(iv)(III)) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) [G]§ 117.310(f) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(2)(C) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.340(p)(2)(A) § 117.340(p)(2)(B) § 117.340(p)(2)(C) § 117.8000(b) § 117.8000(c) § 117.8000(c)(1) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(iii) § 117.345(f)(3)(B) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) § 117.340(p)(2)(D) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
24OWSENG	EU	60III-10	CO	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 37 KW and less than 130 KW and a displacement of less than 10 liters per	None	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						cylinder and is a 2007 model year and later must comply with a CO emission limit of 5.0 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102 and 40 CFR 1039.101.			
24OWSENG	EU	60IIII-10	NMHC and NO _x	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 37 KW but less than 56 KW and a displacement of less than 10 liters per cylinder and is a 2008 model year and later must comply with an NMHC+NO _x emission limit of 4.7 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	None	None	None
24OWSENG	EU	60IIII-10	PM	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 19 KW and less than 56 KW and a displacement of less than 10 liters per	None	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						cylinder and is a 2013 model year and later must comply with a PM emission limit of 0.03 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.			
24OWSENG	EU	63ZZZZ-10	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(c)	Stationary RICE subject to Regulations under 40 CFR Part 60. An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines as applicable. No further requirements apply for such engines under this part.	None	None	None
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						than 500 ppmv above background as methane for all components.	§ 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)		
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.788(e) [G]§ 115.788(g)
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(iii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	[G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.		§ 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3)	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.		§ 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(g)(2) § 115.782(d)(2)	§ 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)				
33-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		§ 115.356(3)(B) § 115.356(5)	
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						on sight, smell, or sound.			
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2)	No valves shall be allowed to have a VOC leak, for more than 15 days after	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						dripping or exuding of process fluid based on sight, smell, or sound.			
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10)	No agitators shall be allowed to have a VOC leak, for more	§ 115.354(1) § 115.354(5) § 115.354(6)	§ 115.352(7) § 115.356 [G]§ 115.356(1)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358 of this title, any leak detected as defined in	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	§115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	[G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.356(5)	
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						(b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.			
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that contains less than	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.			
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(7) § 115.357(1) § 115.357(8)	dripping or exuding of process fluid based on sight, smell, or sound.			
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.357(8)	process fluid based on sight, smell, or sound.			
33-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	For valves in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-2(b)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-2(b)(2)	If an instrument reading of 10,000 ppm or greater is measured for pumps in light liquid service,	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) [G]§ 60.482-2(a) [G]§ 60.482-2(b)(2)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-2(c)(1) [G]§ 60.482-2(c)(2) § 60.482-2(d) [G]§ 60.482-2(d)(1) § 60.482-2(d)(2) § 60.482-2(d)(3) [G]§ 60.482-2(d)(4) [G]§ 60.482-2(d)(5) [G]§ 60.482-2(d)(6) [G]§ 60.482-2(e) § 60.482-2(f) [G]§ 60.482-2(g) § 60.482-2(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	a leak is detected.	[G]§ 60.482-2(d)(4) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) [G]§ 60.486(h) § 60.486(j)	
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-3(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-3(b) § 60.482-3(c) § 60.482-3(d) § 60.482-3(e)(1) § 60.482-3(e)(2) § 60.482-3(f) § 60.482-3(g)(1) § 60.482-3(g)(2) § 60.482-3(h) [G]§ 60.482-3(i) § 60.482-3(j) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of VOC to the atmosphere, except as provided in §60.482-1(c) and paragraphs (h), (i), and (j) of this section.	§ 60.482-3(e)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a)	For pumps in heavy liquid service, if an	§ 60.482-8(a)(1) § 60.485(a)	§ 60.482-1(g) [G]§ 60.486(a)	§ 60.487(a) [G]§ 60.487(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	instrument reading of 10,000 ppm or greater is measured, a leak is detected.	[G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	[G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-1(d) § 60.486(k)	Equipment that is in vacuum service is excluded from the requirements of §60.482-2 to §60.482-10, if it is identified as required in §60.486(e)(5).	None	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(5) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-4(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-4(b)(1) § 60.482-4(c) § 60.482-4(d)(1) § 60.482-4(d)(2) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in § 60.485(c).	§ 60.482-4(b)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(3) [G]§ 60.486(e)(4) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-5(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g)	Each sampling connection system shall be equipped with a closed-purge,	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 60.482-5(b) § 60.482-5(c) § 60.486(k)	closed-loop, or closed-vent system, except as provided in §60.482-1(c) and paragraph (c) of this section.		§ 60.486(j)	
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-6(a)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-6(a)(2) § 60.482-6(b) § 60.482-6(c) § 60.482-6(d) § 60.482-6(e) § 60.486(k)	Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in §60.482-1(c) and paragraphs (d) and (e) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-7(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-7(d)(1) § 60.482-7(d)(2) [G]§ 60.482-7(e) [G]§ 60.482-7(f) [G]§ 60.482-7(g) [G]§ 60.482-7(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	If an instrument reading of 10,000 ppm or greater is measured for valves in gas/vapor service and in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) § 60.482-7(a)(1) [G]§ 60.482-7(a)(2) § 60.482-7(c)(1)(i) § 60.482-7(c)(1)(ii) § 60.482-7(c)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2)	For pressure relief devices in light liquid or in heavy liquid service, if an instrument reading of 10,000 ppm or greater	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	is measured, a leak is detected.		§ 60.486(j)	
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For flanges and other connectors, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-10(g) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-10(f) § 60.482-10(h) § 60.482-10(i) [G]§ 60.482-10(j) [G]§ 60.482-10(k) § 60.482-10(m) § 60.486(k)	Leaks, as indicated by the specified instrument or by visual inspections, shall be repaired as soon as practicable except as provided in § 60.482-10(h). § 60.482-10(g)(1)-(2)	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.482-10(l) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-10(d) § 60.18 § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-10(m) § 60.486(k)	Flares used to comply with this subpart shall comply with the requirements of §60.18.	§ 60.482-10(e) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f) [G]§ 60.485(g)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL	VOC	40 CFR Part 60,	[G]§ 60.482-1(e)	Equipment that an	None	§ 60.486	§ 60.487(a)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				Subpart VV	§ 60.486(k)	owner or operator designates as being in VOC service less than 300 hours (hr)/yr is excluded from the requirements of §§ 60.482-2 through 60.482-10 if it is identified as required in §60.486(e)(6) and it meets any of the conditions specified in paragraphs (e)(1) through (3) of this section. §60.482-1(e)(1)-(3)		[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(6) § 60.486(j)	[G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-3(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-3(b) § 60.482-3(c) § 60.482-3(d) § 60.482-3(e)(1) § 60.482-3(e)(2) § 60.482-3(f) § 60.482-3(g)(1) § 60.482-3(g)(2) § 60.482-3(h) [G]§ 60.482-3(i) § 60.482-3(j) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of VOC to the atmosphere, except as provided in §60.482-1(c) and paragraphs (h), (i), and (j) of this section.	§ 60.482-3(e)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 63.1100(g)(7) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g)	Flares subject to §60.18 or §63.11 and used as a control device for emission	§ 60.482-10(e) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-10(m) § 60.486(k) [G]§ 63.1100(e)(4) [G]§ 63.670	points subject to §60.1103(e) are required to comply only with §60.1103(e)(4).	[G]§ 60.485(d) § 60.485(f) [G]§ 60.485(g) [G]§ 63.671	§ 60.486(e)(1) § 60.486(j) [G]§ 63.1109(e)	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-10(g) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-10(f) § 60.482-10(h) § 60.482-10(i) [G]§ 60.482-10(j) [G]§ 60.482-10(k) § 60.482-10(m) § 60.486(k)	Leaks, as indicated by the specified instrument or by visual inspections, shall be repaired as soon as practicable except as provided in § 60.482-10(h). § 60.482-10(g)(1)-(2)	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.482-10(l) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For flanges and other connectors, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a)	For pressure relief devices in light liquid or in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-9(b) § 60.486(k)				
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-7(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-7(d)(1) § 60.482-7(d)(2) [G]§ 60.482-7(e) [G]§ 60.482-7(f) [G]§ 60.482-7(g) [G]§ 60.482-7(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	If an instrument reading of 10,000 ppm or greater is measured for valves in gas/vapor service and in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) § 60.482-7(a)(1) [G]§ 60.482-7(a)(2) § 60.482-7(c)(1)(i) § 60.482-7(c)(1)(ii) § 60.482-7(c)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-6(a)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-6(a)(2) § 60.482-6(b) § 60.482-6(c) § 60.482-6(d) § 60.482-6(e) § 60.486(k)	Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in §60.482-1(c) and paragraphs (d) and (e) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-5(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-5(b) § 60.482-5(c) § 60.486(k)	Each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in §60.482-1(c) and paragraph (c) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-4(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-4(b)(1) § 60.482-4(c) § 60.482-4(d)(1) § 60.482-4(d)(2) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in § 60.485(c).	§ 60.482-4(b)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(3) [G]§ 60.486(e)(4) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-1(d) § 60.486(k)	Equipment that is in vacuum service is excluded from the requirements of §60.482-2 to §60.482-10, if it is identified as required in §60.486(e)(5).	None	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(5) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	For valves in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL-	VOC	40 CFR Part 60,	§ 60.482-2(b)(1)	If an instrument	§ 60.482-1(f)(1)	§ 60.482-1(g)	§ 60.487(a)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		YY		Subpart VV	§ 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-2(b)(2) § 60.482-2(c)(1) [G]§ 60.482-2(c)(2) § 60.482-2(d) [G]§ 60.482-2(d)(1) § 60.482-2(d)(2) § 60.482-2(d)(3) [G]§ 60.482-2(d)(4) [G]§ 60.482-2(d)(5) [G]§ 60.482-2(d)(6) [G]§ 60.482-2(e) § 60.482-2(f) [G]§ 60.482-2(g) § 60.482-2(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	reading of 10,000 ppm or greater is measured for pumps in light liquid service, a leak is detected.	§ 60.482-1(f)(2) [G]§ 60.482-1(f)(3) [G]§ 60.482-2(a) [G]§ 60.482-2(b)(2) [G]§ 60.482-2(d)(4) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) [G]§ 60.486(h) § 60.486(j)	[G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-1(e) § 60.486(k)	Equipment that an owner or operator designates as being in VOC service less than 300 hours (hr)/yr is excluded from the requirements of §§ 60.482-2 through 60.482-10 if it is identified as required in §60.486(e)(6) and it meets any of the conditions specified in paragraphs (e)(1) through (3) of this section. §60.482-1(e)(1)-(3)	None	§ 60.486 [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(6) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
33-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	For pumps in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33-0-0	EU	63YY-FUG	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
33-36-10	EU	R7300-242	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)		[G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
33-36-10	EU	R7300-242	NH ₃	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(2) § 117.310(c)(2)(B) § 117.340(f)(1)	For process heaters that inject urea or ammonia into the exhaust stream for NO _x control, ammonia emissions must not exceed 10 ppmv at 3.0% O ₂ , dry.	§ 117.335(a)(2) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(g) § 117.340(b)(1) § 117.340(b)(3) § 117.340(d) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A)	§ 117.345(a) § 117.345(f) § 117.345(f)(11) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8130 § 117.8130(4)		
33-36-10	EU	R7300-242	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
33-36-10	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
33-95-10	EU	R5211-096	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.212(a)(3) § 115.212(a)(2) § 115.212(a)(3)(A) § 115.212(a)(3)(A)(i) § 115.212(a)(3)(B) [G]§ 115.212(a)(3)(C) § 115.212(a)(3)(D) § 115.214(a)(1)(B) § 115.214(a)(1)(C)	All land-based VOC transfer to or from transport vessels shall be conducted in the manner specified for leak-free operations.	§ 115.212(a)(3)(B) § 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.214(a)(1)(A)(ii) § 115.214(a)(1)(A)(iii)	§ 115.216 § 115.216(3)(A) § 115.216(3)(A)(i) § 115.216(3)(A)(iii)	None
33-95-10	EU	R5112-7	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.112(e)(1)	No person shall place, store, or hold VOC in any storage tank unless the storage tank is capable of maintaining working pressure sufficient at all times to prevent any vapor or gas loss to the atmosphere or is in compliance with the control requirements specified in Table 1 of this paragraph for VOC other than crude oil and condensate or Table 2 of subsection (a)(1) of this	[G]§ 115.117 ** See Periodic Monitoring Summary	§ 115.118(a)(5) § 115.118(a)(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						paragraph for crude oil and condensate.			
33-95-14	EU	R5211-002	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.217(a)(1) § 115.212(a)(2) § 115.214(a)(1)(B) § 115.214(a)(1)(D) § 115.214(a)(1)(D)(i)	Vapor pressure (at land-based operations). All land-based loading and unloading of VOC with a true vapor pressure less than 0.5 psia is exempt from the requirements of this division, except as specified.	§ 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.215 § 115.215(4)	§ 115.216 § 115.216(2) § 115.216(3)(B)	None
33-PV	EP	R5720194 AMOC145	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(f) § 115.722(d) § 115.722(d)(1) § 115.722(d)(2)	All sites that are subject to this division and that are located in the Houston/Galveston/Brazoria area as defined in §115.10 of this title (relating to Definitions), excluding Harris County, are exempt from § 115.722(b) and (c)(2) of this title, except as provided in § 115.729(a)(3) of this title (relating to Counties and Compliance Schedules).	§ 115.725(n) ** See CAM Summary ** See Alternative Requirement	§ 115.726(d)(1) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n)
33-PV	EP	R5121-12AMOC145	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(B) § 60.18	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least	[G]§ 115.125 § 115.126(1) § 115.126(1)(B) § 115.126(2) ** See CAM Summary ** See Alternative	§ 115.126 § 115.126(1) § 115.126(1)(B) § 115.126(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	Requirement		
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.		§ 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
33.1-0-0	EU	R5780-	Highly	30 TAC Chapter	§ 115.781(b)(9)	Components within	§ 115.354(1)	§ 115.354(13)(D)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL	Reactive VOC	115, HRVOC Fugitive Emissions	§ 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.789(1)(B)
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	requirements of this subsection.			
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	[G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).	None	§ 115.786(e) § 115.786(g)	None
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
33.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
33.1-0-0	EU	R5352-	VOC	30 TAC Chapter	§ 115.352(1)(B)	No pump seals shall	§ 115.354(1)	§ 115.352(7)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		ALL		115, Pet. Refinery & Petrochemicals	§ 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process, that contact a process fluid that	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						contains less than 10% VOC by weight and components at a natural gas/gasoline processing operation that contact a process fluid that contains less than 1.0% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.			
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR §63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						(January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.			
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.356(3)(C).	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii)	No component shall be allowed to have a VOC leak, for more than 15 days, after discovery. If the owner or operator elects to use the alternative work practice in §115.358	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(iii) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.352(8) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	of this title, any leak detected as defined in §115.358 of this title, including any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	[G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.			
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355 § 115.357(1)	§ 115.356(5)	
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No valves shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8) § 115.357(9)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						on sight, smell, or sound.			
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(10) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(12) § 115.357(8)	No agitators shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-1(d) § 60.486(k)	Equipment that is in vacuum service is excluded from the requirements of §60.482-2 to §60.482-	None	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(5) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						10, if it is identified as required in §60.486(e)(5).			
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For flanges and other connectors, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	For valves in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	For pressure relief devices in light liquid or in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)				
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	For pumps in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-1(e) § 60.486(k)	Equipment that an owner or operator designates as being in VOC service less than 300 hours (hr)/yr is excluded from the requirements of §§ 60.482-2 through 60.482-10 if it is identified as required in §60.486(e)(6) and it meets any of the conditions specified in paragraphs (e)(1) through (3) of this section. §60.482-1(e)(1)-(3)	None	§ 60.486 [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(6) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-10(g) § 60.482-1(a) § 60.482-1(b)	Leaks, as indicated by the specified instrument or by	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d)	§ 60.482-1(g) [G]§ 60.482-10(l) [G]§ 60.486(a)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-1(g) [G]§ 60.482-10(f) § 60.482-10(h) § 60.482-10(i) [G]§ 60.482-10(j) [G]§ 60.482-10(k) § 60.482-10(m) § 60.486(k)	visual inspections, shall be repaired as soon as practicable except as provided in § 60.482-10(h). § 60.482-10(g)(1)-(2)	§ 60.485(f)	[G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(e)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-6(a)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-6(a)(2) § 60.482-6(b) § 60.482-6(c) § 60.482-6(d) § 60.482-6(e) § 60.486(k)	Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in §60.482-1(c) and paragraphs (d) and (e) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-3(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-3(b) § 60.482-3(c) § 60.482-3(d) § 60.482-3(e)(1) § 60.482-3(e)(2) § 60.482-3(f) § 60.482-3(g)(1) § 60.482-3(g)(2) § 60.482-3(h) [G]§ 60.482-3(i) § 60.482-3(j) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of VOC to the atmosphere, except as provided in §60.482-1(c) and paragraphs (h), (i), and (j) of this section.	§ 60.482-3(e)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-2(b)(1) § 60.482-1(a)	If an instrument reading of 10,000	§ 60.482-1(f)(1) § 60.482-1(f)(2)	§ 60.482-1(g) [G]§ 60.486(a)	§ 60.487(a) [G]§ 60.487(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-1(b) § 60.482-1(g) [G]§ 60.482-2(b)(2) § 60.482-2(c)(1) [G]§ 60.482-2(c)(2) § 60.482-2(d) [G]§ 60.482-2(d)(1) § 60.482-2(d)(2) § 60.482-2(d)(3) [G]§ 60.482-2(d)(4) [G]§ 60.482-2(d)(5) [G]§ 60.482-2(d)(6) [G]§ 60.482-2(e) § 60.482-2(f) [G]§ 60.482-2(g) § 60.482-2(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	ppm or greater is measured for pumps in light liquid service, a leak is detected.	[G]§ 60.482-1(f)(3) [G]§ 60.482-2(a) [G]§ 60.482-2(b)(2) [G]§ 60.482-2(d)(4) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	[G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) [G]§ 60.486(h) § 60.486(j)	[G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-5(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-5(b) § 60.482-5(c) § 60.486(k)	Each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in §60.482-1(c) and paragraph (c) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-10(d) § 60.18 § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-10(m) § 60.486(k)	Flares used to comply with this subpart shall comply with the requirements of §60.18.	§ 60.482-10(e) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f) [G]§ 60.485(g)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-4(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-4(b)(1) § 60.482-4(c) § 60.482-4(d)(1) § 60.482-4(d)(2) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in § 60.485(c).	§ 60.482-4(b)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(3) [G]§ 60.486(e)(4) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL	VOC	40 CFR Part 60, Subpart VV	§ 60.482-7(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-7(d)(1) § 60.482-7(d)(2) [G]§ 60.482-7(e) [G]§ 60.482-7(f) [G]§ 60.482-7(g) [G]§ 60.482-7(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	If an instrument reading of 10,000 ppm or greater is measured for valves in gas/vapor service and in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) § 60.482-7(a)(1) [G]§ 60.482-7(a)(2) § 60.482-7(c)(1)(i) § 60.482-7(c)(1)(ii) § 60.482-7(c)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-10(g) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-10(f) § 60.482-10(h) § 60.482-10(i) [G]§ 60.482-10(j)	Leaks, as indicated by the specified instrument or by visual inspections, shall be repaired as soon as practicable except as provided in § 60.482-10(h). §	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.482-10(l) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 60.482-10(k) § 60.482-10(m) § 60.486(k)	60.482-10(g)(1)-(2)			
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For flanges and other connectors, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	For pressure relief devices in light liquid or in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-7(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-7(d)(1) § 60.482-7(d)(2) [G]§ 60.482-7(e) [G]§ 60.482-7(f) [G]§ 60.482-7(g) [G]§ 60.482-7(h) § 60.482-9(a)	If an instrument reading of 10,000 ppm or greater is measured for valves in gas/vapor service and in light liquid service, a leak is detected.	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) § 60.482-7(a)(1) [G]§ 60.482-7(a)(2) § 60.482-7(c)(1)(i) § 60.482-7(c)(1)(ii) § 60.482-7(c)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)		[G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)		
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-6(a)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-6(a)(2) § 60.482-6(b) § 60.482-6(c) § 60.482-6(d) § 60.482-6(e) § 60.486(k)	Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in §60.482-1(c) and paragraphs (d) and (e) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-5(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-5(b) § 60.482-5(c) § 60.486(k)	Each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in §60.482-1(c) and paragraph (c) of this section.	§ 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-4(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-4(b)(1) § 60.482-4(c) § 60.482-4(d)(1) § 60.482-4(d)(2) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in §	§ 60.482-4(b)(2) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(3) [G]§ 60.486(e)(4) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						60.485(c).			
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	For pumps in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-3(a) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-3(b) § 60.482-3(c) § 60.482-3(d) § 60.482-3(e)(1) § 60.482-3(e)(2) § 60.482-3(f) § 60.482-3(g)(1) § 60.482-3(g)(2) § 60.482-3(h) [G]§ 60.482-3(i) § 60.482-3(j) § 60.482-9(a) § 60.482-9(b) § 60.486(k)	Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of VOC to the atmosphere, except as provided in §60.482-1(c) and paragraphs (h), (i), and (j) of this section.	§ 60.482-3(e)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(h) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-2(b)(1) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) [G]§ 60.482-2(b)(2)	If an instrument reading of 10,000 ppm or greater is measured for pumps in light liquid service,	§ 60.482-1(f)(1) § 60.482-1(f)(2) [G]§ 60.482-1(f)(3) [G]§ 60.482-2(a) [G]§ 60.482-2(b)(2)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.482-2(c)(1) [G]§ 60.482-2(c)(2) § 60.482-2(d) [G]§ 60.482-2(d)(1) § 60.482-2(d)(2) § 60.482-2(d)(3) [G]§ 60.482-2(d)(4) [G]§ 60.482-2(d)(5) [G]§ 60.482-2(d)(6) [G]§ 60.482-2(e) § 60.482-2(f) [G]§ 60.482-2(g) § 60.482-2(h) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(d) § 60.482-9(f) § 60.486(k)	a leak is detected.	[G]§ 60.482-2(d)(4) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.486(e)(1) [G]§ 60.486(e)(2) [G]§ 60.486(e)(4) [G]§ 60.486(f) [G]§ 60.486(h) § 60.486(j)	
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-8(b) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-8(a) § 60.482-8(a)(2) § 60.482-8(c)(1) § 60.482-8(c)(2) § 60.482-8(d) § 60.482-9(a) § 60.482-9(b) [G]§ 60.482-9(c) § 60.482-9(e) § 60.482-9(f) § 60.486(k)	For valves in heavy liquid service, if an instrument reading of 10,000 ppm or greater is measured, a leak is detected.	§ 60.482-8(a)(1) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(d) [G]§ 60.485(e) § 60.485(f)	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(b) [G]§ 60.486(c) § 60.486(e) § 60.486(e)(1) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 60.482-1(e) § 60.486(k)	Equipment that an owner or operator designates as being in VOC service less than 300 hours (hr)/yr is	None	§ 60.486 [G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(6)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						excluded from the requirements of §§ 60.482-2 through 60.482-10 if it is identified as required in §60.486(e)(6) and it meets any of the conditions specified in paragraphs (e)(1) through (3) of this section. §60.482-1(e)(1)-(3)		§ 60.486(j)	
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	[G]§ 63.1100(g)(7) § 60.482-1(a) § 60.482-1(b) § 60.482-1(g) § 60.482-10(m) § 60.486(k) [G]§ 63.1103(e)(4) [G]§ 63.670	Flares subject to §60.18 or §63.11 and used as a control device for emission points subject to §60.1103(e) are required to comply only with §60.1103(e)(4).	§ 60.482-10(e) § 60.485(a) [G]§ 60.485(b) [G]§ 60.485(c) [G]§ 60.485(d) § 60.485(f) [G]§ 60.485(g) [G]§ 63.671	§ 60.482-1(g) [G]§ 60.486(a) [G]§ 60.486(d) § 60.486(e) § 60.486(e)(1) § 60.486(j) [G]§ 63.1109(e)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e) § 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4)
33.1-0-0	EU	60VV-ALL-YY	VOC	40 CFR Part 60, Subpart VV	§ 60.482-1(d) § 60.486(k)	Equipment that is in vacuum service is excluded from the requirements of §60.482-2 to §60.482-10, if it is identified as required in §60.486(e)(5).	None	[G]§ 60.486(a) § 60.486(e) § 60.486(e)(1) § 60.486(e)(5) § 60.486(j)	§ 60.487(a) [G]§ 60.487(b) [G]§ 60.487(c) § 60.487(e)
33AIR5	EU	R7300-003	Exempt	30 TAC Chapter 117, Subchapter B	[G]§ 117.303(a)(11) [G]§ 117.310(f)	Units exempted from the provisions of this division except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1) and 117.354(a)(5)	None	§ 117.340(j) § 117.345(f) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						include new, modified, reconstructed, or relocated stationary diesel engine placed into service on or after October 1, 2001, that operates less than 100 hours per year, based on a rolling 12-month average, in other than emergency situations; and meets the requirements for non-road engines as specified. §117.303(a)(11)(A)-(B)			
33AIR5	EU	60IIII-14	CO	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 1039-Appendix I § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 3.5 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 1039-Appendix I.	None	None	[G]§ 60.4214(d)
33AIR5	EU	60IIII-14	NMHC and	40 CFR Part 60,	§ 60.4205(b)	Owners and operators	None	None	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			NO _x	Subpart IIII	§ 1039-Appendix I § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218	of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 75 KW and less than or equal to 560 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with an NMHC+NO _x emission limit of 4.0 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 1039-Appendix I.			
33AIR5	EU	60IIII-14	PM	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 1039-Appendix I § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a PM emission limit of 0.20 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 1039-Appendix I.	None	None	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
33AIR5	EU	60III-14	PM (Opacity)	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 1039.105(b)(1) § 1039.105(b)(2) § 1039.105(b)(3) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218	Emergency stationary CI ICE, that are not fire pump engines, with displacement < 10 lpc and not constant-speed engines, with max engine power < 2237 KW and a 2007 model year and later or max engine power > 2237 KW and a 2011 model year and later, must comply with following opacity emission limits: 20% during acceleration, 15% during lugging, 50% during peaks in either acceleration or lugging modes as stated in §60.4202(a)(1)-(2), (b)(2), and 40 CFR 1039.105(b)(1)-(3).	None	None	[G]§ 60.4214(d)
33AIR5	EU	63ZZZZ-215	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(b)(1) § 63.6595(c) § 63.6640(f)(1) § 63.6640(f)(2) § 63.6640(f)(2)(i) § 63.6640(f)(3)	An affected source which meets either of the criteria in paragraphs §63.6590(b)(1)(i)-(ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of §63.6645(f).	None	None	§ 63.6645(f)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
54-22-12	EU	R5760-296	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.767(6) § 115.764(a)(1) § 115.766(i)	All sites that are subject to this division and that are located in the Houston/ Galveston/Brazoria area as defined in § 115.10, excluding Harris County, are exempt from § 115.761(b) and (c)(2), except as provided in § 115.769(a)(3).	§ 115.764(a)(1) § 115.764(a)(3) [G]§ 115.764(a)(6) § 115.764(c) § 115.764(f)	§ 115.766(a)(1) § 115.766(a)(2) § 115.766(a)(3) § 115.766(a)(5) § 115.766(a)(6) § 115.766(c) § 115.766(i)(1)	§ 115.766(i)(2)
54-22-12	EU	63FFFF-CT	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2490(a)-Table 10 § 63.104(a) [G]§ 63.104(d) § 63.104(e) § 63.104(e)(1) [G]§ 63.104(e)(2) § 63.2490(a) § 63.2490(b) § 63.2490(c)	For each heat exchange system, as defined in §63.101, comply with the requirements of §63.104 and the requirements referenced therein except as specified in §63.2490.	[G]§ 63.104(c)	[G]§ 63.104(c) [G]§ 63.104(e)(2) [G]§ 63.104(f)(1)	[G]§ 63.104(f)(2)
54-22-12	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
54-22-13	EU	R5760-296	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.767(6) § 115.764(a)(1) § 115.766(i)	All sites that are subject to this division and that are located in the Houston/ Galveston/Brazoria area as defined in §	§ 115.764(a)(1) § 115.764(a)(3) [G]§ 115.764(a)(6) § 115.764(c) § 115.764(f)	§ 115.766(a)(1) § 115.766(a)(2) § 115.766(a)(3) § 115.766(a)(5) § 115.766(a)(6) § 115.766(c)	§ 115.766(i)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						115.10, excluding Harris County, are exempt from § 115.761(b) and (c)(2), except as provided in § 115.769(a)(3).		§ 115.766(i)(1)	
54-22-13	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
54-22-17	EU	R5760-296	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.767(6) § 115.764(a)(1) § 115.766(i)	All sites that are subject to this division and that are located in the Houston/ Galveston/Brazoria area as defined in § 115.10, excluding Harris County, are exempt from § 115.761(b) and (c)(2), except as provided in § 115.769(a)(3).	§ 115.764(a)(1) § 115.764(a)(3) [G]§ 115.764(a)(6) § 115.764(c) § 115.764(f)	§ 115.766(a)(1) § 115.766(a)(2) § 115.766(a)(3) § 115.766(a)(5) § 115.766(a)(6) § 115.766(c) § 115.766(i)(1)	§ 115.766(i)(2)
54-22-17	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
54-22-5	EU	R5760-296	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.767(6) § 115.764(a)(1) § 115.766(i)	All sites that are subject to this division and that are located in the Houston/ Galveston/Brazoria area as defined in § 115.10, excluding Harris County, are exempt from § 115.761(b) and (c)(2), except as provided in § 115.769(a)(3).	§ 115.764(a)(1) § 115.764(a)(3) [G]§ 115.764(a)(6) § 115.764(c) § 115.764(f)	§ 115.766(a)(1) § 115.766(a)(2) § 115.766(a)(3) § 115.766(a)(5) § 115.766(a)(6) § 115.766(c) § 115.766(i)(1)	§ 115.766(i)(2)
54-22-6	EU	R5760-022	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.767(3) § 115.764(a)(1) § 115.766(i)	Any site for which no stream directed to a cooling tower heat exchange system contains 5.0% or greater by weight HRVOC is exempt from the requirements of §115.761 of this title (relating to Site-wide Cap).	§ 115.764(a)(1) § 115.764(a)(3) § 115.764(c) § 115.764(d)	§ 115.766(c) § 115.766(d) § 115.766(i)(1)	§ 115.766(i)(2)
54-22-6	EU	63FFFF-CT	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2490(a)-Table10 § 63.104(a) [G]§ 63.104(d) § 63.104(e) § 63.104(e)(1) [G]§ 63.104(e)(2) § 63.2490(a) § 63.2490(b) § 63.2490(c)	For each heat exchange system, as defined in §63.101, comply with the requirements of §63.104 and the requirements referenced therein except as specified in §63.2490.	[G]§ 63.104(c)	[G]§ 63.104(c) [G]§ 63.104(e)(2) [G]§ 63.104(f)(1)	[G]§ 63.104(f)(2)
54-22-7	EU	R5760-022	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.767(3) § 115.764(a)(1) § 115.766(i)	Any site for which no stream directed to a cooling tower heat exchange system contains 5.0% or	§ 115.764(a)(1) § 115.764(a)(3) § 115.764(c) § 115.764(d)	§ 115.766(c) § 115.766(d) § 115.766(i)(1)	§ 115.766(i)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						greater by weight HRVOC is exempt from the requirements of 115.761 of this title (relating to Site-wide Cap).			
54-22-7	EU	63FFFF-CT	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2490(a)-Table10 § 63.104(a) [G]§ 63.104(d) § 63.104(e) § 63.104(e)(1) [G]§ 63.104(e)(2) § 63.2490(a) § 63.2490(b) § 63.2490(c)	For each heat exchange system, as defined in §63.101, comply with the requirements of §63.104 and the requirements referenced therein except as specified in §63.2490.	[G]§ 63.104(c)	[G]§ 63.104(c) [G]§ 63.104(e)(2) [G]§ 63.104(f)(1)	[G]§ 63.104(f)(2)
54-22-9	EU	R5760-296	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Cooling Towers	§ 115.767(6) § 115.764(a)(1) § 115.766(i)	All sites that are subject to this division and that are located in the Houston/ Galveston/Brazoria area as defined in § 115.10, excluding Harris County, are exempt from § 115.761(b) and (c)(2), except as provided in § 115.769(a)(3).	§ 115.764(a)(1) § 115.764(a)(3) [G]§ 115.764(a)(6) § 115.764(c) § 115.764(f)	§ 115.766(a)(1) § 115.766(a)(2) § 115.766(a)(3) § 115.766(a)(5) § 115.766(a)(6) § 115.766(c) § 115.766(i)(1)	§ 115.766(i)(2)
54-22-9	EU	63FFFF-CT	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2490(a)-Table10 § 63.104(a) [G]§ 63.104(d) § 63.104(e) § 63.104(e)(1) [G]§ 63.104(e)(2) § 63.2490(a) § 63.2490(b) § 63.2490(c)	For each heat exchange system, as defined in §63.101, comply with the requirements of §63.104 and the requirements referenced therein except as specified in §63.2490.	[G]§ 63.104(c)	[G]§ 63.104(c) [G]§ 63.104(e)(2) [G]§ 63.104(f)(1)	[G]§ 63.104(f)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
56-61-10	EU	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
56-61-10	EP	R5720-145-AMOC	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1) [G]§ 115.725(l) § 115.725(m) § 115.725(n) ** See Alternative Requirement	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)
56-61-10	CD	60A-4	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.18(c)(4)(i) § 60.18(c)(6) § 60.18(e)		§ 60.18(f)(4)		
56-61-10	CD	60A-5	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(iii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4) § 60.18(f)(5)	None	None
56-61-10	CD	60A-6	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(ii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
56-61-10	CD	63A-4	Opacity	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(i)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-10	CD	63A-5	Opacity	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(iii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						of part 60 of this chapter shall be used.			
56-61-10	CD	63A-6	Opacity	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(ii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-10	CD	60A-4-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h)	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670
56-61-10	CD	60A-5-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7)	Visible emissions. The owner or operator	[G]§ 60.670 [G]§ 63.671	[G]§ 60.670 [G]§ 63.1109(e)	[G]§ 60.670 § 63.1110(d)(1)(iv)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.1103(e)(4) [G]§ 63.671	shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).		[G]§ 63.671	[G]§ 63.1110(e)(4)
56-61-10	CD	60A-6-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare.	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-10	CD	63A-4-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670
56-61-10	CD	63A-5-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-10	CD	63A-6-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670
56-61-10	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder	The permit holder shall comply with the	The permit holder shall comply with the	The permit holder shall comply with the	The permit holder shall comply with the

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	applicable requirements of 40 CFR Part 63, Subpart YY	applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	applicable reporting requirements of 40 CFR Part 63, Subpart YY
56-61-12	EU	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
56-61-12	EP	R5720-145-AMOC	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1) [G]§ 115.725(l) § 115.725(m)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 115.725(n) ** See Alternative Requirement		
56-61-12	CD	60A-4	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(i) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
56-61-12	CD	60A-5	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(iii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4) § 60.18(f)(5)	None	None
56-61-12	CD	60A-6	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(ii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
56-61-12	CD	63A-4	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(i)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
56-61-12	CD	63A-5	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(iii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-12	CD	63A-6	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(ii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-12	CD	60A-4-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-12	CD	60A-5-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670
56-61-12	CD	60A-6-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-12	CD	63A-4-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
56-61-12	CD	63A-5-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670
56-61-12	CD	63A-6-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-12	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
56-61-14	EU	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
56-61-14	EP	R5720-145-AMOC	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)		§ 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1) [G]§ 115.725(l) § 115.725(m) § 115.725(n) ** See Alternative Requirement		
56-61-14	CD	60A-3	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(5) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(6)	None	None
56-61-14	CD	63A-3	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(8)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5)	None	None
56-61-14	CD	60A-3-YY	OPACTIY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions,	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-14	CD	63A-3-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 § 63.671G]	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
56-61-14	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
56-61-20	EU	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
56-61-20	EP	R5720-145-AMOC	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							[G]§ 115.725(l) § 115.725(m) § 115.725(n) ** See Alternative Requirement		
56-61-20	CD	60A-3	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(5) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(6)	None	None
56-61-20	CD	63A-3	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(8)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5)	None	None
56-61-20	CD	60A-3-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-20	CD	63A-3-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670
56-61-20	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					requirements of 40 CFR Part 63, Subpart YY				
56-61-22	EU	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
56-61-22	EP	R5720-145-AMOC	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	8 Alternative Requirement [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1) [G]§ 115.725(l) § 115.725(m) § 115.725(n)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)
56-61-22	CD	60A-4	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1)	Flares shall comply with paragraphs (c)-(f)	§ 60.18(d) § 60.18(f)(1)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(i) § 60.18(c)(6) § 60.18(e)	of § 60.18.	§ 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)		
56-61-22	CD	60A-5	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(iii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4) § 60.18(f)(5)	None	None
56-61-22	CD	60A-6	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(ii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
56-61-22	CD	63A-4	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(i)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-22	CD	63A-5	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(iii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.			
56-61-22	CD	63A-6	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(ii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-22	EP	60A-4-YY	OPACTIY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
56-61-22	CD	60A-5-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670
56-61-22	CD	60A-6-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-22	CD	63A-4-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670
56-61-22	CD	63A-5-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-22	CD	63A-6-YY	OPACITY	40 CFR Part 63, Subpart YY	[G]§ 63.670 [G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.1109(e) [G]§ 63.670 [G]§ 63.671	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
56-61-22	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY
56-61-4	EU	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
56-61-4	EP	R5720-145	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							[G]§ 115.725(l) § 115.725(n)		
56-61-4	CD	60A-4	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(i) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
56-61-4	CD	60A-5	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(iii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4) § 60.18(f)(5)	None	None
56-61-4	CD	60A-6	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(ii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
56-61-4	CD	63A-4	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(i)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-4	CD	63A-5	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1)	Flares shall be designed and	§ 63.11(b)(4) § 63.11(b)(5)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(iii)	operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(7)(i)		
56-61-4	CD	63A-6	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(ii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-4	CD	60A-4-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare.	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-4	CD	60A-5-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670
56-61-4	CD	60A-6-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-4	CD	63A-4-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	63.670 Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670
56-61-4	CD	63A-5-	OPACITY	40 CFR Part 63,	[G]§ 63.670	Visible emissions. The	[G]§ 63.670	[G]§ 63.2525(m)	§ 63.2520(d)(3)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		FFFF		Subpart FFFF	[G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.671	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2520(e)(11) [G]§ 63.670
56-61-4	CD	63A-6-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	63.670 Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-8	EU	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
56-61-8	EP	R5720-145	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1) [G]§ 115.725(l) § 115.725(n)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)
56-61-8	CD	60A-4	Opacity	40 CFR Part 60,	§ 60.18(b)	Flares shall comply	§ 60.18(d)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				Subpart A	§ 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(i) § 60.18(c)(6) § 60.18(e)	with paragraphs (c)-(f) of § 60.18.	§ 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)		
56-61-8	CD	60A-5	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(iii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4) § 60.18(f)(5)	None	None
56-61-8	CD	60A-6	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(ii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
56-61-8	CD	63A-4	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(i)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-8	CD	63A-5	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.11(b)(7)(iii)	less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.			
56-61-8	CD	63A-6	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(ii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-8	CD	60A-4-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						in §63.670(h).			
56-61-8	CD	60A-5-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670
56-61-8	CD	60A-6-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-8	CD	63A-4-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670
56-61-8	CD	63A-5-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-8	CD	63A-6-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						in §63.670(h).			
56-61-9	EU	R1111-1	Opacity	30 TAC Chapter 111, Visible Emissions	§ 111.111(a)(4)(A)	Visible emissions from a process gas flare shall not be permitted for more than five minutes in any two-hour period. Non-excessive upset events are subject to the provisions under §101.222(b).	§ 111.111(a)(4)(A)(i) § 111.111(a)(4)(A)(ii)	§ 111.111(a)(4)(A)(ii)	None
56-61-9	EP	R5720-145	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.722(d) § 115.722(d)(1) § 115.722(d)(2) [G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) [G]§ 115.725(l) [G]§ 115.726(a)(2)	All flares must continuously meet the requirements of 40 CFR § 60.18(c)(2)-(6) and (d) as amended through October 17, 2000 (65 FR 61744) when vent gas containing HRVOC is being routed to the flare.	[G]§ 115.725(d)(1) § 115.725(d)(2) § 115.725(d)(2)(A)(i) [G]§ 115.725(d)(2)(A)(ii) § 115.725(d)(2)(A)(iii) § 115.725(d)(2)(A)(iv) § 115.725(d)(2)(B) § 115.725(d)(2)(B)(i) § 115.725(d)(2)(B)(ii) § 115.725(d)(2)(B)(iii) § 115.725(d)(2)(B)(iv) § 115.725(d)(3) § 115.725(d)(4) § 115.725(d)(5) § 115.725(d)(6) § 115.725(d)(7) § 115.725(k)(1) [G]§ 115.725(l) § 115.725(n)	§ 115.726(a)(1) § 115.726(a)(1)(A) § 115.726(d)(1) § 115.726(d)(10) § 115.726(d)(2) § 115.726(d)(3) § 115.726(d)(4) § 115.726(i) § 115.726(j)(1) § 115.726(j)(2)	§ 115.725(n) § 115.726(a)(1)(B) [G]§ 115.726(a)(2)
56-61-9	CD	60A-4	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(i) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
56-61-9	CD	60A-5	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(iii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4) § 60.18(f)(5)	None	None
56-61-9	CD	60A-6	Opacity	40 CFR Part 60, Subpart A	§ 60.18(b) § 60.18(c)(1) § 60.18(c)(2) § 60.18(c)(3)(ii) § 60.18(c)(4)(ii) § 60.18(c)(6) § 60.18(e)	Flares shall comply with paragraphs (c)-(f) of § 60.18.	§ 60.18(d) § 60.18(f)(1) § 60.18(f)(2) § 60.18(f)(3) § 60.18(f)(4)	None	None
56-61-9	CD	63A-4	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(i)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-9	CD	63A-5	112(B) HAPS	40 CFR Part 63, Subpart A	§ 63.11(b)(4) § 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(iii)	Flares shall be designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(4) § 63.11(b)(5) § 63.11(b)(7)(i)	None	None
56-61-9	CD	63A-6	112(B)	40 CFR Part 63,	§ 63.11(b)(4)	Flares shall be	§ 63.11(b)(4)	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
			HAPS	Subpart A	§ 63.11(b)(1) § 63.11(b)(2) § 63.11(b)(3) § 63.11(b)(5) § 63.11(b)(6)(ii) § 63.11(b)(7)(ii)	designed and operated with no visible emissions, except for periods of a total of 5 minutes or less during any 2 consecutive hrs. Test Method 22 in App. A of part 60 of this chapter shall be used.	§ 63.11(b)(5) § 63.11(b)(7)(i)		
56-61-9	CD	60A-4-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670
56-61-9	CD	60A-5-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-9	CD	60A-6-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						the flare as specified in §63.670(h).			
56-61-9	CD	63A-4-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670
56-61-9	CD	63A-5-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).			
56-61-9	CD	63A-6-FFFF	OPACITY	40 CFR Part 63, Subpart FFFF	[G]§ 63.670 [G]§ 63.2450(e)(5) [G]§ 63.2535(m) [G]§ 63.671	Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. The owner or operator shall monitor for visible emissions from the flare as specified in §63.670(h).	[G]§ 63.670 [G]§ 63.671	[G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	§ 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a)	Agitators within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.358(c)(1) [G]§ 115.358(h) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(2) § 115.782(b)(3) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii)	Components within the process unit or processes listed in §115.780(a) is subject to the requirements of this division. If the owner of operator elects to use the alternative work practice in §115.358 of this title, a leak is defined as specified in §115.358 of this title, including any leak detected using the alternative work practice on a	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E) § 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f) § 115.781(b) § 115.781(b)(4)	§ 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(4) § 115.356(5) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d)	[G]§ 115.358(g) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(B)(iv)	component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(h)(1) § 115.781(h)(2) § 115.781(h)(3) § 115.781(h)(4) § 115.781(h)(5) [G]§ 115.781(h)(6) § 115.782(b)(4) § 115.782(d)(1) § 115.788(h)(1) [G]§ 115.788(h)(2) § 115.788(h)(3)	§ 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) [G]§ 115.786(f) § 115.786(g)	
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III)	Pump seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	than 500 ppmv above background as methane for all components.		§ 115.786(g)	
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b)	Compressor seals within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(c)(1) § 115.781(c)(2) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a)	Flanges or other connectors within a petroleum refinery; synthetic organic chemical, polymer,	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a)	Valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.		§ 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.787(e) § 115.787(f) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i)	Pressure relief valves (in gaseous service) within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above methane for all	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(b)(8) § 115.781(e) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.788(a)(2)(C)(iii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	components.			
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.783(4)(A)(i) § 115.783(4)(A)(ii) § 115.783(4)(A)(ii)(I) § 115.783(4)(A)(ii)(II) § 115.783(4)(B) § 115.783(4)(B)(i) § 115.783(4)(B)(ii)	Process drains within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(5) § 115.781(b)(6) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c)
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(a)	Components that contact a process fluid containing less than 5.0% highly-reactive volatile organic	None	§ 115.786(e) § 115.786(g)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						compounds by weight on an annual average basis are exempt from the requirements of this division (relating to Fugitive Emissions), except for 115.786(e) and (g) of this title (relating to Record keeping Requirements).			
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv)	Heat exchanger heads, sight glasses, meters, gauges, sampling connections, bolted manways, hatches, sump covers, junction box vents, and covers and seals on VOC water separators within the process unit or processes listed in §115.780(a) in which a HRVOC is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) [G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.789(1)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) [G]§ 115.781(d) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(1) § 115.783(1)(A) § 115.783(1)(B) § 115.783(5) § 115.787(f) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	Bypass line valves within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.781(b) § 115.781(b)(10) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) [G]§ 115.781(d) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.786(a)(1)	§ 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) § 115.786(a)(1) § 115.786(a)(2) § 115.786(a)(2)(A) § 115.786(a)(2)(B) § 115.786(b)(1) § 115.786(b)(2) § 115.786(b)(2)(A) § 115.786(b)(2)(B) § 115.786(b)(2)(C) [G]§ 115.786(b)(3) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g)
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1)	All agitators that are equipped with a shaft sealing system that prevents or detects emissions of VOC	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)	from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.		§ 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i)	All compressors that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1) § 115.787(g)				
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.787(d) § 115.780(b) [G]§ 115.781(a) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(1) § 115.782(c)(1)(A) § 115.782(c)(1)(B) [G]§ 115.782(c)(1)(B)(i) § 115.782(c)(1)(B)(ii) [G]§ 115.782(c)(1)(B)(iii) § 115.782(c)(1)(B)(iv) § 115.782(c)(1)(C)(i) § 115.782(c)(1)(C)(i)(I) § 115.782(c)(1)(C)(i)(II) § 115.782(c)(1)(C)(i)(III) § 115.782(c)(1)(C)(ii) § 115.783(3) [G]§ 115.783(3)(A) [G]§ 115.783(3)(B) § 115.787(b) § 115.787(b)(1)	All pumps that are equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal are exempt from the monitoring requirement of §115.781(b) and (c). Submerged pumps or sealless pumps may be used to satisfy the requirements of this subsection.	§ 115.782(d)(2)	[G]§ 115.782(c)(1)(B)(i) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(1) § 115.786(d)(2) § 115.786(d)(2)(A) § 115.786(d)(2)(B) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g)	[G]§ 115.782(c)(1)(B)(i) § 115.783(3)(C) [G]§ 115.786(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.787(g)				
68.1-0-0	EU	R5780-ALL	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Fugitive Emissions	§ 115.781(b)(9) § 115.780(b) [G]§ 115.781(a) § 115.781(g)(3) § 115.782(a) § 115.782(b)(1) § 115.782(b)(2) § 115.782(c)(2) § 115.782(c)(2)(A) § 115.782(c)(2)(A)(i) § 115.782(c)(2)(A)(ii) § 115.782(c)(2)(B) § 115.783(5) § 115.787(f) § 115.787(f)(2) § 115.787(f)(3) § 115.787(f)(4) § 115.787(g) § 115.788(a) § 115.788(a)(1) § 115.788(a)(2) § 115.788(a)(2)(A) § 115.788(a)(2)(B) § 115.788(a)(2)(C) § 115.788(a)(2)(C)(i) § 115.788(a)(2)(C)(ii) § 115.788(a)(2)(C)(iii) § 115.788(a)(2)(D) § 115.788(a)(3) § 115.788(a)(3)(A) § 115.788(a)(3)(B) [G]§ 115.788(g)	Open-ended valves or lines within a petroleum refinery; synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether manufacturing process; or natural gas/gasoline processing operation in which a highly-reactive volatile organic compound is a raw material, intermediate, final product, or in a waste stream is subject to the requirements of this division. A leak is defined as a screening concentration greater than 500 ppmv above background as methane for all components.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) § 115.781(b) § 115.781(b)(10) § 115.781(b)(3) § 115.781(b)(4) § 115.781(b)(7) § 115.781(b)(7)(A) § 115.781(b)(7)(B) § 115.781(f) § 115.781(f)(1) § 115.781(f)(2) § 115.781(f)(3) § 115.781(f)(4) § 115.781(f)(5) § 115.781(f)(6) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.782(d)(2) § 115.789(1)(B)	§ 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5) § 115.781(b)(10) § 115.781(g) § 115.781(g)(1) § 115.781(g)(2) § 115.781(g)(3) § 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.786(d) § 115.786(d)(2) § 115.786(d)(2)(C) § 115.786(e) § 115.786(g) [G]§ 115.788(g)	§ 115.782(c)(2)(A)(ii) [G]§ 115.786(c) § 115.788(c) [G]§ 115.788(d) § 115.788(e) [G]§ 115.788(g) § 115.789(1)(B)
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B)	No valves contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service)	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6)	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No pump seals contacting a fluid with TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(10)	Instrumentation systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet 40 CFR	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						§63.169 (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.			
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(11)	Sampling connection systems, as defined in 40 CFR §63.161 (January 17, 1997), that meet the requirements of 40 CFR §63.166(a) and (b) (June 20, 1996) are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(13)	Components/systems that contact a process fluid containing VOC having a true vapor pressure equal to or less than 0.002 psia at 68 degrees Fahrenheit are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(6)	Components at a petroleum refinery or synthetic organic chemical, polymer, resin, or methyl-tert-butyl ether	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						manufacturing process, that contact a process fluid that contains less than 10% VOC by weight are exempt from the requirements of this division except §115.356(3)(C) of this title.			
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(2) § 115.352(9)	Conservation vents or other devices on atmospheric storage tanks that are actuated either by a vacuum or a pressure of no more than 2.5 psig, pressure relief valves equipped with a rupture disk or venting to a control device, components in continuous vacuum service, and valves that are not externally regulated (such as in-line check valves) are exempt from the requirements of this division, except that each pressure relief valve equipped with a rupture disk must comply with §115.352(9) and §115.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(A) § 115.352(1)	No process drains contacting a fluid with	§ 115.354(1) § 115.354(5)	§ 115.352(7) § 115.356	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7) § 115.357(1)	TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(7)	No process drains contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	None
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(A) § 115.352(1)	No pressure relief valves contacting a	§ 115.354(1) § 115.354(2)	§ 115.352(7) § 115.356	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(1) § 115.357(8) § 115.357(9)	fluid with TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(9) § 115.357(12) § 115.357(8) § 115.357(9)	No pressure relief valves contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(4) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No open-ended valves or lines contacting a fluid with TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(12) § 115.357(8) § 115.357(9)	No open-ended valves or lines contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	[G]§ 115.354(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						sound.			
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(3) § 115.352(4) § 115.352(5) § 115.352(6) § 115.352(7) § 115.357(1) § 115.357(8) § 115.357(9)	No valves contacting a fluid with TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery, which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) [G]§ 115.354(7) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) § 115.356(5)	[G]§ 115.354(7)
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.357(5)	Reciprocating compressors and positive displacement pumps used in natural gas/gasoline processing operations are exempt from the requirements of this division except §115.356(3)(C) of this title.	None	§ 115.356 § 115.356(3) [G]§ 115.356(3)(C)	None
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(C) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(B) § 115.352(2)(C) § 115.352(2)(C)(i)	If the owner or operator elects to use the alternative work practice in §115.358, no component shall be allowed to have a VOC leak, detected	§ 115.354(1) § 115.354(11) § 115.354(13)(A) § 115.354(13)(B) § 115.354(13)(C) § 115.354(13)(D) § 115.354(13)(E)	§ 115.352(7) § 115.354(13)(D) § 115.354(13)(E) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3)	[G]§ 115.358(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(8) § 115.358(c)(1) [G]§ 115.358(h)	as defined in §115.358, for more than 15 days after discovery. This includes any leak detected using the alternative work practice on a component that is subject to the requirements of this division but not specifically selected for alternative work practice monitoring.	§ 115.354(13)(F) § 115.354(4) § 115.354(5) § 115.354(9) [G]§ 115.355 § 115.358(c)(2) § 115.358(d) [G]§ 115.358(e) § 115.358(f)	§ 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) [G]§ 115.356(4) § 115.356(5)	
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No pump seals contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A)	No flanges or other connectors contacting a fluid with TVP less than or equal to 0.044	§ 115.354(1) § 115.354(11) § 115.354(3) § 115.354(5)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(1) § 115.357(12) § 115.357(8)	psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(3) § 115.352(5) § 115.352(7) § 115.352(8) § 115.357(12) § 115.357(8)	No flanges or other connectors contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(11) § 115.354(3) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(A) § 115.352(1)	No agitators contacting a fluid with	[G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(1) § 115.357(8)	TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(A) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(7) § 115.357(8)	No agitators contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 500 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery	§ 115.352(1)(B) § 115.352(1)	No compressor seals in hydrogen service	[G]§ 115.355	§ 115.352(7) § 115.356	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				& Petrochemicals	§ 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(3) § 115.357(8)	with and the hydrogen content can be expected to always exceed 50.0% by volume shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.		[G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No compressor seals that are equipped with a shaft sealing system that prevents or detects emissions of VOCs from the seal shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(1) § 115.357(8)	No compressor seals contacting a fluid with TVP less than or equal to 0.044 psia (heavy liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355 § 115.357(1)	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(12) § 115.357(8)	No compressor seals contacting a fluid with TVP greater than 0.044 psia (gas/vapor or light liquid service) shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	§ 115.354(1) § 115.354(10) § 115.354(2) § 115.354(5) § 115.354(6) § 115.354(9) [G]§ 115.355	§ 115.352(7) § 115.354(10) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) § 115.356(3)(A) § 115.356(3)(B) [G]§ 115.356(3)(C) § 115.356(5)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
68.1-0-0	EU	R5352-ALL	VOC	30 TAC Chapter 115, Pet. Refinery & Petrochemicals	§ 115.352(1)(B) § 115.352(1) § 115.352(2) § 115.352(2)(A) § 115.352(2)(C) § 115.352(2)(C)(i) § 115.352(2)(C)(ii) § 115.352(2)(C)(iii) § 115.352(3) § 115.352(5) § 115.352(7) § 115.357(4) § 115.357(8)	No pump seals that are equipped with a shaft sealing system that prevents or detects emissions of VOCs from the seal shall be allowed to have a VOC leak, for more than 15 days after discovery which exceeds a screening concentration greater than 10,000 parts per million by volume above background as methane, or the dripping or exuding of process fluid based on sight, smell, or sound.	[G]§ 115.355	§ 115.352(7) § 115.356 [G]§ 115.356(1) [G]§ 115.356(2) § 115.356(3) [G]§ 115.356(3)(C) § 115.356(5)	None
68.1-0-0	EU	63FFFF-FUG	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2480(a) The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart FFFF	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart FFFF
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.163 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176	Standards: Pumps in light liquid service. §63.163(a)-(j)	[G]§ 63.163 [G]§ 63.176 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
								§ 63.181(h)(6) § 63.181(h)(7) § 63.181(h)(8)	
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.174 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in gas/vapor service and in light liquid service. §63.174(a)-(j)	[G]§ 63.174 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.167 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Open-ended valves or lines. §63.167(a)-(e).	[G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.173 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators gas/vapor service and in light liquid service. §63.173(a)-(j).	[G]§ 63.173 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.172(a) [G]§ 63.172(h) § 63.172(i) § 63.172(j)(1) § 63.172(j)(2) § 63.172(m)	Owners/operators of closed-vent systems and control devices used to comply with provisions of this subpart shall comply with the provisions of this section, except as provided in	[G]§ 63.172(f)(1) [G]§ 63.172(f)(2) § 63.172(g) [G]§ 63.172(h) § 63.172(j)(1) § 63.172(j)(2) [G]§ 63.172(k) [G]§ 63.172(l) [G]§ 63.180(b)	§ 63.118(a)(3) § 63.172(j)(1) [G]§ 63.172(k) [G]§ 63.172(l) § 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						§63.162(b).	[G]§ 63.180(d)	§ 63.181(g)(1)(i) § 63.181(g)(1)(ii) [G]§ 63.181(g)(2) [G]§ 63.181(g)(3)	
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.172(d) § 63.11(b) § 63.172(e) [G]§ 63.172(h) § 63.172(m)	Flares used to comply with this subpart shall comply with the requirements of § 63.11(b) of 40 CFR 63, Subpart A.	§ 63.172(e) [G]§ 63.172(h) [G]§ 63.180(b) [G]§ 63.180(d) [G]§ 63.180(e)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(ii) § 63.181(g)(1)(iii) § 63.181(g)(1)(iv) [G]§ 63.181(g)(2)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.170 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Surge control vessels and bottom receivers.	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.168 § 63.162(a)	Standards: Valves in gas/vapor service and	[G]§ 63.168 [G]§ 63.175	§ 63.181(a) [G]§ 63.181(b)	[G]§ 63.182(a) [G]§ 63.182(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	in light liquid service. §63.168(a)-(j)	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7)	§ 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Valves in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.166 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Sampling connection systems. §63.166(a)-(c)	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.165 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief device in gas/vapor service. §63.165(a)-(d)	[G]§ 63.165 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.164 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Compressors. §63.164(a)-(i)	[G]§ 63.164 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.162(e) § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h)	Equipment that is in organic HAP service less than 300 hours per year is excluded from the requirements of §§63.163 - 63.174 and §63.178 if it is identified as required in §63.181(j).	[G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i) § 63.181(j)	[G]§ 63.182(a) [G]§ 63.182(b)
68.1-0-0	EU	63H-ALL	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.168 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Valves in gas/vapor service and in light liquid service. §63.168(a)-(j)	[G]§ 63.168 [G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
								[G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7)	
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.162(e) § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h)	Equipment that is in organic HAP service less than 300 hours per year is excluded from the requirements of §§63.163 - 63.174 and §63.178 if it is identified as required in §63.181(j).	[G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i) § 63.181(j)	[G]§ 63.182(a) [G]§ 63.182(b)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.164 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Compressors. §63.164(a)-(i)	[G]§ 63.164 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.165 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief device in gas/vapor service. §63.165(a)-(d)	[G]§ 63.165 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.166 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Sampling connection systems. §63.166(a)-(c)	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g)	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.162(h) [G]§ 63.171				[G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Valves in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.171				
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.170 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Surge control vessels and bottom receivers.	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.2535(m) § 63.172(e) [G]§ 63.172(h) § 63.172(m) [G]§ 63.2450(e)(5) [G]§ 63.670 [G]§ 63.671	Flares subject to §60.18 or §63.11 and used as a control device for emission points subject to emission limits/work practice standards in 40 CFR Part 63, Subpart FFFF are required to comply only with §63.2450(e)(5).	§ 63.172(e) [G]§ 63.172(h) [G]§ 63.180(b) [G]§ 63.180(d) [G]§ 63.180(e) [G]§ 63.670 [G]§ 63.671	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(ii) § 63.181(g)(1)(iii) § 63.181(g)(1)(iv) [G]§ 63.181(g)(2) [G]§ 63.2525(m) [G]§ 63.670 [G]§ 63.671	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d) § 63.2520(d)(3) [G]§ 63.2520(e)(11) [G]§ 63.670
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.173 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators gas/vapor service and in light liquid service. §63.173(a)-(j).	[G]§ 63.173 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.174 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in gas/vapor service and in light liquid service. §63.174(a)-(j)	[G]§ 63.174 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.172(a) [G]§ 63.172(h)	Owners/operators of closed-vent systems	[G]§ 63.172(f)(1) [G]§ 63.172(f)(2)	§ 63.118(a)(3) § 63.172(j)(1)	[G]§ 63.182(a) [G]§ 63.182(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.172(i) § 63.172(j)(1) § 63.172(j)(2) § 63.172(m)	and control devices used to comply with provisions of this subpart shall comply with the provisions of this section, except as provided in §63.162(b).	§ 63.172(g) [G]§ 63.172(h) § 63.172(j)(1) § 63.172(j)(2) [G]§ 63.172(k) [G]§ 63.172(l) [G]§ 63.180(b) [G]§ 63.180(d)	[G]§ 63.172(k) [G]§ 63.172(l) § 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(ii) [G]§ 63.181(g)(2) [G]§ 63.181(g)(3)	§ 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.163 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176	Standards: Pumps in light liquid service. §63.163(a)-(j)	[G]§ 63.163 [G]§ 63.176 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) § 63.181(h)(8)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-FFFF	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.167 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Open-ended valves or lines. §63.167(a)-(e).	[G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.168 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g)	Standards: Valves in gas/vapor service and in light liquid service. §63.168(a)-(j)	[G]§ 63.168 [G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 63.162(h) [G]§ 63.171 [G]§ 63.175			[G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7)	[G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Agitators in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.162(e) § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h)	Equipment that is in organic HAP service less than 300 hours per year is excluded from the requirements of §§63.163 - 63.174 and §63.178 if it is identified as required in §63.181(j).	[G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i) § 63.181(j)	[G]§ 63.182(a) [G]§ 63.182(b)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.164 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Compressors. §63.164(a)-(i)	[G]§ 63.164 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.165 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief device in gas/vapor service. §63.165(a)-(d)	[G]§ 63.165 [G]§ 63.180(b) [G]§ 63.180(c) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(f)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-	112(B)	40 CFR Part 63,	[G]§ 63.166	Standards: Sampling	[G]§ 63.180(b)	§ 63.181(a)	[G]§ 63.182(a)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		YY	HAPS	Subpart H	§ 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	connection systems. §63.166(a)-(c)	[G]§ 63.180(d)	[G]§ 63.181(b) § 63.181(c) [G]§ 63.181(i)	[G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pumps in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Valves in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in heavy liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.167 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.175	Standards: Open-ended valves or lines. §63.167(a)-(e).	[G]§ 63.175 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) § 63.181(h) [G]§ 63.181(h)(1) [G]§ 63.181(h)(2) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) [G]§ 63.181(i)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Instrumentation systems. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.169 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Pressure relief devices in liquid service. §63.169(a)-(d)	[G]§ 63.169 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.170 § 63.162(a) § 63.162(c) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Surge control vessels and bottom receivers.	[G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.1100(g)(7) [G]§ 63.1103(e)(4) § 63.172(e) [G]§ 63.172(h) § 63.172(m) [G]§ 63.670	Flares subject to §60.18 or §63.11 and used as a control device for emission points subject to §63.1103(e) are required to comply only with §63.1103(e)(4).	§ 63.172(e) [G]§ 63.172(h) [G]§ 63.180(b) [G]§ 63.180(d) [G]§ 63.180(e) [G]§ 63.671	[G]§ 63.1109(e) § 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(iii) § 63.181(g)(1)(iv) [G]§ 63.181(g)(2)	§ 63.1110(d)(1)(iv) [G]§ 63.1110(e)(4) [G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.173 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h)	Standards: Agitators gas/vapor service and in light liquid service. §63.173(a)-(j).	[G]§ 63.173 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.171				
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.174 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171	Standards: Connectors in gas/vapor service and in light liquid service. §63.174(a)-(j)	[G]§ 63.174 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	§ 63.172(a) [G]§ 63.172(h) § 63.172(i) § 63.172(j)(1) § 63.172(j)(2) § 63.172(m)	Owners/operators of closed-vent systems and control devices used to comply with provisions of this subpart shall comply with the provisions of this section, except as provided in §63.162(b).	[G]§ 63.172(f)(1) [G]§ 63.172(f)(2) § 63.172(g) [G]§ 63.172(h) § 63.172(j)(1) § 63.172(j)(2) [G]§ 63.172(k) [G]§ 63.172(l) [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.118(a)(3) § 63.172(j)(1) [G]§ 63.172(k) [G]§ 63.172(l) § 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(g) § 63.181(g)(1)(i) § 63.181(g)(1)(ii) [G]§ 63.181(g)(2) [G]§ 63.181(g)(3)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63H-ALL-YY	112(B) HAPS	40 CFR Part 63, Subpart H	[G]§ 63.163 § 63.162(a) § 63.162(c) [G]§ 63.162(f) [G]§ 63.162(g) § 63.162(h) [G]§ 63.171 [G]§ 63.176	Standards: Pumps in light liquid service. §63.163(a)-(j)	[G]§ 63.163 [G]§ 63.176 [G]§ 63.180(b) [G]§ 63.180(d)	§ 63.181(a) [G]§ 63.181(b) § 63.181(c) [G]§ 63.181(d) § 63.181(h) [G]§ 63.181(h)(3) § 63.181(h)(4) [G]§ 63.181(h)(5) § 63.181(h)(6) § 63.181(h)(7) § 63.181(h)(8)	[G]§ 63.182(a) [G]§ 63.182(b) § 63.182(c) [G]§ 63.182(c)(1) § 63.182(c)(4) [G]§ 63.182(d)
68.1-0-0	EU	63YY-FUG	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart	The permit holder shall comply with the applicable monitoring and testing requirements of 40	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					equipment specification requirements of 40 CFR Part 63, Subpart YY	YY	CFR Part 63, Subpart YY	Part 63, Subpart YY	
ADM_EMG GEN	EU	R7300-003	Exempt	30 TAC Chapter 117, Subchapter B	[G]§ 117.303(a)(11) [G]§ 117.310(f)	Units exempted from the provisions of this division except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1) and 117.354(a)(5) include new, modified, reconstructed, or relocated stationary diesel engine placed into service on or after October 1, 2001, that operates less than 100 hours per year, based on a rolling 12-month average, in other than emergency situations; and meets the requirements for non-road engines as specified. §117.303(a)(11)(A)-(B)	None	§ 117.340(j) § 117.345(f) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None
ADM_EMG GEN	EU	60III-9	CO	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 60.4218 § 89.112(a)	equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 3.5 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).			
ADM_EMG GEN	EU	60III-9	NMHC and NO _x	40 CFR Part 60, Subpart III	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.112(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than 560 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with an NMHC+NO _x emission limit of 6.4 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)
ADM_EMG GEN	EU	60III-9	PM	40 CFR Part 60, Subpart III	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 60.4211(f) § 60.4218 § 89.112(a)	power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a PM emission limit of 0.20 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).			
ADM_EMG GEN	EU	60III-9	PM (Opacity)	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.113(a)(1) § 89.113(a)(2) § 89.113(a)(3)	Emergency stationary CI ICE, that are not fire pump engines, with displacement < 10 lpc and not constant-speed engines, with max engine power < 2237 KW and a 2007 model year and later or max engine power > 2237 KW and a 2011 model year and later, must comply with following opacity emission limits: 20% during acceleration, 15% during lugging, 50% during peaks in either acceleration or lugging modes as stated in §60.4202(a)(1)-(2), (b)(2) and §89.113(a)(1)-(3) and	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						§1039.105(b)(1)-(3).			
ADM_EMG GEN	EU	63ZZZZ-215	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(b)(1) § 63.6595(c) § 63.6640(f)(1) § 63.6640(f)(2) § 63.6640(f)(2)(i) § 63.6640(f)(3)	An affected source which meets either of the criteria in paragraphs §63.6590(b)(1)(i)-(ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of §63.6645(f).	None	None	§ 63.6645(f)
BSENGINE	EU	R7300-010	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(B)	CO emissions must not exceed 3.0 g/hp-hr for stationary internal combustion engines.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.8000(b) § 117.8000(c) § 117.8000(c)(2) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
BSENGINE	EU	R7300-010	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a)	An owner or operator may not use the	[G]§ 117.335(a)(1) § 117.335(a)(4)	§ 117.345(a) § 117.345(f)	§ 117.335(b) § 117.335(g)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 117.310(a)(9)(E)(iv)(III)) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) [G]§ 117.310(f) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(2)(C) § 117.340(p)(3)	alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.340(p)(2)(A) § 117.340(p)(2)(B) § 117.340(p)(2)(C) § 117.8000(b) § 117.8000(c) § 117.8000(c)(1) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)	[G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(3)(B) § 117.345(f)(9)	§ 117.340(p)(2)(D) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
BSENGINE	EU	60III-12	CO	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 37 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 5.0 g/KW-hr as stated	None	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102 and 40 CFR 1039.101.			
BSENGINE	EU	60III-12	NMHC and NO _x	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 37 KW but less than 56 KW and a displacement of less than 10 liters per cylinder and is a 2008 model year and later must comply with an NMHC+NO _x emission limit of 4.7 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	None	None	None
BSENGINE	EU	60III-12	PM	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 1039.101 § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 19 KW and less than 56 KW and a displacement of less than 10 liters per cylinder and is a 2013 model year and later must comply with a PM emission limit of 0.03 g/KW-hr as	None	None	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						stated in 40 CFR 60.4201(a) and 40 CFR 1039.102 and 40 CFR 1039.101.			
BSENGINE	EU	63ZZZZ-10	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(c)	Stationary RICE subject to Regulations under 40 CFR Part 60. An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines as applicable. No further requirements apply for such engines under this part.	None	None	None
DTANK24	EU	R5211-002	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.217(a)(1) § 115.212(a)(2) § 115.214(a)(1)(B) § 115.214(a)(1)(D) § 115.214(a)(1)(D)(i)	Vapor pressure (at land-based operations). All land-based loading and unloading of VOC with a true vapor pressure less than 0.5 psia is exempt from the requirements of this division, except as specified.	§ 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.215 § 115.215(4)	§ 115.216 § 115.216(2) § 115.216(3)(B)	None
DTANK33	EU	R5211-	VOC	30 TAC Chapter	§ 115.217(a)(1)	Vapor pressure (at	§ 115.214(a)(1)(A)	§ 115.216	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
		002		115, Loading and Unloading of VOC	§ 115.212(a)(2) § 115.214(a)(1)(B) § 115.214(a)(1)(D) § 115.214(a)(1)(D)(i)	land-based operations). All land-based loading and unloading of VOC with a true vapor pressure less than 0.5 psia is exempt from the requirements of this division, except as specified.	§ 115.214(a)(1)(A)(i) § 115.215 § 115.215(4)	§ 115.216(2) § 115.216(3)(B)	
GRP-22-36	EU	R7300-107	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8120 § 117.8120(1) § 117.8120(1)(A)		
GRP-22-36	EU	R7300-107	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
GRP-22-36	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the	The permit holder shall comply with the applicable	The permit holder shall comply with the applicable monitoring	The permit holder shall comply with the applicable	The permit holder shall comply with the applicable reporting

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	requirements of 40 CFR Part 63, Subpart YY	and testing requirements of 40 CFR Part 63, Subpart YY	recordkeeping requirements of 40 CFR Part 63, Subpart YY	requirements of 40 CFR Part 63, Subpart YY
GRP-24-36	EU	R7300-209	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
GRP-24-36	EU	R7300-209	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B) § 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
GRP-24-36	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					requirements of 40 CFR Part 63, Subpart YY				
GRP-33-36	EU	R7300-209	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(A) § 117.310(c)(3) § 117.340(f)(1)	CO emissions must not exceed 400 ppmv at 3.0% O ₂ , dry basis.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(c) § 117.335(d) § 117.335(f) § 117.335(f)(3) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(e) [G]§ 117.340(f)(2) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(B)(iii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6) § 117.8120 § 117.8120(1) § 117.8120(1)(A)	§ 117.345(a) § 117.345(f) § 117.345(f)(1) [G]§ 117.345(f)(2) § 117.345(f)(7) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.345(d) § 117.345(d)(2) § 117.345(d)(3) § 117.345(d)(4) § 117.345(d)(5) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
GRP-33-36	EU	R7300-209	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(a)(8)(B)	An owner or operator may not use the alternative methods	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b)	§ 117.345(a) § 117.345(f) § 117.345(f)(1)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 117.310(b) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) § 117.340(f)(1) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(3)	specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	§ 117.335(c) § 117.335(d) § 117.335(f) § 117.335(g) § 117.340(a) § 117.340(b)(1) § 117.340(b)(3) § 117.340(c)(1) [G]§ 117.340(c)(3) [G]§ 117.340(f)(2) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.8100(a) § 117.8100(a)(1) § 117.8100(a)(1)(A) § 117.8100(a)(1)(B) § 117.8100(a)(1)(B)(i) § 117.8100(a)(1)(B)(ii) § 117.8100(a)(1)(C) § 117.8100(a)(2) [G]§ 117.8100(a)(3) § 117.8100(a)(4) § 117.8100(a)(5) § 117.8100(a)(5)(A) § 117.8100(a)(5)(B) [G]§ 117.8100(a)(5)(D) [G]§ 117.8100(a)(5)(E) § 117.8100(a)(6)	[G]§ 117.345(f)(2) § 117.345(f)(8) § 117.345(f)(9) § 117.8100(a)(5)(C)	[G]§ 117.345(c) § 117.345(d) § 117.345(d)(3) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7) [G]§ 117.8010(8) § 117.8100(c)
GRP-33-36	EU	63YY	112(B) HAPS	40 CFR Part 63, Subpart YY	§ 63.1103 The permit holder shall comply with the applicable limitation, standard and/or equipment specification requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable monitoring and testing requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable recordkeeping requirements of 40 CFR Part 63, Subpart YY	The permit holder shall comply with the applicable reporting requirements of 40 CFR Part 63, Subpart YY

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
GRP-LUBEOIL	EU	R5112-3	VOC	30 TAC Chapter 115, Storage of VOCs	§ 115.111(a)(1)	Except as provided in § 115.118, a storage tank storing VOC with a true vapor pressure less than 1.5 psia is exempt from the requirements of this division.	[G]§ 115.117	§ 115.118(a)(1) § 115.118(a)(5) § 115.118(a)(7)	None
GRP-SUMPS	CD	61FF-530	Benzene	40 CFR Part 61, Subpart FF	§ 61.349(a) § 61.349(a)(1)(i) § 61.349(a)(1)(ii) § 61.349(a)(1)(iii)(B) § 61.349(a)(1)(iii) § 61.349(a)(1)(iv) § 61.349(a)(2)(ii) § 61.349(b) § 61.349(e) § 61.349(f) § 61.349(g)	For each closed-vent system and control device used to comply with §§61.343-61.348, properly design, install, operate, and maintain the closed-vent system and control device.	§ 61.349(a)(1)(i) § 61.349(a)(1)(ii) § 61.349(e) § 61.349(f) § 61.354(d) § 61.354(f)(1) [G]§ 61.355(h)	§ 61.349(a)(1)(ii) § 61.356(f) § 61.356(f)(1) § 61.356(f)(2) § 61.356(f)(2)(i) § 61.356(f)(2)(i)(G) § 61.356(h) § 61.356(j) § 61.356(j)(1) § 61.356(j)(10) § 61.356(j)(2) § 61.356(j)(3) § 61.356(j)(3)(i)	None
GRP24.1-PV	EP	R5121-21AMOC145	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.122(a)(1) § 115.121(a)(1) § 115.122(a)(1)(B) § 60.18	Vent gas streams affected by §115.121(a)(1) must be controlled properly with a control efficiency of at least 90% or to a volatile organic compound (VOC) concentration of no more than 20 parts per million (ppmv) (on a dry basis corrected to 3.0% oxygen for combustion devices).	[G]§ 115.125 § 115.126(1) § 115.126(1)(B) § 115.126(2) ** See CAM Summary ** See Alternative Requirement	§ 115.126 § 115.126(1) § 115.126(1)(B) § 115.126(2)	None
GRP24.1-PV	EP	63GPV-4-YY	112(B) HAPS	40 CFR Part 63, Subpart G	[G]§ 63.113(a)(1) [G]§ 63.1100(g)(7)	Reduce emissions of organic HAP using a	§ 63.114(a) § 63.114(a)(2)	[G]§ 63.1109(e) [G]§ 63.117(a)(5)	§ 63.110(d)(1)(iv) [G]§ 63.110(e)(4)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					[G]§ 63.1103(e)(4) § 63.113(h) [G]§ 63.115(f) [G]§ 63.670	flare. §63.113(a)(1)(i)-(ii)	[G]§ 63.115(f) [G]§ 63.116(a) [G]§ 63.671	§ 63.118(a)(1) § 63.118(a)(2) [G]§ 63.152(a) [G]§ 63.152(f)	[G]§ 63.117(a)(5) § 63.117(f) § 63.118(f)(2) § 63.118(f)(5) [G]§ 63.151(b) § 63.151(e) [G]§ 63.151(e)(1) § 63.151(e)(2) § 63.151(e)(3) [G]§ 63.151(j) [G]§ 63.152(a) § 63.152(b) [G]§ 63.152(b)(1) [G]§ 63.152(b)(2) § 63.152(c)(1) § 63.152(c)(2) § 63.152(c)(2)(i) [G]§ 63.152(c)(2)(ii) § 63.152(c)(2)(iii) § 63.152(c)(4)(ii) [G]§ 63.152(c)(6)
GRPHRVOC AN	EP	R5720-193	Highly Reactive VOC	30 TAC Chapter 115, HRVOC Vent Gas	§ 115.727(c)(2)	A vent gas stream that has the potential to emit HRVOCs, but has a concentration less than 100 ppmv at all times or has a maximum potential flow rate equal to or less than 100 dry standard cubic feet per hour is exempt from this division with the exception of § 115.726(e)(3)(A) of this title. The maximum potential HRVOC emissions for the sum of all vent	None	§ 115.726(e)(3)(A) § 115.726(j)(2)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						gas streams claimed under this exemption, must be less for the account specified in § 115.722(a) or (b) of this title than 0.5 tpy.			
GRPHRVOC AN	EP	R5121-4	VOC	30 TAC Chapter 115, Vent Gas Controls	§ 115.127(a)(2)(A) [G]§ 115.122(a)(4) § 115.127(a)(2)	A vent gas stream having a combined weight of volatile organic compounds (VOC) < 100 lbs (45.4 kg) in any continuous 24-hour period is exempt from the requirements of § 115.121(a)(1).	[G]§ 115.125 § 115.126(2)	§ 115.126 § 115.126(2) § 115.126(4)	None
GRPMONB PV	EP	63FFFF-G1BPV-4F	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2460(a) § 63.2450(b) [G]§ 63.2450(e)(5) § 63.2460(a)-Table 2.1.c § 63.2460(b) § 63.2460(c)(7) [G]§ 63.2535(m) [G]§ 63.670 § 63.982(b) § 63.983(a)(1) § 63.983(a)(2) § 63.983(d)(1) § 63.983(d)(1)(i) [G]§ 63.983(d)(2) § 63.983(d)(3) § 63.987(a) § 63.997(b)(2) § 63.997(b)(3) § 63.997(c)(3)	You must meet each emission limit in Table 2 to this subpart that applies to you, and you must meet each applicable requirement specified in §63.2460(b) and (c).	[G]§ 63.115(d)(2)(v) § 63.115(d)(3)(iii) § 63.2460(c)(2)(i) § 63.2460(c)(2)(ii) § 63.2460(c)(2)(vi) § 63.2460(c)(3) § 63.2460(c)(3)(i) § 63.2460(c)(4) § 63.2460(c)(6) [G]§ 63.671 § 63.983(b) [G]§ 63.671 § 63.983(b) [G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3) [G]§ 63.983(c)(1) § 63.983(c)(2) § 63.983(c)(3) § 63.983(d)(1) § 63.983(d)(1)(ii) § 63.987(c) § 63.997(b) § 63.997(c)(2)	§ 63.2450(f)(2) § 63.2450(f)(2)(i) § 63.2450(f)(2)(ii) § 63.2460(c)(3)(ii) § 63.2460(c)(6) § 63.2525(g) [G]§ 63.2525(m) [G]§ 63.671 § 63.983(b) [G]§ 63.983(d)(2) § 63.987(c) § 63.998(a)(1)(ii) § 63.998(a)(1)(iii)(A) § 63.998(a)(1)(iii)(B) [G]§ 63.998(b)(1) [G]§ 63.998(b)(2) [G]§ 63.998(b)(3) [G]§ 63.998(b)(5) [G]§ 63.998(c)(1) [G]§ 63.998(d)(1) § 63.998(d)(3)(i) § 63.998(d)(3)(ii)	§ 63.2450(f)(2)(ii) § 63.2450(q) § 63.2460(c)(3)(i) § 63.2520(d)(3) [G]§ 63.2520(e)(11) § 63.997(b)(2) § 63.997(c)(3) § 63.998(a)(1)(iii)(A) [G]§ 63.998(b)(3) [G]§ 63.999(a)(1) § 63.999(b)(5) § 63.999(c)(1) § 63.999(c)(2)(i) § 63.999(c)(3) § 63.999(c)(6) [G]§ 63.999(c)(6)(i) § 63.999(c)(6)(iv) [G]§ 63.999(d)(1) [G]§ 63.999(d)(2)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 63.997(c)(3) § 63.997(c)(3)(i) § 63.997(c)(3)(ii)	§ 63.998(d)(5)	
GRPMONC PV	EP	63FFFF-G1CPV-4F	112(B) HAPS	40 CFR Part 63, Subpart FFFF	§ 63.2455(a)-Table 1.1.a.ii § 63.2450(b) [G]§ 63.2450(e)(5) § 63.2455(a) § 63.2455(b) § 63.2455(b)(1) [G]§ 63.2535(m) [G]§ 63.670 § 63.982(b) § 63.983(a)(1) § 63.983(a)(2) § 63.983(d)(1) § 63.983(d)(1)(i) [G]§ 63.983(d)(2) § 63.983(d)(3) § 63.987(a) § 63.997(b)(2) § 63.997(b)(3) § 63.997(c)(3)	For each Group 1 continuous process vent, the owner or operator must reduce emissions of total organic HAP by venting emissions through a closed vent system to a flare.	[G]§ 63.115(d)(2)(v) § 63.115(d)(3)(iii) [G]§ 63.671 § 63.983(b) [G]§ 63.983(b)(1) [G]§ 63.983(b)(2) [G]§ 63.983(b)(3) [G]§ 63.983(c)(1) § 63.983(c)(2) § 63.983(c)(3) § 63.983(d)(1) § 63.983(d)(1)(ii) § 63.987(c) § 63.997(b) § 63.997(c)(2) § 63.997(c)(3) § 63.997(c)(3)(i) § 63.997(c)(3)(ii)	§ 63.2450(f)(2) § 63.2450(f)(2)(i) § 63.2450(f)(2)(ii) [G]§ 63.2525(m) [G]§ 63.671 § 63.983(b) [G]§ 63.983(d)(2) § 63.987(c) § 63.998(a)(1)(ii) § 63.998(a)(1)(iii)(A) § 63.998(a)(1)(iii)(B) [G]§ 63.998(b)(1) [G]§ 63.998(b)(2) [G]§ 63.998(b)(3) [G]§ 63.998(b)(5) [G]§ 63.998(d)(1) § 63.998(d)(3)(i) § 63.998(d)(3)(ii) § 63.998(d)(5)	§ 63.2450(f)(2)(ii) § 63.2450(q) § 63.2520(d)(3) [G]§ 63.2520(e)(11) § 63.997(b)(2) § 63.997(c)(3) § 63.998(a)(1)(iii)(A) [G]§ 63.998(b)(3) [G]§ 63.999(a)(1) § 63.999(b)(5) § 63.999(c)(1) § 63.999(c)(2)(i) § 63.999(c)(3) § 63.999(c)(6) [G]§ 63.999(c)(6)(i) § 63.999(c)(6)(iv) [G]§ 63.999(d)(1) [G]§ 63.999(d)(2)
GTANKAG	EU	R5211-015	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.217(a)(2)(A) § 115.212(a)(2) [G]§ 115.212(a)(7) § 115.214(a)(1)(B) § 115.214(a)(1)(D) § 115.214(a)(1)(D)(i)	Any plant, excluding gasoline bulk plants, which loads less than 20,000 gpd of VOC with a true vapor pressure of 0.5 psia or greater is exempt from the requirements of this division, except for the specified requirements.	§ 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.215 § 115.215(4)	§ 115.216 § 115.216(2) § 115.216(3)(B) § 115.216(3)(D)	None
LDUNLOAD	EU	R5211	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.217(a)(1) § 115.212(a)(2) § 115.214(a)(1)(B) § 115.214(a)(1)(D)	Vapor pressure (at land-based operations). All land-based loading and	§ 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.215 § 115.215(4)	§ 115.216 § 115.216(2) § 115.216(3)(B)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
					§ 115.214(a)(1)(D)(i)	unloading of VOC with a true vapor pressure less than 0.5 psia is exempt from the requirements of this division, except as specified.			
NGLEMGDT K	EU	R5211-002	VOC	30 TAC Chapter 115, Loading and Unloading of VOC	§ 115.217(a)(1) § 115.212(a)(2) § 115.214(a)(1)(B) § 115.214(a)(1)(D) § 115.214(a)(1)(D)(i)	Vapor pressure (at land-based operations). All land-based loading and unloading of VOC with a true vapor pressure less than 0.5 psia is exempt from the requirements of this division, except as specified.	§ 115.214(a)(1)(A) § 115.214(a)(1)(A)(i) § 115.215 § 115.215(4)	§ 115.216 § 115.216(2) § 115.216(3)(B)	None
NGLEMGGE N	EU	R7300-003	Exempt	30 TAC Chapter 117, Subchapter B	[G]§ 117.303(a)(11) [G]§ 117.310(f)	Units exempted from the provisions of this division except as specified in §§117.310(f), 117.340(j), 117.345(f)(6) and (10), 117.350(c)(1) and 117.354(a)(5) include new, modified, reconstructed, or relocated stationary diesel engine placed into service on or after October 1, 2001, that operates less than 100 hours per year, based on a rolling 12-month average, in other than emergency	None	§ 117.340(j) § 117.345(f) [G]§ 117.345(f)(10) [G]§ 117.345(f)(6)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						situations; and meets the requirements for non-road engines as specified. §117.303(a)(11)(A)-(B)			
NGLEMGGEN	EU	60III-7	CO	40 CFR Part 60, Subpart III	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.112(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 3.5 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)
NGLEMGGEN	EU	60III-7	NMHC and NO _x	40 CFR Part 60, Subpart III	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.112(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than 560 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						model year and later must comply with an NMHC+NOx emission limit of 6.4 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).			
NGLEMGGE N	EU	60III-7	PM	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.112(a)	Owners and operators of emergency stationary CI ICE, that are not fire pump engines, with a maximum engine power greater than or equal to 130 KW and less than or equal to 2237 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a PM emission limit of 0.20 g/KW-hr, as stated in 40 CFR 60.4202(a)(2) and 40 CFR 89.112(a).	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)
NGLEMGGE N	EU	60III-7	PM (Opacity)	40 CFR Part 60, Subpart IIII	§ 60.4205(b) § 60.4202(a)(2) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) [G]§ 60.4211(f) § 60.4218 § 89.113(a)(1) § 89.113(a)(2) § 89.113(a)(3)	Emergency stationary CI ICE, that are not fire pump engines, with displacement < 10 lpc and not constant-speed engines, with max engine power < 2237 KW and a 2007 model year and later or max engine power > 2237	§ 60.4209(a)	§ 60.4214(b)	[G]§ 60.4214(d)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						KW and a 2011 model year and later, must comply with following opacity emission limits: 20% during acceleration, 15% during lugging, 50% during peaks in either acceleration or lugging modes as stated in §60.4202(a)(1)-(2), (b)(2) and §89.113(a)(1)-(3) and §1039.105(b)(1)-(3).			
NGLEMGGEN	EU	63ZZZZ-215	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(b)(1) § 63.6595(c) § 63.6640(f)(1) § 63.6640(f)(2) § 63.6640(f)(2)(i) § 63.6640(f)(3)	An affected source which meets either of the criteria in paragraphs §63.6590(b)(1)(i)-(ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of §63.6645(f).	None	None	§ 63.6645(f)
NGL_DITCH	EU	R7300-011	CO	30 TAC Chapter 117, Subchapter B	§ 117.310(c)(1) § 117.310(c)(1)(B)	CO emissions must not exceed 3.0 g/hp-hr for stationary internal combustion engines.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.8000(b)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
							§ 117.8000(c) § 117.8000(c)(2) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)		[G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)
NGL_DITCH	EU	R7300-011	NO _x	30 TAC Chapter 117, Subchapter B	§ 117.310(d)(3) § 117.310(a) § 117.310(b) § 117.310(a)(9)(E)(v)(III) [G]§ 117.310(e)(1) § 117.310(e)(2) [G]§ 117.310(e)(3) § 117.310(e)(4) [G]§ 117.310(f) § 117.340(l)(2) § 117.340(p)(1) § 117.340(p)(2)(C) § 117.340(p)(3)	An owner or operator may not use the alternative methods specified in §§ 117.315, 117.323 and 117.9800 to comply with the NO _x emission specifications but shall use the mass emissions cap and trade program in Chapter 101, Subchapter H, Division 3, except that electric generating facilities must also comply with the daily and 30-day system cap emission limitations of § 117.320. An owner or operator may use the alternative methods specified in § 117.9800 to comply with § 117.320.	[G]§ 117.335(a)(1) § 117.335(a)(4) § 117.335(b) § 117.335(d) § 117.335(e) § 117.335(g) § 117.340(a)(2)(C) § 117.340(h) § 117.340(l)(2) § 117.340(o)(1) § 117.340(p)(1) § 117.340(p)(2)(A) § 117.340(p)(2)(B) § 117.340(p)(2)(C) § 117.8000(b) § 117.8000(c) § 117.8000(c)(1) § 117.8000(c)(3) § 117.8000(c)(5) § 117.8000(c)(6) [G]§ 117.8000(d) § 117.8140(a) § 117.8140(a)(1) § 117.8140(a)(2) § 117.8140(a)(2)(A) [G]§ 117.8140(a)(2)(B) § 117.8140(b)	§ 117.345(a) § 117.345(f) [G]§ 117.345(f)(10) § 117.345(f)(3) § 117.345(f)(3)(A) § 117.345(f)(3)(A)(ii) § 117.345(f)(3)(B) § 117.345(f)(9)	§ 117.335(b) § 117.335(g) § 117.340(p)(2)(D) [G]§ 117.345(b) [G]§ 117.345(c) § 117.8010 [G]§ 117.8010(1) § 117.8010(2) § 117.8010(2)(A) § 117.8010(2)(B) § 117.8010(2)(C) § 117.8010(2)(D) [G]§ 117.8010(3) § 117.8010(4) [G]§ 117.8010(5) § 117.8010(6) [G]§ 117.8010(7)

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
NGL_DITCH	EU	60III-11	CO	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 37 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2007 model year and later must comply with a CO emission limit of 5.0 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102 and 40 CFR 1039.101.	§ 60.4209(b)	§ 60.4214(c)	None
NGL_DITCH	EU	60III-11	NMHC and NO _x	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	Owners and operators of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 75 KW but less than 560 KW and a displacement of less than 10 liters per cylinder and is a 2007 - 2013 model year must comply with an NMHC+NO _x emission limit of 4.0 g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a) and 40 CFR 1039.102.	§ 60.4209(b)	§ 60.4214(c)	None
NGL_DITCH	EU	60III-11	PM	40 CFR Part 60,	§ 60.4204(b)	Owners and operators	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
				Subpart IIII	§ 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.112(a)	of non-emergency stationary CI ICE with a maximum engine power greater than or equal to 75 KW and less than 130 KW and a displacement of less than 10 liters per cylinder and is a 2007 - 2011 model year must comply with a PM emission limit of 0.30g/KW-hr as stated in 40 CFR 60.4201(a) and 40 CFR 89.112(a).			
NGL_DITCH	EU	60IIII-11	PM (Opacity)	40 CFR Part 60, Subpart IIII	§ 60.4204(b) § 60.4201(a) § 60.4206 § 60.4207(b) [G]§ 60.4211(a) § 60.4211(c) § 60.4218 § 89.113(a)(1) § 89.113(a)(2) § 89.113(a)(3)	Owners and operators of non-emergency stationary CI ICE with a displacement of less than 10 liters per cylinder and is not a constant-speed engine and is a 2007 model year and later must comply with the following opacity emission limits: 20% during the acceleration mode, 15% during the lugging mode, and 50% during the peaks in either the acceleration or lugging modes as stated in 40 CFR 60.4201(a)-(c) and 40 CFR 89.113(a)(1)-(3)	§ 60.4209(b)	§ 60.4214(c)	None

Applicable Requirements Summary

Unit Group Process ID No.	Unit Group Process Type	SOP Index No.	Pollutant	State Rule or Federal Regulation Name	Emission Limitation, Standard or Equipment Specification Citation	Textual Description (See Special Term and Condition 1.B.)	Monitoring And Testing Requirements	Recordkeeping Requirements (30 TAC § 122.144)	Reporting Requirements (30 TAC § 122.145)
						and 40 CFR 1039.105(b)(1)-(3).			
NGL_DITCH	EU	63ZZZZ-11	112(B) HAPS	40 CFR Part 63, Subpart ZZZZ	§ 63.6590(c)	Stationary RICE subject to Regulations under 40 CFR Part 60. An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines as applicable. No further requirements apply for such engines under this part.	None	None	None
PRO-24DAC	PRO	63F-1	112(B) HAPS	40 CFR Part 63, Subpart F	§ 63.100(b) [G]§ 63.102(a) [G]§ 63.102(c) § 63.104(a) [G]§ 63.104(d) § 63.104(e) § 63.104(e)(1) [G]§ 63.104(e)(2) § 63.105(d)	Except as provided in paragraphs (b)(4) and (c) of this section, the provisions of subparts F, G, and H apply to chemical manufacturing process units that meet the criteria.	§ 63.103(b)(1) § 63.103(b)(3) § 63.103(b)(4) [G]§ 63.103(b)(5) § 63.103(b)(6) [G]§ 63.104(c)	[G]§ 63.103(c) [G]§ 63.104(c) [G]§ 63.104(e)(2) [G]§ 63.104(f)(1) [G]§ 63.105(b) § 63.105(c) § 63.105(e)	§ 63.103(b)(2) [G]§ 63.103(b)(5) [G]§ 63.103(d) [G]§ 63.104(f)(2)

Additional Monitoring Requirements

Compliance Assurance Monitoring Summary	475
Periodic Monitoring Summary	492

CAM Summary

Unit/Group/Process Information	
ID No.: 10ABC-PV	
Control Device ID No.: 56-61-8	Control Device Type: Flare
Control Device ID No.: 56-61-9	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5720-194
Pollutant: Highly Reactive VOC	Main Standard: § 115.727(f)
Monitoring Information	
Indicator: Pilot flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using the camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices	
CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 10ABC-PV	
Control Device ID No.: 56-61-8	Control Device Type: Flare
Control Device ID No.: 56-61-9	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-12
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using the camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices	
CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 10D-PV	
Control Device ID No.: 56-61-4	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5720-194
Pollutant: Highly Reactive VOC	Main Standard: § 115.727(f)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using the camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices	
CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 10D-PV	
Control Device ID No.: 56-61-4	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-12
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using the camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices	
CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 12-PV	
Control Device ID No.: 56-61-8	Control Device Type: Flare
Control Device ID No.: 56-61-9	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5720-194
Pollutant: Highly Reactive VOC	Main Standard: § 115.727(f)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using the camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices	
CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 12-PV	
Control Device ID No.: 56-61-8	Control Device Type: Flare
Control Device ID No.: 56-691-9	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-12
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using the camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices	
CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 18-PV	
Control Device ID No.: 56-61-4	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5720-194
Pollutant: Highly Reactive VOC	Main Standard: § 115.727(f)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuously	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using the camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices	
CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 18-PV	
Control Device ID No.: 56-61-4	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-12
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using the camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices	
CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame or using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 21-PV	
Control Device ID No.: 56-61-10	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5720194AMOC145
Pollutant: Highly Reactive VOC	Main Standard: § 115.727(f)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices.	
CAM Text: Monitor the presence of ta flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain record of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 21-PV	
Control Device ID No.: 56-61-10	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-12AMOC145
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices.	
CAM Text: Monitor the presence of ta flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain record of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 22-PV	
Control Device ID No.: 56-61-10	Control Device Type: Flare
Control Device ID No.: 56-61-12	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5720194AMOC145
Pollutant: Highly Reactive VOC	Main Standard: § 115.727(f)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices.	
CAM Text: Monitor the presence of ta flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 22-PV	
Control Device ID No.: 56-61-10	Control Device Type: Flare
Control Device ID No.: 56-61-12	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-12AMOC145
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices.	
CAM Text: Monitor the presence of ta flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain record of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 24-PV	
Control Device ID No.: 56-61-14	Control Device Type: Flare
Control Device ID No.: 56-61-20	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5720194AMOC145
Pollutant: Highly Reactive VOC	Main Standard: § 115.727(f)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices.	
CAM Text: Monitor the presence of a flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain records of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 24-PV	
Control Device ID No.: 56-61-14	Control Device Type: Flare
Control Device ID No.: 56-61-20	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-12AMOC145
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices.	
CAM Text: Monitor the presence of ta flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain record of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 33-PV	
Control Device ID No.: 56-61-22	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, HRVOC Vent Gas	SOP Index No.: R5720194AMOC145
Pollutant: Highly Reactive VOC	Main Standard: § 115.727(f)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices.	
CAM Text: Monitor the presence of ta flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain record of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: 33-PV	
Control Device ID No.: 56-61-22	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-12AMOC145
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring devices.	
CAM Text: Monitor the presence of ta flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain record of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

CAM Summary

Unit/Group/Process Information	
ID No.: GRP24.1-PV	
Control Device ID No.: 56-61-20	Control Device Type: Flare
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Vent Gas Controls	SOP Index No.: R5121-21AMOC145
Pollutant: VOC	Main Standard: § 115.122(a)(1)
Monitoring Information	
Indicator: Pilot Flame	
Minimum Frequency: Continuous	
Averaging Period: N/A	
Deviation Limit: Absence of pilot flame. If all monitoring devices indicate absence of pilot flame, confirm visually using camera feed in the control room. A deviation shall be the absence of a pilot flame as indicated by temperature and visual monitoring device. CAM Text: Monitor the presence of ta flare pilot flame using a thermocouple or other equivalent device to detect the presence of a flame using an alarm that uses a thermocouple or other equivalent device to detect the absence of a flame. Maintain record of events when pilot flame is absent and duration of events. Each monitoring device shall be accurate to within manufacturer's recommendations. Each monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or other written procedures that provide an adequate assurance that the device is calibrated accurately.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: 12-95-61	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-7
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Record of Tank Construction Specifications	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: It shall be considered as a deviation if the records of tank construction specifications are not kept.	
Periodic Monitoring Text: Keep a record of tank construction specifications (e.g. engineering drawings) that show a fill pipe that extends from the top of a tank to have a maximum clearance of six inches (15.2 centimeters) from the bottom or, when the tank is loaded from the side, a discharge opening entirely submerged when the pipe used to withdraw liquid from the tank can no longer withdraw liquid in normal operation.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: 12-95-61	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-7
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Structural Integrity of the Pipe	
Minimum Frequency: Emptied and degassed	
Averaging Period: N/A	
Deviation Limit: It shall be considered as a deviation if the repairs are not completed prior to refilling the tanks.	
Periodic Monitoring Text: Inspect to determine the structural integrity of the fill pipe and record each time the storage vessel is emptied and degassed to ensure that it continues to meet the specifications in the above requirement. If the structural integrity of the fill pipe is in question, repairs shall be made before the storage vessel is refilled. It shall be considered and reported as a deviation if the repairs are not completed prior to refilling the storage vessel.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: 24-36-8	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 117, Subchapter B	SOP Index No.: R7300-002
Pollutant: CO	Main Standard: § 117.310(c)(1)
Monitoring Information	
Indicator: Fuel Gas Usage	
Minimum Frequency: Hourly	
Averaging Period: N/A	
Deviation Limit: Any monitoring data above the hourly fuel gas usage of 3.3 MSCF/hr shall be considered and reported as a deviation.	
Periodic Monitoring Text: Measure the hourly fuel gas usage during periods the heater is in operation. The monitoring instrumentation shall be maintained, calibrated, and operated in accordance with the manufacturer's specifications or other written procedures.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: 24-95-314	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-7
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Record of Tank Construction Specifications	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: It shall be considered as a deviation if the records of tank construction specifications are not kept.	
Periodic Monitoring Text: Keep a record of tank construction specifications (e.g. engineering drawings) that show a fill pipe that extends from the top of a tank to have a maximum clearance of six inches (15.2 centimeters) from the bottom or, when the tank is loaded from the side, a discharge opening entirely submerged when the pipe used to withdraw liquid from the tank can no longer withdraw liquid in normal operation.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: 24-95-314	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-7
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Structural Integrity of the Pipe	
Minimum Frequency: Emptied and degassed	
Averaging Period: N/A	
Deviation Limit: It shall be considered as a deviation if the repairs are not completed prior to refilling the tanks.	
Periodic Monitoring Text: Inspect to determine the structural integrity of the fill pipe and record each time the storage vessel is emptied and degassed to ensure that it continues to meet the specifications in the above requirement. If the structural integrity of the fill pipe is in question, repairs shall be made before the storage vessel is refilled. It shall be considered and reported as a deviation if the repairs are not completed prior to refilling the storage vessel.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: 33-95-10	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-7
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Record of Tank Construction Specifications	
Minimum Frequency: N/A	
Averaging Period: N/A	
Deviation Limit: It shall be considered as a deviation if the records of tank construction specifications are not kept.	
Periodic Monitoring Text: Keep a record of tank construction specifications (e.g. engineering drawings) that show a fill pipe that extends from the top of a tank to have a maximum clearance of six inches (15.2 centimeters) from the bottom or, when the tank is loaded from the side, a discharge opening entirely submerged when the pipe used to withdraw liquid from the tank can no longer withdraw liquid in normal operation.	

Periodic Monitoring Summary

Unit/Group/Process Information	
ID No.: 33-95-10	
Control Device ID No.: N/A	Control Device Type: N/A
Applicable Regulatory Requirement	
Name: 30 TAC Chapter 115, Storage of VOCs	SOP Index No.: R5112-7
Pollutant: VOC	Main Standard: § 115.112(e)(1)
Monitoring Information	
Indicator: Structural Integrity of the Pipe	
Minimum Frequency: Emptied and degassed	
Averaging Period: N/A	
Deviation Limit: It shall be considered as a deviation if the repairs are not completed prior to refilling the tanks.	
Periodic Monitoring Text: Inspect to determine the structural integrity of the fill pipe and record each time the storage vessel is emptied and degassed to ensure that it continues to meet the specifications in the above requirement. If the structural integrity of the fill pipe is in question, repairs shall be made before the storage vessel is refilled. It shall be considered and reported as a deviation if the repairs are not completed prior to refilling the storage vessel.	

Permit Shield

Permit Shield 500

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
10.1-0-0	N/A	40 CFR Part 60, Subpart KKK	Facilities covered by subpart VV of 40 CFR part 60 are excluded from this subpart
10.1-0-0	N/A	40 CFR Part 61, Subpart V	Unit does not operate in VHAP service
10.1-0-0	N/A	40 CFR Part 63, Subpart H	Fugitive unit does not operate in organic HAP service as listed in 63.160(a).
10.2-0-0	N/A	40 CFR Part 60, Subpart KKK	Facility did not commence construction, reconstruction, or modification after 1/20/1984.
10.2-0-0	N/A	40 CFR Part 60, Subpart VV	Process unit does not produce, as intermediate or final products, one or more of the chemicals listed in 60.489.
10.2-0-0	N/A	40 CFR Part 61, Subpart V	Unit does not operate in VHAP service
10.2-0-0	N/A	40 CFR Part 63, Subpart H	Fugitive unit does not operate in organic HAP service as listed in 63.160(a).
10.3-0-0	N/A	40 CFR Part 60, Subpart KKK	Facility did not commence construction, reconstruction, or modification after 1/20/1984.
10.3-0-0	N/A	40 CFR Part 60, Subpart VV	Facility did not commence construction, reconstruction, or modification after 1/5/1981.
10.3-0-0	N/A	40 CFR Part 61, Subpart V	Unit does not operate in VHAP service
10.3-0-0	N/A	40 CFR Part 63, Subpart H	Fugitive unit does not operate in organic HAP service as listed in 63.160(a).
12-0-0	N/A	40 CFR Part 60, Subpart KKK	Facility is not an onshore natural gas processing plant.
12-0-0	N/A	40 CFR Part 60, Subpart VV	Facility did not commence construction, reconstruction, or modification after 1/5/1981.

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
12-0-0	N/A	40 CFR Part 61, Subpart J	Equipment subject to NESHAP J is required to comply with MACT YY only.
12-0-0	N/A	40 CFR Part 61, Subpart V	Equipment subject to NESHAP V is required to comply with MACT YY only.
12-0-0	N/A	40 CFR Part 63, Subpart H	Fugitive unit does not operate in organic HAP service as listed in 63.160(a).
12-95-61	N/A	40 CFR Part 60, Subpart K	Tank commenced construction/modification before June 11, 1973 and has a capacity of less than 151,412 liter (40,000 gallons).
18-0-0	N/A	40 CFR Part 60, Subpart KKK	Facility is not an onshore natural gas processing plant
18-0-0	N/A	40 CFR Part 60, Subpart VV	Facility did not commence construction, reconstruction, or modification after 1/5/1981.
18-0-0	N/A	40 CFR Part 61, Subpart V	Unit does not operate in VHAP service
18-0-0	N/A	40 CFR Part 63, Subpart H	Fugitive unit does not operate in organic HAP service as listed in 63.160(a).
18-0-0	N/A	40 CFR Part 63, Subpart YY	The fugitive equipment in the unit does not contain any organic HAP.
21-0-0	N/A	40 CFR Part 60, Subpart KKK	Facility did not commence construction, reconstruction, or modification after 1/20/1984.
21-0-0	N/A	40 CFR Part 60, Subpart VV	Process unit does not produce, as intermediate or final products, one or more of the chemicals listed in 60.489.
21-0-0	N/A	40 CFR Part 61, Subpart V	Unit does not operate in VHAP service

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
21-0-0	N/A	40 CFR Part 63, Subpart H	Fugitive unit does not operate in organic HAP service as listed in 63.160(a).
21-4H4TK	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1000 gallons.
21-4H4TK	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19.813 gallons).
21-95-19	N/A	40 CFR Part 60, Subpart K	Tank has a capacity of less than 151,412 liters (40,000 gallons).
21-95-19	N/A	40 CFR Part 61, Subpart FF	Unit does not store, treat or manage a waste stream subject to NESHAPS FF.
21-95-19	N/A	40 CFR Part 61, Subpart Y	Does not store benzene
21-95-19	N/A	40 CFR Part 63, Subpart G	Unit not part of a HON CMPU.
21-95-19	N/A	40 CFR Part 63, Subpart G	Unit not part of a HON chemical manufacturing process unit (CMPU) as defined in 63.111.
22-0-0	N/A	40 CFR Part 60, Subpart KKK	Facility is not an onshore natural gas processing plant.
22-0-0	N/A	40 CFR Part 60, Subpart VV	Facility did not commence construction, reconstruction, or modification after 1/5/1981.
22-0-0	N/A	40 CFR Part 61, Subpart J	Equipment subject to NESHAP J is required to comply with MACT YY only.
22-0-0	N/A	40 CFR Part 61, Subpart V	Equipment subject to NESHAP V is required to comply with MACT YY only.
22-0-0	N/A	40 CFR Part 63, Subpart H	Fugitive unit does not operate in organic HAP service as listed in 63.160(a).

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
22-16-120	N/A	30 TAC Chapter 112, Sulfur Compounds	Unit fires gaseous fuel only
22-16-120	N/A	40 CFR Part 60, Subpart GG	Constructed, modified, or reconstructed before 10/03/1977
22-16-120	N/A	40 CFR Part 60, Subpart J	Unit is not a refinery process as defined.
22-16-120	N/A	40 CFR Part 63, Subpart YYYY	Existing stationary combustion turbine, commenced construction or reconstructed before 01/14/2003.
22-36-9	N/A	30 TAC Chapter 112, Sulfur Compounds	Unit fires gaseous fuel only.
22-36-9	N/A	30 TAC Chapter 115, Vent Gas Controls	Exhaust stream from a combustion unit that is not being used as a control device for any vent gas stream which is subject to this division and which originates from a non-combustion source.
22-36-9	N/A	40 CFR Part 60, Subpart Ja	Unit is not located at petroleum refinery.
22-4H4	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1000 gallons.
22-4H4	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19.813 gallons).
22-95-27	N/A	30 TAC Chapter 115, Vent Gas Controls	Exhaust stream from a combustion unit that is not being used as a control device for any vent gas stream which originates from a non-combustion source.
24-0-0	N/A	40 CFR Part 60, Subpart KKK	Facility is not an onshore natural gas processing plant
24-0-0	N/A	40 CFR Part 61, Subpart J	Equipment subject to NESHAP J is required to comply with MACT YY only
24-0-0	N/A	40 CFR Part 61, Subpart V	Equipment subject to NESHAP V is required to

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
			comply with MACT YY only.
24-0-0	N/A	40 CFR Part 63, Subpart H	Fugitive unit does not operate in organic HAP service as listed in 63.160(a).
24-36-7	N/A	30 TAC Chapter 112, Sulfur Compounds	Unit fires gaseous fuel only.
24-36-7	N/A	30 TAC Chapter 115, Vent Gas Controls	Exhaust stream from a combustion unit that is not being used as a control device for any vent gas stream which originates from a non-combustion source.
24-36-7	N/A	40 CFR Part 60, Subpart D	Unit is fossil-fuel-fired unit with capacity less than 250 MMBtu/hr
24-36-7	N/A	40 CFR Part 60, Subpart Db	Unit was constructed, modified, or reconstructed before 06/19/1984
24-36-7	N/A	40 CFR Part 60, Subpart J	Unit is not a refinery process as defined.
24-36-8	N/A	30 TAC Chapter 112, Sulfur Compounds	Unit fires gaseous fuel only.
24-36-8	N/A	30 TAC Chapter 115, Vent Gas Controls	Exhaust stream from a combustion unit that is not being used as a control device for any vent gas stream which originates from a non-combustion source.
24-36-8	N/A	40 CFR Part 60, Subpart Dc	Process heater does not meet the definition of a steam generating unit and has a maximum design input capacity of less than 2.9 MW (10 MMBtu/hr).
24-36-8	N/A	40 CFR Part 60, Subpart J	Unit is not located at a petroleum refinery.
24-95-314	N/A	40 CFR Part 60, Subpart K	Tank has a capacity of less than 151,412 liters (40,000 gallons).

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
24-95-314	N/A	40 CFR Part 61, Subpart FF	Unit does not store, treat or manage a waste stream subject to NESHAP FF.
24-95-314	N/A	40 CFR Part 61, Subpart Y	Does not store benzene
24-95-314	N/A	40 CFR Part 63, Subpart G	Vessel is not a part of the HON CMPU.
24.1-0-0	N/A	40 CFR Part 60, Subpart KKK	Facility is not an onshore natural gas processing plant
24.1-0-0	N/A	40 CFR Part 60, Subpart VV	Equipment also subject to Part 60 is required to comply with MACT H only.
24.1-0-0	N/A	40 CFR Part 61, Subpart J	Equipment to which this subpart applies that are also subject to the provisions of 40 CFR part 61 will be required to comply only with the provisions of MACT H
24.1-0-0	N/A	40 CFR Part 61, Subpart V	Equipment to which this subpart applies that are also subject to the provisions of 40 CFR part 61 will be required to comply only with the provisions of MACT H
24EMGGENTK	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19,813 gallons).
33-0-0	N/A	40 CFR Part 60, Subpart KKK	Facility is not an onshore natural gas processing plant
33-0-0	N/A	40 CFR Part 61, Subpart J	Equipment subject to NESHAP J is required to comply with MACT YY only.
33-0-0	N/A	40 CFR Part 61, Subpart V	Equipment subject to NESHAP V is required to comply with MACT YY only.
33-0-0	N/A	40 CFR Part 63, Subpart H	Fugitive unit does not operate in organic HAP service as listed in 63.160(a).

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
33-20Y104	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1000 gallons.
33-20Y104	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19.813 gallons).
33-20Y14	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1000 gallons.
33-20Y14	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19.813 gallons).
33-20Y25	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1000 gallons.
33-20Y25	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19.813 gallons).
33-20Y98N	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1000 gallons.
33-20Y98N	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19.813 gallons).
33-36-10	N/A	30 TAC Chapter 115, Vent Gas Controls	Exhaust stream from a combustion unit that is not being used as a control device for any vent gas stream which originates from a non-combustion source.
33-36-10	N/A	40 CFR Part 60, Subpart Ja	Unit is not located at a petroleum refinery.
33-36-10	N/A	40 CFR Part 63, Subpart DDDDD	Ethylene cracking furnace is covered by 40 CFR Part 63, Subpart YY and is not subject to 40 CFR Part 63, Subpart DDDDD.
33-95-10	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19,813 gallons).
33-95-10	N/A	40 CFR Part 61, Subpart FF	Unit does not store, treat or manage a waste stream subject to NESHAP FF.

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
33-95-10	N/A	40 CFR Part 61, Subpart Y	Does not store benzene
33-95-10	N/A	40 CFR Part 63, Subpart G	Tank is not a part of a HON chemical manufacturing process unit (CMPU) as defined in 63.111.
33-95-14	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19,813 gallons).
33-95-14	N/A	40 CFR Part 61, Subpart FF	Unit does not store, treat or manage a waste stream subject to NESHAP FF.
33-95-14	N/A	40 CFR Part 61, Subpart FF	Unit does not store, treat or manage a waste stream subject to NESHAPS FF.
33-95-14	N/A	40 CFR Part 61, Subpart Y	Does not store benzene
33-95-14	N/A	40 CFR Part 63, Subpart G	Tank is not a part of HON chemical manufacturing process unit (CMPU) as defined in 63.111.
33-OS9990	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1000 gallons.
33-OS9990	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19.813 gallons).
33.1-0-0	N/A	40 CFR Part 63, Subpart YY	The fugitive equipment contains or contacts less than 5% wt of organic HAP.
54-22-12	N/A	40 CFR Part 63, Subpart F	Not applicable - not HON units.
54-22-12	N/A	40 CFR Part 63, Subpart Q	Chromium use stopped prior to 9/8/94
54-22-13	N/A	40 CFR Part 63, Subpart Q	Chromium use stopped prior to 9/8/94
54-22-17	N/A	40 CFR Part 63, Subpart F	Not applicable - not HON units.
54-22-17	N/A	40 CFR Part 63, Subpart Q	Chromium use stopped prior to 9/8/94

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
54-22-5	N/A	40 CFR Part 63, Subpart F	Not applicable - not HON units.
54-22-5	N/A	40 CFR Part 63, Subpart Q	Chromium use stopped prior to 9/8/94
54-22-6	N/A	40 CFR Part 63, Subpart F	Not applicable - not HON units.
54-22-6	N/A	40 CFR Part 63, Subpart Q	Chromium use stopped prior to 9/8/94
54-22-7	N/A	40 CFR Part 63, Subpart F	Not applicable - not HON units.
54-22-7	N/A	40 CFR Part 63, Subpart Q	Chromium use stopped prior to 9/8/94
54-22-9	N/A	40 CFR Part 63, Subpart F	Not applicable - not HON units.
54-22-9	N/A	40 CFR Part 63, Subpart Q	Chromium use stopped prior to 9/8/94
56-61-10	N/A	40 CFR Part 60, Subpart J	Unit is not located at a petroleum refinery
56-61-12	N/A	40 CFR Part 60, Subpart J	Unit is not located at a petroleum refinery.
56-61-14	N/A	40 CFR Part 60, Subpart J	Unit is not located at a petroleum refinery
56-61-20	N/A	40 CFR Part 60, Subpart J	Unit is not located at a petroleum refinery
56-61-22	N/A	40 CFR Part 60, Subpart J	Unit is not located at a petroleum refinery.
56-61-4	N/A	40 CFR Part 60, Subpart J	Unit is not located at a petroleum refining facility.
56-61-8	N/A	40 CFR Part 60, Subpart J	Unit is not located at a petroleum refining facility.
56-61-9	N/A	40 CFR Part 60, Subpart J	Unit is not located at a petroleum refining facility.
68.1-0-0	N/A	40 CFR Part 61, Subpart J	Equipment subject to NESHAP J is required to comply with MACT YY only.
68.1-0-0	N/A	40 CFR Part 61, Subpart V	Equipment subject to NESHAP V is required to comply with MACT YY only.
CPC-PAINT	N/A	30 TAC Chapter 115, Subchapter E, Division 5	The coating of MMPP does not occur at original equipment manufacturer or off-site job shops as

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
			defined in the rule.
CPC-PAINT	N/A	30 TAC Chapter 115, Surface Coating Operations	The coating of MMPP does not occur at original equipment manufacturer, on-site maintenance shops, or off-site job shops as defined in the rule.
CPC-PAINT	N/A	40 CFR Part 63, Subpart Mmmm	Surface coating operations are part of janitorial, building, and facility maintenance operations.
DTANK24	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1,000 gallons.
DTANK24	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19,813 gallons).
DTANK33	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1,000 gallons.
DTANK33	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19,813 gallons).
GRP-22-36	22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-6, 22-36-7, 22-36-8	30 TAC Chapter 112, Sulfur Compounds	Unit fires gaseous fuel only.
GRP-22-36	22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-6, 22-36-7, 22-36-8	30 TAC Chapter 115, Vent Gas Controls	Exhaust stream from a combustion unit that is not being used as a control device for any vent gas stream which originates from a non-combustion source.
GRP-22-36	22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-6, 22-36-7, 22-36-8	40 CFR Part 60, Subpart J	Unit 22 is not a refinery process.
GRP-22-36	22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-6, 22-36-7, 22-36-8	40 CFR Part 63, Subpart DDDDD	Ethylene cracking furnace is covered by 40 CFR Part 63, Subpart YY and is not subject to 40 CFR Part 63, Subpart DDDDD.
GRP-24-36	24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-9	30 TAC Chapter 112, Sulfur Compounds	Unit fires gaseous fuel only.

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
GRP-24-36	24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-9	30 TAC Chapter 115, Vent Gas Controls	Exhaust stream from a combustion unit that is not being used as a control device for any vent gas stream which originates from a non-combustion source.
GRP-24-36	24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-9	40 CFR Part 60, Subpart J	Unit 24 is not a refinery process.
GRP-24-36	24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-9	40 CFR Part 63, Subpart DDDDD	Ethylene cracking furnace is covered by 40 CFR Part 63, Subpart YY and is not subject to 40 CFR Part 63, Subpart DDDDD.
GRP-33-36	33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9	30 TAC Chapter 112, Sulfur Compounds	Unit fires gaseous fuel only.
GRP-33-36	33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9	30 TAC Chapter 115, Vent Gas Controls	Exhaust stream from a combustion unit that is not being used as a control device for any vent gas stream which originates from a non-combustion source.
GRP-33-36	33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9	40 CFR Part 60, Subpart J	Unit is not located at a petroleum refining facility.
GRP-33-36	33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9	40 CFR Part 63, Subpart DDDDD	Ethylene cracking furnace is covered by 40 CFR Part 63, Subpart YY and is not subject to 40 CFR Part 63, Subpart DDDDD.
GRP-LUBEOIL	10-95-328, 10-95-357, 10-95-3572, 10-95-357A, 18-95-54, 22-95-100, 22-95-101, 22-95-120, 22-95-130, 24-95-304, 24-95-305, 24-95-306, 24-95-307, 24-95-319, 24-95-320, 24-95-321, 33-95-15, 33-95-17, 33-95-19,	40 CFR Part 60, Subpart K	Does not store a petroleum liquid

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
	33-95-390, 33-95-392, 33-95-394		
GRP-LUBEOIL	10-95-328, 10-95-357, 10-95-3572, 10-95-357A, 18-95-54, 22-95-100, 22-95-101, 22-95-120, 22-95-130, 24-95-304, 24-95-305, 24-95-306, 24-95-307, 24-95-319, 24-95-320, 24-95-321, 33-95-15, 33-95-17, 33-95-19, 33-95-390, 33-95-392, 33-95-394	40 CFR Part 60, Subpart Ka	Does not store a petroleum liquid
GRP-LUBEOIL	10-95-328, 10-95-357, 10-95-3572, 10-95-357A, 18-95-54, 22-95-100, 22-95-101, 22-95-120, 22-95-130, 24-95-304, 24-95-305, 24-95-306, 24-95-307, 24-95-319, 24-95-320, 24-95-321, 33-95-15, 33-95-17, 33-95-19, 33-95-390, 33-95-392, 33-95-394	40 CFR Part 60, Subpart Kb	VOC vapor pressure less than 0.5 psia
GRP-LUBEOIL	10-95-328, 10-95-357, 10-95-3572, 10-95-357A, 18-95-54, 22-95-100, 22-95-101, 22-95-120, 22-95-130, 24-95-304, 24-95-305, 24-95-306, 24-95-307, 24-95-319, 24-95-320, 24-95-321, 33-95-15, 33-95-17, 33-95-19, 33-95-390, 33-95-392, 33-95-394	40 CFR Part 61, Subpart FF	Unit does not store, treat, or manage a waste stream subject to NESHAP FF
GRP-LUBEOIL	10-95-328, 10-95-357, 10-95-3572, 10-95-357A, 18-95-54, 22-95-100, 22-95-101, 22-95-120, 22-95-130, 24-95-304, 24-95-305, 24-95-306, 24-95-307, 24-95-319, 24-95-320, 24-95-321, 33-95-15, 33-95-17, 33-95-19, 33-95-390, 33-95-392, 33-95-394	40 CFR Part 61, Subpart Y	Does not store benzene

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
GRP-LUBEOIL	10-95-328, 10-95-357, 10-95-3572, 10-95-357A, 18-95-54, 22-95-100, 22-95-101, 22-95-120, 22-95-130, 24-95-304, 24-95-305, 24-95-306, 24-95-307, 24-95-319, 24-95-320, 24-95-321, 33-95-15, 33-95-17, 33-95-19, 33-95-390, 33-95-392, 33-95-394	40 CFR Part 63, Subpart G	Vessels are not a part of a HON chemical manufacturing process unit (CMPU) as defined in 63.111.
GRP-PTSB	PTSB-1, PTSB-2	30 TAC Chapter 115, Subchapter E, Division 5	The coating of MMPP does not occur at original equipment manufacturer of off-site job shops as defined in the rule.
GRP-PTSB	PTSB-1, PTSB-2	30 TAC Chapter 115, Surface Coating Operations	The surface coating operation is for re-coating of used MMPP at an on-site maintenance shop that began operating after January 1, 2012.
GRP-PTSB	PTSB-1, PTSB-2	40 CFR Part 63, Subpart Mmmm	Surface coating operations are part of janitorial, building, and facility maintenance operations.
GRP24.1-PV	24-95-219, 24-95-95	40 CFR Part 60, Subpart NNN	NSPS NNN is superseded by MACT G for Group 1 process vents.
GTANKAG	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1000 gallons.
GTANKAG	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19,813 gallons).
NGLEMGTK	N/A	30 TAC Chapter 115, Storage of VOCs	Tank capacity is less than 1,000 gallons.
NGLEMGTK	N/A	40 CFR Part 60, Subpart Kb	Tank capacity is less than 75 cubic meters (19,813 gallons).
PRO10MEROX	N/A	30 TAC Chapter 112, Sulfur Compounds	Gas sweetening unit does not use sulfur recovery.
PRO10MEROX	N/A	40 CFR Part 60, Subpart LLL	Unit constructed, reconstructed, or modified

Permit Shield

The Executive Director of the TCEQ has determined that the permit holder is not required to comply with the specific regulation(s) identified for each emission unit, group, or process in this table.

Unit / Group / Process ID No.	Group / Inclusive Units	Regulation	Basis of Determination
			prior to January 20, 1984.

New Source Review Authorization References

New Source Review Authorization References	515
New Source Review Authorization References by Emission Unit	516

New Source Review Authorization References

The New Source Review authorizations listed in the table below are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Prevention of Significant Deterioration (PSD) Permits	
PSD Permit No.: GHGPSDTX226	Issuance Date: 08/19/2025
PSD Permit No.: PSDTX751M2	Issuance Date: 08/19/2025
Title 30 TAC Chapter 116 Permits, Special Permits, and Other Authorizations (Other Than Permits By Rule, PSD Permits, or NA Permits) for the Application Area.	
Authorization No.: 22690	Issuance Date: 08/19/2025
Authorization No.: 164587	Issuance Date: 04/15/2021
Authorization No.: 169710	Issuance Date: 05/15/2023
Permits By Rule (30 TAC Chapter 106) for the Application Area	
Number: 106.122	Version No./Date: 09/04/2000
Number: 106.261	Version No./Date: 11/01/2003
Number: 106.262	Version No./Date: 11/01/2003
Number: 106.263	Version No./Date: 11/01/2001
Number: 106.264	Version No./Date: 09/04/2000
Number: 106.355	Version No./Date: 11/01/2001
Number: 106.433	Version No./Date: 09/04/2000
Number: 106.452	Version No./Date: 09/04/2000
Number: 106.472	Version No./Date: 09/04/2000
Number: 106.473	Version No./Date: 09/04/2000
Number: 106.478	Version No./Date: 09/04/2000
Number: 106.492	Version No./Date: 09/04/2000
Number: 106.511	Version No./Date: 09/04/2000
Number: 106.512	Version No./Date: 09/04/2000
Number: 106.512	Version No./Date: 06/13/2001

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
10-95-328	D-328 SEAK IUK RESERVOIR	22690, PSDTX751M2
10-95-357	D-357 LUBE/OIL RESERVOIR	22690, PSDTX751M2
10-95-3572	C-357 (PROPYLENE)-2ND VENT	22690, PSDTX751M2
10-95-357A	C-357 (PROPYLENE)-DEGAS CHAMBER	22690, PSDTX751M2
10.1-0-0	UNIT 10AC PROCESS FUGITIVES	22690, PSDTX751M2, 106.261/11/01/2003 [146197, 147240, 148098, 148595, 149676, 150550, 151531, 152316, 153449, 153456, 153765, 154144, 157123, 157443, 159656, 160797, 162691, 163375, 164583, 168521, 172315], 106.262/11/01/2003 [146197, 147240, 148098, 148595, 149676, 150550, 151531, 152316, 153449, 153456, 153765, 154144, 157123, 157443, 159656, 160797, 162691, 163375]
10.1-95-012	CAUSTIC RELIEF TANK	22690, PSDTX751M2
10.1-95-057	CAUSTIC REGEN OVERHEAD ACCUMULATOR	22690, PSDTX751M2
10.1-95-062	SPENT CAUSTIC VENT TANK	22690, PSDTX751M2
10.1-95-151.1	MEROX CAUSTIC SETTLER	22690, PSDTX751M2
10.1-95-152	DEPENTANIZER ACCUMULATOR	22690, PSDTX751M2
10.1-95-157	MEROX NAPHTHA WATER WASH	22690, PSDTX751M2
10.1-95-251	CAUSTIC REGEN OVERHEAD ACCUMULATOR	22690, PSDTX751M2
10.1-95-258	DEBUTANIZER ACCUMULATOR	22690, PSDTX751M2
10.1-95-272	WATER WASH VENT TANK	22690, PSDTX751M2
10.1-SUMP1	10 OILY WATER SEWER SUMP	22690, PSDTX751M2

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
10.2-0-0	UNIT 10D PROCESS FUGITIVES	22690, PSDTX751M2, 106.261/11/01/2003 [146197, 156219, 160797, 162691, 164583, 168521, 172315], 106.262/11/01/2003 [146197, 156219, 160797, 162691]
10.2-95-305	REGENERATION ACCUMULATOR	22690, PSDTX751M2
10.2-95-319	WATER COLLECTION DRUM	22690, PSDTX751M2
10.2-95-327	SPENT CAUSTIC VENT TANK	22690, PSDTX751M2
10.2-95-344	COMPRESSOR #2 SUCTION SCRUBBER	22690, PSDTX751M2
10.3-0-0	UNIT 10B PROCESS FUGITIVES	22690, PSDTX751M2, 106.261/11/01/2003 [146197, 149893, 151531, 155425, 174065], 106.262/11/01/2003 [146197, 149893, 151531, 155425, 174065]
10ABC-AV	UNIT 10ABC ANALYZER VENTS	22690, PSDTX751M2
10ABC-PV	UNIT 10ABC PROCESS VENTS	22690, PSDTX751M2
10D-AV	UNIT 10D ANALYZER VENTS	22690, PSDTX751M2
10D-PV	UNIT 10D PROCESS VENTS	22690, PSDTX751M2
12-0-0	UNIT 12 PROCESS FUGITIVES	22690, PSDTX751M2, 106.261/11/01/2003 [146197, 151139, 159479, 160797, 164583, 168521, 168902, 172315], 106.262/11/01/2003 [146197, 159479, 160797, 168902]
12-95-61	UNIT 12 METHANOL STORAGE TANK	106.478/09/04/2000
12-AV	UNIT 12 ANALYZER VENTS	22690, PSDTX751M2
12-PV	UNIT 12 PROCESS VENTS	22690, PSDTX751M2
12-SUMP1	12 OILY WATER SEWER SUMP	22690, PSDTX751M2

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
12OWSENG_1	UNIT 12 DIESEL PUMP ENGINE NO 1	106.512/06/13/2001 [169357]
12OWSENG_2	UNIT 12 DIESEL PUMP ENGINE NO 2	106.512/06/13/2001 [169357]
18-0-0	UNIT 18 PROCESS FUGITIVES	22690, PSDTX751M2, 106.261/11/01/2003 [146197, 164583, 172315], 106.262/11/01/2003 [146197]
18-95-54	D-54 LUBE/SEAL OIL RESERVOIR	22690, PSDTX751M2
18-AV	UNIT 18 ANALYZER VENTS	22690, PSDTX751M2
18-PV	UNIT 18 PROCESS VENTS	22690, PSDTX751M2
21-0-0	UNIT 21 PROCESS FUGITIVES	22690, PSDTX751M2, 106.261/11/01/2003 [146197, 151139, 152316, 153765, 160337, 160797, 168521, 172315, 173591], 106.262/11/01/2003 [146197, 152316, 153765, 160337, 160797, 173591]
21-4H4TK	UNIT 21 SUEZ TANK	106.472/09/04/2000
21-95-006	NGL PROPYLENE RECEIVER	22690, PSDTX751M2
21-95-19	UNIT 21 METHANOL STORAGE TANK	106.478/09/04/2000
21-AV	UNIT 21 ANALYZER VENTS	22690, PSDTX751M2
21-PV	UNIT 21 PROCESS VENTS	22690, PSDTX751M2
21/22-SUMP1	21/22 OILY WATER SEWER SUMP	22690, PSDTX751M2
22-0-0	UNIT 22 PROCESS FUGITIVES	22690, GHGPSDTX226, PSDTX751M2, 106.261/11/01/2003 [146197, 151139, 151531, 156219, 159479, 159600, 164583, 164648, 167038, 168521, 168902, 172315, 173085, 173591], 106.262/11/01/2003 [146197, 151531, 156219, 159479, 159600, 164648, 167038,

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
		168902, 173085, 173591]
22-16-120	PROPYLENE COMPRESSOR TURBINE	22690, PSDTX751M2
22-36-1	CRACKING FURNACE	22690, PSDTX751M2
22-36-2	CRACKING FURNACE	22690, PSDTX751M2
22-36-3	CRACKING FURNACE	22690, PSDTX751M2
22-36-4	CRACKING FURNACE	22690, PSDTX751M2
22-36-6	CRACKING FURNACE	22690, PSDTX751M2
22-36-7	CRACKING FURNACE	22690, PSDTX751M2
22-36-8	CRACKING FURNACE	22690, PSDTX751M2
22-36-9	22 CRACKING FURNACE 9	22690, GHGPSDTX226, PSDTX751M2
22-4H4	4H4 TOTE TANK	106.472/09/04/2000
22-95-100	D-100 LUBE OIL RESERVOIR	22690, PSDTX751M2
22-95-101	D-101 SEAL OIL RESERVOIR	22690, PSDTX751M2
22-95-120	D-120 LUBE/SEAL OIL RESERVOIR	22690, PSDTX751M2
22-95-130	D-130 LUBE/SEAL OIL RESERVOIR	22690, PSDTX751M2
22-95-27	PROPYLENE COMPRESSOR TURBINE VENT	22690, PSDTX751M2
22-AV	UNIT 22 ANALYZER VENTS	22690, PSDTX751M2
22-PV	UNIT 22 PROCESS VENTS	22690, PSDTX751M2
22OWSENG	UNIT 22 DIESEL PUMP ENGINE	106.512/06/13/2001 [169357]
24-0-0	UNIT 24 PROCESS FUGITIVES	22690, PSDTX751M2, 106.261/11/01/2003 [145783, 146197, 147240, 148691, 149435,

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
		149676, 151139, 151927, 153456, 156219, 156808, 159657, 160337, 160474, 160555, 160797, 163021, 163635, 164583, 164808, 165408, 166187, 168521, 172315, 173085, 173212, 173362, 173601, 174295], 106.262/11/01/2003 [145783, 146197, 147240, 148691, 149435, 149676, 151927, 153456, 156219, 156808, 159657, 160337, 160474, 160555, 160797, 163021, 163635, 164808, 165408, 166187, 173085, 173212, 173362, 173601, 174295]
24-36-1	CRACKING FURNACE	22690, PSDTX751M2
24-36-2	CRACKING FURNACE	22690, PSDTX751M2
24-36-3	CRACKING FURNACE	22690, PSDTX751M2
24-36-4	CRACKING FURNACE	22690, PSDTX751M2
24-36-5	CRACKING FURNACE	22690, PSDTX751M2
24-36-6	CRACKING FURNACE	22690, PSDTX751M2
24-36-7	STEAM SUPERHEATER	22690, PSDTX751M2
24-36-8	24 DAC HYDROTREATER HEATER 8	22690, PSDTX751M2
24-36-9	CRACKING FURNACE	22690, PSDTX751M2
24-95-219	DCPD FRACTIONATOR	22690, PSDTX751M2
24-95-304	D-304 LUBE/SEAL OIL RESERVOIR	22690, PSDTX751M2
24-95-305	D-305 LUBE/SEAL OIL RESERVOIR	22690, PSDTX751M2
24-95-306	D-306 LUBE/SEAL OIL RESERVOIR	22690, PSDTX751M2

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
24-95-307	EXPANDER LUBE OIL RESERVOIR	22690, PSDTX751M2
24-95-314	UNIT 24 METHANOL STORAGE TANK	22690, PSDTX751M2
24-95-319	C-100 (CRACKED GAS)	22690, PSDTX751M2
24-95-320	C-101 (ETHYLENE)	22690, PSDTX751M2
24-95-321	C-102 (PROPYLENE)	22690, PSDTX751M2
24-95-95	BTX STABILIZER	22690, PSDTX751M2
24-AV	UNIT 24 ANALYZER VENTS	22690, PSDTX751M2
24-PV	UNIT 24 PROCESS VENTS	22690, PSDTX751M2
24-SUMP3	24 OILY WATER SEWER SUMP	22690, PSDTX751M2
24.1-0-0	UNIT 24.1 PROCESS FUGITIVES	22690, PSDTX751M2, 106.261/11/01/2003 [146197, 159656, 161233, 162856, 163635, 163847, 165684, 166187, 167421, 168326, 169684, 172608], 106.262/11/01/2003 [146197, 159656, 161233, 162856, 163635, 163847, 165684, 166187, 167421, 168326, 169684, 172608]
24AIR3	UNIT 24 AIR COMPRESSOR ENGINE NO. 3	106.512/06/13/2001 [166728]
24AIR4	UNIT 24 AIR COMPRESSOR ENGINE NO. 4	106.512/06/13/2001 [166728]
24EMGGEN	UNIT 24 CR EMERGENCY GENERATOR	106.511/09/04/2000
24EMGGENTK	DIESEL TANK FOR 24EMGGEN	106.472/09/04/2000
24OWSENG	UNIT 24 DIESEL PUMP ENGINE	106.512/06/13/2001 [169357]
33-0-0	UNIT 33 PROCESS FUGITIVES	22690, PSDTX751M2, 106.261/11/01/2003 [146045, 146197, 146689, 146825, 148805, 151139, 153456, 154059, 154253, 154502,

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
		156219, 156402, 160127, 160797, 162037, 163288, 164583, 164808, 166244, 166729, 166866, 168521, 171577, 172095, 172315], 106.262/11/01/2003 [146045, 146197, 146689, 146825, 148805, 153456, 154059, 154253, 154502, 156219, 156402, 160127, 160797, 162037, 163288, 164808, 166244, 166729, 166866, 171577, 172095]
33-20Y104	UNIT 33 SUEZ TANK	106.472/09/04/2000
33-20Y14	UNIT 33 SUEZ TANK	106.472/09/04/2000
33-20Y25	UNIT 33 SUEZ TANK	106.472/09/04/2000
33-20Y98N	UNIT 33 SUEZ TANK	106.472/09/04/2000
33-36-1	CRACKING FURNACE	22690, PSDTX751M2
33-36-10	CRACKING FURNACE	22690, PSDTX751M2
33-36-2	CRACKING FURNACE	22690, PSDTX751M2
33-36-3	CRACKING FURNACE	22690, PSDTX751M2
33-36-4	CRACKING FURNACE	22690, PSDTX751M2
33-36-5	CRACKING FURNACE	22690, PSDTX751M2
33-36-6	CRACKING FURNACE	22690, PSDTX751M2
33-36-7	CRACKING FURNACE	22690, PSDTX751M2
33-36-8	CRACKING FURNACE	22690, PSDTX751M2
33-36-9	CRACKING FURNACE	22690, PSDTX751M2
33-95-10	UNIT 33 METHANOL STORAGE TANK	22690, PSDTX751M2

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
33-95-14	NALCO EC 3161 A STORAGE TANK	22690, PSDTX751M2
33-95-15	C-101 LUBE/SEAL OIL	22690, PSDTX751M2
33-95-17	C-102 LUBE/SEAL OIL	22690, PSDTX751M2
33-95-19	C-103 LUBE/SEAL OIL	22690, PSDTX751M2
33-95-390	D-390 SEAL OIL RESERVOIR	22690, PSDTX751M2
33-95-392	D-392 SEAL OIL RESERVOIR	22690, PSDTX751M2
33-95-394	D-394 SEAL OIL RSERVOIR	22690, PSDTX751M2
33-AV	UNIT 33 ANALYZER VENTS	22690, PSDTX751M2
33-OS9990	UNIT 33 SUEZ TANK	106.472/09/04/2000
33-PV	UNIT 33 PROCESS VENTS	22690, PSDTX751M2
33-SUMP1	33 CAUSTIC SUMP	22690, PSDTX751M2
33-SUMP2	33 WATER SLUDGE PIT	22690, PSDTX751M2
33-SUMP3	33 OILY WATER SEWER SUMP	22690, PSDTX751M2
33-SUMP4	33 BLOWDOWN DRUM SUMP	22690, PSDTX751M2
33.1-0-0	UNIT 33 FURNACE 10 FUGITIVES	22690, PSDTX751M2
33AIR5	UNIT 33 AIR COMPRESSOR EMERGENCY ENGINE NO. 5	106.511/09/04/2000 [166728]
54-22-12	UNIT 21/22 COOLING TOWER (CT-12)	22690, PSDTX751M2
54-22-13	UNIT 24 COOLING TOWER (CT-13)	22690, PSDTX751M2
54-22-17	UNIT 33 COOLING TOWER (CT-17)	22690, PSDTX751M2
54-22-5	UNIT 12 COOLING TOWER (CT-5)	22690, PSDTX751M2
54-22-6	UNIT 10ABC COOLING TOWER (CT-6)	22690, PSDTX751M2

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
54-22-7	UNIT 10ABC COOLING TOWER (CT-7)	22690, PSDTX751M2
54-22-9	UNIT 10D/18 COOLING TOWER (CT-9)	22690, PSDTX751M2
56-61-10	UNIT 21, 22 LOW-PRESSURE FLARE	22690, GHGPSDTX226, PSDTX751M2, 106.264/09/04/2000
56-61-12	UNIT 22 HIGH-PRESSURE FLARE	22690, PSDTX751M2
56-61-14	UNIT 24 HIGH-PRESSURE FLARE	22690, PSDTX751M2
56-61-20	UNIT 24 LOW-PRESSURE FLARE	22690, 164587, PSDTX751M2
56-61-22	UNIT 33 PROCESS FLARE	22690, 169710, PSDTX751M2
56-61-4	UNIT 10D/18 PROCESS FLARE	22690, 169710, PSDTX751M2, 106.261/11/01/2003 [162691], 106.262/11/01/2003 [162691]
56-61-8	UNITS 10ABC, 12 LOW PRESSURE FLARE	22690, PSDTX751M2, 106.261/11/01/2003 [162691], 106.262/11/01/2003 [162691]
56-61-9	UNITS 10ABC, 12 HIGH PRESSURE FLARE	22690, PSDTX751M2
68.1-0-0	WEST PIPE RACK FUGITIVES	22690, PSDTX751M2, 106.261/11/01/2003 [146197, 151139, 164583]
ADM_EMGGEN	ADMINISTRATIVE BUILDING DIESEL GENERATOR	106.511/09/04/2000 [146097]
BSENGINE	BUNDLE SLAB GENERATOR ENGINE	106.512/06/13/2001 [166521]
CPC-PAINT	PAINTING OPERATIONS	22690, PSDTX751M2
DTANK24	DIESEL TANK FOR U24 AIR COMPRESSOR	106.472/09/04/2000
DTANK33	DIESEL TANK FOR U33 AIR COMPRESSOR	106.472/09/04/2000
GTANKAG	GASOLINE TANK AREA G	106.473/09/04/2000

New Source Review Authorization References by Emissions Unit

The following is a list of New Source Review (NSR) authorizations for emission units listed elsewhere in this operating permit. The NSR authorizations are applicable requirements under 30 TAC Chapter 122 and enforceable under this operating permit.

Unit/Group/Process ID No.	Emission Unit Name/Description	New Source Review Authorization**
LDUNLOAD	LOW VP LOADING AND UNLOADING ACTIVITIES	106.472/09/04/2000
NGLEMGTK	DIESEL TANK FOR NGLEMGGEN	106.472/09/04/2000
NGLEMGGEN	NGL/22 CR EMERGENCY GENERATOR	106.511/09/04/2000
NGL_DITCH	UNIT 10 DIESEL PUMP ENGINE	106.512/06/13/2001 [169357]
PRO-24DAC	DAC HYDROTREATER	22690, PSDTX751M2
PRO10MEROX	10 ABC MEROX	22690, PSDTX751M2
PTSB-1	PAINTING AND ABRASIVE BLASTING AREA NO 1	106.433/09/04/2000 [154982], 106.452/09/04/2000 [154982]
PTSB-2	PAINTING AND ABRASIVE BLASTING AREA NO 2	106.433/09/04/2000 [155982], 106.452/09/04/2000 [155982]

**This column may include Permit by Rule (PBR) numbers and version dates, PBR Registration numbers in brackets, Standard Permit Registration numbers, Minor NSR permit numbers, and Major NSR permit numbers.

Alternative Requirement

Alternative Requirement.....	527

TEXAS COMMISSION ON ENVIRONMENTAL QUALITY



**Alternative Method of Control (AMOC) Plan, AMOC No.: 145
Chevron Phillips Chemical Company, L.P.
Sweeney Old Ocean Plant, Alternative Flare Operations and Monitoring
Sweeney, Brazoria County, Regulated Entity Number: 100825249**

This AMOC Plan Authorization shall apply at the Chevron Phillips Chemical Company, L.P. (CPChem) Sweeney Old Ocean Plant located in Sweeney, Brazoria County. Under Title 30 Texas Administrative Code (TAC) Section 115.910 (§115.910) this plan authorizes alternative operational parameter requirements, monitoring, recordkeeping, recording and reporting for flares which control routine, planned maintenance, start-up and shutdown (MSS), and unplanned event emissions from ethylene production and is effective no later than July 1, 2022.

This authorization is granted under § 115.910 for emissions sources regulated by 30 TAC Chapter 115: Subchapter B: General Volatile Organic Compound Sources, Division 1: Storage of Volatile Organic Compounds, Division 2: Vent Gas Control, and Subchapter H: Highly-Reactive Volatile Organic Compounds Division 1: Vent Gas Control. This AMOC shall apply in lieu of the requirements §§ 115.112(e)(3)(C), 115.126(1)(B), and 115.722(d), as applicable and to the extent that §115.725(d)(2) conflicts with 40 CFR §§63.670(j) and (l)(5) (effective February 4, 2020) relating to sample locations and analysis of combined vent gas streams.

Compliance with this AMOC is independent of CPChem's obligation to comply with all other applicable requirements of 30 TAC Chapter 115, TCEQ permits, and applicable state and federal law. In accordance with § 115.913(c), all representations submitted for this plan, as well as the provisions listed here, become conditions upon which this AMOC Plan is issued. It is unlawful to vary from the emission limits, control requirements, monitoring, testing, reporting or recordkeeping requirements of this Plan.

A copy of the AMOC application and the AMOC Plan provisions must be kept on-site or at a centralized location and made available at the request of personnel from the TCEQ or any pollution control agency with jurisdiction. The AMOC application is defined by the application dated August 29, 2019 and subsequent supporting information dated through January 13, 2022.

I. Requirements.

- A. The requirements of this AMOC are applicable to the following Flares:
 - Flare 10 (EPN 56-61-10) a low-pressure, steam-assisted flare controlling emissions from Ethylene Unit 22; Flare 12 (EPN 56-61-12) a high-pressure, steam-assisted flare controlling emissions from Ethylene Unit 22; Flare 14 (EPN 56-61-14) a high-pressure air-assisted flare controlling emissions from Ethylene Unit 24; Flare 20 (EPN 56-61-20) a low-pressure air-assisted flare controlling emissions from Ethylene Unit 24; and Flare 22 (EPN 56-61-22) a steam-assisted flare controlling emissions from Ethylene Unit 33.
- B. Pilot flame presence. The owner or operator shall operate each flare with a pilot flame present at all times when regulated material is routed to the flare. Each 15-minute block during which there is at least one minute where no pilot flame is present when regulated material is routed to the flare is a deviation of the standard. Deviations in different 15-minute blocks from the same event are considered separate deviations. Monitoring shall follow paragraph G.

- C. Visible emissions. The owner or operator shall specify the smokeless design capacity of each flare and operate with no visible emissions, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours, when regulated material is routed to the flare and the flare vent gas flow rate is less than the smokeless design capacity of the flare. Prior to the compliance schedule specified in the effective, promulgated rule "National Emission Standards for Hazardous Air Pollutants: Generic Maximum Achievable Control Technology Standards Residual Risk and Technology Review for Ethylene Production", the requirement shall apply regardless of whether the flare vent gas flow rate is less than the smokeless design capacity of the flare.
- D. Flare tip velocity. For each flare, the owner or operator shall comply with either (1) or (2) below, provided the appropriate monitoring systems are in-place, whenever regulated material is routed to the flare for at least 15-minutes and the flare vent gas flow rate is less than the smokeless design capacity of the flare. Prior to the compliance schedule specified in the effective, promulgated rule "National Emission Standards for Hazardous Air Pollutants: Generic Maximum Achievable Control Technology Standards Residual Risk and Technology Review for Ethylene Production", the requirement shall apply regardless of whether the flare vent gas flow rate is less than the smokeless design capacity of the flare.
1. Except as provided in paragraph (2) below, the actual flare tip velocity (V_{tip}) must be less than 60 feet per second. The owner or operator shall monitor V_{tip} using the procedures specified below in paragraphs (I) and (K).
 2. V_{tip} must be less than 400 feet per second and also less than the maximum allowed flare tip velocity (V_{max}) as calculated according to the following equation. The owner or operator shall monitor V_{tip} using the procedures specified in paragraphs (I) and (K) and monitor gas composition and determine $NHVV_g$ using the procedures specified in paragraphs (J) and (L).

$$\log_{10} (V_{max}) = \{NHVV_g + 1212\} / 850$$

Where:
 V_{max} = Maximum allowed flare tip velocity, ft/sec.
 $NHVV_g$ = Net heating value of flare vent gas, as determined by (L)(4), Btu/scf.
 1,212 = Constant.
 850 = Constant.
- E. Combustion zone operating limits. For each flare, the owner or operator shall operate the flare to maintain the net heating value of flare combustion zone gas ($NHVV_{cz}$) at or above 270 British thermal units per standard cubic feet (Btu/scf) determined on a 15-minute block period basis when regulated material is routed to the flare for at least 15-minutes. The owner or operator shall monitor and calculate $NHVV_{cz}$ as specified in paragraph (M).
- F. Dilution operating limits for flares with perimeter assist air. For each flare actively receiving perimeter assist air, the owner or operator shall operate the flare to maintain the net heating value dilution parameter ($NHVV_{dil}$) at or above 22 British thermal units per square foot (Btu/ft²) determined on a 15-minute block period basis when regulated material is being routed to the flare for at least 15-minutes. The owner or operator shall monitor and calculate $NHVV_{dil}$ as specified in paragraph (N).
- G. Pilot flame monitoring. The owner or operator shall continuously monitor the presence of the pilot flame(s) using a device (including, but not limited to, a thermocouple, ultraviolet beam sensor, or infrared sensor) capable of detecting that the pilot flame(s) is present.
- H. Visible emissions monitoring. The owner or operator shall monitor visible emissions while regulated materials are vented to the flare. An initial visible emissions demonstration must be conducted using an observation period of 2 hours using Method 22 at 40 CFR part 60, appendix A-7. Subsequent visible emissions observations must be conducted using either the methods in (1) or (2) below. The owner or operator must record and report any instances where visible emissions are observed for more than 5 minutes during any 2 consecutive hours.
1. At least once per day, conduct visible emissions observations using an observation period of 5 minutes using Method 22 at 40 CFR Part 60, Appendix A-7. If at any time the owner or operator sees visible emissions, even if the minimum required daily visible emission monitoring has already been performed, the owner or operator shall immediately begin an observation period of 5 minutes using Method 22 at 40 CFR Part 60, Appendix A-7. If visible emissions are observed for more than one continuous minute during any 5-minute observation period, the observation period using Method 22 at 40 CFR Part 60, Appendix A-7 must be extended to 2 hours or until 5-minutes of visible emissions are observed.
 2. Use a video surveillance camera to continuously record (at least one frame every 15 seconds with time and date stamps) images of the flare flame and a reasonable distance above the flare flame at an angle suitable for visual emissions observations. The owner or operator must provide real-time video surveillance camera output to the control room or other continuously manned location where the camera images may be viewed at any time.

- I. Flare vent gas, steam assist and air assist flow rate monitoring. The owner or operator shall install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the volumetric flow rate in the flare header or headers that feed the flare as well as any supplemental natural gas used. Different flow monitoring methods may be used to measure different gaseous streams that make up the flare vent gas provided that the flow rates of all gas streams that contribute to the flare vent gas are determined.
If assist air or assist steam is used, the owner or operator shall install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the volumetric flow rate of assist air and/or assist steam used with the flare.
If pre-mix assist air and perimeter assist are both used, the owner or operator shall install, operate, calibrate, and maintain a monitoring system capable of separately measuring, calculating, and recording the volumetric flow rate of premix assist air and perimeter assist air used with the flare.
Continuously monitoring fan speed or power and using fan curves is an acceptable method for continuously monitoring assist air flow rates.
 1. The flow rate monitoring systems must be able to correct for the temperature and pressure of the system and output parameters in standard conditions (i.e., a temperature of 20° C (68° F) and a pressure of 1 atmosphere).
 2. Mass flow monitors may be used for determining volumetric flow rate of flare vent gas provided the molecular weight of the flare vent gas is determined using compositional analysis as specified in paragraph (J) so that the mass flow rate can be converted to volumetric flow at standard conditions using the following equation.

$$Q_{vol} = \{Q_{mass} * 385.3\} / MWt$$
 Where:
 Q_{vol} = Volumetric flow rate, standard cubic feet per second.
 Q_{mass} = Mass flow rate, pounds per second.
 385.3 = Conversion factor, standard cubic feet per pound-mole.
 MWt = Molecular weight of the gas at the flow monitoring location, pounds per pound-mole.
 3. Mass flow monitors may be used for determining volumetric flow rate of assist air or assist steam. Use equation in paragraph (I)(2) to convert mass flow rates to volumetric flow rates. Use a molecular weight of 18 pounds per pound-mole for assist steam and use a molecular weight of 29 pounds per pound-mole for assist air.
 4. Continuous pressure/temperature monitoring system(s) and appropriate engineering calculations may be used in lieu of a continuous volumetric flow monitoring system provided the molecular weight of the gas is known. For assist steam, use a molecular weight of 18 pounds per pound-mole. For assist air, use a molecular weight of 29 pounds per pound-mole. For flare vent gas, molecular weight must be determined using compositional analysis as specified in paragraph (J).
- J. Flare vent gas composition monitoring. The owner or operator shall determine the concentration of individual components in the flare vent gas using either the methods provided in paragraph (J)(1) or (2), to assess compliance with the operating limits in paragraph (E) and, if applicable, paragraphs (D) and (F). Alternatively, the owner or operator may elect to directly monitor the net heating value of the flare vent gas following the methods provided in paragraphs (J)(3) and, if desired, may directly measure the hydrogen concentration in the flare vent gas following the methods provided in paragraphs (J)(4). The owner or operator may elect to use different monitoring methods for different gaseous streams that make up the flare vent gas using different methods provided the composition or net heating value of all gas streams that contribute to the flare vent gas are determined.
 1. Except as provided in paragraphs (J)(5) and (6), the owner or operator shall install, operate, calibrate, and maintain a monitoring system capable of continuously measuring (i.e., at least once every 15-minutes), calculating, and recording the individual component concentrations present in the flare vent gas.
 2. Except as provided in paragraphs (J)(5) and (6), the owner or operator shall install, operate, and maintain a grab sampling system capable of collecting an evacuated canister sample for subsequent compositional analysis at least once every eight hours while there is flow of regulated material to the flare. Subsequent compositional analysis of the samples must be performed according to Method 18 of 40 CFR part 60, appendix A-6, ASTM D6420-99 (Reapproved 2010), ASTM D1945-03 (Reapproved 2010), ASTM D1945-14 or ASTM UOP539-12.
 3. Except as provided in paragraphs (J)(5) and (6), the owner or operator shall install, operate, calibrate, and maintain a calorimeter capable of continuously measuring, calculating, and recording NHV_{vg} at standard conditions.

4. If the owner or operator uses a continuous net heating value monitor according to paragraph (J)(3), the owner or operator may, at their discretion, install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the hydrogen concentration in the flare vent gas.
5. Direct compositional or net heating value monitoring is not required for purchased ("pipeline quality") natural gas streams. The net heating value of purchased natural gas streams may be determined using annual or more frequent grab sampling at any one representative location. Alternatively, the net heating value of any purchased natural gas stream can be assumed to be 920 Btu/scf. As applicable, requirements of 30 TAC § 115.725(d)(2) also apply. Where overlapping applicable requirements exist under 40 CFR §§ 60.670(j) and 60.670(l)(5) (effective February 4, 2020), this AMOC plan shall supersede the third sentence of § 115.725(d)(2) ("Samples must be collected from a location on the main flare header such that the measured constituents, including any supplemental fuel, are representative of the combined gas combusted in the flare system").
6. Direct compositional or net heating value monitoring is not required for gas streams that have been demonstrated to have consistent composition (or a fixed minimum net heating value) according to the relevant provisions specified in 40 CFR 63.1103(e) applying to flares, consistent with the compliance schedule specified in the effective, promulgated rule "National Emission Standards for Hazardous Air Pollutants: Generic Maximum Achievable Control Technology Standards Residual Risk and Technology Review for Ethylene Production". Prior to the effective date of the above-referenced rules, waivers for monitoring consistent composition streams may be requested from the TCEQ.
- K. Calculation methods for cumulative flow rates and determining compliance with V_{tip} operating limits. The owner or operator shall determine V_{tip} on a 15-minute block average basis according to the following requirements:
 1. The owner or operator shall use design and engineering principles to determine the unobstructed cross-sectional area of the flare tip. The unobstructed cross-sectional area of the flare tip is the total tip area that vent gas can pass through. This area does not include any stability tabs, stability rings, and upper steam or air tubes because flare vent gas does not exit through them.
 2. The owner or operator shall determine the cumulative volumetric flow of flare vent gas for each 15-minute block average period using the data from the continuous flow monitoring system required in paragraph (I) according to the following requirements, as applicable. If desired, the cumulative flow rate for a 15-minute block period only needs to include flow during those periods when regulated material is sent to the flare, but owners or operators may elect to calculate the cumulative flow rates across the entire 15-minute block period for any 15-minute block period where there is regulated material flow to the flare.
 - i. Use set 15-minute time periods starting at 12 midnight to 12:15 a.m., 12:15 a.m. to 12:30 a.m. and so on concluding at 11:45 p.m. to midnight when calculating 15-minute block average flow volumes.
 - ii. If continuous pressure/temperature monitoring system(s) and engineering calculations are used as allowed under paragraph (L)(4), the owner or operator shall, at a minimum, determine the 15-minute block average temperature and pressure from the monitoring system and use those values to perform the engineering calculations to determine the cumulative flow over the 15-minute block average period.
Alternatively, the owner or operator may divide the 15-minute block average period into equal duration sub-periods (e.g., three 5-minute periods) and determine the average temperature and pressure for each subperiod, perform engineering calculations to determine the flow for each subperiod, then add the volumetric flows for the subperiods to determine the cumulative volumetric flow of vent gas for the 15-minute block average period.
 3. The 15-minute block average V_{tip} shall be calculated using the following equation.

$$V_{tip} = Q_{cum} / \{Area * 900\}$$
 Where:
 V_{tip} = Flare tip velocity, feet per second.
 Q_{cum} = Cumulative volumetric flow over 15-minute block average period, actual ft³.
 Area = Unobstructed area of the flare tip, square feet.
 900 = Conversion factor, seconds per 15-minute block average.
 4. If the owner or operator chooses to comply with paragraph (D)(2), the owner or operator shall also determine the net heating value of the flare vent gas following the requirements in paragraphs (J) and (L) and calculate V_{max} using the equation in paragraph (D)(2) in order to compare V_{tip} to V_{max} on a 15-minute block average basis.

- L. Calculation methods for determining flare vent gas net heating value. The owner or operator shall determine the net heating value of the flare vent gas (NHV_{vg}) based on the composition monitoring data on a 15-minute block average basis according to the following requirements.
1. If compositional analysis data are collected as provided in paragraph (J)(1) or (2), the owner or operator shall determine NHV_{vg} of a specific sample by using the following equation:

$$NHV_{vg} = \sum_{i=1}^n X_i NHV_i$$

Where:

NHV_{vg} = Net heating value of flare vent gas, Btu/scf.

i = Individual component in flare vent gas.

n = Number of components in flare vent gas.

x_i = Concentration of component i in flare vent gas, volume fraction.

NHV_i = Net heating value of component i according to Table 1, Btu/scf. If the component is not specified in the table, the heat of combustion may be determined using any published values where the net enthalpy per mole of offgas is based on combustion at 25 °C and 1 atmosphere (or constant pressure) with offgas water in the gaseous state, but the standard temperature for determining the volume corresponding to one mole of vent gas is 20 °C.

2. If direct net heating value monitoring data are collected as provided in paragraph (J)(3) but a hydrogen concentration monitor is not used, the owner or operator shall use the direct output of the monitoring system(s) (in Btu/scf) to determine the NHV_{vg} for the sample.
3. If direct net heating value monitoring data are collected as provided in paragraph (J)(3) and hydrogen concentration monitoring data are collected as provided in paragraph (J)(4), the owner or operator shall use the following equation to determine NHV_{vg} for each sample measured via the net heating value monitoring system.

$$NHV_{vg} = NHV_{measured} + 938X_{H2}$$

Where:

NHV_{vg} = Net heating value of flare vent gas, Btu/scf.

$NHV_{measured}$ = Net heating value of flare vent gas stream as measured by the continuous net heating value monitoring system, Btu/scf.

X_{H2} = Concentration of hydrogen in flare vent gas at the time the sample was input into the net heating value monitoring system, volume fraction.

938 = Net correction for the measured heating value of hydrogen (1,212 - 274), Btu/scf.

4. Use set 15-minute time periods starting at 12 midnight to 12:15 a.m., 12:15 a.m. to 12:30 a.m. and so on concluding at 11:45 p.m. to midnight when calculating 15-minute block averages.
5. When a continuous monitoring system is used as provided in paragraph (J)(1) or (3) and, if applicable, paragraph (J)(4), the owner or operator may elect to determine the 15-minute block average NHV_{vg} using either the calculation methods in paragraph (L)(5)(i) or the calculation methods in paragraph (L)(5)(ii). The owner or operator may choose to comply using the calculation methods in paragraph (L)(5)(i) for some flares at the ethylene production unit and comply using the calculation methods (L)(5)(ii) for other flares. However, for each flare, the owner or operator must elect one calculation method that will apply at all times and use that method for all continuously monitored flare vent streams associated with that flare. If the owner or operator intends to change the calculation method that applies to a flare, the owner or operator must notify the Administrator 30 days in advance of such a change. Prior to the effective date of the "National Emission Standards for Hazardous Air Pollutants: Generic Maximum Achievable Control Technology Standards Residual Risk and Technology Review for Ethylene Production", notification shall be made to the TCEQ Executive Director.
- i. Feed-forward calculation method. When calculating NHV_{vg} for a specific 15-minute block:
- a. Use the results from the first sample collected during an event, (for periodic flare vent gas flow events) for the first 15-minute block associated with that event.
- b. If the results from the first sample collected during an event (for periodic flare vent gas flow events) are not available until after the second 15-minute block starts, use the results from the first sample collected during an event for the second 15-minute block associated with that event.

- c. For all other cases, use the results that are available from the most recent sample prior to the 15-minute block period for that 15-minute block period for all flare vent gas streams. For the purpose of this requirement, use the time that the results become available rather than the time the sample was collected. For example, if a sample is collected at 12:25 a.m. and the analysis is completed at 12:38 a.m., the results are available at 12:38 a.m. and these results would be used to determine compliance during the 15-minute block period from 12:45 a.m. to 1:00 a.m.
 - ii. Direct calculation method. When calculating NHV_{vg} for a specific 15-minute block:
 - a. If the results from the first sample collected during an event (for periodic flare vent gas flow events) are not available until after the second 15-minute block starts, use the results from the first sample collected during an event for the first 15-minute block associated with that event.
 - b. For all other cases, use the arithmetic average of all NHV_{vg} measurement data results that become available during a 15-minute block to calculate the 15-minute block average for that period. For the purpose of this requirement, use the time that the results become available rather than the time the sample was collected. For example, if a sample is collected at 12:25 a.m. and the analysis is completed at 12:38 a.m., the results are available at 12:38 a.m. and these results would be used to determine compliance during the 15-minute block period from 12:30 a.m. to 12:45 a.m.
- 6. When grab samples are used to determine flare vent gas composition:
 - i. Use the analytical results from the first grab sample collected for an event for all 15-minute periods from the start of the event through the 15-minute block prior to the 15-minute block in which a subsequent grab sample is collected.
 - ii. Use the results from subsequent grab sampling events for all 15-minute periods starting with the 15-minute block in which the sample was collected and ending with the 15-minute block prior to the 15-minute block in which the next grab sample is collected. For the purpose of this requirement, use the time the sample was collected rather than the time the analytical results become available.
- 7. If the owner or operator monitors separate gas streams that combine to comprise the total flare vent gas flow, the 15-minute block average net heating value shall be determined separately for each measurement location according to the methods in paragraphs (L)(1) - (6) and a flow-weighted average of the gas stream net heating values shall be used to determine the 15-minute block average net heating value of the cumulative flare vent gas.
- M. Calculation methods for determining combustion zone net heating value. The owner or operator shall determine the net heating value of the combustion zone gas (NHV_{cz}) as specified in paragraph (M)(1) or (2), as applicable.
 - 1. Except as specified in paragraph (M)(2), determine the 15-minute block average NHV_{cz} based on the 15-minute block average vent gas and assist gas flow rates using the following equation. For periods when there is no assist steam flow or premix assist air flow, $NHV_{cz} = NHV_{vg}$.

$$NHV_{cz} = \{ Q_{vg} * NHV_{vg} \} / (Q_{vg} + Q_s + Q_{a,premix})$$

Where:

 - NHV_{cz} = Net heating value of combustion zone gas, Btu/scf.
 - NHV_{vg} = Net heating value of flare vent gas for the 15-minute block period, Btu/scf.
 - Q_{vg} = Cumulative volumetric flow of vent gas during the 15-minute block period, scf.
 - Q_s = Cumulative volumetric flow of total steam during the 15-minute block period, scf.
 - $Q_{a,premix}$ = Cumulative volumetric flow of premix assist air during the 15-minute block period, scf.
 - 2. Owners or operators of flares that use the feed-forward calculation methodology in paragraph (L)(5)(i) and that monitor gas composition or net heating value in a location representative of the cumulative vent gas stream and that directly monitor supplemental natural gas flow additions to the flare must determine the 15-minute block average NHV_{cz} using the following equation:

$$NHV_{cz} = \frac{[(Q_{vg} - Q_{NG2} + Q_{NG1}) * NHV_{vg} + (Q_{NG2} - Q_{NG1}) * NHV_{NG}]}{(Q_{vg} + Q_s + Q_{a,premix})}$$

Where:

NHV_{cz} = Net heating value of combustion zone gas, Btu/scf.

NHV_{vg} = Net heating value of flare vent gas for the 15-minute block period, Btu/scf.

Q_{vg} = Cumulative volumetric flow of vent gas during the 15-minute block period, scf.

Q_{NG2} = Cumulative volumetric flow of supplemental natural gas to the flare during the 15-minute block period, scf.

Q_{NG1} = Cumulative volumetric flow of supplemental natural gas to the flare during the previous 15-minute block period, scf. For the first 15-minute block period of an event, use the volumetric flow value for the current 15-minute block period, i.e., $Q_{NG1} = Q_{NG2}$.

NHV_{NG} = Net heating value of supplemental natural gas to the flare for the 15-minute block period determined according to the requirements in paragraph (J)(5), Btu/scf.

Q_s = Cumulative volumetric flow of total steam during the 15-minute block period, scf.

$Q_{a,premix}$ = Cumulative volumetric flow of premix assist air during the 15-minute block period, scf.

- N. Calculation methods for determining the net heating value dilution parameter. The owner or operator shall determine the net heating value dilution parameter (NHV_{dil}) as specified in paragraph (N)(1) or (2), as applicable.

1. Except as specified in paragraph (N)(2), determine the 15-minute block average NHV_{dil} based on the 15-minute block average vent gas and perimeter assist air flow rates using the following equation only during periods when perimeter assist air is used. For 15-minute block periods when there is no cumulative volumetric flow of perimeter assist air, the 15-minute block average NHV_{dil} parameter does not need to be calculated.

$$NHV_{dil} = [Q_{vg} * Diam * NHV_{vg}] / (Q_{vg} + Q_s + Q_{a,premix} + Q_{a,perimeter})$$

Where:

NHV_{dil} = Net heating value dilution parameter, Btu/ft².

NHV_{vg} = Net heating value of flare vent gas determined for the 15-minute block period, Btu/scf.

Q_{vg} = Cumulative volumetric flow of flare vent gas during the 15-minute block period, scf.

$Diam$ = Effective diameter of the unobstructed area of the flare tip for flare vent gas flow, ft. Use the area as determined in paragraph (K)(1) and determine the diameter as

$$Diam = 2 * \sqrt{Area/\pi}$$

Q_s = Cumulative volumetric flow of total steam during the 15-minute block period, scf.

$Q_{a,premix}$ = Cumulative volumetric flow of premix assist air during the 15-minute block period, scf.

$Q_{a,perimeter}$ = Cumulative volumetric flow of perimeter assist air during the 15-minute block period, scf.

2. Owners or operators of flares that use the feed-forward calculation methodology in paragraph (L)(5)(i) and that monitor gas composition or net heating value in a location representative of the cumulative vent gas stream and that directly monitor supplemental natural gas flow additions to the flare must determine the 15-minute block average NHV_{dil} using the following equation only during periods when perimeter assist air is used. For 15-minute block periods when there is no cumulative volumetric flow of perimeter assist air, the 15-minute block average NHV_{dil} parameter does not need to be calculated.

$$NHV_{dil} = \frac{\{[(Q_{vg} - Q_{NG2} + Q_{NG1}) * NHV_{vg} + (Q_{NG2} - Q_{NG1}) * NHV_{NG}] * Diam\}}{(Q_{vg} + Q_s + Q_{a,premix} + Q_{a,perimeter})}$$

Where:

NHV_{dil} = Net heating value dilution parameter, Btu/ft².

NHV_{vg} = Net heating value of flare vent gas determined for the 15-minute block period, Btu/scf.

Q_{vg} = Cumulative volumetric flow of flare vent gas during the 15-minute block period, scf.

Q_{NG2} = Cumulative volumetric flow of supplemental natural gas to the flare during the 15-minute block period, scf.

Q_{NG1} = Cumulative volumetric flow of supplemental natural gas to the flare during the previous 15-minute block period, scf. For the first 15-minute block period of an event, use the volumetric flow value for the current 15-minute block period, i.e., $Q_{NG1} = Q_{NG2}$

NHV_{NG} = Net heating value of supplemental natural gas to the flare for the 15-minute block period determined according to the requirements in paragraph (J)(5), Btu/scf.

Diam = Effective diameter of the unobstructed area of the flare tip for flare vent gas flow, ft. Use the area as determined in paragraph (K)(1) and determine the diameter as

$$Diam = 2 * \sqrt{Area/\pi}$$

Q_s = Cumulative volumetric flow of total steam during the 15-minute block period, scf.

Q_{a,premix} = Cumulative volumetric flow of premix assist air during the 15-minute block period, scf.

Q_{a,perimeter} = Cumulative volumetric flow of perimeter assist air during the 15-minute block period, scf.

- O. Emergency flaring provisions. If any flare covered by this Plan has the potential to operate above its smokeless capacity under any circumstance, such flare shall comply with the relevant provisions specified in 40 CFR 63.1103(e) applying to flares, consistent with the compliance schedule specified in the effective, promulgated rule "National Emission Standards for Hazardous Air Pollutants: Generic Maximum Achievable Control Technology Standards Residual Risk and Technology Review for Ethylene Production".
- P. [RESERVED]
- Q. Reporting. The owner or operator shall submit Periodic Reports in accordance with 30 TAC §122.145 after the end of each 6-month period when any of the information specified in this Plan is collected.
 - 1. *Notification of Compliance Status (NOCS)*. The owner or operator shall submit a Notification of Compliance Status within 150 days after the first applicable compliance date for flare monitoring.
 - i. Alternatively, required information can be submitted as part of a title V permit application or amendment.
 - ii. The NOCS shall include a statement from the owner or operator identifying which subpart they have elected to comply with, where given a choice, as provided for in §63.1100(g).
 - iii. The NOCS shall include flare design (e.g., steam-assisted, air-assisted, non-assisted, or pressure-assisted multi-point); all visible emission readings, heat content determinations, flow rate measurements, and exit velocity determinations made during the initial visible emissions demonstration required by § 63.670(h) of subpart CC, as applicable; and all periods during the compliance determination when the pilot flame or flare flame is absent.
 - 2. *Periodic Reports*
 - i. Records as specified in § 63.1109(e)(1) for each 15-minute block during which there was at least one minute when regulated material is routed to a flare and no pilot flame or flare flame is present. Include the start and stop time and date of each 15-minute block.
 - ii. Visible emission records as specified in § 63.1109(e)(2)(iv) for each period of 2 consecutive hours during which visible emissions exceeded a total of 5 minutes.
 - iii. The periods specified in §63.1109(e)(7). Indicate the date and time for the period, the net heating value operating parameter(s) determined following the methods in paragraphs (K) through (N) above as applicable.
 - iv. For flaring events meeting the criteria in §63.670(o)(3) of subpart CC and § 63.1103(e)(4)(iv):
 - A. The start and stop time and date of the flaring event.
 - B. The length of time that emissions were visible from the flare during the event.
 - C. Results of the root cause and corrective actions analysis completed during the reporting period, including the corrective actions implemented during the reporting period and, if applicable, the implementation schedule for planned corrective actions to be implemented subsequent to the reporting period.
- R. Alternative emission limitation requirements may be authorized by the TCEQ prior to the effective date of the "National Emission Standards for Hazardous Air Pollutants: Generic Maximum Achievable Control Technology Standards Residual Risk and Technology Review for Ethylene Production". Alternative emission limitation requirements may be authorized as provided for in §63.1113 in lieu of the requirements in paragraphs (D) through (F) above.
- II. **Requirements for flare monitoring systems**
 - A. Operation of CPMS. For each CPMS installed to comply with the requirements above, the owner or operator shall install, operate, calibrate, and maintain the CPMS as specified in (1) - (8) below.
 - 1. Except for CPMS installed for pilot flame monitoring, all monitoring equipment must meet the applicable minimum accuracy, calibration and quality control requirements specified in Table 2.

2. The owner or operator shall ensure the readout (that portion of the CPMS that provides a visual display or record) or other indication of the monitored operating parameter from any CPMS required for compliance is readily accessible onsite for operational control or inspection by the operator of the source.
3. All CPMS must complete a minimum of one cycle of operation (sampling, analyzing and data recording) for each successive 15-minute period.
4. Except for periods of monitoring system malfunctions, repairs associated with monitoring system malfunctions and required monitoring system quality assurance or quality control activities (including, as applicable, calibration checks and required zero and span adjustments), the owner or operator shall operate all CPMS and collect data continuously at all times when regulated emissions are routed to the flare.
5. The owner or operator shall operate, maintain, and calibrate each CPMS according to the CPMS monitoring plan specified in paragraph (B).
6. For each CPMS except for CPMS installed for pilot flame monitoring, the owner or operator shall comply with the out-of-control procedures described in paragraph (C).
7. The owner or operator shall reduce data from a CPMS as specified in paragraph (D).
8. The CPMS must be capable of measuring the appropriate parameter over the range of values expected for that measurement location. The data recording system associated with each CPMS must have a resolution that is equal to or better than the required system accuracy.
- B. CPMS monitoring plan. The owner or operator shall develop and implement a CPMS quality control program documented in a CPMS monitoring plan that covers each flare subject to this AMOC and each CPMS installed to comply with this Plan. The owner or operator shall have the CPMS monitoring plan readily available on-site at all times and shall submit a copy of the CPMS monitoring plan to the TCEQ upon request. The CPMS monitoring plan must contain the information listed in (1) - (5).
 1. Identification of the specific flare being monitored and the flare type (air-assisted only, steam-assisted only, air- and steam-assisted, pressure-assisted, or non-assisted).
 2. Identification of the parameter to be monitored by the CPMS and the expected parameter range, including worst case and normal operation.
 3. Description of the monitoring equipment, including the information specified in (i) - (vii).
 - i. Manufacturer and model number for all monitoring equipment components installed to comply with applicable provisions of this Plan.
 - ii. Performance specifications, as provided by the manufacturer, and any differences expected for this installation and operation.
 - iii. The location of the CPMS sampling probe or other interface and a justification of how the location meets the requirements of paragraph (A)(1).
 - iv. Placement of the CPMS readout, or other indication of parameter values, indicating how the location meets the requirements of paragraph (A)(2).
 - v. Span of the CPMS. The span of the CPMS sensor and analyzer must encompass the full range of all expected values.
 - vi. How data outside of the span of the CPMS will be handled and the corrective action that will be taken to reduce and eliminate such occurrences in the future.
 - vii. Identification of the parameter detected by the parametric signal analyzer and the algorithm used to convert these values into the operating parameter monitored to demonstrate compliance, if the parameter detected is different from the operating parameter monitored.
 4. Description of the data collection and reduction systems, including the information specified below:
 - i. A copy of the data acquisition system algorithm used to reduce the measured data into the reportable form of the standard and to calculate the applicable averages.
 - ii. Identification of whether the algorithm excludes data collected during CPMS breakdowns, out-of-control periods, repairs, maintenance periods, instrument adjustments or checks to maintain precision and accuracy, calibration checks, and zero (low-level), mid-level (if applicable) and high-level adjustments.
 - iii. If the data acquisition algorithm does not exclude data collected during CPMS breakdowns, out-of-control periods, repairs, maintenance periods, instrument adjustments or checks to maintain precision and accuracy, calibration checks, and zero (low-level), mid-level (if applicable) and high-level adjustments, a description of the procedure for excluding this data when the averages calculated as specified in paragraph (E) are determined.
 5. Routine quality control and assurance procedures, including descriptions of the procedures listed in (i) - (vi) below. The routine procedures must provide an assessment of CPMS performance.
 - i. Initial and subsequent calibration of the CPMS and acceptance criteria.

- ii. Determination and adjustment of the calibration drift of the CPMS.
- iii. Daily checks for indications that the system is responding. If the CPMS system includes an internal system check, the owner or operator may use the results to verify the system is responding, as long as the system provides an alarm to the owner or operator or the owner or operator checks the internal system results daily for proper operation and the results are recorded.
- iv. Preventive maintenance of the CPMS, including spare parts inventory.
- v. Data recording, calculations and reporting.
- vi. Program of corrective action for a CPMS that is not operating properly.
- C. Out-of-control periods. For each CPMS installed to comply with applicable provisions of this Plan except for CPMS installed for pilot flame monitoring, the owner or operator shall comply with the out-of-control procedures described in (1) and (2) below.
 - 1. A CPMS is out-of-control if the zero (low-level), mid-level (if applicable) or high-level calibration drift exceeds two times the accuracy requirement of Table 2.
 - 2. When the CPMS is out of control, the owner or operator shall take the necessary corrective action and repeat all necessary tests that indicate the system is out of control. The owner or operator shall take corrective action and conduct retesting until the performance requirements are below the applicable limits. The beginning of the out-of-control period is the hour a performance check (e.g., calibration drift) that indicates an exceedance of the performance requirements established is conducted. The end of the out-of-control period is the hour following the completion of corrective action and successful demonstration that the system is within the allowable limits. The owner or operator shall not use data recorded during periods the CPMS is out of control in data averages and calculations, used to report emissions or operating levels, as specified in paragraph (D)(3).
- D. CPMS data reduction. The owner or operator shall reduce data from a CPMS installed to comply with applicable provisions in this Plan as specified in (1) - (3) below.
 - 1. The owner or operator may round the data to the same number of significant digits used in that operating limit.
 - 2. Periods of non-operation of the process unit (or portion thereof) resulting in cessation of the emissions to which the monitoring applies must not be included in the 15-minute block averages.
 - 3. Periods when the CPMS is out of control must not be included in the 15-minute block averages.
- E. Additional requirements for gas chromatographs. For monitors used to determine compositional analysis for net heating value, the gas chromatograph must also meet the requirements of (1) - (3) below.
 - 1. The quality assurance requirements are in Table 2.
 - 2. The calibration gases must meet one of the following options:
 - i. The owner or operator must use a calibration gas or multiple gases that include Hydrogen, Methane, Ethane, Ethylene, Propane, Propylene, n-Butane, iso-Butane, Butene (It is not necessary to separately speciate butene isomers, but the net heating value of trans-butene must be used for co-eluting butene isomers), 1,3-Butadiene (It is not necessary to separately speciate butadiene isomers, but you must use the response factor and net heating value of 1,3-butadiene for co-eluting butadiene isomers), and n-Pentane (Use the response factor for n-pentane to quantify all C5+ hydrocarbons) that may be reasonably expected to exist in the flare gas stream and optionally include Acetylene, Carbon monoxide, Propadiene, Hydrogen sulfide. All of the calibration gases may be combined in one cylinder. If multiple calibration gases are necessary to cover all compounds, the owner or operator must calibrate the instrument on all of the gases.
 - ii. The owner or operator must use a surrogate calibration gas consisting of hydrogen and C1 through C5 normal hydrocarbons. All of the calibration gases may be combined in one cylinder. If multiple calibration gases are necessary to cover all compounds, the owner or operator must calibrate the instrument on all of the gases.
 - 3. If the owner or operator chooses to use a surrogate calibration gas under paragraph (E)(2)(ii), the owner or operator must comply with paragraphs (i) and (ii) below.
 - i. Use the response factor for the nearest normal hydrocarbon (i.e., n-alkane) in the calibration mixture to quantify unknown components detected in the analysis.
 - ii. Use the response factor for n-pentane to quantify unknown components detected in the analysis that elute after n-pentane.
- F. If an owner or operator chooses to determine compositional analysis for net heating value with a continuous process mass spectrometer, the owner or operator must comply with the following:

1. The owner or operator must meet the requirements of paragraph (E)(2) above. The minimum list of calibration gas components may be augmented with compounds found during a pre-survey or known to be in the gas through process knowledge.
2. Calibration gas cylinders must be certified to an accuracy of 2% and traceable to National Institute of Standards and Technology (NIST) standards.
3. For unknown gas components that have similar analytical mass fragments to calibration compounds, the owner or operator may report the unknowns as an increase in the overlapped calibration gas compound. For unknown compounds that produce mass fragments that do not overlap calibration compounds, the owner or operator may use the response factor for the nearest molecular weight hydrocarbon in the calibration mix to quantify the unknown component's NHV_{vg} .
4. The owner or operator may use the response factor for n-pentane to quantify any unknown components detected with a higher molecular weight than n-pentane.
5. The owner or operator must perform an initial calibration to identify mass fragment overlap and response factors for the target compounds.
6. The owner or operator must meet applicable requirements in Performance Specification 9 of 40 CFR Part 60, Appendix D, for continuous monitoring system acceptance including, but not limited to, performing an initial multi-point calibration check at three concentrations following the procedure in §10.1 and performing the periodic calibration requirements listed for gas chromatographs in Table 2 of this Plan for the process mass spectrometer. The owner or operator may use the alternative sampling line temperature allowed under Net Heating Value by Gas Chromatograph in Table 2 of this Plan.
7. The average instrument calibration error (CE) for each calibration compound at any calibration concentration must not differ by more than 10% from the certified cylinder gas value. The CE for each component in the calibration blend must be calculated using the following equation:

$$CE = [(C_m - C_a) / C_a] * 100$$

Where:

C_m = average instrument response (ppm)

C_a = certified cylinder gas value (ppm)

- G. An owner or operator using a gas chromatograph or mass spectrometer for compositional analysis for net heating value may choose to use the CE of $NHV_{measured}$ versus the cylinder tag value NHV as the measure of agreement for daily calibration and quarterly audits in lieu of determining the compound-specific CE. The CE for NHV at any calibration level must not differ by more than 10% from the certified cylinder gas value. The CE must be calculated using the following equation:

$$CE = [(NHV_{measured} - NHV_a) / NHV_a] * 100$$

Where:

$NHV_{measured}$ = average instrument response (Btu/scf)

NHV_a = certified cylinder gas value (Btu/scf)

- H. When determining compliance with the flare tip velocity and combustion zone operating limits specified in Plan Conditions I.D. and I.E., the initial 15-minutes block period starts with the 15-minute block that includes a full 15 minutes of the flaring events. The owner or operator is required to demonstrate compliance with the velocity and NHV_{cz} requirements starting with the block that contains the fifteenth minute of a flaring event. The owner or operator is not required to demonstrate compliance for the previous 15-minute block in which the event started and contained only a fraction of flow.
- I. In lieu of meeting the monitoring requirements above and as required in §§ 63.670 and 63.671 of 40 CFR 63 subpart CC, an owner or operator may submit a request to the Administrator for approval of an alternative test method in accordance with § 63.7(f). The alternative test method must be able to demonstrate on an ongoing basis at least once every 15-minutes that the flare meets 96.5% combustion efficiency and provide a description of the alternative recordkeeping and reporting that would be associated with the alternative test method. The alternative test method request may also include a request to use the alternative test method in lieu of the pilot or flare flame monitoring requirements.

III. Recordkeeping

- A. Retain records of the output of the monitoring device used to detect the presence of a pilot flame or flare flame as required in this Plan for a minimum of 2 years. Retain records of each 15-minute block during which there was at least one minute that no pilot flame or flare flame is present when regulated material is routed to a flare for a minimum of 5 years. The collected minute-by-minute data may be reduced to a 15-minute block basis with an indication of whether there was at least one minute where no pilot flame or flare flame was present.
- B. Retain records of daily visible emissions observations required in (1)-(4) of this paragraph, as applicable, for a minimum of 3 years.
 1. To determine when visible emissions observations are required, the record must identify all periods when regulated material is vented to the flare.

2. If visible emissions observations are performed using Method 22 of 40 CFR part 60, appendix A-7, then the record must identify whether the visible emissions observation was performed, the results of each observation, total duration of observed visible emissions, and whether it was a 5-minute or 2-hour observation. Record the date and start time of each visible emissions observation.
 3. If a video surveillance camera is used pursuant to this Plan I.H.2., then the record must include all video surveillance images recorded, with time and date stamps.
 4. For each 2-hour period for which visible emissions are observed for more than 5 minutes in 2 consecutive hours, then the record must include the date and start and end time of the 2-hour period and an estimate of the cumulative number of minutes in the 2-hour period for which emissions were visible.
- C. The 15-minute block average cumulative flows for flare vent gas and, if applicable, total steam, perimeter assist air, and premix assist air specified to be monitored under this Plan Paragraph I of Section I., along with the date and time interval for the 15-minute block. If multiple monitoring locations are used to determine cumulative vent gas flow, total steam, perimeter assist air, and premix assist air, then retain records of the 15-minute block average flows for each monitoring location for a minimum of 2 years, and retain records of the 15-minute block average cumulative flows that are used in subsequent calculations for a minimum of 5 years. If pressure and temperature monitoring is used, then retain records of the 15-minute block average temperature, pressure and molecular weight of the flare vent gas or assist gas stream for each measurement location used to determine the 15-minute block average cumulative flows for a minimum of 2 years, and retain records of the 15-minute block average cumulative flows that are used in subsequent calculations for a minimum of 5 years.
- D. The flare vent gas compositions specified to be monitored under paragraph J. of this Plan. Retain records of individual component concentrations from each compositional analysis for a minimum of 2 years. If an NHVvg analyzer is used, retain records of the 15-minute block average values for a minimum of 5 years.
- E. Each 15-minute block average operating parameter calculated following the methods specified in I.(K) - (N) of this Plan, as applicable.
- F. All periods during which operating values are outside of the applicable operating limits specified in this Plan I.(D) - (F) and (P), as applicable, when regulated material is being routed to the flare.
- G. All periods during which the owner or operator does not perform flare monitoring according to the procedures in this Plan I.(G) - (J).
- H. Records of periods when there is flow of vent gas to the flare, but when there is no flow of regulated material to the flare, including the start and stop time and dates of periods of no regulated material flow.
- I. The owner or operator of a flare subject to this AMOC shall keep copies of all applicable reports and records required by this AMOC for at least 5 years except as otherwise specified.
- J. All applicable records shall be maintained in such a manner that are up-to-date and readily accessed within 24 hours. Records may be maintained in hard copy or computer-readable form including, but not limited to, on paper, microfilm, computer, flash drive, floppy disk, magnetic tape, or microfiche.
- K. Records when the flow of vent gas exceeds the smokeless capacity of the flare, including start and stop time and dates of the flaring event.
- L. Records of the root cause analysis and corrective action analysis conducted as required in § 63.670(o)(3) of subpart CC and § 63.1103(e)(4)(iv), including an identification of the affected flare, the date and duration of the event, a statement noting whether the event resulted from the same root cause(s) identified in a previous analysis and either a description of the recommended corrective action(s) or an explanation of why corrective action is not necessary under § 63.670(o)(5)(i) of subpart CC.
- M. For any corrective action analysis for which implementation of corrective actions are required in § 63.670(o)(5) of subpart CC, a description of the corrective action(s) completed within the first 45 days following the discharge and, for action(s) not already completed, a schedule for implementation, including proposed commencement and completion dates.
- N. Maintain Records for Each period during which a Continuous Monitoring System (CMS) is malfunctioning or inoperative (including out-of-control periods).
- IV. Terms**
- A. *Assist air* All air that intentionally is introduced prior to or at a flare tip through nozzles or other hardware conveyance for the purposes including, but not limited to, protecting the design of the flare tip, promoting turbulence for mixing or inducing air into the flame. Assist air includes premix assist air and perimeter assist air. Assist air does not include the surrounding ambient air.

B.	<i>Assist steam</i>	All steam that intentionally is introduced prior to or at a flare tip through nozzles or other hardware conveyance for the purposes including, but not limited to, protecting the design of the flare tip, promoting turbulence for mixing or inducing air into the flame. Assist steam includes, but is not necessarily limited to, center steam, lower steam and upper steam.
C.	<i>Center steam</i>	The portion of assist steam introduced into the stack of a flare to reduce burnback.
D.	<i>Combustion zone</i>	The area of the flare flame where the combustion zone gas combines for combustion.
E.	<i>Combustion zone gas</i>	All gases and vapors found just after a flare tip. This gas includes all flare vent gas, total steam, and premix air.
F.	<i>Continuous record</i>	Documentation, either in hard copy or computer readable form, of data values measured at least once every hour and recorded at the frequency specified.
G.	<i>Continuous recorder</i>	A data recording device recording an instantaneous data value or an average data value at least once every hour.
H.	<i>Flare</i>	A combustion device lacking an enclosed combustion chamber that uses an uncontrolled volume of ambient air to burn gases. For the purposes of this rule, the definition of flare includes, but is not necessarily limited to, air-assisted flares, steam-assisted flares and non-assisted flares.
I.	<i>Flare purge gas</i>	Gas introduced between a flare header's water seal and the flare tip to prevent oxygen infiltration (backflow) into the flare tip or for other safety reasons. For a flare with no water seal, the function of flare purge gas is performed by flare sweep gas and, therefore, by definition, such a flare has no flare purge gas.
J.	<i>Flare Supplemental gas</i>	All gas introduced to the flare to improve the heat content of combustion zone gas. Flare supplemental gas does not include assist air or assist steam.
K.	<i>Flare sweep gas</i>	For a flare with a flare gas recovery system, the gas intentionally introduced into the flare header system to maintain a constant flow of gas through the flare header in order to prevent oxygen buildup in the flare header; flare sweep gas in these flares is introduced prior to and recovered by the flare gas recovery system. For a flare without a flare gas recovery system, flare sweep gas means the gas intentionally introduced into the flare header system to maintain a constant flow of gas through the flare header and out the flare tip in order to prevent oxygen buildup in the flare header and to prevent oxygen infiltration (backflow) into the flare tip.
L.	<i>Flare vent gas</i>	All gas found just prior to the flare tip. This gas includes all flare waste gas (i.e., gas from facility operations that is directed to a flare for the purpose of disposing of the gas), that portion of flare sweep gas that is not recovered, flare purge gas and flare supplemental gas, but does not include pilot gas, total steam or assist air.
M.	<i>Flow indicator</i>	A device that indicates whether gas is flowing, or whether the valve position would allow gas to flow, in a line.
N.	<i>Lower steam</i>	The portion of assist steam piped to an exterior annular ring near the lower part of a flare tip, which then flows through tubes to the flare tip, and ultimately exits the tubes at the flare tip.
O.	<i>Net heating value</i>	The energy released as heat when a compound undergoes complete combustion with oxygen to form gaseous carbon dioxide and gaseous water (also referred to as lower heating value).
P.	<i>Perimeter assist air</i>	The portion of assist air introduced at the perimeter of the flare tip or above the flare tip. Perimeter assist air includes air intentionally entrained in lower and upper steam. Perimeter assist air includes all assist air except premix assist air.
Q.	<i>Pilot gas</i>	Gas introduced into a flare tip that provides a flame to ignite the flare vent gas.
R.	<i>Premix assist air</i>	The portion of assist air that is introduced to the flare vent gas, whether injected or induced, prior to the flare tip. Premix assist air also includes any air intentionally entrained in center steam.
S.	<i>Total steam</i>	The total of all steam that is supplied to a flare and includes, but is not limited to, lower steam, center steam and upper steam.
T.	<i>Upper steam</i>	The portion of assist steam introduced via nozzles located on the exterior perimeter of the upper end of the flare tip.

V.	Federal Overlap	At any time the owner or operator may elect to comply with any provision of ~~such rule~~ "National Emission Standards for Hazardous Air Pollutants: Generic Maximum Achievable Control Technology Standards Residual Risk and Technology Review for Ethylene Production" specifying an alternative to compliance with 40 CFR §§ 60.18 or 63.11 for flares in lieu of complying with the requirements of Sections I–IV of this Plan. The owner or operator shall provide written notification to the TCEQ Executive Director no later than 30 days prior to such transition in compliance option.
VI.	Void	Following the effective date of any future amendments to applicable requirements of 30 TAC Chapter 115 which specify work practice requirements for flares that apply in lieu of 40 CFR § 60.18, the owner or operator may request this Plan to be voided.

Table 1 – Individual Component Properties

Component	Molecular Formula	MW _i (lb/lb mol)	CMN _i (mol/mol)	NHV _i (Btu/scf)	LFL _i (volume %)
Acetylene	C ₂ H ₂	26.04	2	1404	2.5
Benzene	C ₆ H ₆	78.11	6	3591	1.3
1,2-Butadiene	C ₄ H ₆	54.09	4	2794	2.0
1,3-Butadiene	C ₄ H ₆	54.09	4	2690	2.0
Iso-Butane	C ₄ H ₁₀	58.12	4	2957	1.8
n-Butane	C ₄ H ₁₀	58.12	4	2968	1.8
cis-Butene	C ₄ H ₈	56.11	4	2830	1.6
iso-Butene	C ₄ H ₈	56.11	4	2928	1.8
trans-Butene	C ₄ H ₈	56.11	4	2826	1.7
Carbon Dioxide	CO ₂	44.01	1	0	8
Carbon Monoxide	CO	28.01	1	316	12.5
Cyclopropane	C ₃ H ₆	42.08	3	2185	2.4
Ethane	C ₂ H ₆	30.07	2	1595	3.0
Ethylene	C ₂ H ₄	28.05	2	1477	2.7
Hydrogen	H ₂	2.02	0	1212*	4.0
Hydrogen Sulfide	H ₂ S	34.08	0	587	4.0
Methane	CH ₄	16.04	1	896	5.0
Methyl-Acetylene	C ₃ H ₃	40.06	3	2088	1.7
Nitrogen	N ₂	28.01	0	0	8
Oxygen	O ₂	32.00	0	0	8
Pentane+ (C5+)	C ₅ H ₁₂	72.15	5	3655	1.4
Propadiene	C ₃ H ₄	40.06	3	2066	2.16
Propane	C ₃ H ₈	44.10	3	2281	2.1
Propylene	C ₃ H ₆	42.08	3	2150	2.4
Water	H ₂ O	18.02	0	0	8

* The theoretical net heating value for hydrogen is 274 Btu/scf, but for the purposes of the flare requirement in this Plan, a net heating value of 1,212 Btu/scf shall be used.

**Table 2 – Calibration and Quality Control Requirements
for Continuous Parametric Monitoring Systems**

Parameter	Minimum Accuracy	Calibration Requirements
Temperature	±1 percent over the normal range of temperature measured, expressed in degrees Celsius (C), or 2.8° C, whichever is greater	Conduct calibration checks at least annually; conduct calibration checks following any period of more than 24 hours throughout which the temperature exceeded the manufacturer's specified maximum rated temperature or install a new temperature sensor. At least quarterly, inspect all components for integrity and all electrical connections for continuity, oxidation, and galvanic corrosion, unless the CPMS has a redundant temperature sensor.
		Record the results of each calibration check and inspection.
		Locate the temperature sensor in a position that provides a representative temperature; shield the temperature sensor system from electromagnetic interference and chemical contaminants.
Flow Rate for All Flows Other Than Flare Vent Gas	±5 percent over the normal range of flow measured or 1.9 liters per minute (0.5 gallons per minute), whichever is greater, for liquid flow	Conduct a flow sensor calibration check at least biennially (every two years); conduct a calibration check following any period of more than 24 hours throughout which the flow rate exceeded the manufacturer's specified maximum rated flow rate or install a new flow sensor.
	±5 percent over the normal range of flow measured or 280 liters per minute (10 cubic feet per minute), whichever is greater, for gas flow	At least quarterly, inspect all components for leakage, unless the CPMS has a redundant flow sensor.
	±5 percent over the normal range measured for mass flow	Record the results of each calibration check and inspection. Locate the flow sensor(s) and other necessary equipment (such as straightening vanes) in a position that provides representative flow; reduce swirling flow or abnormal velocity distributions due to upstream and downstream disturbances.
Flare Vent Gas Flow Rate	±20 percent of flow rate at velocities ranging from 0.03 to 0.3 meters per second (0.1 to 1 feet per second)	Conduct a flow sensor calibration check at least biennially (every two years); conduct a calibration check following any period of more than 24 hours throughout which the flow rate exceeded the manufacturer's specified maximum rated flow rate or install a new flow sensor. At least quarterly, inspect all components for leakage, unless the CPMS has a redundant flow sensor.
	±5 percent of flow rate at velocities greater than 0.3 meters per second (1 feet per second)	Record the results of each calibration check and inspection.
		Locate the flow sensor(s) and other necessary equipment (such as straightening vanes) in a position that provides representative flow; reduce swirling flow or abnormal velocity distributions due to upstream and downstream disturbances.
Pressure	± 5 percent over the normal operating range or 0.12 kilopascals (0.5 inches of water column), whichever is greater	Review pressure sensor readings at least once a week for straightline (unchanging) pressure and perform corrective action to ensure proper pressure sensor operation if blockage is indicated. Using an instrument recommended by the sensor's manufacturer, check gauge calibration and transducer calibration annually; conduct calibration checks following any period of more than 24 hours throughout which the pressure exceeded the manufacturer's specified maximum rated pressure or install a new pressure sensor.
		At least quarterly, inspect all components for integrity, all electrical connections for continuity, and all mechanical connections for leakage, unless the CPMS has a redundant pressure sensor.

		Record the results of each calibration check and inspection.
		Locate the pressure sensor(s) in a position that provides a representative measurement of the pressure and minimizes or eliminates pulsating pressure, vibration, and internal and external corrosion.
Net Heating Value by Calorimeter	± 2 percent of span	Specify calibration requirements in your site specific CPMS monitoring plan. Calibration requirements should follow manufacturer's recommendations at a minimum. Temperature control (heated and/or cooled as necessary) the sampling system to ensure proper year-round operation.
		Where feasible, select a sampling location at least two equivalent diameters downstream from and 0.5 equivalent diameters upstream from the nearest disturbance. Select the sampling location at least two equivalent duct diameters from the nearest control device, point of pollutant generation, air in-leakages, or other point at which a change in the pollutant concentration or emission rate occurs.
Net Heating Value by Gas Chromatograph	As specified in Performance Specification 9 of 40 CFR part 60, appendix B	Follow the procedure in Performance Specification 9 of 40 CFR part 60, appendix B, except that a single daily mid-level calibration check can be used (rather than triplicate analysis), the multi-point calibration can be conducted quarterly (rather than monthly), and the sampling line temperature must be maintained at a minimum temperature of 60 °C (rather than 120 °C).
Hydrogen analyzer	± 2 percent over the concentration measured or 0.1 volume percent, whichever is greater	Specify calibration requirements in your site specific CPMS monitoring plan. Calibration requirements should follow manufacturer's recommendations at a minimum.
		Where feasible, select the sampling location at least two equivalent duct diameters from the nearest control device, point of pollutant generation, air in-leakages, or other point at which a change in the pollutant concentration occurs.

Appendix A

Acronym List 545

Acronym List

The following abbreviations or acronyms may be used in this permit:

ACFM	actual cubic feet per minute
AMOC	alternate means of control
ARP	Acid Rain Program
ASTM	American Society of Testing and Materials
B/PA	Beaumont/Port Arthur (nonattainment area)
CAM	Compliance Assurance Monitoring
CD	control device
CEMS	continuous emissions monitoring system
CFR	Code of Federal Regulations
COMS	continuous opacity monitoring system
CVS	closed vent system
D/FW	Dallas/Fort Worth (nonattainment area)
EP	emission point
EPA	U.S. Environmental Protection Agency
EU	emission unit
FCAA Amendments	Federal Clean Air Act Amendments
FOP	federal operating permit
gr/100 scf	grains per 100 standard cubic feet
HAP	hazardous air pollutant
H/G/B	Houston/Galveston/Brazoria (nonattainment area)
H ₂ S	hydrogen sulfide
ID No.	identification number
lb/hr	pound(s) per hour
MACT	Maximum Achievable Control Technology (40 CFR Part 63)
MMBtu/hr	Million British thermal units per hour
NA	nonattainment
N/A	not applicable
NADB	National Allowance Data Base
NESHAP	National Emission Standards for Hazardous Air Pollutants (40 CFR Part 61)
NO _x	nitrogen oxides
NSPS	New Source Performance Standard (40 CFR Part 60)
NSR	New Source Review
ORIS	Office of Regulatory Information Systems
Pb	lead
PBR	Permit By Rule
PEMS	predictive emissions monitoring system
PM	particulate matter
ppmv	parts per million by volume
PRO	process unit
PSD	prevention of significant deterioration
psia	pounds per square inch absolute
SIP	state implementation plan
SO ₂	sulfur dioxide
TCEQ	Texas Commission on Environmental Quality
TSP	total suspended particulate
TVP	true vapor pressure
U.S.C.	United States Code
VOC	volatile organic compound

Appendix B

Major NSR Summary Table 547

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
22-36-1	22 Cracking Furnace 1	CO	37.48	29.74	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	15.60	16.99			
		PM	0.97	3.17			
		PM ₁₀	0.97	3.17			
		PM _{2.5}	0.97	3.17			
		SO ₂	4.33	7.48			
		VOC	0.70	2.29			
22-36-2	22 Cracking Furnace 2	CO	37.48	29.74	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	15.60	16.99			
		PM	0.97	3.17			
		PM ₁₀	0.97	3.17			
		PM _{2.5}	0.97	3.17			
		SO ₂	4.33	7.48			
		VOC	0.70	2.29			
22-36-3	22 Cracking Furnace 3	CO	37.48	29.74	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	15.60	16.99			
		PM	0.97	3.17			
		PM ₁₀	0.97	3.17			
		PM _{2.5}	0.97	3.17			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
		SO ₂	4.33	7.48			
		VOC	0.70	2.29			
22-36-4	22 Cracking Furnace 4	CO	37.48	29.74	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	15.60	16.99			
		PM	0.97	3.17			
		PM ₁₀	0.97	3.17			
		PM _{2.5}	0.97	3.17			
		SO ₂	4.33	7.48			
		VOC	0.70	2.29			
22-36-6	22 Cracking Furnace 6	CO	37.48	29.74	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	15.60	16.99			
		PM	0.97	3.17			
		PM ₁₀	0.97	3.17			
		PM _{2.5}	0.97	3.17			
		SO ₂	4.33	7.48			
		VOC	0.70	2.29			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
22-36-7	22 Cracking Furnace 7	CO	37.48	29.74	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	15.60	16.99			
		PM	0.97	3.17			
		PM ₁₀	0.97	3.17			
		PM _{2.5}	0.97	3.17			
		SO ₂	4.33	7.48			
		VOC	0.70	2.29			
22-36-8	22 Furnace Cracking 8	CO	37.48	29.74	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	15.60	16.99			
		PM	0.97	3.17			
		PM ₁₀	0.97	3.17			
		PM _{2.5}	0.97	3.17			
		SO ₂	4.33	7.48			
		VOC	0.70	2.29			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
22-36-9	22 Furnace Cracking 9	CO	10.96	21.60	7, 9, 10, 11, 12, 13, 28, 29	7, 9, 10, 11, 12, 13, 28, 29, 65	7, 9, 12, 13
		CO (10)	32.88				
		NO _x	2.25	5.91			
		NO _x (10)	5.06				
		PM	1.12	4.41			
		PM ₁₀	1.12	4.41			
		PM _{2.5}	1.12	4.41			
		SO ₂	6.54	8.28			
		VOC	0.81	3.19			
		NH ₃	0.67	2.62			
22-36-9DC	Ethylene Cracking Furnace No. F-9 Decoking	CO	556.00	25.13	29	29, 65	
		PM	10.39	0.45			
		PM ₁₀	10.39	0.45			
		PM _{2.5}	8.31	0.36			
24-36-1	24 Cracking Furnace 1 (2 stacks)	CO	72.08	76.65	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	30.00	87.60			
		PM	1.86	8.16			
		PM ₁₀	1.86	8.16			
		PM _{2.5}	1.86	8.16			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
		SO ₂	7.82	18.11			
		VOC	1.35	5.90			
24-36-2	24 Cracking Furnace 2 (2 stacks)	CO	72.08	76.65	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	30.00	87.60			
		PM	1.86	8.16			
		PM ₁₀	1.86	8.16			
		PM _{2.5}	1.86	8.16			
		SO ₂	7.82	18.11			
		VOC	1.35	5.90			
24-36-3	24 Cracking Furnace 3 (2 stacks)	CO	72.08	76.65	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	30.00	87.60			
		PM	1.86	8.16			
		PM ₁₀	1.86	8.16			
		PM _{2.5}	1.86	8.16			
		SO ₂	7.82	18.11			
		VOC	1.35	5.90			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
24-36-4	24 Cracking Furnace 4 (2 stacks)	CO	72.08	76.65	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	30.00	87.60			
		PM	1.86	8.16			
		PM ₁₀	1.86	8.16			
		PM _{2.5}	1.86	8.16			
		SO ₂	7.82	18.11			
		VOC	1.35	5.90			
24-36-5	24 Cracking Furnace 5 (2 stacks)	CO	72.08	76.65	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	30.00	87.60			
		PM	1.86	8.16			
		PM ₁₀	1.86	8.16			
		PM _{2.5}	1.86	8.16			
		SO ₂	7.82	18.11			
		VOC	1.35	5.90			
24-36-6	24 Cracking Furnace 6 (2 stacks)	CO	72.08	76.65	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	30.00	87.60			
		PM	1.86	8.16			
		PM ₁₀	1.86	8.16			
		PM _{2.5}	1.86	8.16			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
		SO ₂	7.82	18.11			
		VOC	1.35	5.90			
24-36-7	24 Steam Superheater 7	CO	63.72	67.76	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	26.52	96.80			
		PM	1.65	7.21			
		PM ₁₀	1.65	7.21			
		PM _{2.5}	1.65	7.21			
		SO ₂	6.92	16.01			
		VOC	1.19	5.22			
24-36-8	24 DAC Hydrotreater Heater 8	CO	0.98	1.08	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	0.57	2.23			
		PM	0.02	0.10			
		PM ₁₀	0.02	0.10			
		PM _{2.5}	0.02	0.10			
		SO ₂	0.09	0.19			
		VOC	0.02	0.07			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
24-36-9	24 Cracking Furnace 9	CO	97.17	103.32	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x	40.44	118.08			
		PM	2.51	11.00			
		PM ₁₀	2.51	11.00			
		PM _{2.5}	2.51	11.00			
		SO ₂	10.55	24.41			
		VOC	1.82	7.96			
33-36-1	33 Cracking Furnace 1	CO (7)	93.71	97.81	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x (7)	39.00	83.83			
		PM	2.42	10.41			
		PM ₁₀	2.42	10.41			
		PM _{2.5}	2.42	10.41			
		SO ₂ (7)	15.85	10.80			
		VOC	1.75	7.53			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
33-36-2	33 Cracking Furnace 2	CO (7)	93.71	97.81	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x (7)	39.00	83.83			
		PM	2.42	10.41			
		PM ₁₀	2.42	10.41			
		PM _{2.5}	2.42	10.41			
		SO ₂ (7)	15.85	10.80			
		VOC	1.75	7.53			
33-36-3	33 Cracking Furnace 3	CO (7)	93.71	97.81	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x (7)	39.00	83.83			
		PM	2.42	10.41			
		PM ₁₀	2.42	10.41			
		PM _{2.5}	2.42	10.41			
		SO ₂ (7)	15.85	10.80			
		VOC	1.75	7.53			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
33-36-4	33 Cracking Furnace 4	CO (7)	93.71	97.81	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x (7)	39.00	83.83			
		PM	2.42	10.41			
		PM ₁₀	2.42	10.41			
		PM _{2.5}	2.42	10.41			
		SO ₂ (7)	15.85	10.80			
		VOC	1.75	7.53			
33-36-5	33 Cracking Furnace 5	CO (7)	93.71	97.81	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x (7)	39.00	83.83			
		PM	2.42	10.41			
		PM ₁₀	2.42	10.41			
		PM _{2.5}	2.42	10.41			
		SO ₂ (7)	15.85	10.80			
		VOC	1.75	7.53			
33-36-6	33 Cracking Furnace 6	CO (7)	93.71	97.81	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x (7)	39.00	83.83			
		PM	2.42	10.41			
		PM ₁₀	2.42	10.41			
		PM _{2.5}	2.42	10.41			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
		SO ₂ (7)	15.85	10.80			
		VOC	1.75	7.53			
33-36-7	33 Cracking Furnace 7	CO (7)	93.71	83.09	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x (7)	39.00	71.22			
		PM	2.42	8.84			
		PM ₁₀	2.42	8.84			
		PM _{2.5}	2.42	8.84			
		SO ₂ (7)	15.85	9.17			
		VOC	1.75	6.40			
33-36-8	33 Cracking Furnace 8	CO (7)	93.71	82.78	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x (7)	39.00	70.96			
		PM	2.42	8.81			
		PM ₁₀	2.42	8.81			
		PM _{2.5}	2.42	8.81			
		SO ₂ (7)	15.85	9.14			
		VOC	1.75	6.38			
33-36-9	33 Cracking Furnace 9	CO (7)	93.71	82.78	5, 8, 11, 12, 13	5, 6, 8, 11, 12, 13, 33, 65	5, 8, 12, 13
		NO _x (7)	39.00	70.96			
		PM	2.42	8.81			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
		PM ₁₀	2.42	8.81			
		PM _{2.5}	2.42	8.81			
		SO ₂ (7)	15.85	9.14			
		VOC	1.75	6.38			
33-36-10	33 Cracking Furnace 10	CO	93.90	37.60	5, 8, 10, 11, 12, 13	5, 6, 8, 10, 11, 12, 13, 33, 65	5, 8, 12, 13
		NH ₃	1.50	4.78			
		NO _x	19.50	17.08			
		PM	2.42	8.49			
		PM ₁₀	2.42	8.49			
		PM _{2.5}	2.42	8.49			
		SO ₂	8.65	8.04			
		VOC	1.75	6.14			
56-61-4	Unit 10D/18 Process Flare (Flare #4)	CO	22.58	19.68	5, 27, 39, 41, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 56, 57	5, 27, 33, 39, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 57, 58, 65	5, 39, 52
		H ₂ S	0.02	0.06			
		NO _x	4.43	3.86			
		SO ₂	1.49	4.82			
		VOC	20.55	3.94			
56-61-8	Unit 10, 12 Low-Pressure Flare (Flare #8)	CO	46.08	40.99	5, 27, 39, 41, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 56, 57	5, 27, 33, 39, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 57, 58, 65	5, 39, 52
		H ₂ S	0.03	0.14			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
		NO _x	6.71	7.10			
		SO ₂	3.13	13.41			
		VOC	20.68	28.23			
56-61-9	Unit 10, 12 High-Pressure Flare (Flare #9)	CO	1.00	3.19	5, 27, 39, 41, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 56, 57	5, 27, 33, 39, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 57, 58, 65	5, 39, 52
		H ₂ S	<0.01	<0.01			
		NO _x	0.19	0.63			
		SO ₂	0.21	0.68			
		VOC	0.09	0.30			
56-61-10	Unit 21, 22 Low-Pressure Flare (Flare #10)	CO	18.32	27.35	5, 27, 39, 41, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 56, 57	5, 27, 33, 39, 42, 44, 45, 46, 47, 48, 49, 51, 52, 53, 55, 57, 58, 65	5, 39, 52
		H ₂ S	<0.01	0.06			
		NO _x	3.59	5.37			
		SO ₂	8.56	2.21			
		VOC	11.10	10.96			
56-61-12	Unit 22 High-Pressure Flare (Flare #12)	CO	0.34	1.48	5, 27, 39, 41, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 56, 57	5, 27, 33, 39, 42, 44, 45, 46, 47, 48, 49, 51, 52, 53, 55, 57, 58, 65	5, 39, 52
		H ₂ S	<0.01	<0.01			
		NO _x	0.07	0.29			
		SO ₂	0.07	0.31			
		VOC	0.03	0.14			
56-61-14		CO	0.99	4.33			5, 39, 52

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
	Unit 24 High-Pressure Flare (Flare #14)	H ₂ S	<0.01	<0.01	5, 27, 39, 41, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 56, 57	5, 27, 33, 39, 42, 44, 45, 46, 47, 48, 49, 51, 52, 53, 55, 57, 58, 65	
		NO _x	0.12	0.50			
		SO ₂	0.13	0.58			
		VOC	0.06	0.26			
56-61-20	Unit 24 Low-Pressure Flare (Flare #20)	CO	68.67	79.11	5, 27, 39, 41, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 56, 57	5, 27, 33, 39, 42, 44, 45, 46, 47, 48, 49, 51, 52, 53, 55, 57, 58, 65	5, 39, 52
		H ₂ S	0.04	0.17			
		NO _x	32.79	32.59			
		SO ₂	10.79	15.75			
		VOC	25.80	22.77			
56-61-22	Unit 33 Process Flare (Flare #22)	CO (7)	40.09	88.48	5, 27, 39, 41, 42, 44, 45, 46, 47, 48, 49, 52, 53, 55, 56, 57	5, 27, 33, 39, 42, 44, 45, 46, 47, 48, 49, 51, 52, 53, 55, 57, 58, 65	5, 39, 52
		H ₂ S	0.02	0.09			
		NO _x (7)	7.87	17.36			
		SO ₂ (7)	9.52	9.50			
		VOC	21.41	12.27			
54-22-5	Unit 12 Cooling Tower (CT-5)	PM	1.62	7.10	5, 30, 31, 32	5, 30, 31, 32, 33, 65	5, 30
		PM ₁₀	1.59	6.96			
		PM _{2.5}	0.36	1.57			
		VOC	1.70	2.13			
54-22-6		PM	1.24	5.42	5, 30, 31, 32	5, 30, 31, 32, 33, 65	5, 30

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
	Unit 10ABC Cooling Tower (CT-6)	PM ₁₀	1.21	5.31			
		PM _{2.5}	0.27	1.20			
		VOC	1.30	1.62			
54-22-7	Unit 10ABC Cooling Tower (CT-7)	PM	1.56	6.85	5, 30, 31, 32	5, 30, 31, 32, 33, 65	5, 30
		PM ₁₀	1.53	6.72			
		PM _{2.5}	0.35	1.52			
		VOC	1.64	2.05			
54-22-9	Unit 10D/18 Cooling Tower (CT-9)	PM	1.40	6.15	5, 30, 31, 32	5, 30, 31, 32, 33, 65	5, 30
		PM ₁₀	1.38	6.02			
		PM _{2.5}	0.31	1.36			
		VOC	1.47	1.84			
54-22-12	Unit 21/22 Cooling Tower (CT-12)	PM	2.32	10.17	5, 30, 31, 32	5, 30, 31, 32, 33, 65	5, 30
		PM ₁₀	2.28	9.97			
		PM _{2.5}	0.51	2.25			
		VOC	2.44	3.05			
54-22-13	Unit 24 Cooling Tower (CT-13)	PM	3.17	13.89	5, 30, 31, 32	5, 30, 31, 32, 33, 65	5, 30
		PM ₁₀	3.11	13.62			
		PM _{2.5}	0.70	3.07			
		VOC	3.33	4.16			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
54-22-17	Unit 33 Cooling Tower (CT-17)	PM	5.82	25.49	5, 30, 31, 32	5, 30, 31, 32, 33, 65	5, 30
		PM ₁₀	5.71	24.99			
		PM _{2.5}	1.29	5.64			
		VOC	6.11	7.64			
10.1-0-0	Unit 10AC Process Fugitives (5)	VOC	5.03	22.01	3, 4, 5, 14, 15, 16	3, 4, 5, 14, 15, 16, 33, 65	3, 4, 5
		Benzene (8)	<0.01	0.03			
10.2-0-0	Unit 10D Process Fugitives (5)	VOC	2.50	10.92	3, 4, 5, 14, 15, 16	3, 4, 5, 14, 15, 16, 33, 65	3, 4, 5
		Benzene (8)	<0.01	0.01			
10.3-0-0	Unit 10B Process Fugitives (5)	VOC	1.13	4.96	3, 4, 5, 14, 15, 16	3, 4, 5, 14, 15, 16, 33, 65	3, 4, 5
		Benzene (8)	<0.01	<0.01			
12-0-0	Unit 12 Process Fugitives (5)	VOC	1.91	8.38	3, 4, 5, 14, 15, 16, 17	3, 4, 5, 14, 15, 16, 17, 33, 65	3, 4, 5
		Benzene (8)	0.11	0.48			
18-0-0	Unit 18 Process Fugitives (5)	VOC	1.60	7.01	3, 5, 14, 15, 16	3, 5, 14, 15, 16, 17, 33, 65	3, 5
21-0-0	Unit 21 Process Fugitives (5)	VOC	0.84	3.69	3, 4, 5, 14, 15, 16, 17	3, 4, 5, 14, 15, 16, 17, 33, 65	3, 4, 5
		Benzene (8)	<0.01	0.02			
22-0-0	Unit 22 Process Fugitives (5)	VOC	12.44	51.75	3, 4, 5, 14, 15, 16, 17	3, 4, 5, 14, 15, 16, 17, 33, 65	3, 4, 5
		Benzene (8)	0.13	0.57			
		NH ₃	0.04	0.16			
24-0-0		VOC	19.82	86.82	3, 4, 5, 14, 15, 16, 17		3, 4, 5

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
	Unit 24 Process Fugitives (5)	Benzene (8)	0.21	0.93		3, 4, 5, 14, 15, 16, 17, 33, 65	
24.1-0-0	Unit 24.1 Process Fugitives (5)	VOC	2.90	12.71	3, 4, 5, 14, 15, 16, 17	3, 4, 5, 14, 15, 16, 17, 33, 65	3, 4, 5
		Benzene (8)	0.96	4.21			
33-0-0	Unit 33 Process Fugitives (5)(6)	VOC	18.52	81.15	3, 4, 5, 14, 15, 16, 17	3, 4, 5, 14, 15, 16, 17, 33, 65	3, 4, 5
		Benzene (8)	0.35	1.49			
33.1-0-0	U33 F-10 Fugitives (5)	NH ₃	0.23	0.98	3, 4, 5, 14, 15, 16, 17, 18	3, 4, 5, 14, 15, 16, 17, 18, 33, 65	3, 4, 5
		VOC	0.20	0.85			
		Benzene (8)	<0.01	<0.01			
68.1-0-0	West Pipe Rack Fugitives (5)	VOC	0.53	2.34	3, 4, 5, 14, 15, 16, 17	3, 4, 5, 14, 15, 16, 17, 33, 65	3, 4, 5
		Benzene (8)	0.16	0.71			
24-95-314	Methanol Storage Tank	VOC	3.31	0.08	5	5, 33, 65	5
33-95-10	Methanol Storage Tank	VOC	3.31	0.08	5	5, 33, 65	5
33-95-14	TBC Storage Tank	VOC	0.03	<0.01	5	5, 33, 65	5
10-95-328	D-328 Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
10-95-357	D-357 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
18-95-54	D-54 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
21-95-120	D-120 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
22-95-100	D-100 Lube Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
22-95-101	D-101 Lube Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
22-95-120	D-120 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
22-95-130	D-130 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
24-95-304	D-304 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
24-95-305	D-305 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
24-95-306	D-306 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
24-95-307	D-307 Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
33-95-15	D-15 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
33-95-17	D-17 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
33-95-19	D-19 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
33-95-390	D-390 Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
33-95-392	D-392 Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
33-95-394	D-394 Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
10-95-3572	D-357 LO Res. - 2nd Vent	VOC	0.01	0.05	5	5, 33, 65	5
10-95-357A	D-357A Degassing Chamber	VOC	0.01	0.05	5	5, 33, 65	5
24-95-319	D-319 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
24-95-320	D-320 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
24-95-321	D-321 Lube/Seal Oil Reservoir	VOC	0.01	0.05	5	5, 33, 65	5
10.1-SUMP1	10.1 Oily Water Sewer Sump	VOC	0.03	<0.01	5	5, 33, 65	5
12-SUMP1	12 Oily Water Sewer Sump	VOC	0.02	<0.01	5	5, 33, 65	5
21/22-SUMP1	21/22 Oily Water Sewer Sump	VOC	0.01	<0.01	5	5, 33, 65	5
24-SUMP2	24 Ethylene Sodium Hydroxide Sump	VOC	<0.01	0.01	5	5, 33, 65	5
24-SUMP3	24 Oily Water Sewer Sump	VOC	<0.01	0.01	5	5, 33, 65	5
33-SUMP1	33 Sodium Hydroxide Sump	VOC	<0.01	0.03	5	5, 33, 65	5
33-SUMP2	33 Water Sludge Pit	VOC	<0.01	<0.01	5	5, 33, 65	5
33-SUMP3	33 Oily Water Sewer Sump	VOC	0.01	<0.01	5	5, 33, 65	5
33-SUMP4	33 Blowdown Drum Sump	VOC	<0.01	<0.01	5	5, 33, 65	5
22-95-27	C-120 Propylene Compressor Turbine	CO	12.05	52.77	2, 13, 66	13, 33, 65, 66, 67	13
		NO _x	36.83	161.30			
		PM	0.84	3.70			
		PM ₁₀	0.84	3.70			
		PM _{2.5}	0.84	3.70			
		SO ₂	0.44	1.91			
		VOC	1.41	6.17			
10ABC-AV	Unit 10ABC Analyzer Vents	VOC	<0.01	<0.01	5	5, 33, 65	5

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
10D-AV	Unit 10D Analyzer Vents	VOC	<0.01	<0.01	5	5, 33, 65	5
12-AV	Unit 12 Analyzer Vents	VOC	<0.01	<0.01	5	5, 33, 65	5
18-AV	Unit 18 Analyzer Vents	VOC	<0.01	<0.01	5	5, 33, 65	5
21-AV	Unit 21 Analyzer Vents	VOC	<0.01	<0.01	5	5, 33, 65	5
22-AV	Unit 22 Analyzer Vents	VOC	<0.01	<0.01	5	5, 33, 65	5
24-AV	Unit 24 Analyzer Vents	VOC	<0.01	<0.01	5	5, 33, 65	5
33-AV	Unit 33 Analyzer Vents	VOC	0.16	0.70	5	5, 33, 65	5
22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-5, 22-36-6, 22-36-7, 22-36-8, 24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-7, 24-36-8, 24-36-9, 33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, 56-61-22	Furnaces, Flares 10, 12, 14, 20, 22	CO	478.74			33, 65	

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-5, 22-36-6, 22-36-7, 22-36-8, 24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-7, 24-36-8, 24-36-9, 33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, 56-61-22, 22-95-27	Furnaces, Flares 10, 12, 14, 20, 22, Propylene Compressor Turbine	NOx	436.25			33, 65	

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-5, 22-36-6, 22-36-7, 22-36-8, 24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-7, 24-36-8, 24-36-9, 33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9	Furnaces	PM ₁₀	41.44			33, 65	
		SO ₂	223.95				
56-61-4, 56-61-8, 56-61-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, 56-61-22	Flares	SO ₂	18.05	24.72		33, 65	
		H ₂ S	0.06	0.26			
22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-5, 22-36-6, 22-36-7, 22-36-8, 24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-7, 24-36-8, 24-	Furnaces, Process Fugitives, Cooling Towers, Storage Tanks, Lube/ Seal Reservoirs, Sumps, Flares, Atmospheric Vents	VOC	127.95	494.24		33, 65	

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
36-9, 33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9, 56-61-4, 56-61-8, 56-61-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, 56-61-22, 54-22-5, 54-22-6, 54-22-7, 54-22-9, 54-22-12, 54-22-13, 54-22-17, 10.1-0-0, 10.2-0-0, 10.3-0-0, 12-0-0, 18-0-0, 21-0-0, 22-0-0, 24-0-0, 24.1-0-0, 33-0-0, 24-95-314, 33-95-10, 33-95-14, 10-95-328, 10-95-357, 18-95-54, 21-95-120, 22-95-120, 22-95-130, 22-95-101, 22-95-100, 24-95-304, 24-95-305, 24-95-							

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
306, 24-95-307, 33-95-15, 33-95-17, 33-95-19, 33-95-390, 33-95-392, 33-95-394, 10-95-3572, 10-95-357A, 24-95-319, 24-95-320, 24-95-321, 10.1-SUMP1, 12-SUMP1, 21/22-SUMP1, 24-SUMP2, 24-SUMP3, 33-SUMP1, 33-SUMP2, 33-SUMP3, 33-SUMP4, 10ABC-AV, 10D-AV, 12-AV, 18-AV, 21-AV, 22-AV, 24-AV, 33-AV, 68.1-0-0							
10.1-0-0, 10.2-0-0, 10.3-0-0, 12-0-0, 21-0-0, 22-0-0, 24-0-0, 24.1-0-0, 33-0-0, 68.1-0-0	Process Fugitives	Benzene (8)	1.74	7.60		33, 65	

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
Decoking Equipment MSS 22-95-3, 22-95-3A, 22-95-3B, and 22-95-3C 24-95-300 33-95-376 and 33-95-376A	Emission Cap for the EPNs U22 Decoke U24 Decoke U33 Decoke	CO	792.82	88.77	21, 22, 26	19, 21, 22, 26, 33, 65	
Flare System MSS 56-61-4 56-61-8 56-61-9 56-61-10 56-61-12 56-61-14 56-61-20 56-61-22	Emission Cap for the EPNs Unit 10D/18 Process Flare 4 Unit 10, 12 Low-Pressure Flare 8 Unit 10, 12 High-Pressure Flare 9 Unit 21, 22 Low-Pressure Flare 10 Unit 22 High-Pressure Flare 12 Unit 24 High-Pressure Flare 14 Unit 24 Low-Pressure Flare 20 Unit 33 Process Flare 22	NOx	1513.37	28.82	21, 22, 26	19, 21, 22, 26, 27, 33, 65	
		CO	7505.60	137.12			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
MSS 22-95-3, 22-95-3A, 22-95-3B, and 22-95-3C 24-95-300 33-95-376 and 33-95-376A CPC-ABLAST CPC-PAINT Catalyst	Emission Cap for the EPNs U22 Decoke U24 Decoke U33 Decoke Abrasive Blasting Painting Catalyst Handling	PM	621.98	66.29			

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
MSS 56-61-4 56-61-8 56-61-9 56-61-10 56-61-12 56-61-14 56-61-20 56-61-22 CPC-Paint MSSATM	Emission Cap for the EPNs Unit 10D/18 Process Flare 4 Unit 10, 12 Low-Pressure Flare 8 Unit 10, 12 High-Pressure Flare 9 Unit 21, 22 Low-Pressure Flare 10 Unit 22 High-Pressure Flare 12 Unit 24 High-Pressure Flare 14 Unit 24 Low-Pressure Flare 20 Unit 33 Process Flare 22 Painting Atmospheric Venting/Purging (See Attachment B for a list of activities)	VOC	5247.80	124.41	5, 21, 22, 23, 25, 26	5, 19, 21, 22, 23, 24, 25, 26, 33, 65	5

Major NSR Summary Table

Permit Numbers: 22690 and PSDTX751M2					Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates		Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			lbs/hour	TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
MSS	Emission Cap for the EPNs	Benzene	176.72	2.88	5, 21, 22, 23, 25, 26	5, 19, 21, 22, 23, 24, 25, 26, 33, 65	5
56-61-4	Unit 10D/18 Process Flare 4						
56-61-8	Unit 10, 12 Low-Pressure Flare 8						
56-61-9	Unit 10, 12 High-Pressure Flare 9						
56-61-10	Unit 21, 22 Low-Pressure Flare 10						
56-61-12	Unit 22 High-Pressure Flare 12						
56-61-14	Unit 24 High-Pressure Flare 14						
56-61-20	Unit 24 Low-Pressure Flare 20						
56-61-22	Unit 33 Process Flare 22						
MSSATM	Atmospheric Venting/Purging (See Attachment B for a list of activities)						

(1) Emission point identification – either specific equipment designation or emission point number from plot plan.

(2) Specific point source name. For fugitive sources, use area name or fugitive source name.

- (3)
- CO - carbon monoxide
 - H₂S - hydrogen sulfide
 - N₃H - ammonia
 - NO_x - total oxides of nitrogen
 - PM - total particulate matter, suspended in the atmosphere, including PM₁₀ and PM_{2.5}, as represented
 - PM₁₀ - total particulate matter equal to or less than 10 microns in diameter, including PM_{2.5}, as represented
 - PM_{2.5} - particulate matter equal to or less than 2.5 microns in diameter
 - SO₂ - sulfur dioxide

- (4) Compliance with annual emission limits (tons per year) is based on a 12-month rolling period.
- (5) Emission rate is an estimate and is enforceable through compliance with the applicable special condition(s) and permit application representations.
- (6) Excluding fugitives associated with Furnace 10.
- (7) This pollutant is also covered by Permit No. PSDTX751M1.
- (8) Benzene emissions are included in the VOC emissions limit.
- (9) Emissions from the Propylene Compressor Turbine (EPN 22-95-27) are prohibited upon commencement of operation of TCEQ Project No. 346268. See Special Condition No. 64.
- (10) Short-term emission limit applicable to operating scenarios defined in SC No. 7.C.

Major NSR Summary Table

Permit Numbers: GHGPSDTX226				Issuance Date: August 19, 2025		
Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	Monitoring and Testing Requirements	Recordkeeping Requirements	Reporting Requirements
			TPY (4)	Special Conditions/ Application Information	Special Conditions/ Application Information	Special Conditions/ Application Information
22-36-9	22 Furnace 9	CO ₂ (5)	77,694.00	60, 61, 62	60, 61, 62, 63	
		CH ₄ (5)	3.91			
		N ₂ O (5)	0.78			
		CO ₂ e	78,024.19			
56-61-10	Unit 21/22 Low-Pressure Flare (6)	CO ₂ (5)	12,870.98	60, 61, 62	60, 61, 62, 63	
		CH ₄ (5)	0.52			
		N ₂ O (5)	0.10			
		CO ₂ e	12,915.15			
22-0-0	Unit 22 Process Fugitives (6)	CH ₄ (5)	0.14	60, 61, 62	60, 61, 62, 63	
		CO ₂ e	3.38			

(1) Emission point identification - either specific equipment designation or emission point number from plot plan.

(2) Specific point source name. For fugitive sources, use area name or fugitive source name.

(3) CO₂ - carbon dioxide
 N₂O - nitrous oxide
 CH₄ - methane
 HFCs - hydrofluorocarbons
 PFCs - perfluorocarbons
 SF₆ - sulfur hexafluoride
 CO₂e - carbon dioxide equivalents based on the following Global Warming Potentials (1/2015):
 CO₂ (1), N₂O (298), CH₄ (25), SF₆ (22,800), HFC (various), PFC (various)

(4) Compliance with annual emission limits (tons per year) is based on a 12-month rolling period. These rates include emissions from maintenance, startup, and shutdown.

(5) Emission rate is given for informational purposes only and does not constitute enforceable limit.

(6) GHG emissions limited to project piping additions and flaring associated with TCEQ Project No. 346268



Texas Commission on Environmental Quality Air Quality Permit

A Permit Is Hereby Issued To
Chevron Phillips Chemical Company LP
Authorizing the Construction and Operation of
Sweeny Old Ocean Facilities
Located at Sweeny, Brazoria County, Texas
Latitude 29.075 Longitude -95.746666

Permits: 22690, GHGPSDTX226 and PSDTX751M2

Amendment Date: August 19, 2025

Expiration Date: November 1, 2027



For the Commission

1. **Facilities** covered by this permit shall be constructed and operated as specified in the application for the permit. All representations regarding construction plans and operation procedures contained in the permit application shall be conditions upon which the permit is issued. Variations from these representations shall be unlawful unless the permit holder first makes application to the Texas Commission on Environmental Quality (commission) Executive Director to amend this permit in that regard and such amendment is approved. [Title 30 Texas Administrative Code (TAC) Section 116.116 (30 TAC § 116.116)]¹
2. **Voiding of Permit.** A permit or permit amendment is automatically void if the holder fails to begin construction within 18 months of the date of issuance, discontinues construction for more than 18 months prior to completion, or fails to complete construction within a reasonable time. Upon request, the executive director may grant an 18-month extension. Before the extension is granted the permit may be subject to revision based on best available control technology, lowest achievable emission rate, and netting or offsets as applicable. One additional extension of up to 18 months may be granted if the permit holder demonstrates that emissions from the facility will comply with all rules and regulations of the commission, the intent of the Texas Clean Air Act (TCAA), including protection of the public's health and physical property; and (b)(1) the permit holder is a party to litigation not of the permit holder's initiation regarding the issuance of the permit; or (b)(2) the permit holder has spent, or committed to spend, at least 10 percent of the estimated total cost of the project up to a maximum of \$5 million. A permit holder granted an extension under subsection (b)(1) of this section may receive one subsequent extension if the permit holder meets the conditions of subsection (b)(2) of this section. [30 TAC § 116.120]
3. **Construction Progress.** Start of construction, construction interruptions exceeding 45 days, and completion of construction shall be reported to the appropriate regional office of the commission not later than 15 working days after occurrence of the event. [30 TAC § 116.115(b)(2)(A)]
4. **Start-up Notification.** The appropriate air program regional office shall be notified prior to the commencement of operations of the facilities authorized by the permit in such a manner that a representative of the commission may be present. The permit holder shall provide a separate notification for the commencement of operations for each unit of phased construction, which may involve a series of units commencing operations at different times. Prior to operation of the facilities authorized by the permit, the permit holder shall identify the source or sources of allowances to be utilized for compliance with Chapter 101, Subchapter H, Division 3 of this title (relating to Mass Emissions Cap and Trade Program). [30 TAC § 116.115(b)(2)(B)]
5. **Sampling Requirements.** If sampling is required, the permit holder shall contact the commission's Office of Compliance and Enforcement prior to sampling to obtain the proper data forms and procedures. All sampling and testing procedures must be approved by the executive director and coordinated with the regional representatives of the commission. The permit holder is also responsible for providing sampling facilities and conducting the sampling operations or contracting with an independent sampling consultant. [30 TAC § 116.115(b)(2)(C)]
6. **Equivalency of Methods.** The permit holder must demonstrate or otherwise justify the equivalency of emission control methods, sampling or other emission testing methods, and monitoring methods proposed as alternatives to methods indicated in the conditions of the permit. Alternative methods shall be applied for in writing and must be reviewed and approved by the executive director prior to their use in fulfilling any requirements of the permit. [30 TAC § 116.115(b)(2)(D)]
7. **Recordkeeping.** The permit holder shall maintain a copy of the permit along with records containing the information and data sufficient to demonstrate compliance with the permit, including production records and

operating hours; keep all required records in a file at the plant site. If, however, the facility normally operates unattended, records shall be maintained at the nearest staffed location within Texas specified in the application; make the records available at the request of personnel from the commission or any air pollution control program having jurisdiction in a timely manner; comply with any additional recordkeeping requirements specified in special conditions in the permit; and retain information in the file for at least two years following the date that the information or data is obtained. [30 TAC § 116.115(b)(2)(E)]

8. **Maximum Allowable Emission Rates.** The total emissions of air contaminants from any of the sources of emissions must not exceed the values stated on the table attached to the permit entitled "Emission Sources-- Maximum Allowable Emission Rates." [30 TAC § 116.115(b)(2)(F)] ¹
9. **Maintenance of Emission Control.** The permitted facilities shall not be operated unless all air pollution emission capture and abatement equipment is maintained in good working order and operating properly during normal facility operations. The permit holder shall provide notification in accordance with 30 TAC §101.201, 101.211, and 101.221 of this title (relating to Emissions Event Reporting and Recordkeeping Requirements; Scheduled Maintenance, Startup, and Shutdown Reporting and Recordkeeping Requirements; and Operational Requirements). [30 TAC§ 116.115(b)(2)(G)]
10. **Compliance with Rules.** Acceptance of a permit by an applicant constitutes an acknowledgment and agreement that the permit holder will comply with all rules and orders of the commission issued in conformity with the TCAA and the conditions precedent to the granting of the permit. If more than one state or federal rule or regulation or permit condition is applicable, the most stringent limit or condition shall govern and be the standard by which compliance shall be demonstrated. Acceptance includes consent to the entrance of commission employees and agents into the permitted premises at reasonable times to investigate conditions relating to the emission or concentration of air contaminants, including compliance with the permit. [30 TAC § 116.115(b)(2)(H)]
11. **This** permit may not be transferred, assigned, or conveyed by the holder except as provided by rule. [30 TAC § 116.110(e)]
12. **There** may be additional special conditions attached to a permit upon issuance or modification of the permit. Such conditions in a permit may be more restrictive than the requirements of Title 30 of the Texas Administrative Code. [30 TAC § 116.115(c)]
13. **Emissions** from this facility must not cause or contribute to "air pollution" as defined in Texas Health and Safety Code (THSC) §382.003(3) or violate THSC § 382.085. If the executive director determines that such a condition or violation occurs, the holder shall implement additional abatement measures as necessary to control or prevent the condition or violation.
14. **The** permit holder shall comply with all the requirements of this permit. Emissions that exceed the limits of this permit are not authorized and are violations of this permit. ¹

¹ Please be advised that the requirements of this provision of the general conditions may not be applicable to greenhouse gas emissions.

Common Acronyms in Air Permits

°C = Temperature in degrees Celsius	GLCmax = maximum (predicted) ground-level concentration
°F = Temperature in degrees Fahrenheit	gpm = gallon per minute
°K = Temperature in degrees Kelvin	gr/1000scf = grain per 1000 standard cubic feet
µg = microgram	gr/dscf = grain per dry standard cubic feet
µg/m ³ = microgram per cubic meter	H ₂ CO = formaldehyde
acfm = actual cubic feet per minute	H ₂ S = hydrogen sulfide
AMOC = alternate means of control	H ₂ SO ₄ = sulfuric acid
AOS = alternative operating scenario	HAP = hazardous air pollutant as listed in § 112(b) of the Federal Clean Air Act or Title 40 Code of Federal Regulations Part 63, Subpart C
AP-42 = Air Pollutant Emission Factors, 5th edition	HC = hydrocarbons
APD = Air Permits Division	HCl = hydrochloric acid, hydrogen chloride
API = American Petroleum Institute	Hg = mercury
APWL = air pollutant watch list	HGB = Houston/Galveston/Brazoria
BPA = Beaumont/ Port Arthur	hp = horsepower
BACT = best available control technology	hr = hour
BAE = baseline actual emissions	IFR = internal floating roof tank
bbl = barrel	in H ₂ O = inches of water
bbl/day = barrel per day	in Hg = inches of mercury
bhp = brake horsepower	IR = infrared
BMP = best management practices	ISC3 = Industrial Source Complex, a dispersion model
Btu = British thermal unit	ISCST3 = Industrial Source Complex Short-Term, a dispersion model
Btu/scf = British thermal unit per standard cubic foot or feet	K = Kelvin; extension of the degree Celsius scaled-down to absolute zero
CAA = Clean Air Act	LACT = lease automatic custody transfer
CAM = compliance-assurance monitoring	LAER = lowest achievable emission rate
CEMS = continuous emissions monitoring systems	lb = pound
cfm = cubic feet (per) minute	lb/day = pound per day
CFR = Code of Federal Regulations	lb/hr = pound per hour
CN = customer ID number	lb/MMBtu = pound per million British thermal units
CNG = compressed natural gas	LDAR = Leak Detection and Repair (Requirements)
CO = carbon monoxide	LNG = liquefied natural gas
COMS = continuous opacity monitoring system	LPG = liquefied petroleum gas
CPMS = continuous parametric monitoring system	LT/D = long ton per day
DFW = Dallas/ Fort Worth (Metroplex)	m = meter
DE = destruction efficiency	m ³ = cubic meter
DRE = destruction and removal efficiency	m/sec = meters per second
dscf = dry standard cubic foot or feet	MACT = maximum achievable control technology
dscfm = dry standard cubic foot or feet per minute	MAERT = Maximum Allowable Emission Rate Table
ED = (TCEQ) Executive Director	MERA = Modeling and Effects Review Applicability
EF = emissions factor	mg = milligram
EFR = external floating roof tank	mg/g = milligram per gram
EGU = electric generating unit	mL = milliliter
EI = Emissions Inventory	MMBtu = million British thermal units
ELP = El Paso	MMBtu/hr = million British thermal units per hour
EPA = (United States) Environmental Protection Agency	MSDS = material safety data sheet
EPN = emission point number	MSS = maintenance, startup, and shutdown
ESL = effects screening level	MW = megawatt
ESP = electrostatic precipitator	NAAQS = National Ambient Air Quality Standards
FCAA = Federal Clean Air Act	NESHAP = National Emission Standards for Hazardous Air Pollutants
FCCU = fluid catalytic cracking unit	NGL = natural gas liquids
FID = flame ionization detector	NNSR = nonattainment new source review
FIN = facility identification number	NO _x = total oxides of nitrogen
ft = foot or feet	NSPS = New Source Performance Standards
ft/sec = foot or feet per second	
g = gram	
gal/wk = gallon per week	
gal/yr = gallon per year	
GLC = ground level concentration	

PAL = plant-wide applicability limit
PBR = Permit(s) by Rule
PCP = pollution control project
PEMS = predictive emission monitoring system
PID = photo ionization detector
PM = periodic monitoring
PM = total particulate matter, suspended in the atmosphere, including PM₁₀ and PM_{2.5}, as represented
PM_{2.5} = particulate matter equal to or less than 2.5 microns in diameter
PM₁₀ = total particulate matter equal to or less than 10 microns in diameter, including PM_{2.5}, as represented
POC = products of combustion
ppb = parts per billion
ppm = parts per million
ppmv = parts per million (by) volume
psia = pounds (per) square inch, absolute
psig = pounds (per) square inch, gage
PTE = potential to emit
RA = relative accuracy
RATA = relative accuracy test audit
RM = reference method
RVP = Reid vapor pressure
scf = standard cubic foot or feet
scfm = standard cubic foot or feet (per) minute
SCR = selective catalytic reduction
SIL = significant impact levels
SNCR = selective non-catalytic reduction
SO₂ = sulfur dioxide
SOCMI = synthetic organic chemical manufacturing industry
SRU = sulfur recovery unit
TAC = Texas Administrative Code
TCAA = Texas Clean Air Act
TCEQ = Texas Commission on Environmental Quality
TD = Toxicology Division
TLV = threshold limit value
TMDL = total maximum daily load
tpd = tons per day
tpy = tons per year
TVP = true vapor pressure
VOC = volatile organic compounds as defined in Title 30 Texas Administrative Code § 101.1
VRU = vapor recovery unit or system

Special Conditions

Permit Numbers 22690, PSDTX751M2, and GHGPSDTX226

Emission Standards

1. This permit authorizes emissions only from those points listed in the attached table entitled "Emission Sources - Maximum Allowable Emission Rates," (MAERT) and the facilities covered by this permit are authorized to emit subject to the emission rate limits on that table and other operating conditions specified in this permit.
2. Non-fugitive emissions from relief valves, safety valves, or rupture discs of gases containing volatile organic compounds (VOC) at a concentration of greater than 1 percent are not authorized by this permit unless authorized on the MAERT. Any releases directly to atmosphere from relief valves, safety valves, or rupture discs of gases containing VOC at a concentration greater than 1 weight percent are not consistent with good practice for minimizing emissions. **(4/24)**

Federal Applicability

3. These facilities shall comply with all applicable requirements of the U.S. Environmental Protection Agency (EPA) regulations on Standards of Performance for New Stationary Sources promulgated in Title 40 Code of Federal Regulations Part 60 (40 CFR Part 60):
 - A. Subpart A, General Provisions
 - B. Subpart VV, Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for which Construction, Reconstruction, or Modification Commenced after January 5, 1981, and on or Before November 7, 2006
 - C. Subpart IIII, Standards of Performance for Stationary Compression Ignition Internal Combustion Engines
4. These facilities shall comply with all applicable requirements of the EPA regulations on National Emission Standards for Hazardous Air Pollutants in 40 CFR Part 61:
 - A. Subpart A, General Provisions
 - B. Subpart J, National Emission Standards for Equipment Leaks (Fugitive Emission Sources) of Benzene
 - C. Subpart V, National Emission Standards for Equipment Leaks (Fugitive Emission Sources)
 - D. Subpart FF, National Emission Standard for Benzene Waste Operations
5. These facilities shall comply with all applicable requirements of the EPA regulations on National Emission Standards for Hazardous Air Pollutants for Source Categories in 40 CFR Part 63:
 - A. Subpart A, General Provisions
 - B. Subpart F, Organic Hazardous Air Pollutants from the Synthetic Organic Chemical Manufacturing Industry
 - C. Subpart G, Organic Hazardous Air Pollutants from the Synthetic Organic Chemical Manufacturing Industry for Process Vents, Storage Vessels, Transfer Operations, and Wastewater
 - D. Subpart H, National Emission Standards for Organic Hazardous Air Pollutants for Equipment Leaks
 - E. Subpart XX, National Emission Standards for Ethylene Manufacturing Process Units: Heat Exchange Systems and Waste Operations

- F. Subpart YY, National Emission Standards for Hazardous Air Pollutants for Source Categories: Generic Maximum Achievable Control Technology Standards
- G. Subpart UU, National Emission Standards for Equipment Leaks – Control Level 2
- H. Subpart FFFF, National Emission Standards for Hazardous Air Pollutants for Miscellaneous Organic Chemical manufacturing
- I. Subpart DDDDD, National Emission Standards for Hazardous Air Pollutants for Industrial, Commercial, and Institutional Boilers and Process Heaters

Compliance for Furnaces and Heaters

- 6. Particulate matter (PM) equal to or less than 10 microns in diameter (PM_{10}), PM equal to or less than 2.5 microns in diameter ($PM_{2.5}$), and Volatile Organic Compounds (VOC) emissions for the Cracking Furnaces in Unit 22 (EPNs 22-36-1 through 22-36-8), Unit No. 24 (EPNs 24-36-1 through 24-36-6, and 24-36-9), 24 Steam Superheater 7 (EPN 24-36-7), Debutanized Aromatic Concentrate (DAC) Hydrotreater Heater No. 8 (EPN 24-36-8), and Unit No. 33 (EPNs-33-36-1 through 33-36-10) shall be determined in accordance with the following emission factors. To demonstrate compliance when each CEMS is not utilized, the carbon monoxide (CO), NO_x , and sulfur dioxide (SO_2) (hydrogen sulfide [H_2S] CEMS utilized to estimate SO_2 emissions) emissions for the above listed facilities shall be determined in accordance with the following emission factors. The process heater serving the DAC Hydrotreating Unit is not required to have CEMS. The emission factors for EPN 33-36-10 are for calculation purposes and verified by actual testing. All emission factors for EPNs other than EPN 33-36-10 are for calculation purposes, verified by actual testing, and do not determine continuous emissions limitations for each individual furnace.

The firing rate for each furnace, expressed in MMBtu/hr shall be calculated hourly using the average fuel flow rate and measured high heat value of the fuel gas. The annual firing rate for each furnace shall be calculated using annual average fuel flow rate for each furnace and the high heat value of the fuel. **(4/24)**

A. CO Emissions:

- (1) The CO emissions for all furnaces other than furnace EPN 33-36-10 shall be calculated using an emission factor of 0.082 lb/MMBtu.
- (2) The CO emissions for furnace EPN 33-36-10, corrected to 3% oxygen (O_2), shall not exceed 50 ppmv on an annual basis.
- (3) The CO emissions for furnace EPN 33-36-10, corrected to 3% oxygen (O_2), shall not exceed 400 ppmv on an hourly basis, corresponding to an emission factor of 0.29 lb/MMBtu, except during the following operating conditions:
 - (a) Hot Standby Mode. Hot standby mode is defined as operation when the furnace is firing at 70 percent or less of the maximum firing rate.
 - (b) Decoking Operations Mode. Decoking operations mode is defined as operation of the furnace in its decoking cycle.
 - (c) Startup Mode. Startup mode is defined as operation of the furnace during the period beginning when fuel is introduced to the idle furnace and ending when the selective catalytic reduction (SCR) catalyst is at operating temperature.

- (d) Shutdown Mode. Shutdown mode is defined as operation of the furnace during the period beginning when the SCR catalyst temperature first drops below the operating temperature and ending when the burners are extinguished.
- (e) Load Change. Load change is defined as the period beginning when the feed rate to the furnace changes from its prior state and ending when the desired new rate is reached.

B. NO_x Emissions:

- (1) The NO_x emissions for furnaces from Unit 22 shall be calculated by using the method specified under 30 TAC § 117.340(c)(3)(D) or (E).
- (2) The NO_x emissions for the cracking furnaces from Unit 24 (EPNs 24-36-1 through 24-36-6 and 24-36-9) and Steam Superheater 7 (EPN 24-36-7) shall be calculated by using the method specified under 30 TAC § 117.340(c)(3)(D) or (E). The DAC Hydrotreater Heater No. 8 (EPN 24-36-8) shall be limited to a 3 MMBtu/hr firing rate, except during startup periods not to exceed 15 hours per calendar year.
- (3) The NO_x emissions for furnaces from Unit 33 shall be calculated by using the method specified under 30 TAC § 117.340(c)(3)(D) or (E).
- (4) The NO_x emissions for furnace EPN 33-36-10 shall not exceed the emission rate limits in the MAERT table under any operating condition. The NO_x emissions for furnace EPN 33-36-10 shall not exceed the emission factors of 0.015 NO_x/MMBtu (24-hour average) and 0.01 NO_x/MMBtu (annual average), except during the following operating conditions:
 - (a) Hot Standby Mode. Hot standby mode is defined as operation when the furnace is firing at 70 percent or less of the maximum firing rate.
 - (b) Decoking Operations Mode. Decoking operations mode is defined as operation of the furnace in its decoking cycle.
 - (c) Startup Mode. Startup mode is defined as operation of the furnace during the period beginning when fuel is introduced to the idle furnace and ending when the selective catalytic reduction (SCR) catalyst is at operating temperature.
 - (d) Shutdown Mode. Shutdown mode is defined as operation of the furnace during the period beginning when the SCR catalyst temperature first drops below the operating temperature and ending when the burners are extinguished.
 - (e) Load Change. Load change is defined as the period beginning when the feed rate to the furnace changes from its prior state and ending when the desired new rate is reached.

- C. PM/PM₁₀/PM_{2.5} Emissions: Total PM/PM₁₀ emissions shall be calculated using an emission factor of 0.0075 lb/MMBtu.
- D. SO₂ Emissions: The SO₂ hourly emissions shall be calculated based on a 160 part per million by volume (ppmv) H₂S concentration in the fuel gas burned.
- E. VOC Emissions: The VOC emissions shall be calculated using an emission factor of 0.0054 lb/MMBtu.
- F. Ammonia (NH₃) Emissions: The NH₃ hourly emissions for furnace EPN 33-36-10 shall not exceed 10 ppmvd ammonia (NH₃) corrected to 3 percent oxygen on an hourly basis at maximum flue gas flow.

- G. Records: Records shall be kept of the total volume in million standard cubic feet (MMscf) and high heating value [HHV], in MMBtu, of the fuel burned in each furnace on a monthly and cumulative annual basis and the emission caps for all furnace emissions shall be calculated on a monthly and cumulative annual basis or determined from CEMS records.

7. The following requirements shall apply to Unit 22 Cracking Furnace 9 (EPN 22-36-9). **(4/24)**

- A. Except where provided otherwise in paragraph C of this Special Condition, emissions of NO_x, CO, and NH₃ from the cracking furnace shall not exceed the following values. Compliance with the NO_x emissions limits shall be achieved through the use of a Selective Catalytic Reduction (SCR) system.

(1) Short-term average limits:

Pollutant	Emission Limit	Averaging Period
NO _x	0.015 lb/MMBtu	1-hr
CO	100 ppmvd	1-hr
NH ₃	10 ppmvd	1-hr

(2) Long-term average limits:

Pollutant	Emission Limit	Averaging Period
NO _x	0.010 lb/MMBtu	Annual
CO	50 ppmvd	Annual

Concentration of a pollutant in the exhaust of the cracking furnace shall be evaluated on a dry basis, corrected to 3% oxygen.

- B. Compliance with the NO_x, CO, and NH₃ emission limits of paragraph A shall be demonstrated through use of Continuous Emissions Monitoring System (CEMS) in accordance with Special Condition No. 12. The NH₃ concentration in the Unit 22 Cracking Furnace 9 (EPN 22-36-9) may be tested or calculated in accordance with Special Condition No. 10 during the 5% downtime allowed by Special Condition No. 13.G.
- C. The Unit 22 Cracking Furnace 9 (EPN 22-36-9) is exempt from NO_x and CO operating requirements identified during planned startup and shutdown activities and during hot steam standby, decoking, and load change operating scenarios, as defined in this special condition, if the following criteria are satisfied.
- (1) The maximum allowable emission rates in the permit authorizing the facility are not exceeded.
 - (2) During each startup, shutdown, decoking, load change, and hot steam standby operating period, NO_x and CO emissions do not exceed the applicable operating requirements of Special Condition No. 7.A.1. by more than 72 hours for each defined event.
 - (3) Startup Mode. Startup mode is defined as operation of the furnace during the period beginning when fuel is introduced to the idle furnace and ending when the selective catalytic reduction (SCR) catalyst is at operating temperature.
 - (4) Shutdown Mode. Shutdown mode is defined as operation of the furnace during the period beginning when the SCR catalyst temperature first drops below the operating temperature and ending when the burners are extinguished.

- (5) Hot Steam Standby Mode. Hot steam standby mode is defined as the period when the unit is not being decoked, the hydrocarbon feed valve is in the closed position, and the unit is operating at less than or equal to 50 percent of the maximum rated firing capacity as represented in the permit application.
- (6) Decoking Operations Mode. Decoking is defined as the period when the unit is taken off-line to remove carbon deposits and the furnace effluent valve is in the closed position.
- (7) Load Change. Load change is defined as the period beginning when the feed rate to the furnace changes from its prior state and ending when the desired new rate is reached.

D. During decoking operations, effluent shall be captured and directed to the decoke cyclone.

Initial Determination of Compliance

- 8. The permit holder shall perform stack sampling and other testing as required for all cracking furnaces in Ethylene Unit No. 22 Furnaces 1 through 8, Ethylene Unit No. 24 Furnaces 1 through 6 and 9 and Ethylene Unit No. 33 Furnaces 1 through 10.

Initial compliance with the permit opacity limit of Special Condition No. 29 shall be demonstrated on the basis of compliance with Title 40 Code of Federal Regulations (40 CFR) § 60.11(b). Sampling must be conducted in accordance with appropriate procedures of the Texas Commission on Environmental Quality (TCEQ) Sampling Procedures Manual. Sampling by means of one of the test methods specified in 40 CFR § 60.45(b) or any test method approved by the EPA and/or the TCEQ Executive Director, including use of fuel sulfur data, shall be conducted to determine initial compliance with the SO₂ limit of this permit.

Testing can be required at any time at the TCEQ Regional Director's discretion.

The holder of this permit is responsible for providing sampling and testing facilities and conducting the sampling and testing operations at his expense.

Requests to waive testing for any pollutant specified in this condition shall be submitted to the TCEQ Office of Air, Air Permits Division. Test waivers and alternate/equivalent procedure proposals for Title 40 Code of Federal Regulation Part 60 (40 CFR Part 60) testing which must have EPA approval shall be submitted to the TCEQ Regional Director.

- A. The appropriate TCEQ Regional Office shall be notified not less than 45 days prior to sampling. The notice shall include:
 - (1) Proposed date for pretest meeting;
 - (2) Date sampling will occur;
 - (3) Name of firm conducting sampling;
 - (4) Type of sampling equipment to be used;
 - (5) Method or procedure to be used in sampling;
 - (6) Proposed method of demonstrating compliance with the continuous NO_x monitoring required by Special Condition No. 11.

- (7) Description of any proposed deviation from the sampling procedures specified in this permit or TCEQ/EPA sampling procedures; and
- (8) Procedure/parameters to be used to determine worst case emissions during the sampling period.

The purpose of the pretest meeting is to review the necessary sampling and testing procedures, to provide the proper data forms for recording pertinent data, and to review the format procedures for the test reports. The TCEQ Regional Director shall approve or disapprove any deviation from specified sampling procedures.

- B. Air contaminants emitted from each cracking furnace, to be tested for include (but are not limited to) CO, NO_x, PM₁₀, and SO₂. Air contaminants emitted from the cracking furnace EPN 33-36-10 to be tested shall also include (but are not limited to) PM_{2.5}. Testing results will be used to verify the applicable lbs CO and lbs NO_x per MMBtu that may be designated for each furnace in this permit.
- C. Sampling shall occur as may be required by the TCEQ Executive Director. Requests for additional time to perform sampling shall be submitted to the appropriate TCEQ Regional Office.
- D. Each EPN shall operate at maximum rates during stack emission testing. These conditions/parameters and any other primary operating parameters that affect the emission rate shall be monitored and recorded during the stack test. Any additional parameters shall be determined at the pretest meeting and shall be stated in the sampling report. Permit conditions and parameter limits may be waived during stack testing performed under this condition if the proposed condition/parameter range is identified in the test notice specified in Paragraph A and accepted by the TCEQ Regional Office. Permit allowable emissions and emission control requirements are not waived and still apply during stack testing periods.

During subsequent operations, if the production rate of an EPN is greater than that recorded during the test period, stack sampling shall be performed at the new operating conditions within 120 days. This sampling may be waived by the TCEQ Air Section Manager for the region.

- E. Copies of the final sampling report shall be forwarded to the offices below within 60 days after sampling is completed. Sampling reports shall comply with the attached provisions entitled "Chapter 14, Contents of Sampling Reports" of the TCEQ Sampling Procedures Manual. The reports shall be distributed as follows:

One copy to the appropriate TCEQ Regional Office.

One copy to the EPA Region 6 New Source Review Office in Dallas.

One copy to each local air pollution control program.

- 9. The permit holder shall perform stack sampling and other testing as required to establish the actual pattern and quantities of air contaminants being emitted into the atmosphere from the Unit 22 Cracking Furnace 9 (EPNs 22-36-9) to demonstrate compliance with Special Condition Nos. 1 and 7. The permit holder is responsible for providing sampling and testing facilities and conducting the sampling and testing operations at his expense. Sampling shall be conducted in accordance with the appropriate procedures of the Texas Commission on Environmental Quality (TCEQ) Sampling Procedures Manual and EPA Reference Methods.

Requests to waive testing for any pollutant specified in this condition shall be submitted to the TCEQ Office of Air, Air Permits Division. Test waivers and alternate/equivalent procedure proposals for Title 40 Code of Federal Regulation Part 60 (40 CFR Part 60) testing which must have EPA approval shall be submitted to the TCEQ Regional Director. **(4/24)**

- A. The appropriate TCEQ Regional Office shall be notified not less than 45 days prior to sampling. The notice shall include:
- (1) Proposed date for pretest meeting.
 - (2) Date sampling will occur.
 - (3) Name of firm conducting sampling.
 - (4) Type of sampling equipment to be used.
 - (5) Method or procedure to be used in sampling.
 - (6) Description of any proposed deviation from the sampling procedures specified in this permit or TCEQ/EPA sampling procedures.
 - (7) Procedure/parameters to be used to determine worst case emissions.

The purpose of the pretest meeting is to review the necessary sampling and testing procedures, to provide the proper data forms for recording pertinent data, and to review the format procedures for the test reports. The TCEQ Regional Director must approve any deviation from specified sampling procedures.

- B. Air contaminants emitted from the Unit 22 Cracking Furnace 9 (EPN 22-36-9) to be tested for include (but are not limited to) CO, NO_x, and NH₃.
- C. Sampling shall occur within 60 days after achieving the maximum operating rate, but no later than 180 days after initial start-up of the facilities and at such other times as may be required by the TCEQ Executive Director. Requests for additional time to perform sampling shall be submitted to the appropriate regional office.
- D. The facility being sampled shall operate at the maximum heat duty that can be reasonably achieved during stack emission testing. These conditions/parameters and any other primary operating parameters that affect the emission rate shall be monitored and recorded during the stack test. Any additional parameters shall be determined at the pretest meeting and shall be stated in the sampling report. Permit conditions and parameter limits may be waived during stack testing performed under this condition if the proposed condition/parameter range is identified in the test notice specified in paragraph A and accepted by the TCEQ Regional Office. Permit allowable emissions and emission control requirements are not waived and still apply during stack testing periods.

During subsequent operations, if the heat duty is greater than that recorded during the test period, stack sampling shall be performed at the new operating conditions within 120 days. If each individual stack test result from the last successful stack test demonstrated that the actual emissions are less than 80% of the MAERT emission limits, then subsequent operations may include up to a 5% increase in the firing rate for the heater without requiring stack sampling at the new operating conditions unless required by the regional office.

Copies of the final sampling report shall be forwarded to the offices below within 60 days after sampling is completed. Sampling reports shall comply with the attached provisions entitled "Chapter 14, Contents of Sampling Reports" of the TCEQ Sampling Procedures Manual. The reports shall be distributed as follows:

One copy to the appropriate TCEQ Regional Office.
One copy to each local air pollution control program.

- E. Sampling ports and platform(s) shall be incorporated into the design of (source stack and EPN) according to the specifications set forth in the attachment entitled "Chapter 2, Guidelines for Stack Sampling Facilities" of the Texas Commission on Environmental Quality (TCEQ) Sampling Procedures Manual. Alternate sampling facility designs must be submitted for approval to the TCEQ Regional Director.

Continuous Emission Monitoring

- 10. The NH_3 concentration in the Furnace 10 exhaust stack (EPN 33-36-10) and Furnace 9 (EPN: 22-36-9) shall be tested or calculated according to one of the methods listed below and shall be tested or calculated according to frequency listed below. Testing for NH_3 slip is only required on days when the SCR unit is in operation.
 - A. The holder of this permit may install, calibrate, maintain, and operate a CEMS to measure and record the concentrations of NH_3 . The NH_3 concentrations shall be corrected and reported in accordance with Special Condition No. 6.F.
 - B. As an approved alternative, the NH_3 slip may be measured using a sorbent or stain tube device specific for NH_3 measurement in the 5 to 10 ppm range. The frequency of sorbent or stain tube testing shall be daily for the first 60 days of operation, after which, the frequency may be reduced to weekly testing if operating procedures have been developed to prevent excess amounts of NH_3 from being introduced in the SCR unit and when operation of the SCR unit has been proven successful with regard to controlling NH_3 slip. Daily sorbent or stain tube testing shall resume when the catalyst is within 30 days of its useful life expectancy. These results shall be recorded and used to determine compliance with Special Condition No. 6.F.
 - C. As an approved alternative to sorbent or stain tube testing or an NH_3 CEMS, the permit holder may install and operate a second NO_x CEMS probe located between the burners and the SCR, upstream of the stack NO_x CEMS, which may be used in association with the SCR efficiency and NH_3 injection rate to estimate NH_3 slip. This condition shall not be construed to set a minimum NO_x reduction efficiency on the SCR unit. These results shall be recorded and used to determine compliance with Special Condition No. 6.F.
 - D. If the sorbent or stain tube testing indicates an ammonia slip concentration which exceeds 5 parts per million (ppm) at any time, the permit holder shall begin NH_3 testing by either the Phenol-Nitroprusside Method, the Indophenol Method, or EPA Conditional Test Method (CTM) 27 on a quarterly basis in addition to the weekly sorbent or stain tube testing. The quarterly testing shall continue until such time as the SCR unit catalyst is replaced; or if the quarterly testing indicates NH_3 slip is 4 ppm or less, the Phenol-Nitroprusside/Indophenol/CTM 27 tests may be suspended until sorbent or stain tube testing again indicate 5 ppm NH_3 slip or greater. These results shall be recorded and used to determine compliance with Special Condition No. 6.F.
 - E. As an approved alternative to sorbent or stain tube testing, NH_3 CEMS, or a second NO_x CEMS, the permit holder may install and operate a dual stream system of NO_x CEMS at the exit of the SCR. One of the exhaust streams would be routed, in an unconverted state, to one NO_x CEMS, and the other exhaust stream would be routed through a NH_3 converter to convert NH_3 to NO_x and then to a second NO_x CEMS. The NH_3 slip concentration shall be calculated from the delta between the two NO_x CEMS readings (converted and unconverted).

These results shall be recorded and used to determine compliance with Special Condition No. 6.F.

- F. Any other method used for measuring NH₃ slip shall require prior approval from the TCEQ Regional Director.
11. The CEMS are to be installed to monitor all cracking furnaces. The CEMS installation shall be as follows: **(4/24)**
- A. Unit No. 22 shall have a CEMS for NO_x, CO, and O₂ on each cracking furnace stack. The excess O₂ levels, fuel feed rates, and firing rates for the cracking furnaces shall be recorded.
 - B. Unit No. 24 shall have a CEMS for NO_x, CO, and O₂ on each cracking furnace stack. The excess O₂ levels, fuel feed rates, and firing rates for the cracking furnaces shall be recorded.
 - C. Unit No. 33 shall have a CEMS for NO_x, CO, and O₂ on each cracking furnace stack. The excess O₂ levels, fuel feed rates and firing rates for the cracking furnaces shall be recorded.
- Each monitoring system shall meet the requirements of Special Condition No. 13.

Requirements for CEMS

12. The holder of this permit shall install, calibrate, operate, and maintain a CEMS to measure and record the H₂S concentration or ensure the supplier of the refinery fuel gas meets these requirements in the Ethylene Unit No. 22, Ethylene Unit No. 24, and Ethylene Unit No. 33 fuel gas system. The CEMS shall be placed at any location, including at the adjacent refinery that supplies the fuel gas, upstream of the common fuel header as long as the CEMS accurately reflects the H₂S concentration of the fuel gas being burned.
- A. The CEMS shall meet the design and performance specifications, pass the field tests, meet the installation requirements, data analysis, and reporting requirements specified in the Performance Specification No. 7 for H₂S, 40 CFR Part 60, Appendix B. Written copies of the results shall be submitted within 60 days of completion of the test to the TCEQ Regional Office.
 - B. The system shall be zeroed and spanned daily excluding weekends and holidays and corrective action taken when the span drift exceeds two times the amounts specified in 40 CFR Part 60, Appendix B. Zero and span is not required on weekends and plant holidays if instrument technicians are not normally scheduled on those days, unless the monitor is required by a subpart of NSPS or National Emission Standard for Hazardous Air Pollutants (NESHAPS), in which case zero and span shall be done daily without exception. The cylinder gas audit (CGA) shall be performed at least quarterly on each CEMS installed to measure fuel gas H₂S upstream of each ethylene furnace or group of furnaces identified in Ethylene Unit Nos. 22, 24, and 33 in accordance with 40 CFR Part 60, Appendix F, Procedure 1, § 5.1.2., with the following exception: a relative accuracy test audit (RATA) is not required once every four quarters (i.e., four successive quarterly CGA may be conducted). An equivalent quality-assurance method approved by the TCEQ may also be used. Successive quarterly audits shall occur no closer than two months.
 - C. Compliance with furnace emission rate SO₂ limits will be ensured through compliance with 40 CFR § 60.104(a)(1), which sets fuel gas H₂S concentration limits, and 40 CFR §60.105(a)(4), which outlines H₂S monitoring requirements.

- D. All CGA exceedances of ± 15 percent accuracy and any unscheduled CEMS downtime not corrected within 24 hours shall be reported to the TCEQ Regional Office, and necessary corrective action shall be taken. Unscheduled CEMS downtime is any CEMS downtime not required for daily zero and span checks and CGAs.
13. The holder of this permit shall install, calibrate, operate, and maintain a CEMS if required by Special Condition No. 11 to measure and record the CO, NO_x, and O₂ concentration from each Ethylene Unit No. 22, Ethylene Unit No. 24, and Ethylene Unit No. 33 furnace exhaust stack. In addition, the holder of this permit shall install, calibrate, operate and maintain a CEMS required by Special Condition No. 10.A to measure and record the in stack concentration of NH₃ from Unit 33 Furnace F10 (EPN 33-36-10). The permit holder shall install, calibrate, operate, and maintain a CEMS as required by Special Condition No. 11 to measure and record the NH₃ concentration from Unit 22 Cracking Furnace 9 (EPN 22-36-9). The permit holder shall install, calibrate, and maintain a CEMS to measure and record the in-stack concentration of CO, NO_x, and O₂ from the Propylene Compressor Turbine (EPN 22-95-27). The holder of this permit shall comply with the following:
(4/24)
- A. The CEMS shall meet the design and performance specifications, pass the field tests, and meet the installation requirements and the data analysis and reporting requirements specified in the applicable Performance Specification Nos. 1 through 9, 40 CFR Part 60, Appendix B or EPA Preliminary Performance Specifications for Ammonia Continuous Emissions Monitors (PPs-001) for the NH₃ analyzer on Unit 33 F-10 and Unit 22 F-9 (EPN: 22-36-9). If there are no applicable performance specifications in 40 CFR Part 60, Appendix B, contact the TCEQ Office of Air, Air Permits Division for requirements to be met.
- B. Section 1 below applies to sources subject to the quality-assurance requirements of 40 CFR Part 60, Appendix F; Section 2 applies to all other sources:
- (1) The permit holder shall assure that the CEMS meets the applicable quality-assurance requirements specified in 40 CFR Part 60, Appendix F, Procedure 1. Relative accuracy exceedances, as specified in 40 CFR Part 60, Appendix F, Section 5.2.3 and any CEMS downtime shall be reported to the appropriate TCEQ Regional Manager, and necessary corrective action shall be taken. Supplemental stack concentration measurements may be required at the discretion of the appropriate TCEQ Regional Manager.
- (2) The system shall be zeroed and spanned daily, and corrective action taken when the 24-hour span drift exceeds four times the amounts specified in the applicable Performance Specification Nos. 1 through 9, 40 CFR Part 60, Appendix B, EPA Preliminary Performance Specification for Ammonia Continuous Emission Monitors (PPs-001) for the NH₃ on Unit 33 furnace F-10 (EPN 33-36-10) and Unit 22 Furnace F-9 (EPN: 22-36-9) or as specified by the TCEQ if not specified in Appendix B. Zero and span is not required on weekends and plant holidays if instrument technicians are not normally scheduled on those days.
- Each monitor shall be quality-assured at least quarterly using Cylinder Gas Audits (CGA) in accordance with 40 CFR Part 60, Appendix F, Procedure 1, § 5.1.2, or an equivalent quality assurance method per Preliminary Performance Specification for Ammonia Continuous Emissions Monitors (PP3-001) for the NH₃ analyzer on Unit 33 furnace F-10 (EPN 33-36-10) and Unit 22 Furnace F-9 (EPN: 22-36-9) with the following exception: a relative accuracy test audit (RATA) is not required once every four quarters (i.e., four successive quarterly CGA may be conducted). An equivalent

quality-assurance method approved by the TCEQ may also be used. Successive quarterly audits shall occur no closer than two months.

All CGA exceedances of ± 15 percent accuracy indicate that the CEMS is out of control. Exceedances of ± 15 percent also apply to equivalent methods approved by the TCEQ for the Ammonia analyzer on Unit 33 F-10 (EPN 33-36-10) and Unit 22 Furnace F-9 (EPN: 22-36-9). **(08/25)**

- C. The monitoring data shall be reduced to hourly average concentrations at least once every day, using a minimum of four equally-spaced data points from each one-hour period. The individual average concentrations shall be reduced as follows
- (1) For all furnaces except Unit 22 Cracking Furnace 9 (EPN 22-36-9), to units of pounds per hour at least once every week as follows:

The measured hourly average concentration from the CEMS shall be multiplied by the calculated flow rate which is based on fuel gas combustion products and excess O₂ content, to determine the hourly emission rate.
- D. For Unit 22 Cracking Furnace 9 (EPN 22-36-9), to units of ppmvd, lb/MMBtu, and/or lb/hr, as applicable at least once every week as follows:
- (1) The measured 1-hr average concentration (in units of ppmvd) from the CEMS shall be converted to a dry basis and corrected to the reference oxygen concentration.
 - (2) The converted concentration, corrected for oxygen, shall be converted to an emissions factor (in units of lb/MMBtu) by using an appropriate F-factor determined as specified in EPA Method 19, Equation 19-13, determined using the measured hydrogen content of the fuel gas.
 - (3) The emission rate (in units of lb/hr) shall be determined by multiplying the emission factor by the fuel flow rate and fuel heat content measured as required under Paragraphs H and I of this Special Condition.
 - (4) In case the permit holder elects to monitor stack exhaust flow as provided for in Paragraph H of this Special Condition, the emission rate (in units of lb/hr) shall be determined by multiplying the measured concentration (converted and corrected as needed) by the exhaust flow rate; and the emission factor (in units of lb/MMBtu) shall be determined by dividing the emission rate by the monitored fuel flow rate, using fuel flow rate and fuel heat content data measured as required under Paragraphs H and I of this Special Condition.
- E. All monitoring data and quality-assurance data shall be maintained by the source. The data from the CEMS may, at the discretion of the TCEQ, be used to determine compliance with the conditions of this permit.
- F. The appropriate TCEQ Regional Office shall be notified at least 30 days prior to any required RATA in order to provide them the opportunity to observe the testing.
- G. Quality-assured (or valid) data must be generated when the Ethylene Unit No. 22, Ethylene Unit No. 24, and Ethylene Unit No. 33 furnaces, are operating except during the performance of a daily zero and span check. Loss of valid data due to periods of monitor break down, out-of-control operation (producing inaccurate data), repair, maintenance, or calibration may be exempted provided it does not exceed 5 percent of the time (in minutes) that the Ethylene Unit No. 22, Ethylene Unit No. 24, and Ethylene Unit No. 33 furnaces are operated over the previous six-month period (on a semiannual basis). The measurements missed shall be estimated using engineering judgment and the methods used recorded. Options to increase

system reliability to an acceptable value, including a redundant CEMS, may be required by the TCEQ Regional Manager.

- H. The permit holder shall install and operate a fuel flow meter to measure the gas fuel usage on Unit 22 Cracking Furnace 9 (EPN 22-36-9). The monitored data shall be reduced to an hourly average flow rate at least once each day, using a minimum of four equally-spaced data points from each one-hour period. The monitoring device shall be calibrated at a frequency in accordance with the manufacturer's specifications or at least annually, whichever is more frequent, and shall be accurate to within 5 percent. In lieu of monitoring fuel flow, the permit holder may monitor stack exhaust flow using the flow monitoring specifications of 40 CFR Part 60, Appendix B, Performance Specification 6 or 40 CFR Part 75, Appendix A.
- I. The permit holder shall install and operate an analyzer which continuously monitors the heat content of fuel supplied to Unit 22 Cracking Furnace 9 (EPN 22-36-9). For sources which receive fuel from a common fuel gas header, a single analyzer may be installed in the fuel gas header.

Process Fugitive Monitoring

14. Piping, Valves, Connectors, Pumps, Agitators and Compressors - 28VHP (4/24)

The following requirements apply to piping, valves, connectors, pumps, agitators, and compressors containing or in contact with fluids that could reasonably be expected to contain greater than or equal to 10 weight percent volatile organic compounds (VOC) at any time.

- A. The requirements of paragraphs F and G shall not apply (1) where the VOC has an aggregate partial pressure or vapor pressure equal to or less than 0.044 lb per square inch, absolute at 68 °F or (2) operating pressure is at least 5 kilopascals (0.725 lb per square inch) below ambient pressure. Equipment excluded from this condition shall be identified in a list or by one of the methods described below to be made available upon request.

The exempted components may be identified by one or more of the following methods:

- (1) piping and instrumentation diagram (PID);
 - (2) a written or electronic database or electronic file;
 - (3) color coding;
 - (4) a form of weatherproof identification; or
 - (5) designation of exempted process unit boundaries.
- B. Construction of new and reworked piping, valves, pump systems, and compressor systems shall conform to applicable American National Standards Institute (ANSI), American Petroleum Institute (API), American Society of Mechanical Engineers (ASME), or equivalent codes.
 - C. New and reworked underground process pipelines shall contain no buried valves such that fugitive emission monitoring is rendered impractical.
 - D. To the extent that good engineering practice will permit, new and reworked valves and piping connections shall be so located to be reasonably accessible for leak-checking during plant operation. Difficult-to-monitor and unsafe-to-monitor valves, as defined by Title 30 Texas

Administrative Code Chapter 115 (30 TAC Chapter 115), shall be identified in a list to be made available upon request. The difficult-to-monitor and unsafe-to-monitor valves may be identified by one or more of the methods described in Paragraph A above. If an unsafe to monitor component is not considered safe to monitor within a calendar year, then it shall be monitored as soon as possible during safe to monitor times. A difficult to monitor component for which quarterly monitoring is specified may instead be monitored annually.

- E. New and reworked piping connections shall be welded or flanged. Screwed connections are permissible only on piping smaller than two-inch diameter. Gas or hydraulic testing of the new and reworked piping connections at no less than operating pressure shall be performed prior to returning the components to service or they shall be monitored for leaks using an approved gas analyzer within 15 days of the components being returned to service. Adjustments shall be made as necessary to obtain leak-free performance. Connectors shall be inspected by visual, audible, and/or olfactory means at least weekly by operating personnel walk-through.

Each open-ended valve or line shall be equipped with an appropriately sized cap, blind flange, plug, or a second valve to seal the line. Except during sampling, both valves shall be closed. If the isolation of equipment for hot work or the removal of a component for repair or replacement results in an open ended line or valve, it is exempt from the requirement to install a cap, blind flange, plug, or second valve for 72 hours. If the repair or replacement is not completed within 72 hours, the permit holder must complete either of the following actions within that time period;

- (1) a cap, blind flange plug, or second valve must be installed on the line or valve; or
- (2) the open-ended valve or line shall be monitored once for leaks above background for a plant or unit turnaround lasting up to 45 days with an approved gas analyzer and the results recorded. For all situations, the open-ended valve or line shall be monitored once with the 72 hour period following the creation of the open ended line and monthly thereafter with an approved gas analyzer and the results recorded. For turnarounds and all other situations, leaks are indicated by readings of 500 ppmv and must be repaired within 24 hours or a cap blind flange, plug, or second valve must be installed on the line or valve.

- F. Accessible valves shall be monitored by leak-checking for fugitive emissions at least quarterly using an approved gas analyzer. Sealless/leakless valves (including, but not limited to, welded bonnet bellows and diaphragm valves) and relief valves equipped with a rupture disc upstream or venting to a control device are not required to be monitored. For valves equipped with rupture discs, a pressure-sensing device shall be installed between the relief valve and rupture disc to monitor disc integrity. All leaking discs shall be replaced at the earliest opportunity but no later than the next process shutdown.

The gas analyzer shall conform to requirements listed in Method 21 of 40 CFR Part 60, Appendix A. The gas analyzer shall be calibrated with methane. In addition, the response factor of the instrument for a specific VOC of interest shall be determined and meet the requirements of Section 8 of Method 21. If a mixture of VOCs is being monitored, the response factor shall be calculated for the average composition of the process fluid. A calculated average is not required when all of the compounds in the mixture have a response factor less than 10 using methane. If a response factor less than 10 cannot be achieved using methane, then the instrument may be calibrated with one of the VOC to be measured or any other VOC so long as the instrument has a response factor of less than 10 for each of the VOC to be measured.

Replacements for leaking components shall be re-monitored within 15 days of being placed back into VOC service.

- G. Except as may be provided for in the special conditions of this permit, all pump, compressor and agitator seals shall be monitored with an approved gas analyzer at least quarterly or be equipped with a shaft sealing system that prevents or detects emissions of VOC from the seal. Seal systems designed and operated to prevent emissions or seals equipped with an automatic seal failure detection and alarm system need not be monitored. These seal systems may include (but are not limited to) dual pump seals with barrier fluid at higher pressure than process pressure, seals degassing to vent control systems kept in good working order, or seals equipped with an automatic seal failure detection and alarm system. Submerged pumps or sealless pumps (including, but not limited to, diaphragm, canned, or magnetic-driven pumps) may be used to satisfy the requirements of this condition and need not be monitored.
- H. Damaged or leaking valves or connectors found to be emitting VOC in excess of 500 ppmv or found by visual inspection to be leaking (e.g., dripping process fluids) shall be tagged and replaced or repaired. Damaged or leaking pump, compressor seals found to be emitting VOC in excess of 2,000 ppmv or found by visual inspection to be leaking (e.g., dripping process fluids) shall be tagged and replaced or repaired. A first attempt to repair the leak must be made within 5 days and a record of the attempt shall be maintained.
- I. A leaking component shall be repaired as soon as practicable, but no later than 15 days after the leak is found. If the repair of a component would require a unit shutdown that would create more emissions than the repair would eliminate, the repair may be delayed until the next scheduled shutdown. All leaking components which cannot be repaired until a scheduled shutdown shall be identified for such repair by tagging within 15 days of the detection of the leak. A listing of all components that qualify for delay of repair shall be maintained on a delay of repair list. The cumulative daily emissions from all components on the delay of repair list shall be estimated by multiplying by 24 the mass emission rate for each component calculated in accordance with the instructions in 30 TAC 115.782 (c)(1)(B)(i)(II). The calculations of the cumulative daily emissions from all components on the delay of repair list shall be updated within ten days of when the latest leaking component is added to the delay of repair list. When the cumulative daily emission rate of all components on the delay of repair list times the number of days until the next scheduled unit shutdown is equal to or exceeds the total emissions from a unit shut down as calculated in accordance with 30 TAC 115.782 (c)(1)(B)(i)(I or 500 pounds, whichever is greater, the TCEQ Regional Manager and any local programs shall be notified and may require early unit shut down or other appropriate action based on the number and severity of tagged leaks awaiting shutdown. This notification shall be made within 15 days of making this determination.
- J. Records of repairs shall include date of repairs, repair results, justification for delay of repairs, and corrective actions taken for all components. Records of instrument monitoring shall indicate dates and times, test methods, and instrument readings. The instrument monitoring record shall include the time that monitoring took place for no less than 95% of the instrument readings recorded. Records of physical inspections shall be noted in the operator's log or equivalent.
- K. Alternative monitoring frequency schedules of 30 TAC §§ 115.352 - 115.359 or National Emission Standards for Organic Hazardous Air Pollutants, 40 CFR Part 63, Subpart H, may be used in lieu of Items F through G of this condition.
- L. Compliance with the requirements of this condition does not assure compliance with requirements of 30 TAC Chapter 115, an applicable New Source Performance Standard

(NSPS), or an applicable National Emission Standard for Hazardous Air Pollutants (NESHAPS) and does not constitute approval of alternative standards for these regulations.

- M. All process drains in Process Unit Nos. 12, 18, 22, 24, 24.1, and 33 shall be monitored quarterly with an approved gas analyzer at a leak threshold of 500 ppmv in addition to a weekly physical inspection. All process drains in Process Unit Nos. 10.1, 10.2, 10.3, and 21 shall be monitored annually with an approved gas analyzer at a leak threshold of 500 ppmv. The gas analyzer used to monitor these process drains shall comply with the calibration requirements of this special condition.
- N. All flange/connectors associated with the low NO_x burners in Process Unit Areas 22 and 24 shall be monitored annually with an approved gas analyzer at a leak threshold of 500 ppmv in addition to a weekly physical inspection required by Paragraph E of this special condition. The gas analyzer used to monitor these flange/connectors shall comply with the calibration requirements of this special condition.

15. Enhanced 28VHP

In lieu of Special Condition No. 14, item H, and in accordance with items F through J, all damaged or leaking pump and compressor seals found to be emitting VOC in excess of 500 ppmv or found by visual inspection to be leaking (e.g., dripping process fluids) shall be tagged and replaced or repaired.

16. Difficult to Monitor Components: Annual Instrument Monitoring - 28 CNTA

In addition to the weekly physical inspection required by Item E of Special Condition No. 14, all difficult to monitor valves in gas/vapor and light liquid service and difficult to monitor flanges/connectors in gas/vapor and light liquid service in Process Unit Areas 10.1, 10.2, 10.3, 12, 18, 21, 24.1, and Ethylene Unit Nos. 22, 24, and 33 shall be monitored annually with an approved gas analyzer in accordance with Items F through J of Special Condition No. 14. Alternative monitoring frequency schedules of 40 CFR Part 63, Subpart H, National Emission Standards for Organic Hazardous Air Pollutants for Equipment Leaks, may be used in lieu of the monitoring frequency required by this permit condition. Compliance with this condition does not assure compliance with requirements of applicable state or federal regulation and does not constitute approval of alternative standards for these regulations. Equipment included with this condition shall be identified in a list to be made available upon request of TCEQ personnel.

All insulated valves in Process Unit Areas 10.1, 10.2, 10.3, 12, 18, 21, 24.1, and Ethylene Unit Nos. 22, 24, and 33, insulation flanges/connectors in Process Units 10.1, 10.2, 10.3, 12, 18, 21, 22, 24, 24.1, and 33 in gas/vapor and light liquid service are exempt from the monitoring requirements of this special condition. Equipment excluded from this condition shall be identified in a list to be made available upon request of TCEQ personnel.

17. Quarterly Instrument Flanges/Connectors Monitoring - 28CNTQ **(04/18)**

- A. The requirements of this special condition only apply to flanges/connectors in Process Unit Areas 12, 18, and Ethylene Unit Nos. 22, 24, 24.1, and 33. Flanges/connectors under insulation, and designated as difficult to monitor or, in heavy liquid service where the VOC has an aggregate partial pressure or vapor pressure equal to or less than 0.044 lb per square inch, absolute at 68°F and, those associated with low NO_x burners in Process Unit Areas 22 and 24 are exempt from the quarterly instrument monitoring requirements of this condition.

Equipment excluded from this condition shall be identified in a list to be made available upon request of TCEQ personnel. Equipment included with this condition shall be identified in a list to be made available upon request of TCEQ personnel.

- B. In addition to the weekly physical inspection required by Item E of Special Condition No. 14, all accessible flanges/connectors in gas/vapor and light liquid service shall be monitored quarterly with an approved gas analyzer in accordance with Items F through J of Special Condition No. 14.
- (1) Allowance for reduced monitoring frequencies
- (a) The frequency of monitoring may be reduced from quarterly to semiannually if the percent of connectors leaking for two consecutive quarterly monitoring periods is less than 0.5 percent.
- (b) The frequency of monitoring may be reduced from semiannually to annually if the percent of connectors leaking for two consecutive semiannual monitoring periods is less than 0.5 percent.
- (2) If the percent of connectors leaking for any semiannual or annual monitoring period is 0.5 percent or greater, the facility shall revert to quarterly monitoring until the facility again qualifies for the alternative monitoring schedules previously outlined in this paragraph. The percent of connectors leaking used in paragraph (1) above shall be determined using the following formula:

$$(CI + Cs) \times 100/Ct = Cp$$

Where:

CI = the number of connectors found leaking by the end of the monitoring period either by Method 21 or sight, sound and smell.

Cs = the number of connectors for which repair has been delayed and are listed on the facility shutdown log.

Ct = the total number of connectors in the facility subject to the monitoring requirements, as of the last day of the monitoring period, not including nonaccessible and unsafe-to-monitor connectors.

Cp = the percentage of leaking connectors for the monitoring period.

18. Flanged Piping, Valves, Pumps, and Compressors in Ammonia (NH₃) Service

- A. Audio, olfactory, and visual checks for NH₃ leaks within the operating area shall be made at least once per day.
- B. Immediately, but no later than five hours upon detection of a leak, plant personnel shall take one of the following actions:
- (1) Isolate the leak.
- (2) Commence repair or replacement of the leaking component.
- (3) Use a leak collection/containment system to prevent the leak until repair or replacement can be made if immediate repair is not possible.

Repair or replacement of the leaking component must be completed as soon as safely practicable. Date and time of each inspection shall be noted in the operator's log or

equivalent. Records shall be maintained at the plant site of all repairs and replacements made due to leaks. These records shall be made available to representatives of the TCEQ upon request.

Maintenance, Start-up, and Shutdown (MSS)

19. This permit authorizes the emissions from the facilities identified in Attachment C for the planned MSS activities summarized in the MSS Activity Summary (Attachment B) attached to this permit.

Routine maintenance activities, as identified in Attachment A may be tracked through the work orders or equivalent. Emissions from activities identified in Attachment A shall be calculated using the number of work orders or equivalent that month and the emissions associated with that activity identified in the permit application.

The performance of each planned MSS activity not identified in Attachment A and the emissions associated with it shall be recorded and include at least the following information:

- A. The physical location at which emissions from the MSS activity occurred, including the emission point number, common name, and any other identifier for the point at which the emissions were released into the atmosphere;
- B. The type of planned MSS activity and the reason for the planned activity;
- C. The common name and the facility identification number, if applicable, of the facilities at which the MSS activity and emissions occurred;
- D. The date and time of the MSS activity and its duration;
- E. The estimated quantity of each air contaminant, or mixture of air contaminants, emitted with the data and methods used to determine it. The emissions shall be estimated using the methods identified in the amendment applications, PI-1 dated October 11, 2007, and PI-1 dated January 2, 2008, consistent with good engineering practice.

All MSS emissions shall be summed monthly and the rolling 12-month emissions shall be updated on a monthly basis.

20. This permit condition applies only to safety relief valves in VOC service that discharge to the atmosphere. Safety relief valves in VOC service that discharge to the atmosphere shall be equipped with a rupture disk. A pressure gauge shall be installed between the relief valve and the rupture disk to monitor disk integrity. All leaking rupture disks shall be replaced at the earliest opportunity but no later than the next process shutdown. No later than 30 days after discovery of a leaking rupture disk, each line leading to the rupture disk shall be blocked or stopped, unless the disk has already been replaced.
21. Process units and facilities, with the exception of those identified in Special Condition Nos. 24 and 25, and in Attachment A, shall be depressurized, emptied, degassed, and placed in service in accordance with the following requirements.
- A. The process equipment shall be depressurized to a control device or a controlled recovery system prior to venting to atmosphere, degassing, or draining liquid. Equipment that only contains material that is liquid with VOC partial pressure less than 0.50 psi at the normal process temperature and 95°F may be opened to atmosphere and drained in accordance

with paragraph B of this special condition. The vapor pressure at 95°F may be used if the actual temperature of the liquid is verified to be less than 95°F and the temperature is recorded.

- B. All liquids from process equipment or storage vessels must be removed to the maximum extent practical prior to opening equipment to commence degassing and/or maintenance. Liquids must be drained into a closed vessel or closed liquid recovery system unless prevented by the physical configuration of the equipment. If it is necessary to drain liquid into an open pan or sump, the liquid must be covered or transferred to a covered vessel within one hour of being drained.
- C. If the VOC partial pressure is greater than 0.50 psia at the actual temperature or 95°F, facilities shall be degassed using good engineering practice to ensure air contaminants are removed from the system through the control device or controlled recovery system to the extent allowed by process equipment or storage vessel design. The vapor pressure at 95°F may be used if the actual temperature of the liquid is verified to be less than 95°F and the temperature is recorded. The facilities to be degassed shall not be vented directly to atmosphere, except as necessary to establish isolation of the work area or to monitor VOC concentration following controlled depressurization. The venting shall be minimized to the maximum extent practicable and actions taken recorded. The control device or recovery system utilized shall be recorded with the estimated emissions from controlled and uncontrolled degassing calculated using the methods that were used to determine allowable emissions for the permit application.

The locations and/or identifiers where the purge gas or steam enters the process equipment or storage vessel and the exit points for the exhaust gases shall be recorded. As an alternative to the preceding records, process flow diagrams or piping and instrumentation diagrams may be used to demonstrate compliance with the requirement. As another alternative to the preceding records, documented procedures used to de-inventory equipment to a control device for safety-purposes, such as hot work or vessel entry procedures, that achieve the same level of purging may also be used to demonstrate compliance with the requirement. If the process equipment is purged with a gas, two system volumes of purge gas must have passed through the control device or controlled recovery system before the vent stream may be sampled to verify acceptable VOC concentration prior to uncontrolled venting. The VOC sampling and analysis shall be performed using an instrument meeting the requirements of Special Condition No. 22. The sampling point shall be upstream of the inlet to the control device or controlled recovery system. The sample ports and the collection system must be designed and operated such that there is no air leakage into the sample probe or the collection system downstream of the process equipment or vessel being purged. The facilities shall be degassed to a control device or controlled recovery system until the VOC concentration is less than 10,000 ppmv or 10 percent of the LEL. If a TVA-1000 series FID analyzer calibrated with methane is used to determine the VOC concentration, a measured concentration of 34,000 ppmv may be considered equivalent to 10,000 ppmv as VOC.

- D. Gases and vapors with VOC partial pressure greater than 0.50 psia may be vented directly to atmosphere if all the following criteria are met:
 - (1) It is not technically practicable to depressurize or degas, as applicable, into the process;
 - (2) There is not an available connection to a plant control system (flare); and

- (3) There is no more than 50 lbs of air contaminant to be vented to atmosphere during shutdown or start-up, as applicable.

Except when identified for an activity on Special Condition No. 19, all instances of venting directly to atmosphere in accordance with this Special Condition must be documented when occurring as part of any MSS activity.

- 22. Air contaminant concentration shall be measured using an instrument/detector meeting one set of requirements specified below:

- A. VOC concentration shall be measured using an instrument meeting all the requirements specified in EPA Method 21 (40 CFR Part 60, Appendix A) with the following exceptions:

- (1) The instrument shall be calibrated within 24 hours of use with a calibration gas. The calibration gas used and its concentration, and the vapor to be sampled and its approximate response factor (RF), shall be recorded. If the RF of the VOC (or mixture of VOCs) to be monitored is greater than 2.0, the VOC concentration shall be determined as follows:

$$\text{VOC Concentration} = \text{Concentration as read from the instrument} \times \text{RF}$$

The RF may be estimated based on process knowledge. The approximate RF of the vapor to be sampled and the basis for its determination shall be recorded.

- (2) Sampling shall be performed as directed by this permit in lieu of Section 8.3 of Method 21. During sampling, data recording shall not begin until after two times the instrument response time. The date and time shall be recorded, and VOC concentration shall be monitored for at least five minutes, recording VOC concentration each minute. The highest measured VOC concentration shall not exceed the specified VOC concentration limit prior to uncontrolled venting.
- (3) If a TVA-1000 series FID analyzer calibrated with methane is used to determine the VOC concentration, a measured concentration of 34,000 ppmv may be considered equivalent to 10,000 ppmv as VOC.

- B. Colorimetric gas detector tubes may be used to determine air contaminant concentrations if they are used in accordance with the following requirements:

- (1) The air contaminant concentration measured is less than 80 percent of the range of the tube. If the maximum range of the tube is greater than the release concentration defined in (3), the concentration measured is at least 20 percent of the maximum range of the tube.
- (2) The tube is used in accordance with the manufacturer's guidelines.
- (3) At least 2 samples taken at least 5 minutes apart must satisfy the following prior to uncontrolled venting:

measured contaminant concentration (ppmv) < release concentration.

Where the release concentration is:

10,000 * mole fraction of the total air contaminants present that can be detected by the tube.

The mole fraction may be estimated based on process knowledge. The release concentration and basis for its determination shall be recorded.

Records shall be maintained of the tube type, range, measured concentrations, and time the samples were taken.

- C. Lower explosive limit (LEL) measured with an LEL detector may be used to determine air contaminant concentrations if used in accordance with the following requirements or in accordance with D of this condition:
 - (1) The detector shall be calibrated monthly with a certified pentane gas standard at 25% of the LEL for pentane. Records of the calibration date/time and calibration result (pass/fail) shall be maintained.
 - (2) A daily functionality test shall be performed on each detector using the same certified gas standard used for calibration. The LEL monitor shall read no lower than 90% of the calibration gas certified value. Records, including the date/time and test results, shall be maintained.
 - (3) A certified methane gas standard equivalent to 25% of the LEL for pentane may be used for calibration and functionality tests provided that the LEL response is within 95% of that for pentane.
 - D. As an alternative to C of this condition, the LEL measured with an LEL detector may be used to determine air contaminant concentrations if used in accordance with the following requirements:
 - (1) The detector shall be calibrated monthly with a certified propane gas standard at 25% of the LEL for propane. Records of the calibration date/time and calibration result (pass/fail) shall be maintained.
 - (2) A daily functionality test shall be performed on each detector using the same certified gas standard used for calibration. The LEL monitor shall read no lower than 90% of the calibration gas certified value. Records, including the date/time and test results, shall be maintained.
 - (3) A certified methane gas standard equivalent to 25% of the LEL for propane may be used for calibration and functionality tests provided that the LEL response is within 95% of that for propane.
23. Each open-ended valve or line shall be equipped with an appropriately sized cap, blind flange, plug, or a second valve to seal the line. Except during sampling, both valves shall be closed. If the isolation of equipment for hot work maintenance, the decoking of an ethylene cracking furnace, or the removal of a component for repair or replacement results in an open ended line or valve, it is exempt from the requirement to install a cap, blind flange, plug, or second valve for 72 hours. If the repair or replacement is not completed within 72 hours, the permit holder must complete either of the following actions within that time period:
- A. a cap, blind flange, plug, or second valve must be installed on the line or valve; or
 - B. the open-ended valve or line shall be monitored once for leaks above background for a plant or unit turnaround lasting up to 45 days with an approved gas analyzer and the results recorded. For all other situations, the open-ended valve or line shall be monitored once at the end of the 72 hour period following the creation of the open ended line and monthly thereafter with an approved gas analyzer and the results recorded. For turnarounds and all other situations, leaks are indicated by readings 20 ppmv above background and must be repaired within 24 hours or a cap, blind flange, plug, or second valve must be installed on the line or valve.

24. The following requirements apply to vacuum and air mover truck operations to support planned MSS activities at this site:
- A. Vacuum pumps and blowers shall not be operated on trucks containing or vacuuming liquids with VOC partial pressure greater than 0.50 psia at 95°F unless the vacuum/blower exhaust is routed to a control device or a controlled recovery system.
 - B. Equip fill line intake with a “duckbill” or equivalent attachment if the hose end cannot be submerged in the liquid being collected.
 - C. A daily record containing the information identified below is required for each vacuum truck in operation at the site each day.
 - (1) Prior to initial use, identify any liquid in the truck. Record the liquid level and document that the VOC partial pressure is less than 0.50 psia if the vacuum exhaust is not routed to a control device or a controlled recovery system. After each liquid transfer, identify the liquid transferred and document that the VOC partial pressure is less than 0.50 psia if the vacuum exhaust is not routed to a control device or a controlled recovery system.
 - (2) For each liquid transfer made with the vacuum operating, record the duration of any periods when air may have been entrained with the liquid transfer. The reason for operating in this manner and whether a “duckbill” or equivalent was used shall be recorded. Short, incidental periods, such as those necessary to walk from the truck to the fill line intake, do not need to be documented.
 - (3) If the vacuum truck exhaust is controlled with a control device other than an engine or oxidizer, VOC exhaust concentration upon commencing each transfer, at the end of each transfer, and at least every hour during each transfer, measured using an instrument meeting the requirements of Special Condition No. 22.
 - (4) The volume in the vacuum truck at the end of the day, or the volume unloaded, as applicable.
 - D. The permit holder shall determine the vacuum truck emissions each month using the daily vacuum truck records and the calculation methods utilized in the permit application. If records of the volume of liquid transferred for each pick-up are not maintained, the emissions shall be determined using the physical properties of the liquid vacuumed with the greatest potential emissions. Rolling 12-month vacuum truck emissions shall also be determined on a monthly basis.
 - E. If the VOC partial pressure of all the liquids vacuumed into the truck is less than 0.10 psia, this shall be recorded when the truck is unloaded or leaves the plant site and the emissions may be estimated as the maximum potential to emit for a truck in that service as documented in the permit application. The recordkeeping requirements in A through D of this condition do not apply.
25. The following requirements apply to frac, or temporary, tanks and vessels used in support of MSS activities.
- A. The exterior surfaces of these tanks/vessels that are exposed to the sun shall be white or aluminum effective May 1, 2013. This requirement does not apply to tanks/vessels that only vent to atmosphere when being filled.

- B. These tanks/vessels must be covered and equipped with fill pipes that discharge within six inches of the tank/vessel bottom. The requirement for fill pipes that discharge within six inches of the tank/vessel bottom is waived for the following exceptions:
 - (1) When the tank/vessel vent is routed to a control device.
 - (2) When the liquid or sludge in the tank/vessel contains less than 100 ppm VOC, as determined by measurement of the contents of the tank/vessel or by previous measurement of a stream identical to the contents of the tank/vessel.
 - C. These requirements do not apply to vessels storing less than 100 gallons of liquid that are closed such that the vessel does not vent to the atmosphere.
 - D. The permit holder shall maintain an emissions record which includes calculated emissions of VOC from all frac tanks during the previous calendar month and the past consecutive 12-month period. The record shall include tank identification number, dates put into and removed from service, control method used, tank capacity and volume of liquid stored in gallons, name of the material stored, VOC molecular weight, and VOC partial pressure at the estimated monthly average material temperature in psia. Filling emissions for tanks shall be calculated using the TCEQ publication titled "Technical Guidance Package for Chemical Sources - Loading Operations" and standing emissions determined using: the TCEQ publication titled "Technical Guidance Package for Chemical Sources - Storage Tanks."
 - E. If the tank/vessel is used to store liquid with VOC partial pressure less than 0.10 psia at 95°F, records may be limited to the days the tank is in service and the liquid stored. Emissions may be estimated based upon the potential to emit as identified in the permit application.
26. This Special Condition applies only to the control of emissions from planned MSS activities. Control devices required by this permit for emissions from planned MSS activities are limited to those types identified in this condition. Control devices shall be operated with no visible emissions except periods not to exceed a total of five minutes during any two consecutive hours. Each device used must meet all the requirements identified for that type of control device.

Controlled recovery systems identified in this permit shall be directed to an operating plant process or to a collection system that is vented through a control device meeting the requirements of this permit condition.

- A. Carbon Adsorption System (CAS).
 - (1) The CAS shall consist of two carbon canisters in series with adequate carbon supply for the emission control operation.
 - (2) The CAS shall be sampled downstream of the first can and the concentration recorded at least once every hour of CAS run time to determine breakthrough of the VOC. The sampling frequency may be extended using either of the following methods:
 - (a) It may be extended to up to 30 percent of the minimum potential saturation time for a new can of carbon. The permit holder shall maintain records including the calculations performed to determine the minimum saturation time.
 - (b) The carbon sampling frequency may be extended to longer periods based on previous experience with carbon control of a MSS waste gas stream. The past experience must be with the same VOC, type of facility, and MSS activity. The basis for the sampling frequency shall be recorded. If the VOC concentration on the initial sample downstream of the first carbon canister following a new

polishing canister being put in place is greater than 100 ppmv above background, it shall be assumed that breakthrough occurred while that canister functioned as the final polishing canister and a permit deviation shall be recorded.

- (3) The method of VOC sampling and analysis shall be by detector meeting the requirements of Special Condition No. 22.
- (4) Breakthrough is defined as the highest measured VOC concentration at or exceeding 100 ppmv above background. When the condition of breakthrough of VOC from the initial saturation canister occurs, the waste gas flow shall be switched to the second canister and a fresh canister shall be placed as the new final polishing canister within four hours. Sufficient new activated carbon canisters shall be maintained at the site to replace spent carbon canisters such that replacements can be done in the above specified time frame.
- (5) Records of CAS monitoring shall include the following:
 - (a) Sample time and date;
 - (b) Monitoring results (ppmv); and
 - (c) Canister replacement log.

B. Thermal Oxidizer.

- (1) The thermal oxidizer firebox exit temperature shall be maintained at not less than 1400°F and waste gas flows shall be limited to assure at least a 0.5 second residence time in the fire box while waste gas is being fed into the oxidizer.
- (2) The thermal oxidizer exhaust temperature shall be continuously monitored and recorded when waste gas is directed to the oxidizer. The temperature measurements shall be made at intervals of six minutes or less and recorded at that frequency.

The temperature measurement device shall be installed, calibrated, and maintained according to accepted practice and the manufacturer's specifications. The device shall have an accuracy of the greater of ± 0.75 percent of the temperature being measured expressed in degrees Celsius or $\pm 2.5^\circ\text{C}$.

C. The plant flare system.

- (1) The heating value and velocity requirements in 40 CFR § 60.18 shall be satisfied during operations authorized by this permit.
- (2) The flare shall be operated with a flame present at all times and/or have a constant pilot flame. The flame shall be continuously monitored by a thermal couple or an infrared monitor. The time, date, and duration of any loss of pilot flame shall be recorded. Each monitoring device shall be accurate to, and shall be calibrated at a frequency in accordance with, the manufacturer's specifications.
- (3) The holder of this permit shall maintain records of the calculated daily average heating value, in Btu/scf, of the total gas streams, including waste gases and supplemental fuel, sent to each flare for each operating day. This condition shall be satisfied by installing and maintaining a monitoring system which meets the requirements for highly reactive VOC (HRVOC) found in Chapter 115, Subchapter H, Division 1: Vent Gas Control Revised December 23, 2004.

D. Internal Combustion Engine.

- (1) The internal combustion engine shall have a VOC destruction efficiency of at least 99 percent.
 - (2) The engine must have been stack tested with butane to confirm the required destruction efficiency within the past 12 months. VOC shall be measured in accordance with the applicable EPA Reference Method during the stack test and the exhaust flow rate may be determined from measured fuel flow rate and measured O₂ concentration. A copy of the stack test report shall be maintained with the engine. There shall also be documentation of acceptable VOC emissions following each occurrence of engine maintenance which may reasonably be expected to increase emissions including O₂ sensor replacement and catalyst cleaning or replacement. Stain tube indicators specifically designed to measure VOC concentration shall be acceptable for this documentation, provided a hot air probe or equivalent device is used to prevent error due to high stack temperature, and three sets of concentration measurements are made and averaged. Portable VOC analyzers meeting the requirements of Special Condition No. 22 are also acceptable for this documentation.
 - (3) The engine shall be operated with an O₂ sensor-based air-to-fuel ratio (AFR) controller. Documentation for each AFR controller that the, manufacturer's, or supplier's recommended maintenance has been performed, including replacement of the O₂ sensor as necessary for O₂ sensor-based controllers shall be maintained with the engine. The O₂ sensor shall be replaced at least quarterly in the absence of a specific written recommendation.
- E. A liquid scrubbing system may be used upstream of carbon adsorption. A single carbon can or a liquid scrubbing system may be used as the sole control device if the requirements below are satisfied.
- (1) The exhaust to atmosphere shall be monitored continuously and the VOC concentration recorded at least once every 15 minutes when waste gas is directed to the scrubber.
 - (2) The method of VOC sampling and analysis shall be by detector meeting the requirements of Special Condition No. 22.A.
 - (3) An alarm shall be installed such that an operator is alerted when outlet VOC concentration exceeds 100 ppmv above background. The MSS activity shall be stopped as soon as possible when the VOC concentration exceeds 100 ppmv above background for more than one minute. The date and time of all alarms and the actions taken shall be recorded.
- F. A closed loop refrigerated vapor recovery system.
- (1) The vapor recovery system shall be installed on the facility to be degassed using good engineering practice to ensure air contaminants are flushed from the facility through the refrigerated vapor condensers and back to the facility being degassed. The vapor recovery system and facility being degassed shall enclosed except as necessary to insure structural integrity (such as roof vents on a floating roof tank).
 - (2) VOC concentration in vapor being circulated by the system shall be sampled and recorded at least once every 4 hours at the inlet of the condenser unit with an instrument meeting the requirements of Special Condition No. 22.
 - (3) The quantity of liquid recovered from the tank vapors and the tank pressure shall be monitored and recorded each hour. The liquid recovered must increase with each

reading and the tank pressure shall not exceed one inch water pressure while the system is operating.

Flares

27. This Special Condition applies only to the control of emissions from routine activities. Flares (EPNs 56-61- [4, 8, 9, 10, 12, 14, 20 and 22]) shall be designed and operated in accordance with the following requirements:

All flares shall be designed and operated in accordance with the following requirements:

- A. The flare systems shall be designed such that the combined assist natural gas and waste stream to each flare meets the 40 CFR § 60.18 specifications of minimum heating value and maximum tip velocity at all times when emissions may be vented to them.
- The heating value and velocity requirements shall be satisfied during operations authorized by this permit. Flare testing per 40 CFR § 60.18(f) may be requested by the appropriate regional office to demonstrate compliance with these requirements.
- B. The flare shall be operated with a flame present at all times and/or have a constant pilot flame. The pilot flame shall be continuously monitored by a thermocouple, infrared monitor, or ultraviolet monitor. The time, date, and duration of any loss of pilot flame shall be recorded. Each monitoring device shall be accurate to, and shall be calibrated at a frequency in accordance with, the manufacturer's specifications.
- C. The flare shall be operated with no visible emissions except periods not to exceed a total of five minutes during any two consecutive hours. This shall be ensured by the use of steam or air assist to the flare.
- D. The permit holder shall install a continuous flow monitor capable of measuring the flow rate over the full potential range of operation and composition analyzer system that provides a record of the vent stream flow and composition to the flare. The flow monitoring system must be capable of measuring the entire gas stream flow to the flare (i.e., all vent gas and supplemental fuel sources) and may consist of one or more flow measurements at one or more header locations. The composition monitoring system must be capable of determining the flow-weighted heating value for the entire gas stream to the flare (i.e., all vent gas and supplemental fuel sources) and may consist of one or more sampling locations at one or more header locations. Grab samples taken at least annually, or a reference heating value may be used for purchased natural gas in lieu of direct measurement. The flow monitor sensor(s) and analyzer(s) sample point(s) shall be installed in the vent stream(s) as near as possible to the flare inlet such that the total vent stream to the flare is measured and analyzed. Readings shall be taken at least once every 15 minutes and the average hourly values of the flow and composition (or Btu content) shall be recorded each hour. **(01/21)**

The monitors shall be calibrated or have a calibration check performed on an annual basis to meet the following accuracy specifications: the flow monitor shall be $\pm 5.0\%$, temperature monitor shall be $\pm 2.0\%$ at absolute temperature, and pressure monitor shall be ± 5.0 mm Hg.

Calibration of the analyzer shall follow the procedures and requirements of Section 10.0 of 40 CFR Part 60, Appendix B, Performance Specification 9, as amended through October 17, 2000 (65 FR 61744), except that the multi-point calibration procedure in Section 10.1 of Performance Specification 9 shall be performed at least once every calendar quarter instead of once every month, and the mid-level calibration check procedure in Section 10.2 of

Performance Specification 9 shall be performed at least once every calendar week instead of once every 24 hours. The calibration gases used for calibration procedures shall be in accordance with Section 7.1 of Performance Specification 9. Net heating value of the gas combusted in the flare shall be calculated according to the equation given in 40 CFR §60.18(f)(3) as amended through October 17, 2000 (65 FR 61744).

The monitors and analyzers shall operate as required by this section at least 95% of the time when the flare is operational, averaged over a rolling 12 month period. Flared gas net heating value and actual exit velocity determined in accordance with 40 CFR §60.18(f)(3) and 60.18(f)(4) shall be recorded at least once every hour.

- E. In addition, for the constituents monitored to determine net heating value and molecular weight, the owner or operator may elect to follow the calibration procedures recommended by the analyzer manufacturer. If the owner or operator elects to follow manufacturer's recommended procedures:

- (1) those calibration procedures must include, at a minimum, single point calibration checks at least once every calendar week to meet the acceptance criteria specified in Section 10.2 of Performance Specification 9 with certified standards of the top two non-HRVOC constituents affecting molecular weight and net heating value; and
- (2) the owner or operator shall include in the quality assurance plan (QAP) required under 30 TAC §115.726(a), manufacturer's information and data to demonstrate the accuracy and reliability of the analyzer for those monitored constituents for which routine calibration checks are not performed.

Additionally, the range of calibration standards for the HRVOCs and other constituents may be based on the typical concentrations observed rather than the full potential range of concentrations. Data must be included in the QAP required under 30 TAC §115.726(a) to demonstrate the accuracy of the analyzer at maximum potential concentrations outside of the proposed calibration range; and the executive director may specify additional calibration requirements during approval of the QAP under 30 TAC §115.726(a)(1)(B).

- F. If the on-line analyzer, measures concentrations on a dry basis, the results must be corrected for moisture when determining net heating value according to the requirements in 40 CFR §60.18(f)(3) or when determining mass rates using volumetric flow rates that are on a wet basis. The following methods may be used to determine moisture for this correction:

- (1) a continuous moisture analyzer installed, calibrated, maintained, and operated according to the manufacturer's recommendations;
- (2) assume saturated moisture conditions for the temperature and pressure at the sample extraction point in the flare header for conditions up to 20% moisture by volume;
- (3) assume 0% moisture for flare systems where moisture is not expected to be present due to the process nature of the vent streams routed to the flare; or
- (4) process information and engineering calculations for conditions, such as steaming operations, where moisture is expected to be greater than 20% by volume.

- G. The Flares 10, 12, 14, 20 and 22 (EPNs 56-61- [10, 12, 14, 20 and 22 respectively]) shall operate in accordance with Special Condition 27, Special Conditions 41 through 58, Attachment D of these Special Conditions, 40 CFR Part 63 Subpart YY, and Alternate Method of Control (AMOC) No. 145. Special Conditions 41 through 58 and Attachment D include the requirements established in the Consent Decree issued by the U.S. EPA filed on March 9, 2022, and identified as Civil Case No. 4:22-cv-737. If there is a conflict in

compliance with Special Condition 27, Special Conditions 41 through 58, Attachment D, MACT YY, and AMOC No. 145, then the most stringent requirement shall apply. **(09/23)**

- H. Flares 4, 8, and 9 (EPNs 56-61- [4, 8, and 9]) shall operate in accordance with 40 CFR 63 Subpart FFFF "National Emission Standards for Hazardous Air Pollutants: Miscellaneous Organic Chemical Manufacturing", Special Conditions 41 through 58, and Attachment D. If there is a conflict between Special Conditions 27.A through 27.F, MACT FFFF, Special Conditions 41 through 58, and Attachment D, the most stringent requirement shall apply. **(08/25)**

Fuel Gas

28. Fuel gas combusted at this facility is subject to the following requirements for fuel sulfur: **(4/24)**

- A. Fuel for the Unit Nos. 22 and 24 cracking furnaces except Unit 22 Cracking Furnace 9 (EPN 22-36-9), shall be plant fuel gas, tail gas, or sweet natural gas containing no more than 160 ppmv H₂S (hourly maximum) and 7 grains total sulfur per 100 dscf (12-month rolling average).
- B. Fuel for the Unit No. 33 cracking furnaces shall be plant fuel gas, tail gas, or sweet natural gas containing no more than 160 ppmv H₂S (hourly maximum) and 1.5 grains total sulfur per 100 dscf (12-month rolling average).
- C. Fuel for the Unit 22 Cracking Furnace 9 (EPN 22-36-9) shall be limited to natural gas, ethane, hydrogen, and/or plant/fuel/tail/vent gas containing no more than 160 ppmv H₂S (hourly maximum) and 5 grains total sulfur per 100 dscf (12-month rolling average).

For the refinery fuel gas, the permit holder shall install and operate a continuous H₂S monitoring system in a portion of the fuel gas system common to the combustion devices in accordance with Special Condition No. 12. For all other fuels, compliance shall be verified through sampling of fuel gas at least semi-annually. Fuel gas streams may be sampled individually, or a representative sample of blended fuel gas may be taken from the fuel gas header. For natural gas and hydrogen, tariff sheets documenting the sulfur content of the fuel may be retained in lieu of performing sampling.

- D. Pilot and supplemental fuel for the Unit Nos. 10, 21, 22, 24 and 33 Flares (EPNs 56-61 – [8, 9, 10, 12, 14, 20 and 22] shall be sweet natural gas, tail gas or plant fuel gas containing no more than 0.25 grain H₂S and 5 grains total sulfur per 100 dscf.
- E. Fuel for the Propylene Compressor Turbine (EPN 22-95-27) shall be pipeline-quality, sweet natural gas.
- F. Use of any other fuel will require an amendment to the permit.

Visible Emissions

29. Opacity of emissions from the Ethylene Cracking Furnaces shall comply with the following requirements: **(4/24)**

- A. Opacity of emissions from the Ethylene Cracking Furnaces in Unit Nos. 22, 24, and 33, except Unit 22 Cracking Furnace 9 (EPNs 22-36-9 and 22-36-9DC), and each decoking cyclone shall not exceed 5 percent averaged over a five-minute period except for those periods described in 30 TAC § 111.111.

- B. Opacity of emissions from the Unit 22 Cracking Furnace 9 (EPNs 22-36-9) shall not exceed 5 percent averaged over any six minute period.

Opacity shall be determined by EPA Test Method 9 during the initial compliance testing and at least once per year thereafter. In lieu of performing a required opacity test, the permit holder may verify that there are no visible emissions as determined by EPA Test Method 22.

- C. Opacity of emissions from the Unit 22 Cracking Furnace 9 Decoke Stack (EPNs 22-36-9DC) shall not exceed 5 percent averaged over any six minute period.

Opacity shall be determined by EPA Test Method 9 during Furnace 9 decoking activities and shall take place during each decoking cycle. In lieu of performing a required opacity test, the permit holder may verify that there are no visible emissions as determined by EPA Test Method 22.

Cooling Towers

30. The holder of this permit shall perform sampling and other testing, as necessary, to establish the lbs/hr of VOC being emitted into the atmosphere from the cooling towers associated with this permit (EPN 54-22- [5, 6, 7, 9, 12, 13 and 17]). All sampling and testing methods shall be subject to approval of the TCEQ Executive Director prior to their implementation. In addition, for cooling towers operated with an internal coil shed (EPN 54-22- [6, 7 and 9]), testing methods must be submitted to and approved by the TCEQ Regional Office before implementation. For standard cooling towers (i.e., those without internal heat exchangers) (EPN 54-22- [5, 12, 13, and 17]), the VOC concentration (ppmv) in the exhaust from the air stripping testing system or equivalent testing system and the corresponding lbs of strippable VOC/gallon (gal) of cooling water shall be reported. For cooling towers operated with an internal coil shed, the VOC concentration (ppmv) in the exhaust from the coil shed vents shall be reported. For Cooling Tower 7 (EPN 54-22-7), both the VOC concentration (ppmv) in the exhaust from the air stripping testing system and the exhaust from the coil shed vents shall be reported. These shall be used to determine the level (either ppmv or lb/VOC/gal) at which a leak into cooling water or coil shed exhaust shall be assumed in the ongoing monitoring program. Within 30 days after completion of sampling, copies of the test report shall be kept at the plant site.
31. For Standard Cooling Towers (EPN 54-22- [5, 12, 13, and 17]), the VOC associated with cooling tower water shall be monitored monthly with a portable organic vapor analyzer/approved air stripping system or equivalent. For cooling towers operated with an internal coil shed (EPN 54-22- [6, 7 and 9]), the VOC concentration in the vents from the coil shed shall be monitored monthly with an approved VOC analyzer or equivalent. Determination of VOC emissions from Cooling Tower 7 (EPN 54-22-7) shall include monitoring of both the cooling tower water and the air from the coil shed vents as described above. The appropriate equipment shall be maintained so as to minimize fugitive VOC emissions from the cooling towers. Faulty equipment shall be repaired at the earliest opportunity but no later than the next scheduled shutdown of the process unit in which the leak occurs. The results of the monitoring and maintenance efforts shall be recorded, and such records shall be maintained for a period of five years. The records shall be made available to the TCEQ Executive Director upon request. Each cooling tower shall be equipped with mist eliminators.

Sampling and monitoring as required by 30 TAC Chapter 115 (last modified December 23, 2004) may be performed in lieu of the requirements in Special Condition Nos. 30 and 31 as long as the results are adequate in showing compliance with the VOC emission limits of this permit.

32. Ongoing compliance with the TPY PM₁₀ cap for Cooling Towers (EPNs 54-22- [5, 6, 7, 9, 12, 13, and 17]) in the MAERT shall be demonstrated by the permit holder as follows. **(07/22)**
- A. Cooling towers with maximum recirculation rates equal to or less than 50,000 gallons per minute (including EPNs 54-22-[5, 6, 7, and 9]) shall be monitored as follows:
- (1) Cooling water shall be sampled at least once per week for TDS.
 - (2) A sample of cooling tower water shall be taken at a location that is representative of the water stream(s) entering the cooling tower. The analysis shall be conducted using the approved methods below:
 - (a) The analysis method for TDS shall be EPA Method 160.1, ASTM D5907, and SM 2540 C [SM - 19th edition of Standard Methods for Examination of Water]. Water samples should be capped upon collection, and transferred to a laboratory area for analysis.
 - (b) Alternate sampling and analysis methods may be used to comply with D(1) with written approval from the TCEQ Regional Director. If approved by the TCEQ Regional Director, the permit holder shall submit a permit application to incorporate the alternative sampling and analysis method into the permit within 2 months of the date of written approval.
 - (c) Records of all instrument calibrations and test results and process measurements used for the emission calculations shall be retained.
- B. Cooling towers with maximum recirculation rates greater than 50,000 gallons per minute (including EPNs 54-22-[12, 13, and 17]) shall be monitored as follows:
- (1) Cooling towers shall be analyzed for particulate emissions using one of the following methods:
 - (a) Cooling water shall be sampled at least once per day for total dissolved solids (TDS); or
 - (b) TDS monitoring may be reduced to weekly if conductivity is monitored daily and TDS is calculated using a ratio of TDS-to-conductivity (in ppmw per $\mu\text{mho/cm}$ or ppmw/siemens). The ratio of TDS-to-conductivity shall be determined by concurrently monitoring TDS and conductivity on a weekly basis. The permit holder may use the average of two consecutive TDS-to-conductivity ratios to calculate daily TDS; or
 - (c) TDS monitoring may be reduced to quarterly if conductivity is monitored daily and TDS is calculated using a correlation factor established for each cooling tower. The correlation factor shall be the average of nine consecutive weekly TDS-to-conductivity ratios determined using (b) above provided the highest ratio is not more than 10% larger than the smallest ratio.
 - (d) The permit holder shall validate the TDS-to-conductivity correlation factor once each calendar quarter. If the ratio of concurrently sampled TDS and conductivity is more than 10% higher or lower than the established factor, the permit holder

shall increase TDS monitoring to weekly until a new correlation factor can be established.

- (2) A sample of cooling tower water shall be taken at a location that is representative of the water stream(s) entering the cooling tower. The analysis shall be conducted using the approved methods below:
 - (a) The analysis method for TDS shall be EPA Method 160.1, ASTM D5907, or SM 2540 C [SM - 19th edition of Standard Methods for Examination of Water]. Water samples should be capped upon collection, and transferred to a laboratory area for analysis.
 - (b) The analysis method for conductivity shall be either ASTM D1125-14 Test Method A (field or routine laboratory testing) or ASTM D1125-14 Test Method B (continuous monitor). The analysis may be conducted at the sample site or with a calibrated process conductivity meter. If a conductivity meter is used, it shall be calibrated at least annually. Documentation of the method and any associated calibration records shall be maintained.
 - (c) Alternate sampling and analysis methods may be used to comply with D(1) and D(2) with written approval from the TCEQ Regional Director. If approved by the TCEQ Regional Director, the permit holder shall submit a permit application to incorporate the alternative sampling and analysis method into the permit within 2 months of the date of written approval.
 - (d) Records of all instrument calibrations and test results and process measurements used for the emission calculations shall be retained.
- C. The TDS concentrations shall be used to calculate mass emission rates in TPY of PM₁₀ due to drift loss from each cooling tower using the maximum recirculation rates, percent drift losses and calculation procedure included in August 2003 revisions to Appendix E of the December 2002 permit application. The PM₁₀ mass emission rate calculations shall be on a 12-month rolling average basis and shall be updated at least quarterly.
- D. The sampling data required by this special condition shall be recorded and shall include:
 - (1) Location of the sampling point for the cooling tower recirculating water and date of sampling.
 - (2) If measured and converted to TDS, the measured conductivity in ohms.
 - (3) The TDS in ppm in the recirculating water of each cooling tower.
 - (4) Calculated 12-month rolling average PM₁₀ emission rates in TPY for each cooling tower and the total for all cooling towers.

Recordkeeping

33. The following recordkeeping requirements apply. All records shall be kept on-site in a current and complete condition, and shall be made available upon request to representatives of the TCEQ.
 - A. All emissions calculated to determine an emission cap shall be calculated and the rolling 12-month emissions shall be updated on a monthly basis to provide an accumulated total annual emission for comparison with the established emission caps. Therefore, all furnace, flare, cooling tower, and storage tank emissions for the following air contaminants: benzene,

CO, NO_x, PM/PM₁₀, SO₂, H₂S, and VOC must be calculated and the rolling 12-month calculation and accumulated total must be recorded.

- B. Records of MSS emissions as specified in Special Condition Nos. 19, 21, 22, 23, 24, 25, and 26.
- C. Records shall be maintained of all tank refilling operations as part of any MSS activity. These records shall include the date, tank identification, filling rate and type of material, and control method.

Records shall be maintained when fixed roof tanks are ventilated without control as part of any MSS activity. These records shall include the date, name and type of material, and VOC partial pressure.

- D. Records of Process Fugitive Monitoring as specified in Special Condition Nos. 14 - 18.

Abrasive Blasting and Painting Operations

- 34. Blasting operations shall be limited to the following:

- A. Blasting operations shall be limited to boiler slag or other low silica abrasive grit. Silica sand shall not be used in any blasting operations.
- B. New grit shall be maintained in covered storage or a closed feed hopper except for delivery and replacement operations. Spent grit shall not be allowed to accumulate in uncovered mounds which may contribute to off-property fugitive emissions.
- C. Grit usage shall be limited to the following:

Activity	Pounds grit per hour
Routine Maintenance	2,000
Turnaround Maintenance	3,000

- 35. Paint/thinner usage shall be limited to the following:

Activity	What	Gallons per hour
Equipment Coating	Paint/thinner	6
Routine Equipment Cleanup	Thinner	8
Turnaround Equipment Cleanup	Thinner	12

- 36. Paint Operations Substitution

Materials other than those listed within the amendment application and related submissions, PI-1 dated March 29, 2005, may be used for painting operations provided that all of the following criteria are satisfied:

- A. The replacement material shall serve the same basic function as the current material, and the emissions shall be emitted from the same source as the current material.

- B. The total ingredients of the replacement and current material are known (i.e., weight percents add to 100 percent).
- C. For any ingredient air contaminant within a replacement material, if the total maximum emission rate from all sources in the permit is less than 0.04 pound per hour (lb/hr) and the effects screening level (ESL) is greater than or equal to 2 µg/m³, it shall be exempt from parts D, E, and F of this special condition.

- D. Applicability for this special condition is dependent upon satisfying the following condition:

$$\frac{(ER2)}{(ESL2)} \leq \frac{(ER1)}{(ESL1)}$$

Where:

Emission rate (ER) 1 is the maximum ER of the air contaminant within the current material (lb/hr) as permitted,

ER2 is the total maximum ER of the air contaminant found in the new material (lb/hr), (the total includes the emissions to be added and the total previously authorized, if authorized elsewhere in the permit)

ESL1 is the ESL for the air contaminant within the current material (µg/m³), and

ESL2 is the ESL for the air contaminant within the replacement material (µg/m³).

- E. The ESL for the material shall be obtained from the current TCEQ ESL list or by written request to the TCEQ Toxicology Section. The ESL shall be obtained in writing prior to the use of the replacement material.
 - F. Emission calculations and records must be maintained to demonstrate compliance with this special condition.
 - G. This special condition allows for changes in material formulations and does not allow for any increase in total air contaminant emissions from any source covered by the MAERT.
- 37. All paint/thinner spills shall be cleaned up as soon as possible and all waste materials, rags, and other absorbent materials shall be stored in sealed containers until removed from the site by a licensed disposal service.
 - 38. Records shall be maintained of monthly paint and blasting grit usage rates.

Compliance Assurance Monitoring (CAM)

- 39. The following requirements apply to capture systems for the control devices listed on the table:

Emission Point Number	Source Name
56-61-4	Unit 10D/18 Process Flare (Flare 4)
56-61-8	Unit 10ABC, 12 Low-Pressure Flare (Flare 8)
56-61-9	Unit 10ABC, 12 High-Pressure Flare (Flare 9)

Emission Point Number	Source Name
56-61-10	Unit 21, 22 Low-Pressure Flare (Flare 10)
56-61-12	Unit 22 High-Pressure Flare (Flare 12)
56-61-14	Unit 24 High-Pressure Flare (Flare 14)
56-61-20	Unit 24 Low-Pressure Flare (Flare 20)
56-61-22	Unit 33 Process Flare (Flare 22)

A. The operator shall perform the following:

- (1) Conduct a once a month visual, audible, and/or olfactory inspection of the capture system to verify there are no leaking components in the capture system; or
- (2) At least once in every 12-month period, verify the capture system is leak-free by inspecting in accordance with 40 CFR Part 60, Appendix A, Test Method 21. Leaks shall be indicated by an instrument reading greater than or equal to 500 ppmv above background.
- (3) As an exception to A.(1) of this condition, for parts of the capture system which are unsafe to approach, the holder of this permit may choose to conduct from outside the unsafe area a once a month visual inspection of the capture system to verify there are no leaking components in the capture system. This alternate inspection is a substitute for the inspection required in A.(1) of this condition. Equipment inspected with this alternate inspection method is subject to the following:
 - (a) Equipment must have been unsafe to approach at least twenty days of the month.
 - (b) Equipment which may be unsafe to approach is listed in the table:

AREA	EQUIPMENT	LOCATION
33.1	FLARE 22	UNIT 33 FLARE YARD @ FLARE ON 1ST LEVEL
33.1	FLARE 22	UNIT 33 FLARE YARD @ BELOW 2ND LEVEL OFF FLARE
24A	FLARE 20	IN 24 FLARE YARD @ SMALL FLARE ON FIRST LVL.

- (c) Instances when inspection has been done using this alternate inspection method shall be noted in the record of the inspections.

B. If there is a bypass for the control device, comply with either of the following requirements:

- (1) Install a flow indicator that records and verifies zero flow at least once every fifteen minutes immediately downstream of each valve that if opened would allow a vent stream to bypass the control device and be emitted, either directly or indirectly, to the atmosphere; or
- (2) Once a month, inspect the valves, verifying the position of the valves and the condition of the car seals prevent flow out the bypass.

A deviation shall be reported if the monitoring or inspections indicate bypass of the control device. A bypass does not include analyzer vents that are authorized,

highpoint bleeder vents, low point drains, or rupture discs followed by pressure relief valves if the pressure between them is monitored and recorded at least weekly.

- C. Records of the inspections required shall be maintained and if the result of any of the above inspections is not satisfactory, the permit holder shall promptly take necessary corrective action.

Permit by Rule

40. The following sources and/or activities are authorized under a Permit by Rule (PBR) by Title 30 Texas Administrative Code Chapter 106 (30 TAC Chapter 106). These lists are not intended to be all inclusive and can be altered without modifications to this permit. **(08/25)**

Authorization	Source or Activity
PBR Registration No. 75479	Unit 33 air compressor engine (EPN: 33AIRCOMP4)
PBR Registration No. 134337	Installation of Unit 24 air compressor Engines No. 5-7 (EPNs: 24AIRCOMP5, 24AIRCOMP6, 24AIRCOMP7)
PBR Registration No. 159600	Authorization of two tote tanks (EPNs U22-4H4 and U22-20Y104)
PBR Registration No. 160127	Authorization of five tote tanks (EPNs U33SUEZ20Y14, U33SUEZ20Y25, U33SUEZ20Y98N, U33SUEZ20Y104, and U33SUEZOS9990)
PBR Registration No. 160337	Authorization of a storage tote (EPN U21-4H4 TK)
PBR Registration No. 160555	Authorization of a Unit 24 Suez Tank (EPN U24SUEZ20Y14)
PBR Registration No. 163847	Authorization of three storage totes (EPNs U24SUEZ20Y14, U24SUEZ20Y25, and U24SUEZ20Y3161A169357)
PBR Registration No. 164808	Authorization of one tote tank (EPN U33SUEZ3161)
PBR Registration No. 166521	Authorization of a diesel generator engine (EPN BSENGINE)
PBR Registration No. 166728	Authorization of air compressor diesel engines (EPNs 24AIR3, 24AIR4, and 33AIR5)
PBR Registration No. 166729	Authorization of two storage totes (EPNs DEC4TOTE and OWSTOTE)
PBR Registration No. 166866	Authorization of five storage totes (EPNs DSGtote, CGCtote, CGCtote_2, 33-95-14, DEC3tote, and DEC3tote_2)
PBR Registration No. 168521	Authorize Process Fugitive emissions from EPNs: 10.1-0-0/Unit 10AC, 10.2-0-0/Unit 10D, 12-0-0/Unit 12, 21-0-0 /Unit 21, 22-0-0/Unit 22, 24-0-0/Unit 24, 33-0-0/Unit 33

Authorization	Source or Activity
PBR Registration No. 169357	Authorization of five diesel pump engines (EPNs 22OWSENG, NGL_DITCH, 24OWSENG, 12OWSENG_1, 12OWSENG_2, and 12OWSENG CAP)
PBR Registration No. 169684	Authorization of piping components (EPN: 24.1-0-0)
PBR Registration No. 171577	Authorization of piping components (EPN: 33-0-0)
PBR Registration No. 172095	Authorization of piping components (EPN: 33-0-0)
PBR Registration No. 172315	Authorization of piping components (EPN: 10.1-0-0, 10.2-0-0, 12-0-0, 18-0-0, 21-0-0, 22-0-0, 24-0-0, 33-0-0)
PBR Registration No. 172608	Authorization of piping components (EPN: 24.1-0-0)
PBR Registration No. 173085	Authorization of piping components (EPNs: 22-0-0, 24-0-0)
PBR Registration No. 173212	Authorization of piping components (EPNs: 24-0-0, 24-95-300)
PBR Registration No. 173362	Authorize emissions from EPN 24-0-0 / Unit 24 Process Fugitives and EPN 24tote / Unit 24 Additive Tote
PBR Registration No. 173591	Authorization of additive totes and piping components (EPNs: U22_EC3267, U22_EC3144, 95-250, 21-0-0, 22-0-0, 95-057)
PBR Registration No. 173601	Authorization of additive totes and piping components (EPNs: U24_EC3053, U24_EC3087, U24_EC3267, U24_EC3268, 24-0-0)
PBR Registration No. 174065	Authorization of piping components (EPN: 10.3-0-0)
PBR Registration No. 174295	Authorization of additive tote and piping components (EPNs: U24_EC3054, 24-0-0))
PBR Registration No. 174706	Authorization of piping components (EPN: 10.1-0-0)
PBR Registration No. 175608	Authorize EPN 24-0-0 / Unit 24 and EPN 24.1-0-0 / Unit 24.1 Process Fugitives
PBR Registration No. 175856	Authorize Process Fugitive emissions from EPNs: 10.2-0-0 / Unit 10D, 12-0-0 / Unit 12, 24-0-0 / Unit 24, and 33-0-0 / Unit 33
PBR Registration No. 176055	Authorize EPN 24-0-0 / Unit 24 Process Fugitives Emissions
PBR Registration No. 176187	Authorize EPN 10.1-0-0/Unit 10AC Process Fugitives Emissions
PBR Registration No. 176313	Authorize EPN 22-0-0 / Unit 22 and EPN 24-0-0 / Unit 24 Process Fugitives Emissions
PBR Registration No. 176512	Authorize EPN 10.1-0-0/Unit 10AC Process Fugitives Emissions
PBR Registration No. 176622	Authorize Process Fugitive emissions from EPNs: 18-0-0 / Unit 18, 24-0-0 / Unit 24, and 33-0-0 / Unit 33

Special Conditions Applicable to the Flares

41. Installation and Operation of Monitoring and Control Systems on Flares 4, 8, 9, 10, 12, 14, 20, and 22 (EPNs 56-61-4, 56-61-8, 56-61-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, and 56-61-22, respectively). **(09/23)**
 - A. The plant site must install and commence operation of the instrumentation, controls, and monitoring systems set forth in Special Conditions 42–45 for the following Flares: Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22) except for Newly Installed Flares and Portable Flares installed after June 2, 2022.
 - B. The plant site must operate the instrumentation, controls, and monitoring systems for Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22) in accordance with Special Conditions 47-49.
 - C. Newly Installed Flares and Portable Flares. By no later than the date that any Newly Installed Flare or Portable Flare installed after June 2, 2022 is In Operation and Capable of Receiving Waste, Supplemental, and/or Sweep Gas, the plant site must have in place and commence operation of the instrumentation, controls, and monitoring systems set forth in Special Conditions 41-44, as specified for Steam-Assisted Flares and Air-Assisted Flares. The plant site must operate the instrumentation, controls, and monitoring systems for Newly Installed Flares and Portable Flares installed after June 2, 2022 in accordance with Special Conditions 41-45 during all times when the Flare is In Operation and Capable of Receiving Waste, Supplemental, and/or Sweep Gas.
42. Vent Gas, Assist Steam, and Assist Air Monitoring Systems. **(09/23)**
 - A. For Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22), the plant site must install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the volumetric flow rate of Vent Gas in the header or headers feeding that flare. This system must also be able to continuously analyze pressure and temperature at each point of Vent Gas flow measurement. Different flow monitoring methods may be used to measure different gaseous streams that make up the Vent Gas provided that the flow rates of all gas streams that contribute to the Vent Gas are determined. Flow must be calculated in scfm.
 - B. For steam assisted Flares 4 (EPN 56-61-4), 8 (EPN 56-61-8), 9 (EPN 56-61-9), 10 (EPN 56-61-10), 12 (EPN 56-61-12), and 22 (EPN 56-61-22) the plant site must install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the volumetric flow rate of Assist Steam used with each Steam-Assisted Flare. This system must also be able to continuously analyze the pressure and temperature of Assist Steam at a representative point of steam flow measurement. Flow must be calculated in scfm.
 - C. For air assisted Flares 14 (EPN 56-61-14) and 20 (EPN 56-61-20), the plant site must install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the volumetric flow rate of Assist Air used with each Air-Assisted Flare. If premix assist air and Perimeter Assist Air are both used, the plant site must install, operate, calibrate, and maintain a monitoring system capable of separately continuously

- measuring, calculating, and recording the volumetric flow rate of pre-mix assist air and Perimeter Assist Air used with that flare. Continuously monitoring fan speed or power and using fan curves is an acceptable method for continuously monitoring Assist Air flow rates.
- D. Each flow rate monitoring system (whether for a Steam-Assisted Flare or an Air-Assisted Flare) must be able to correct for the temperature and pressure of the system and output parameters in Standard Conditions.
- E. In lieu of a monitoring system that directly measures volumetric flow rate, the plant site may choose from the following additional options for monitoring any gas stream:
- (1) Mass flow monitors may be used for determining the volumetric flow rate of Assist Steam provided that the plant site converts the mass flow rates to volumetric flow rates pursuant to the methodology in Step 2 of Appendix 1.2;
 - (2) Mass flow monitors may be used for determining the volumetric flow rate of Vent Gas, provided the plant site determines the molecular weight of such Vent Gas using compositional analysis data collected pursuant to the monitoring method specified in Special Condition 45.A and provided that the plant site converts the mass flow rates to volumetric flow rates pursuant to the methodology in Step 2 of Appendix 1.2; and
 - (3) Continuous pressure/temperature monitoring system(s) and appropriate engineering calculations may be used in lieu of a continuous volumetric flow monitoring system provided the molecular weight of the gas is known and provided the plant site complies with the methodology in Step 2 of Appendix 1.2 for calculating volumetric flow rates. For Vent Gas, the plant site must determine molecular weight using compositional analysis data collected pursuant to the monitoring method specified in Special Condition 45.A.
43. Assist Steam Control Equipment. The plant site must install and commence operation of equipment, including, as necessary, main and trim control valves and piping which enables the plant site to control Assist Steam flow to each Steam-Assisted Flare in a manner sufficient to ensure compliance with these provisions. **(09/23)**
44. Video Camera. The plant site must install and commence operation of a video camera that is capable of monitoring and recording, in digital format, the flame of and any Smoke Emissions from Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22). It is not a violation of this Special Condition or Special Condition 48, however, if a Flare video camera cannot discern the Flare Combustion Zone and/or any Smoke Emissions at a Flare subject to these provisions during periods of weather conditions such as fog or snow, provided that recordings are created and retained during these time periods. **(09/23)**
45. Vent Gas Compositional Monitoring or Direct Monitoring of Net Heating Value of Vent Gas. For Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22), the plant site must either determine the concentration of individual components in the Vent Gas or directly monitor the Net Heating Value of the Vent Gas (NHV_{vg}) in compliance with one of the methods specified in this Special Condition. The plant site may elect to use different monitoring methods (of the methods provided in this Special Condition) for different gaseous streams that make up the Vent Gas, provided the composition or Net Heating Value of all gas streams that contribute to the Vent Gas are determined. The plant site must: **(09/23)**

- A. Install, operate, calibrate, and maintain a monitoring system capable of continuously measuring (*i.e.*, at least once every 15 minutes), calculating, and recording the individual component concentrations present in the Vent Gas; or
- B. Install, operate, calibrate, and maintain a calorimeter capable of continuously measuring (*i.e.*, at least once every 15 minutes), calculating, and recording the NHV_{vg} at Standard Conditions. If the plant site elects this method, the plant site may install, operate, calibrate, and maintain a monitoring system capable of continuously measuring, calculating, and recording the hydrogen concentration in the Vent Gas. The sample extraction point of the calorimeter may be located upstream of the introduction of Supplemental Gas or Sweep Gas or Purge Gas if the composition and flow rate of all such downstream gas(es) is known, and if these known values are then used in the calculation of the Net Heating Value of Vent Gas.
- C. If the plant site elects the method in Special Condition 45.B above, and the Net Heating Value of the Vent Gas exceeds the upper calibrated span of the calorimeter on Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), or Flare 22 (EPN 56-61-22), then the plant site must use the value of the upper calibrated span of that calorimeter for calculating the NHV_{vg} at Standard Conditions until the Net Heating Value of the Vent Gas returns to within the measured calibrated span. Use of this method will not constitute instrument system downtime for the period of time that the Net Heating Value of the Vent Gas exceeds the upper calibrated span of the calorimeter.

Direct compositional or Net Heating Value monitoring is not required for purchased ("pipeline quality") natural gas streams. The Net Heating Value of purchased natural gas streams may be determined using annual or more frequent grab sampling at any one representative location. Alternatively, the Net Heating Value of any purchased natural gas stream can be assumed to be 920 BTU/scf.

- 46. Instrumentation and Monitoring Systems: Optional Equipment for any Covered Flare. To continuously measure and calculate flow of all Pilot Gas to Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), or Flare 22 (EPN 56-61-22) in scfm, the plant site, at its option, may either: a) install (if not already installed) an instrument, or b) use a restriction orifice and pressure measurements. The plant site may use the data generated by this instrument or restriction orifice as part of the calculation of the Net Heating Value of the Combustion Zone Gas. **(09/23)**
- 47. Instrumentation and Monitoring Systems: Specifications, Calibration, Quality Control, and Maintenance. The plant site must comply with Special Conditions 47.A through 47.E, provided, however, the plant site may elect instead to utilize exemptions set forth in 40 C.F.R. § 63.1103(e)(4)(i) through (ix). **(09/23)**
 - A. The instrumentation and monitoring systems identified in Special Conditions 42 and 45 must:
 - (1) Meet or exceed all applicable minimum accuracy, calibration and quality control requirements specified in Table 13 of 40 C.F.R. Part 63, Subpart CC;
 - (2) Have an associated readout (*i.e.*, a visual display or record) or other indication of the monitored operating parameter that is readily accessible onsite for operational control or inspection by the plant site;

- (3) Be capable of measuring the appropriate parameter over the range of values expected for that measurement location; and
 - (4) Have an associated data recording system with a resolution that is equal to or better than the required instrumentation/system accuracy.
 - B. The plant site must operate, maintain, and calibrate each instrument and monitoring system identified in Special Conditions 42 and 45 according to a monitoring plan that contains the information listed in 40 C.F.R. § 63.671(b)(1)-(5). However, if the plant site is determining NHV_{CZ} using a process mass spectrometer, the plant site may use the methods established for determining NHV_{CZ} in the February 5, 2018 letter to representatives of Extrel CMS, LLC and AMETEK, Energy and Process Division from Steffan M. Johnson, Group Leader, Measurement Technology Group, Office of Air Quality Planning and Standards (attached as Appendix 2.1) in lieu of complying with 40 C.F.R. § 63.671(b)(1)-(5)'s requirements for determining NHV_{CZ} using Gas Chromatographs.
 - C. All gas chromatograph monitoring systems used to comply with Special Condition 45.A must also meet the requirements of 40 C.F.R. § 63.671(e)(1) through (3) (Additional Requirements for Gas Chromatographs) regardless of whether the Gas Chromatographs are complying with 40 C.F.R. § 63.671(e)(1)-(3) or the methods outlined in Appendix 2.1.
 - D. For each instrumentation and monitoring system required by Special Conditions 42 and 45, the plant site must comply with the out-of- control procedures described in 40 C.F.R. § 63.671(c)(1) and (2), and with the data reduction requirements specified in 40 C.F.R. § 63.671(d)(1) through (3).
 - E. The language in 40 C.F.R. § 63.671, Table 13 of 40 C.F.R. Part 63, Subpart CC, or in any regulatory provision cross-referenced in 40 C.F.R. § 63.671 or Table 13 of 40 C.F.R. Part 63, Subpart CC, that limits the applicability of these regulatory requirements to periods when "regulated material" (as defined in 40 C.F.R. § 63.641) is routed to a Flare, is not applicable for purposes of this permit. In addition, for purposes of this permit, the language in 40 C.F.R. § 63.671, Table 13 of 40 C.F.R. Part 63, Subpart CC, or in any regulatory provision cross-referenced in 40 C.F.R. § 63.671 or Table 13 of 40 C.F.R. Part 63, Subpart CC, that refers to a continuous parametric monitoring system will instead be read to refer to the instrumentation and monitoring systems required by Special Conditions 42 and 45.
- 48. Instrumentation and Monitoring Systems: Recording and Averaging Times. The instrumentation and monitoring systems identified in Special Conditions 42 and 44-45 must be able to produce and record data measurements and calculations for each parameter at the following time intervals:
(09/23)

Instrumentation and Monitoring System	Recording and Averaging Times
Vent Gas, Assist Steam Flow, Assist Air Flow, and (if installed) Pilot Gas Flow Monitoring Systems	Measure continuously and record 15-minute block averages
Vent Gas Compositional Monitoring (if using the methodology in Special Condition 45.A.)	Measure no less than once every 15 minutes and record that value
Vent Gas Net Heating Value Analyzer (if using the methodology in Special Condition 45.B.)	Measure continuously and record 15-minute block averages

Video Camera	Record at a rate of no less than 4 frames per minute

The term “continuously” means to make a measurement as often as the manufacturer’s stated design capabilities of the flow monitors (for Vent Gas, Assist Steam, Assist Air, and (if installed) Pilot Gas) and the Vent Gas Net Heating Value Analyzers during each fifteen (15) minute block period, but in no case shall the flow monitors or the Vent Gas Net Heating Value Analyzers make less than one measurement in each fifteen (15) minute block period. The measurement results are then averaged and recorded to represent each fifteen (15) minute block period. Nothing in this Special Condition prohibits the plant site from setting up process control logic that uses different averaging times from those in this table, provided that the recording and averaging times in this table are available and used for determining compliance with this permit.

49. Instrumentation and Monitoring Systems: Operation. The plant site must operate each of the instruments and monitoring systems required by Special Conditions 42 and 44-45 and collect data on a continuous basis when Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), or Flare 22 (EPN 56-61-22) is In Operation and Capable of Receiving Sweep, Supplemental, and/or Waste Gas, except for: a) the periods of Instrument Downtime specified in Special Conditions 57.A-57.D. **(09/23)**

Limitations on Flaring

50. The plant site must comply with the following limitations on flaring for Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22): **(09/23)**
 - A. 365-Day Rolling Average. By no later than June 2, 2023, the plant site may not flare more than 2.17 million scfd of Vent Gas on a 365-Day rolling average cumulatively (*i.e.*, the total, combined amount of Vent Gas) from Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22), rolled daily. For each limit, each Day that the 365-Day rolling average limit is exceeded shall constitute one violation of this special condition.
 - B. Hourly Limit. Vent Gas flow cumulatively (*i.e.*, the total, combined amount of Vent Gas) from Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22) may not exceed 1.05 million scfh during any hour. Any hour during which Vent Gas flow equals or exceeds the applicable hourly limit shall constitute a violation of this permit unless the exceedance of either hourly limit occurred during a Turnaround or Force Majeure event. Notwithstanding the preceding sentence, exceedances of the applicable hourly limit during Turnarounds shall be a violation of this permit when the flares have exceeded their hourly limit during Turnarounds for more than 1,765 hours in a 5-year rolling period.
51. For the purposes of calculating the 365-Day rolling averages set forth in Special Condition 50.A, the following shall apply: **(09/23)**
 - A. Vent Gas flows occurring in the 365-Day averaging period during an event that is determined by EPA to be a Force Majeure or to be an External Utility Loss may be excluded from the

Vent Gas 365-Day rolling average calculation to the extent that the flows were caused by the Force Majeure event or the External Utility Loss;

- B. The volume of Vent Gas flows that are greater than 1.05 million scfh cumulatively (*i.e.*, the total, combined amount of Vent Gas) from Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22) may be excluded from the Vent Gas 365-Day rolling average calculation;
- C. The volume of Vent Gas flows that are greater than 0.13 million scfh during any hour in the 365-Day rolling averaging period when a Turnaround is occurring may be excluded from the Vent Gas 365-Day rolling average calculation. Notwithstanding the preceding sentence, Turnaround hours with flows that exceed 0.13 million scfh must be included in the 365-Day rolling average calculation once Turnaround hours with greater than 0.13 million scfh in Vent Gas flow exceed, 1,765 hours in a 5-year rolling period. During any Turnaround hours the plant site proposes to be excluded from the 365-Day rolling average calculation, the plant site must make best efforts to reduce Vent Gas flared.

Flare Combustion Efficiency

- 52. General Emission Standards Applicable to Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22). The plant site must comply with the requirements set forth in this special condition at each Flare at all times when that Flare is In Operation. **(09/23)**
 - A. Operation during Emissions Venting. The plant site must operate Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22) at all times when emissions may be vented to them.
 - B. No Visible Emissions. The plant site must specify the smokeless design capacity of Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22) and operate with no Visible Emissions when the Flare is In Operation and the Vent Gas flow is less than the smokeless design capacity of the Flare. The plant site must monitor, as specified below in Paragraphs 52.B(1) or 52.B(2), for Visible Emissions from each Flare while it is In Operation. An initial Visible Emissions demonstration must be conducted using an observation period of 2 hours using Method 22 at 40 C.F.R. Part 60, Appendix A–7. Subsequent Visible Emissions observations must be conducted using either method listed in Paragraphs 52.B(1) or 52.B(2). The plant site must record and report any instances where Visible Emissions are observed for more than 5 minutes during any 2 consecutive hours as specified in 40 C.F.R. § 63.655(g)(11)(ii).
 - (1) At least once per Day, the plant site must conduct Visible Emissions observations using an observation period of 5 minutes using Method 22 at 40 C.F.R. Part 60, Appendix A–7. If at any time Visible Emissions are observed, even if the minimum required daily Visible Emission monitoring has already been performed, the plant site must immediately begin an observation period of 5 minutes using Method 22 at 40 C.F.R. Part 60, Appendix A–7. If Visible Emissions are observed for more than one continuous minute during any 5- minute observation period, the observation period using Method 22 at 40 C.F.R. Part 60, Appendix A–7 must be extended to 2 hours or until 5 minutes of Visible Emissions are observed.

- (2) Alternatively, the plant site may use a video surveillance camera to continuously record (at least one frame every 15 seconds with time and date stamps) images of the Flare flame at a reasonable distance above the Flare flame and at an angle suitable for Visible Emissions observations. The plant site must provide real-time video surveillance camera output to the control room or other continuously staffed location where the camera images may be viewed at any time.
 - (a) Pilot Flame Presence. The plant site must operate each Flare with a pilot flame present at all times. The plant site must continuously monitor the presence of the pilot flame(s) using a device (including, but not limited to, a thermocouple, ultraviolet beam sensor, or infrared sensor) capable of detecting that the pilot flame is present.
 - C. Monitoring According to Applicable Provisions. The plant site must comply with all applicable Subparts of 40 C.F.R. Parts 60, 61, or 63 except as provided in Special Condition 55. **(09/23)**
 - D. Good Air Pollution Control Practices. The plant site must at all times, including during periods of startup, shutdown, and/or Malfunction, implement good air pollution control practices to minimize emissions from Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22). Nothing in this sub-Special Condition 52.D requires the plant site to install or maintain Flare monitoring equipment in addition to or different from the equipment required by this permit.
53. Flare Tip Velocity or V_{tip} . The plant site must operate Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22) in compliance with either sub-Special Condition 53.A. or 53.B. below, provided that the appropriate monitoring systems are in place, whenever the Vent Gas flow rate is less than the smokeless design capacity of the Flare. **(09/23)**
- A. The actual Flare Tip Velocity (V_{tip}) must be less than 60 feet per second. The plant site must monitor V_{tip} using the procedures specified in Appendix 1.2, or
 - B. V_{tip} must be less than 400 feet per second and also less than the maximum allowed Flare Tip Velocity (V_{max}) as calculated according to Equation 11 in Appendix 1.2. The plant site must monitor V_{tip} and gas composition, and must determine NHV_{vg} using the procedures specified in Appendix 1.2. The Unobstructed Cross Sectional Area of the Flare Tip must be calculated consistent with Appendix 1.3.
54. Operation According to Design. The plant site must operate and maintain Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22) in accordance with its design and the requirements of this permit. **(09/23)**
55. Net Heating Value Standards. The plant site must comply with the following Net Heating Value standards, except as provided in Special Conditions 57 (Standard During Instrument Downtime). **(09/23)**
- A. Net Heating Value of Combustion Zone Gas (NHV_{cz}) for Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22). At any time a

Flare is In Operation, the plant site must operate that Flare so as to maintain the NHV_{cz} at or above 270 BTU/scf, as determined on a 15-minute block period basis when Waste Gas is routed to the Flare for at least 15 minutes. The plant site must monitor and calculate NHV_{cz} at each Flare in accordance with Appendix 1.2.

- B. Dilution Operating Limits for Flare 14 (EPN 56-61-14) and Flare 20 (EPN 56-61-20) with Perimeter Assist Air (NHV_{dil}). While each Air-Assisted Flare is In Operation, the plant site must maintain the Net Heating Value Dilution parameter (NHV_{dil}) at or above 22 BTU/square foot determined on a 15-minute block period basis, when Waste Gas is routed to the Flare for at least 15 minutes. The plant site must monitor and calculate NHV_{dil} at each Flare that is actively receiving Perimeter Assist Air in accordance with Appendix 1.2.
56. 98% Combustion Efficiency. The plant site must operate Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22) with a minimum of a 98% Combustion Efficiency at all times when Waste Gas is vented to the flares. To demonstrate continuous compliance with the 98% Combustion Efficiency, the plant site must operate each Steam-Assisted Flare in compliance with Special Condition 55.A and each Air-Assisted Flare in compliance with Special Conditions 55.A and 55.B. **(09/23)**
57. Standard During Instrument Downtime. If one or more of the following conditions (collectively referred to as "Instrument Downtime") is present and renders the plant site incapable of operating Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22) in accordance with the applicable NHV standards in Special Condition 55, the plant site must operate that Flare in accordance with good air pollution control practices so as to minimize emissions and ensure good combustion efficiency at that Flare: **(09/23)**
- A. Malfunction of an instrument needed to meet the requirement(s);
 - B. Repairs following Malfunction of an instrument needed to meet the requirement(s);
 - C. Recommended scheduled maintenance of an instrument in accordance with the manufacturer's recommended schedule, for an instrument needed to meet the requirement(s); and/or
 - D. Quality Assurance/Quality Control activities on an instrument needed to meet the requirement(s).

Instrument Downtime must be calculated in accordance with 40 C.F.R. § 60.13(h)(2). In no event must Instrument Downtime exceed 5% of the time in a Semi-Annual Period that the Flare affected by the Instrument Downtime is In Operation. For purposes of calculating the 5%, the time used for NHV Analyzer or gas chromatograph calibration and validation activities may be excluded. Nothing in this special condition is intended to prevent the plant site from asserting Force Majeure as the cause of any period of Instrument Downtime.

58. Recordkeeping for Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22): Timing and Substance. The plant site must comply with the following recordkeeping requirements: **(09/23)**
- A. The plant site must calculate and record each of the following parameters:

- (1) Volumetric flow rates of all gas streams that contribute to the Vent Gas volumetric flow rate (in scfm) (in 15-minute block averages and in accordance with any calculation requirements of Special Conditions 43, 49, and Step 2 of Appendix 1.2);
 - (2) Assist Steam volumetric flow rate (in scfm) (in 15-minute block averages and in accordance with any calculation requirements of Special Conditions 42, 49, and Step 2 of Appendix 1.2);
 - (3) Assist Air volumetric flow rate (in scfm) (in 15-minute block averages and in accordance with any calculation requirements of Special Conditions 43, 49, and Step 2 of Appendix 1.2);
 - (4) NHVvg (in BTU/scf) (in 15-minute block averages in accordance with Step 1 of Appendix 1.2);
 - (5) NHVdil (in BTU/ft²) (in 15-minute block averages in accordance with Step 4 of Appendix 1.2); and
 - (6) NHVcz (in BTU/scf) (in 15-minute block averages in accordance with Step 3 of Appendix 1.2).
- B. For Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22), the plant site must record the duration of all periods of Instrument Downtime for each Flare that exceed 5% of the time in a Semi-Annual Period that the Flare is In Operation. The plant site must record which instrument(s) experienced the downtime, which Flare was affected by the downtime, an explanation of the cause(s) of the deviation, and a description of the corrective action(s) that the plant site took.
- C. The plant site must record the dates and times of any periods that the plant site deviates from the standards in Special Condition 50. The plant site must also record the duration of the deviation, an explanation of the cause(s) of the deviation, and a description of the corrective action(s) that the plant site took.
- D. At any time that the plant site deviates from the emissions standards in Special Conditions 55- 57 at any Flare, the plant site must record the duration of the deviation, an explanation of the cause(s) of the deviation, and a description of the corrective action(s) that the plant site took.

Fenceline Monitoring Project Requirements

59. The plant site must install, maintain, and operate a Fenceline Monitoring Project in accordance with Appendix 2.2. **(09/23)**

Greenhouse Gas Emissions – TCEQ Project No. 346268

60. Permit holders must keep records sufficient to demonstrate compliance with 30 Texas Administrative Code § 116.164. If construction, a physical change or a change in method of operation results in Prevention of Significant Deterioration (PSD) review for criteria pollutants, records shall be sufficient to demonstrate the amount of emissions of GHGs from the source as a result of construction, a physical change or a change in method of operation does not require authorization under 30 TAC §116.164(a). If there is construction, a physical change or change in the method of operation that will result in a net emission increase of 75,000 tpy or more CO_{2e} and

PSD review is triggered for criteria pollutants, greenhouse gas emissions are subject to PSD review. **(4/24)**

61. Monitoring, quality assurance/quality control requirements, emission calculation methodologies, record keeping, and reporting requirements related to Greenhouse Gas (GHG) emissions shall adhere to the applicable requirements in 40 CFR Part 98 and in this permit. **(4/24)**
62. Permittee shall calculate the CO_{2e} emissions on a 12-month rolling basis, based on the procedures and Global Warming Potentials (GWP) contained in Greenhouse Gas Regulations, 40 CFR Part 98, Subpart A, Table A-1. **(4/24)**
63. Records of emissions of GHG, and how they were determined, in compliance with Special Condition Nos. 60, 61, and 62 must be maintained by the holder of this permit in a form suitable for inspection for a period of five years after collection and must be made available upon request to representatives of the TCEQ, EPA, or any local air pollution control program having jurisdiction. **(4/24)**

Netting

64. This permit is conditioned on the completion of all emission reduction projects represented in the Table 3F, Project Contemporaneous Changes submitted April 21, 2023, for the amendment with the PI-1 dated August 15, 2022. This reduction of emissions shall occur not later than the commencement of operation of the permitted facilities represented by this permit. The holder of this permit shall maintain records of the emission reductions and provide access and/or copies upon request to the TCEQ Executive Director, or representatives, or any local air pollution control program having jurisdiction. Construction of these facilities must commence as defined in 40 CFR 52.21(b)(9) Prevention of Significant Deterioration or 40 CFR 51.165(a)(1)(xvi) (nonattainment) no later than five years after the reductions are actually accomplished, or the above reductions are no longer creditable and the permit is automatically void. **(4/24)**

Recordkeeping

65. The records required by these special conditions shall be maintained in either hard copy or electronic format and shall be maintained for at least five years. These records shall be made immediately available at the request of personnel from the TCEQ or any air pollution control agency with jurisdiction. **(4/24)**

Propylene Compressor Turbine

66. When continuous emission monitoring system (CEMS) data is not utilized, the nitrogen oxide (NO_x) emissions from the Propylene Compressor Turbine (EPN 22-95-27) shall be calculated by using the method specified under 30 TAC § 117.340(c)(3)(D) or (E).
67. The following recordkeeping requirements apply to the Propylene Compressor Turbine (EPN 22-95-27):
 - A. Average hourly NO_x concentration in ppmvd, average hourly emissions in lb/hr.

Special Conditions

Permit Numbers 22690, PSDTX751M2, and GHGPSDTX226

Page 46

- B. Records of initial performance test. After the initial determination of compliance, the holder of this permit shall maintain a raw data file of all CEMS measurements, including CEMS performance testing measurements and all CEMS calibration checks and adjustments and maintenance performed on these systems.

Date: August 19, 2025

ATTACHMENT A

Permit Numbers 22690 and PSDTX751M2

Routine Maintenance Activities

Repair/replacement of components such as pumps, valves, and filters that may be isolated so that the process volume to be emptied and degassed to the atmosphere is less than 5 cubic feet.

Repair/replacement of facilities such as compressors and heat exchangers that may be isolated so that the process volume to be emptied and degassed to the atmosphere is less than 50 cubic feet.

Preparation of equipment for maintenance and repair/replacement of equipment that requires purging of non-condensable hydrocarbons which are routed to a control device and result in intermittent or indiscernible emissions which may not exceed 10 lbs of combined VOC emissions per event.

Date: November 1, 2017

ATTACHMENT B

Permit Numbers 22690 and PSDTX751M2

MSS Activity Summary

The activities identified in the table below are authorized for the facilities indicated and are subject to the emission limits identified in the table. Startup and shutdown of facilities that are compliant with Special Condition 19 are authorized by this permit.

Facilities	Description	Emissions Activity	EPN
all process units	process unit shutdown/depressurize/ drain	vent to flare	56-61-4, 56-61-8, 56-61-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, & 56-61-22
all process units	process unit purge/degas/drain	vent to atmosphere	MSSATM
all process units	process unit startup	vent to flare	56-61-4, 56-61-8, 56-61-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, & 56-61-22
all process units and tanks	preparation for facility/component repair/replacement	depressurize/degas/purge to flare	56-61-4, 56-61-8, 56-61-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, & 56-61-22
all process units and tanks	preparation for facility/component repair/replacement	vent to atmosphere for degas/purge	MSSATM
all process units and tanks	recovery from facility/component repair/replacement	vent to flare	56-61-4, 56-61-8, 56-61-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, & 56-61-22
all process units and tanks	recovery from facility/component repair/replacement	vent to atmosphere	MSSATM
all process units and tanks	preparation for unit turnaround or facility/component repair/replacement	remove liquid	MSSATM
All	all production related facilities	painting vent to atmosphere	MSSATM
all tanks	tank cleaning	cleaning activity and solvents vent to atmosphere	MSSATM
all process units	Catalyst handling	catalyst handling	MSSATM

Facilities	Description	Emissions Activity	EPN
Cleaning slab	Cleaning containers, frac tanks, and vacuum trucks with water solutions	Cleaning containers, frac tanks, and vacuum trucks with water solutions vented to atmosphere	MSSATM
All	abrasive blasting	PM from blasting media	MSSATM
all process unit heaters / furnaces / boilers, and turbines	Heaters, furnaces, boilers, and turbines	Maintenance	22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-6 22-36-7, 22-36-8, 24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-7, 24-36-8, 24-36-9, 33-36-1 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9, 33-36-10, 22-95-3, 22-95-3A, 22-95-3B, 22-95-3C, 22-95-300, 22-95-376, 33-95-376A
EPN 22-36-9	22 Cracking Furnace 9	Startup/shutdown	22-36-9

Date: April 5, 2024

ATTACHMENT C

Permit Numbers 22690 and PSDTX751M2

Facility Lists

This permit authorizes emissions from the following temporary facilities used to support planned MSS activities at permanent site facilities: frac tanks, containers, vacuum trucks, facilities used for painting or abrasive blasting, portable control devices identified in Special Condition 26, and controlled recovery systems. Emissions from temporary facilities are authorized provided the temporary facility (a) does not remain on the plant site for more than 12 consecutive months, (b) is used solely to support planned MSS activities at the permanent site facilities listed in this Attachment, and (c) does not operate as a replacement for an existing authorized facility.

This permit authorizes MSS emissions from the permanent site facilities identified below. The headings for each group of facilities (Process Units, Tanks, etc) are used in the MSS Activity Summary to identify all facilities in the respective group.

EPN	Facility Name
Process Units	
10.1-0-0	Unit 10.1
10.2-0-0	Unit 10.2
10.3-0-0	Unit10.3
12-0-0	Unit12
18-0-0	Unit 18
21-0-0	Unit 21
24.1-0-0	Unit 24.1
22-0-0	Unit 22
24-0-0	Unit 24
33-0-0	Unit 33
68.1-0-0	West Pipe Rack Fugitives
Heaters, Furnaces, Boilers, and Turbines	
22-36-1	22 Furnace 1
22-36-2	22 Furnace 2
22-36-3	22 Furnace 3
22-36-4	22 Furnace 4
22-36-6	22 Furnace 6

EPN	Facility Name
22-36-7	22 Furnace 7
22-36-8	22 Furnace 8
22-36-9	22 Furnace 9
24-36-1	24 Furnace 1
24-36-2	24 Furnace 2
24-36-3	24 Furnace 3
24-36-4	24 Furnace 4
24-36-5	24 Furnace 5
24-36-6	24 Furnace 6
24-36-7	24 Steam Superheater 7
24-36-8	24 DAC Hydrotreater Heater 8
24-36-9	24 Furnace 9
33-36-1	33 Furnace 1
33-36-2	33 Furnace 2
33-36-3	33 Furnace 3
33-36-4	33 Furnace 4
33-36-5	33 Furnace 5
33-36-6	33 Furnace 6
33-36-7	33 Furnace 7
33-36-8	33 Furnace 8
33-36-9	33 Furnace 9
33-36-10	33 Furnace 10

Flares

56-61-4	Unit 10/18 Process Flare
56-61-8	Unit 10, 12 Low-Pressure Flare
56-61-9	Unit 10, 12 High-Pressure Flare
56-61-10	Unit 21, 22 Low-Pressure Flare
56-61-12	Unit 22 High Pressure Flare
56-61-14	Unit 24 High-Pressure Flare
56-61-20	Unit 24 Low-Pressure Flare
56-61-22	Unit 33 Process Flare

Cooling Towers

54-22-5	Unit 12 Cooling Tower

EPN	Facility Name
54-22-6	Unit 10ABC Cooling Tower
54-22-7	Unit 10ABC Cooling Tower
54-22-9	Unit 10D/18 Cooling Tower
54-22-12	Unit 21/22 Cooling Tower
54-22-13	Unit 24 Cooling Tower
54-22-17	Unit 33 Cooling Tower

Fixed-Roof Storage Tanks

24-95-314	Methanol Storage Tank
33-95-10	Methanol Storage Tank
33-95-14	TBC Storage Tank

Lube/Seal Reservoirs

10-95-328	D-328 Seal Oil Reservoir
10-95-357	D-357 Lube/Seal Oil Reservoir
18-95-54	D-54 Lube/Seal Oil Reservoir
21-95-120	D-120 lube/Seal Oil Reservoir
22-95-100	D-100 Lube Oil Reservoir
22-95-101	D-101Seal Oil Reservoir
22-95-120	D-120 Lube/Seal Oil Reservoir
22-95-130	D-130 Lube/Seal Oil Reservoir
24-95-304	D-304 Lube/Seal Oil Reservoir
24-95-305	D-305 Lube/Seal Oil Reservoir
24-95-306	D-306 Lube/Seal Oil Reservoir
24-95-307	D-307 Expander Lube Oil Reservoir
33-95-15	C-101 (Cracked Gas)
33-95-17	C-102 (Ethylene)
33-95-19	C-103 (Propylene)
33-95-390	C-101 (Cracked Gas)
33-95-392	C-102 (Ethylene)
33-95-394	C-103 (Propylene)
10-95-3572	C-357 (Propylene) – 2nd vent
10-95-357A	C-357 (Propylene) – de-gas chamber
24-95-319	C-100 (Cracked Gas)
24-95-320	C-101 (Ethylene)

EPN	Facility Name
24-95-321	C-102 (Propylene)
Sumps	
10-1-SUMP1	10.1 Oily Water Sewer Sump
12-SUMP1	12 Oily Water Sewer Sump
21/22-SUMP1	21/22 Oily Water Sewer Sump
24-SUMP2	24 Ethylene Sodium Hydroxide Sump
24-SUMP3	24 Oily Water Sewer Sump
33-SUMP1	33 Sodium Hydroxide Sump
33-SUMP2	33 Water Sludge Pit
33-SUMP3	33 Oily Water Sewer Sump
33-SUMP4	33 Blowdown Drum Sump
Atmospheric Vents	
10ABC-AV	Unit 10ABC Analyzer Vents
10D-AV	Unit 10D Analyzer Vents
12-AV	Unit 12 Analyzer Vents
18-AV	Unit 18 Analyzer Vents
21-AV	Unit 21 Analyzer Vents
22-AV	Unit 22 Analyzer Vents
24-AV	Unit 24 Analyzer Vents
33-AV	Unit 33 Analyzer Vents
Miscellaneous Sources	
22-95-(3, 3A, 3B, and 3C)	U22 Decoke
24-95-300	U24 Decoke
33-95-376 and 376A	U33 Decoke
CPC-ABLAST	Abrasive Blasting
CPC-PAINT	Painting
MSS-ATM	Purge/Degas/Drain Vent to Atmosphere
Catalyst	Catalyst Handling

Date: April 5, 2024

ATTACHMENT D
Permit Numbers 22690 and PSDTX751M2
Appendices 1.1-1.3 and 2.1-2.2

Appendix 1.1 – Incorporated Consent Decree Definitions

The definitions in Appendix 1.1 of Attachment D are only applicable to Special Conditions 0-59 of this permit.

“Air-Assisted Flare” or “Air_{asst}” means a Flare that uses Assist Air to assist in combustion.

“Assist Air” means all air that is intentionally introduced before or at a Flare tip through nozzles or other hardware conveyance for the purposes of, including, but not limited to, protecting the design of the Flare tip, promoting turbulence for mixing, or inducing air into the flame. Assist Air includes premix assist air and Perimeter Assist Air. Assist Air does not include surrounding ambient air.

“Assist Steam” means all steam that is intentionally introduced before or at a Flare tip through nozzles or other hardware conveyance for the purposes of, including, but not limited to, protecting the design of the Flare tip, promoting turbulence for mixing, or inducing air into the flame. Assist Steam includes, but is not necessarily limited to, center steam, lower steam, and upper steam.

“Backup Flare” means a Flare that is permanently installed and that receives Waste Gas only when the Waste Gas has been redirected to it from Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), or Flare 22 (EPN 56-61-22).

“Calendar Quarter” means a three-month period ending on March 31, June 30, September 30, or December 31.

“Capable of Receiving Sweep, Supplemental, and/or Waste Gas” means, for a Flare, that the flow of Sweep Gas, Supplemental Gas, and/or Waste Gas is not prevented from being directed to the Flare by means of an isolation device such as closed valves, blinds, or stopples.

“Combustion Efficiency” or “CE” means a Flare’s efficiency in converting the organic carbon compounds found in Combustion Zone Gas to carbon dioxide. Combustion Efficiency must be determined in accordance with the NHV_{CZ} calculations in Appendix 1.2.

“Combustion Zone” means the area of the Flare flame where the Combustion Zone Gas combines for combustion.

“Combustion Zone Gas” means all gases and vapors found after the Flare tip. This gas includes all Vent Gas, Pilot Gas, Total Steam, and Assist Air.

“Day” means a calendar day unless expressly stated to be a business day. In computing any period of time for a compliance deadline, where the last day would fall on a Saturday, Sunday, or federal or state holiday, the period will run until the close of business of the next business day.

“External Utility Loss” means a loss in the supply of electrical power or other third-party utility to a Covered Plant that is caused by actions occurring outside the boundaries of a Covered Plant, excluding utility losses due to an interruptible utility service agreement.

“Flare” means a combustion device lacking an enclosed combustion chamber that uses an uncontrolled volume of ambient air to burn gases.

“Flare Tip Velocity” or “Vtip” means the velocity of gases exiting the Flare tip as defined in Special Condition 53.

“In Operation,” with respect to a Flare, means all times that Sweep, Supplemental, or Waste Gas is or may be vented to a Flare. A Flare that is In Operation is Capable of Receiving Sweep, Supplemental, or Waste Gas unless all Sweep, Supplemental, and Waste Gas flow is prevented by means of an isolation device such as closed valves, blinds, and/or stopples.

“Malfunction” means, as specified in 40 C.F.R. § 60.2, any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner. Failures that are caused in part by poor maintenance or careless operation are not Malfunctions.

“Monitoring System Malfunction” means any sudden, infrequent, and not reasonably preventable failure of instrumentation or a monitoring system to operate in a normal or usual manner. Failures that are caused in part by poor maintenance or careless operation are not Monitoring System Malfunctions.

“MMSCFD” or “mmscfd” means million standard cubic feet per Day.

“MMSCFH” or “mmscfh” means million standard cubic feet per hour.

“MSCFH” or “mscfh” means thousand standard cubic feet per hour.

“Net Heating Value” or “NHV” means the theoretical total quantity of heat liberated by the complete combustion of a unit volume or weight of a fuel initially at 25 degrees Centigrade and 760 mmHg, assuming that the produced water is vaporized and all combustion products remain at, or are returned to, 25 degrees Centigrade; however, the standard for determining the volume corresponding to one mole is 20 degrees Centigrade.

“Net Heating Value Analyzer” or “NHV Analyzer” means an instrument capable of measuring the Net Heating Value of Vent Gas in BTU/scf. The sample extraction point of a Net Heating Value Analyzer may be located upstream of the introduction of Supplemental Gas and/or Sweep Gas and/or Purge Gas if the composition and flow rate of any such Supplemental Gas and/or Sweep Gas and/or Purge Gas is known and if this known value then is used in the calculation of the Net Heating Value of the Vent Gas.

“Net Heating Value of Combustion Zone Gas” or “NHVcz” means the Net Heating Value, in BTU/scf, of the Combustion Zone Gas in a Flare. NHVcz must be calculated in accordance with Step 3 of Appendix 1.2.

“Net Heating Value of Dilution” or “NHVdil” means the Net Heating Value, in BTU/ft², of the dilution zone gas in a Flare. NHVdil must be calculated in accordance with Step 4 of Appendix 1.2.

“Net Heating Value of Vent Gas” or “NHV_{VG}” means the Net Heating Value, in BTU/scf, of the Vent Gas directed to a Flare. NHV_{VG} must be calculated in accordance with Step 1 of Appendix 1.2.

“Newly Installed Covered Flare(s)” means any Flare that is permanently installed, receives Waste Gas that has been redirected to it from Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), or Flare 22 (EPN 56-61-22).

“Perimeter Assist Air” means the portion of Assist Air introduced at the perimeter of the Flare tip or above the Flare tip. Perimeter Assist Air includes air intentionally entrained in lower and upper steam. Perimeter Assist Air includes all Assist Air except premix assist air.

“Pilot Gas” means gas introduced into a Flare tip that provides a flame to ignite the Vent Gas.

“Portable Flare” means any Flare that is not permanently installed and that receives Waste Gas that has been redirected to it from Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), or Flare 22 (EPN 56-61-22).

“Prevention Measure” means an instrument, device, piece of equipment, system, process change, physical change to process equipment, procedure, or program to minimize or eliminate flaring.

“Purge Gas” means the gas introduced between a Flare header’s water seal and the Flare tip to prevent oxygen infiltration (backflow) into the Flare tip. For a Flare with no water seal, the function of Purge Gas is performed by Sweep Gas, and therefore, by definition, such a Flare has no Purge Gas.

“Smoke Emissions” shall have the definition set forth in Section 3.5 of Method 22 of 40 C.F.R. Part 60, Appendix A. Smoke Emissions may be either documented by a video camera or determined by an observer knowledgeable with respect to the general procedures for determining the presence of Smoke Emissions per Method 22.

“Standard Conditions” means a temperature of 68 degrees Fahrenheit and a pressure of 1 atmosphere. Unless otherwise expressly set forth in this Consent Decree or an Appendix, Standard Conditions apply.

“Steam-Assisted Flare” means a Flare that uses Assist Steam to assist in combustion.

“Supplemental Gas” means all gas introduced to a Flare in order to improve the combustible characteristics of the Combustion Zone Gas.

“Sweep Gas” means:

1. For a Flare with an FGRS: Gas intentionally introduced into a Flare header system to prevent oxygen buildup in the Flare header. Sweep Gas in these Flares is introduced prior to and recovered by the FGRS; and
2. For a Flare without an FGRS: Gas intentionally introduced into a Flare header system to maintain a constant flow of gas through the Flare header and out the Flare tip in order to prevent oxygen building in the Flare header and to prevent infiltration (backflow) into the Flare tip.

“Sweeny Plant” means the petrochemical manufacturing plant owned and operated by the plant site, located at 21441 Loop 410, Sweeny, Texas 77480.

“Sweeny Flares” means the following Steam-Assisted Flares and Air-Assisted Flares located at the Sweeny Plant:

- 4 (Steam-Assisted);
- 8 (Steam-Assisted);
- 9 (Steam-Assisted);
- 10 (Steam-Assisted);
- 12 (Steam-Assisted);
- 14 (Air-Assisted);
- 20 (Air-Assisted); and
- 22 (Steam-Assisted).

“Total Steam” means the total of all steam that is supplied to a Flare and includes, but is not limited to, lower steam, center steam, and upper steam.

“Turnaround” means a complete shutdown of any emission unit to: (1) perform necessary cleaning and repairs; (2) perform required tests and internal inspections; and/or (3) install any modifications or additions, or make preparations necessary for a future modification or addition.

“Unassisted Flare” means a Flare that does not use Assist Steam or Assist Air.

“Unobstructed Cross Sectional Area of the Flare Tip” or “ $A_{tip-unob}$ ” means the open, unobstructed area of a Flare tip through which Vent Gas and center steam pass. Diagrams of four common Flare types are set forth in Appendix 1.3 together with the equations for calculating the $A_{tip-unob}$ of these four types.

“Vent Gas” means all gas found just before the Flare tip. This gas includes all Waste Gas, that portion of Sweep Gas that is not recovered, Purge Gas, and Supplemental Gas, but does not include Pilot Gas, Total Steam, or Assist Air.

“Visible Emissions” means five minutes or more of Smoke Emissions during any two consecutive hours.

“Waste Gas” means the mixture of all gases from facility operations that is directed to a Flare for the purpose of disposing of the gas. “Waste Gas” does not include gas introduced to a Flare exclusively to make it operate safely and as intended; therefore, “Waste Gas” does not include Pilot Gas, Total Steam, Assist Air, or the minimum amount of Sweep Gas and Purge Gas that is necessary to perform the functions of Sweep Gas and Purge Gas. “Waste Gas” also does not include the minimum amount of gas introduced to a Flare to comply with regulatory and/or enforceable permit requirements regarding the combustible characteristics of Combustion Zone Gas; therefore, “Waste Gas” does not include Supplemental Gas. Depending upon the instrumentation that monitors Waste Gas, certain compounds (hydrogen, nitrogen, oxygen, carbon dioxide, carbon monoxide, and/or water (steam)) that are directed to a Flare for the purpose of disposing of these compounds may be excluded from calculations relating to Waste Gas flow.

Appendix 1.2 – Calculating Combustion Efficiency, Net Heating Value of the Combustion Zone Gas (NHVcz), the Net Heating Value Dilution Parameter (NHVdil), and Flare Tip Velocity

All abbreviations, constants, and variables are defined in the Key on Page 8 of this Appendix.

Combustion Efficiency Equation:

$$CE = [CO_2]/([CO_2] + [CO] + [OC])$$

where:

[CO₂] = Concentration in volume percent or ppm-meters of carbon dioxide in the combusted gas immediately above the Combustion Zone

[CO] = Concentration in volume percent or ppm-meters of carbon monoxide in the combusted gas immediately above the Combustion Zone

[OC] = Concentration in volume percent or ppm-meters of the sum of all organic carbon compounds in the combusted gas immediately above the Combustion Zone, counting each carbon molecule separately where the concentration of each individual compound is multiplied by the number of carbon atoms it contains before summing (e.g., 0.1 volume percent ethane shall count as 0.2 percent OC because ethane has two carbon atoms)

For purposes of using the CE equation, the unit of measurement for CO₂, CO, and OC must be the same; that is, if “volume percent” is used for one compound, it must be used for all compounds. “Volume percent” cannot be used for one or more compounds and “ppm-meters” for the remainder.

Step 1: Determine the Net Heating Value of the Vent Gas (NHV_{vg})

The plant site shall determine the Net Heating Value of the Vent Gas (NHV_{vg}) based on composition monitoring data on a 15-minute block average basis according to the following requirements. If the plant site monitors separate gas streams that combine to comprise the total Vent Gas flow to Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), and Flare 22 (EPN 56-61-22), the 15-minute block average Net Heating Value shall be determined separately for each measurement location according to the following requirements and a flow-weighted average of the gas stream Net Heating Values shall be used to determine the 15-minute block average Net Heating Value of the cumulative Vent Gas. The NHV_{vg} 15-minute block averages shall be calculated for set 15-minute time periods starting at 12 midnight to 12:15 AM, 12:15 AM to 12:30 AM and so on, concluding at 11:45 PM to midnight.

Step 1a: Equation or Output to be Used to Determine NHV_{vg} at a Measurement Location

For any gas stream for which the plant site complies with Special Condition 46 by collecting compositional analysis data in accordance with the method set forth in 46.a: Equation 1 shall be used to determine the NHV_{vg} of a specific sample by summing the Net Heating Value for each individual component by individual component volume fractions. Individual component Net Heating Values are listed in Table 1 of this Appendix.

$$NHV_{vg} = \sum_{i=1}^n (x_i \cdot NHV_i) \quad \text{Equation 1}$$

For any gas stream for which the plant site complies with Paragraph 46 by collecting direct Net Heating Value monitoring data in accordance with the method set forth in 46.b but for which a Hydrogen Concentration Monitor is not used: Use the direct output (measured value) of the monitoring system(s) (in BTU/scf) to determine the NHV_{vg} for the sample.

For any gas stream for which the plant site complies with Paragraph 46 by collecting direct Net Heating Value monitoring data in accordance with the method set forth in 46.b and for which a Hydrogen Concentration Monitor is also used: Equation 2 shall be used to determine the NHV_{vg} for each sample measured via the Net Heating Value monitoring system. Where hydrogen concentration data is collected, Equation 2 performs a net correction for the measured heating value of hydrogen since the theoretical Net Heating Value for hydrogen is 274 Btu/scf, but for the purposes of this permit, a Net Heating Value of 1,212 Btu/scf may be used ($1,212 - 274 = 938$ BTU/scf).

$$NHV_{vg} = NHV_{measured} + 938x_{H_2} \quad \text{Equation 2}$$

Step 1b: Calculation Method to be Used in Applying Equation/Output to Determine NHV_{vg}

For Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), or Flare 22 (EPN 56-61-22) for which the plant site complies with Paragraph 46 by using a continuous monitoring system in accordance with the method set forth in 46.a or 46.b: The plant site may elect to determine the 15-minute block average NHV_{vg} using either the Feed- Forward Calculation Method or the Direct Calculation Method (both described below). The plant site need not elect to use the same methodology at all Flares with a continuous monitoring system; however, for each such Flare, the plant site must elect one calculation method that will apply at all times, and use that method for all continuously monitored flare vent streams associated with that Flare. If the plant site intends to change the calculation method that applies to a Flare, the plant site must notify the EPA 30 Days in advance of such a change.

Feed-Forward Calculation Method. When calculating NHV_{vg} for a specific 15-minute block:

3. Use the results from the first sample collected during an event (for periodic Vent Gas flow events) for the first 15-minute block associated with that event.
4. If the results from the first sample collected during an event (for periodic Vent Gas flow events) are not available until after the second 15-minute block starts, use the results from the first sample collected during an event for the second 15- minute block associated with that event.
5. For all other cases, use the results that are available from the most recent sample prior to the 15-minute block period for that 15-minute block period for all Vent Gas streams. For the purpose of this requirement, use the time that the results become available rather than the time the sample was collected. For example, if a sample is collected at 12:25 AM and the analysis is completed at 12:38 AM, the results are available at 12:38 AM and these results would be used to determine compliance during the 15-minute block period from 12:45 AM to 1:00 AM.

Direct Calculation Method. When calculating NHV_{vg} for a specific 15-minute block:

6. If the results from the first sample collected during an event (for periodic Vent Gas flow events) are not available until after the second 15-minute block starts, use the results from the first sample collected during an event for the first 15- minute block associated with that event.
7. For all other cases, use the arithmetic average of all NHV_{vg} measurement data results that become available during a 15-minute block to calculate the 15-minute block average for that period. For the purpose of this requirement, use the time that the results become available rather than the time the sample was collected. For example, if a sample is collected at 12:25 AM and the analysis is completed at 12:38 AM, the results are available at 12:38 AM and these results would be used to determine compliance during the 15-minute block period from 12:30 AM to 12:45 AM.

Step 2: Determine Volumetric Flow Rates of Gas Streams

The plant site shall determine the volumetric flow rate in standard cubic feet (scf) of Vent Gas, along with the volumetric flow rates (in scf) of any Supplemental Gas, Assist Steam, and Premix Assist Air, over a 15-minute block average basis. The 15-minute block average volumetric flow rates shall be calculated for set 15-minute time periods starting at 12 midnight to 12:15 AM, 12:15 AM to 12:30 AM and so on, concluding at 11:45 PM to midnight.

For any gas streams for which the plant site complies with Special Condition 43 by using a monitoring system that directly records volumetric flow rate: Use the direct output (measured value) of the monitoring system(s) (in scf), as corrected for the temperature and pressure of the system to standard conditions (i.e., a temperature of 20°C (68°F) and a pressure of 1 atmosphere) to then calculate the average volumetric flow rate of that gas stream for the 15- minute block period.

For Vent Gas, Assist Steam, or Premix Assist Air gas streams for which the plant site complies with Special Condition 43 by using a mass flow monitor to determine volumetric flow rate: Equation 3 shall be used to determine the volumetric flow rate of Vent Gas, Assist Air, or Assist Steam by converting mass flow rate to volumetric flow at standard conditions (i.e., a temperature of 20°C (68°F) and a pressure of 1 atmosphere). Equation 3 uses the molecular weight of the gas stream as an input to the equation; therefore, if the plant site elects to use a mass flow monitor to determine volumetric flow rate of Vent Gas, the plant site must collect compositional analysis data for such Vent Gas in accordance with the method set forth in 46.a. For Assist Steam, use a molecular weight of 18 pounds per pound-mole. For Assist Air, use a molecular weight of 29 pounds per pound-mole. The converted volumetric flow rates at standard conditions from Equation 3 shall then be used to calculate the average volumetric flow rate of that gas stream for the 15-minute block period.

$$Q_{vol} = \frac{Q_{mass} * 385.3}{MWt} \quad \text{Equation 3}$$

For gas streams for which the molecular weight of the gas is known and for which the plant site complies with Special Condition 43 by using continuous pressure/temperature monitoring system(s): Use appropriate engineering calculations to determine the average volumetric flow rate of that gas stream for the 15-minute block period. For Assist Steam, use a molecular weight of 18 pounds per pound-mole. For Assist Air, use a molecular weight of 29 pounds per pound-mole. For Vent Gas, molecular weight must be determined by collecting compositional analysis data for such Vent Gas in accordance with the method set forth in 22.a.

Step 3: Calculate the Net Heating Value of the Combustion Zone Gas (NHV_{cZ})

For Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), or Flare 22 (EPN 56-61-22) at which: 1) the Feed-Forward Calculation Method is used; 2) gas composition or Net Heating Value monitoring is performed in a location representative of the cumulative vent gas stream; and 3) Supplemental Gas flow additions to the Flare are directly monitored: Equation 4 shall be used to determine the 15-minute block average NHV_{cz} based on the 15-minute block average Vent Gas, Supplemental Gas, and assist gas flow rates.

$$NHV_{cz} = \frac{(Q_{vg} - Q_{NG2} + Q_{NG1}) * NHV_{vg} + (Q_{NG2} - Q_{NG1}) * NHV_{NG}}{Q_{vg} + Q_s + Q_{a,premix}} \quad \text{Equation 4}$$

For the first 15-minute block period of an event, Q_{NG1} shall use the volumetric flow value for the current 15-minute block period (i.e. $Q_{NG1} = Q_{NG2}$). NHV_{NG} shall be determined using one of the following methods: 1) direct compositional or Net Heating Value monitoring of the natural gas stream in accordance with Step 1; or 2) for purchased ("pipeline quality") natural gas streams, the plant site may elect to either: a) use annual or more frequent grab sampling at any one representative location; or b) assume a Net Heating Value of 920 BTU/scf.

For all other Flares: Equation 5 shall be used to determine the 15-minute block average NHV_{cz} based on the 15-minute block average Vent Gas and assist gas flow rates. For periods when there is no Assist Steam flow or Premix Assist Air flow, $NHV_{cz} = NHV_{vg}$.

$$NHV_{cz} = \frac{(Q_{vg}) * NHV_{vg}}{Q_{vg} + Q_s + Q_{a,premix}} \quad \text{Equation 5}$$

Step 4: Calculate the Net Heating Value Dilution Parameter (NHV_{dil})

For Flare 4 (EPN 56-61-4), Flare 8 (EPN 56-61-8), Flare 9 (EPN 56-61-9), Flare 10 (EPN 56-61-10), Flare 12 (EPN 56-61-12), Flare 14 (EPN 56-61-14), Flare 20 (EPN 56-61-20), or Flare 22 (EPN 56-61-22) at which: 1) the Feed-Forward Calculation Method is used; 2) gas composition or Net Heating Value monitoring is performed in a location representative of the cumulative Vent Gas stream; and 3) Supplemental Gas flow additions to the Flare are directly monitored: Equation 6 shall be used to determine the 15-minute block average NHV_{dil} only during periods when Perimeter Assist Air is used. For 15-minute block periods when there is no cumulative volumetric flow of Perimeter Assist Air, the 15-minute block average NHV_{dil} parameter does not need to be calculated.

$$NHV_{dil} = \frac{[(Q_{vg} - Q_{NG2} + Q_{NG1}) * NHV_{vg} + (Q_{NG2} - Q_{NG1}) * NHV_{NG}] * Diam}{(Q_{vg} + Q_s + Q_{a,premix} + Q_{a,perimeter})} \quad \text{Equation 6}$$

For the first 15-minute block period of an event, Q_{NG1} shall use the volumetric flow value for the current 15-minute block period (i.e. $Q_{NG1} = Q_{NG2}$). NHV_{NG} shall be determined using one of the following methods: 1) direct compositional or Net Heating Value monitoring of the natural gas stream in accordance with Step 1; or 2) for purchased ("pipeline quality") natural gas streams, the plant site may elect to either: a) use annual or more frequent grab sampling at any one representative location; or b) assume a Net Heating Value of 920 BTU/scf.

For all other Flares: Equation 7 shall be used to determine the 15-minute block average NHV_{dil} based on the 15-minute block average vent gas and Perimeter Assist Air flow rates, only during periods when

Perimeter Assist Air is used. For 15-minute block periods when there is no cumulative volumetric flow of Perimeter Assist Air, the 15- minute block average NHV_{dil} parameter does not need to be calculated.

$$NHV_{dil} = \frac{Q_{vg} * Diam * NHV_{vg}}{(Q_{vg} + Q_s + Q_{a,premix} + Q_{a,perimeter})} \quad \text{Equation 7}$$

Step 5: Ensure that during Flare operation, $NHV_{cz} \geq 270$ BTU/scf

The Flare must be operated to ensure that NHV_{cz} is equal to or above 270 BTU/scf, as determined for each 15-minute block period when Supplemental, Sweep, and/or Waste Gas is routed to a Flare for at least 15-minutes. Equation 8 shows this relationship.

$$NHV_{cz} \geq 270 \text{ BTU/scf} \quad \text{Equation 8}$$

Step 6: Ensure that during Flare operation, $NHV_{dil} \geq 22$ BTU/ft²

A Flare actively receiving Perimeter Assist Air must be operated to ensure that NHV_{dil} is equal to or above 22 BTU/ft², as determined for each 15-minute block period when Supplemental, Sweep, and/or Waste Gas is routed to a Flare for at least 15-minutes. Equation 9 shows this relationship.

$$NHV_{dil} \geq 22 \text{ BTU/ft}^2 \quad \text{Equation 9}$$

Calculation Method for Determining Compliance with V_{tip} Operating Limits.

The plant site shall determine V_{tip} on a 15-minute Block Average basis according to the following requirements:

- (a) The site shall use design and engineering principles and the guidance in Appendix 1.3 to determine the Unobstructed Cross Sectional Area of the Flare Tip. The Unobstructed Cross Sectional Area of the Flare Tip is the total tip area that Vent Gas can pass through. This area does not include any stability tabs, stability rings, and Upper Steam or air tubes because Vent Gas does not exit through them.
- (b) The site shall determine the cumulative volumetric flow of Vent Gas for each 15-minute Block Average Period using the data from the continuous flow monitoring system required in Paragraph 43 according to the requirements in Step 2 above.
- (c) The 15-minute Block Average V_{tip} shall be calculated using Equation 10.

$$V_{tip} = \frac{Q_{cum}}{Area_{x900}} \quad \text{Equation 10}$$

- (d) If the site chooses to comply with Paragraph 54.b, the site shall also determine the NHV_{vg} using Step 1 above and calculate V_{max} using Equation 11 in order to compare V_{tip} to V_{max} on a 15-minute Block Average basis.

$$\log_{10}(V_{max}) = \frac{NHV_{vg} + 1,212}{850} \quad \text{Equation 11}$$

Key to the Abbreviations:

385.3 = Conversion Factor (scf/lb-mol)

850 = Constant

900 = Conversion Factor (seconds/15-minute block average)

1,212 = Constant

Area = The unobstructed cross sectional area of the flare tip is the total tip area that vent gas can pass through, in ft². This area does not include any stability tabs, stability rings, and upper steam or air tubes because Vent gas does not exit through them. Use design and engineering principles to determine the unobstructed cross sectional area of the flare tip.

Diam = Effective diameter of the unobstructed area of the flare tip for Vent gas flow, in ft. Determine the diameter as

$$Diam = 2 * \sqrt{Area \div \pi}$$

i = individual component in Vent Gas (unitless)

MWt = molecular weight of the gas at the flow monitoring location (lb/lb-mol)

n = number of components in Vent Gas (unitless)

NHV_{cz} = Net Heating Value of Combustion Zone Gas (BTU/scf)

NHV_i = Net Heating Value of component i according to Table 1 of this Appendix (BTU/scf)

NHV_{measured} = Net Heating Value of Vent Gas stream as measured by monitoring system (BTU/scf)

NHV_{NG} = Net Heating Value of Supplemental Gas to flare during the 15-minute block period (BTU/scf)

NHV_{vg} = Net Heating Value of Vent Gas (BTU/scf)

Q_{a,perimeter} = cumulative volumetric flow of perimeter assist air during the 15-minute block period (scf)

Q_{a,premix} = cumulative volumetric flow of premix assist air during the 15-minute block period (scf)

Q_{cum} = cumulative volumetric flow over 15-minute block average period (scf)

Q_{mass} = mass flow rate (pounds per second)

Q_{NG1} = cumulative volumetric flow of Supplemental Gas to flare during previous 15-minute block period (scf)

Q_{NG2} = cumulative volumetric flow of Supplemental Gas to flare during the 15-minute block period (scf)

Q_S = cumulative volumetric flow of Total Steam during the 15-minute block period (scf)

Q_{vg} = cumulative volumetric flow of Vent gas during the 15-minute block period (scf)

Q_{vol} = volumetric flow rate (scf per second)

V_{max} = Maximum allowed flare tip velocity (feet per second)

V_{tip} = Flare tip velocity (feet per second)

x_i = concentration of component i in Vent gas (vol fraction)

x_{H2} = concentration of H₂ in Vent Gas at time sample was input into NHV monitoring system (vol fraction)

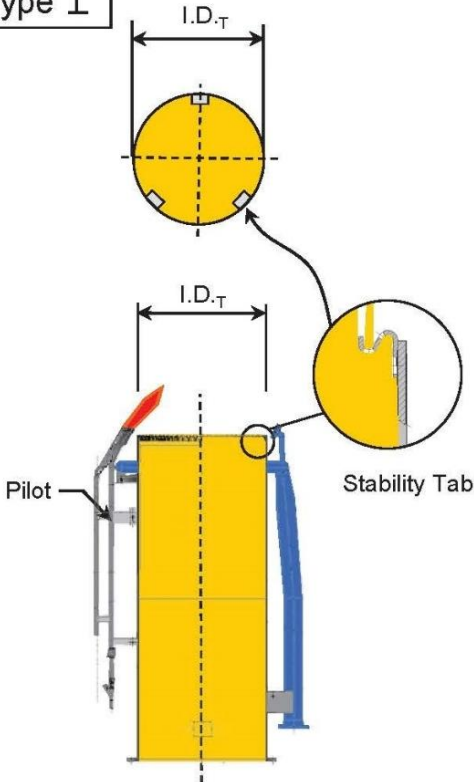
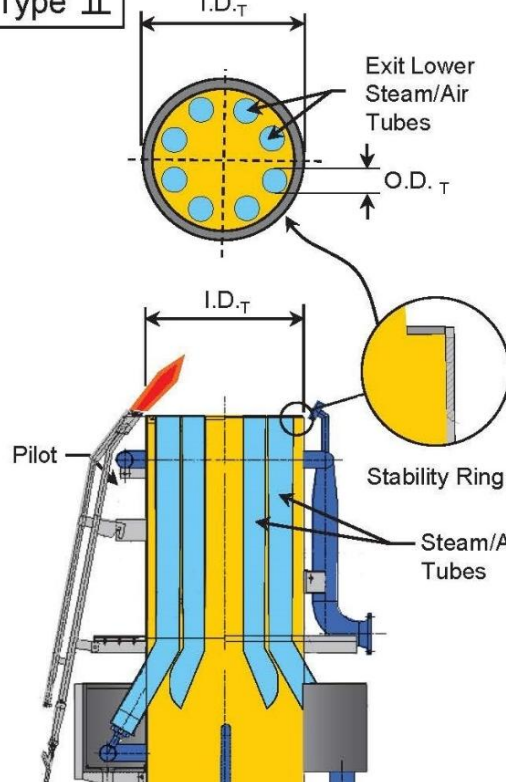
Table 1 – Individual Component Properties

Component	Molecular Formula	MW _i (pounds per pound-mol)	CMN _i (mole per mole)	NHV _i (British thermal units per standard cubic foot)	LFL _i (volume %)
Acetylene	C ₂ H ₂	26.04	2	1,404	2.5
Benzene	C ₆ H ₆	78.11	6	3,591	1.3
1,2-Butadiene	C ₄ H ₆	54.09	4	2,794	2.0
1,3-Butadiene	C ₄ H ₆	54.09	4	2,690	2.0
iso-Butane	C ₄ H ₁₀	58.12	4	2,957	1.8
n-Butane	C ₄ H ₁₀	58.12	4	2,968	1.8
cis-Butene	C ₄ H ₈	56.11	4	2,830	1.6
iso-Butene	C ₄ H ₈	56.11	4	2,928	1.8
trans-Butene	C ₄ H ₈	56.11	4	2,826	1.7
Carbon Dioxide	CO ₂	44.01	1	0	∞
Carbon Monoxide	CO	28.01	1	316	12.5
Cyclopropane	C ₃ H ₆	42.08	3	2,185	2.4
Ethane	C ₂ H ₆	30.07	2	1,595	3.0
Ethylene	C ₂ H ₄	28.05	2	1,477	2.7
Hydrogen	H ₂	2.02	0	1,212 ^A	4.0
Hydrogen Sulfide	H ₂ S	34.08	0	587	4.0
Methane	CH ₄	16.04	1	896	5.0
Methyl-Acetylene	C ₃ H ₄	40.06	3	2,088	1.7
Nitrogen	N ₂	28.01	0	0	∞
Oxygen	O ₂	32.00	0	0	∞
Pentane+ (C ₅ +)	C ₅ H ₁₂	72.15	5	3,655	1.4
Propadiene	C ₃ H ₄	40.06	3	2,066	2.16
Propane	C ₃ H ₈	44.10	3	2,281	2.1
Propylene	C ₃ H ₆	42.08	3	2,150	2.4
Water	H ₂ O	18.02	0	0	∞

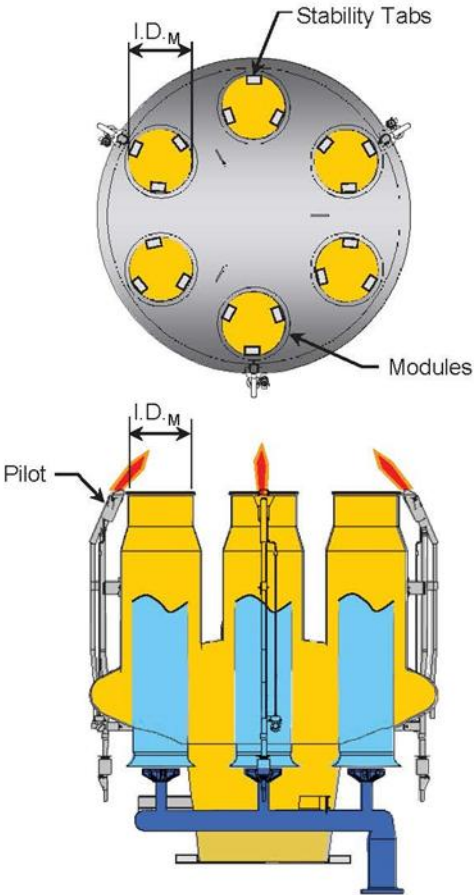
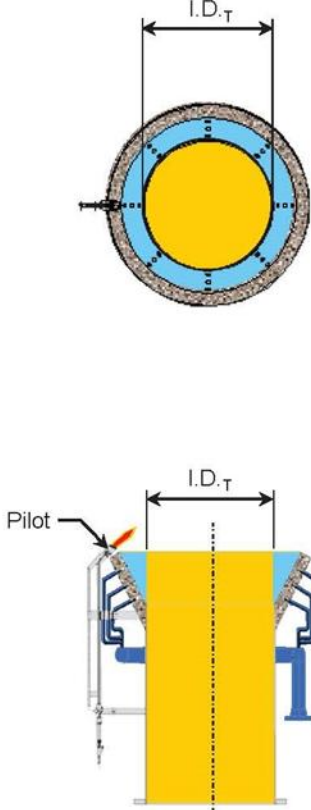
^A The theoretical Net Heating Value for hydrogen is 274 Btu/scf, but for the purposes of this Permit, a Net Heating Value of 1,212 Btu/scf shall be used.

Note: If a component is not specified in this Table 1, the heats of combustion may be determined using any published values where the net enthalpy per mole of offgas is based on combustion at 25°C and 1 atmosphere (or constant pressure) with offgas water in the gaseous state, but the standard temperature for determining the volume corresponding to one mole of vent gas is 20°C.

**Appendix 1.3 - Calculating the Unobstructed Cross Sectional
Area of Various Types of Flare Tips**

Type I  Diagram illustrating the Type I flare tip configuration. The top view shows a circular cross-section with diameter $I.D.T$. The side view shows the flare tip with a pilot and a stability tab. A circular inset shows a close-up of the stability tab. $A_{tip-unob} = \pi(I.D.T)^2/4 - (X_T * A_{ST})$	Type II  Diagram illustrating the Type II flare tip configuration. The top view shows a circular cross-section with diameter $I.D.T$ and exit lower steam/air tubes. The side view shows the flare tip with a pilot, stability ring, and steam/air tubes. A circular inset shows a close-up of the stability ring. $A_{tip-unob} = \pi(I.D.T)^2/4 - A_{ST} - N_T * \pi(O.D.T)^2/4$
Where: $A_{tip-unob}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D.T$ = Inside Diameter Flare Tip X_T = Number of Stability Tabs A_{ST} = Area of a Stability Tab	Where: $A_{tip-unob}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D.T$ = Inside Diameter Flare Tip A_{ST} = Area of Stability Ring $O.D.T$ = Outside Diameter of Steam/Air Tubes N_T = Number of Steam/Air Tubes
Example: $I.D.T = 41.5$ inches $X_T = 3$ $A_{ST} = 3$ Sq. inches	Example: $I.D.T = 47.5$ inches $A_{ST} = 100$ Sq. inches $O.D.T = 6.5$ inches $N_T = 8$
$A_{tip-unob} = \pi(41.5)^2/4 - (3 * 3)$ $A_{tip-unob} = 1344$ Sq. inches	$A_{tip-unob} = \pi(47.5)^2/4 - 100 - 8 * \pi(6.5)^2/4$ $A_{tip-unob} = 1322$ Sq. inches

Appendix 1.3 - Calculating the Unobstructed Cross Sectional Area of Various Types of Flare Tips

Type III	Type IV
 $A_{\text{tip-unob}} = N_M * (\pi * (I.D._M)^2 / 4 - X_T * A_{ST})$	 $A_{\text{tip-unob}} = \pi (I.D._T)^2 / 4$
Where: $A_{\text{tip-unob}}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D._M$ = Inside Diameter of One Tip Module N_M = Number of Modules X_T = Number of Stability Tabs per Module A_{ST} = Area of a Stability Tab	Where: $A_{\text{tip-unob}}$ = Unobstructed Cross Sectional Area of Flare Tip $I.D._T$ = Inside Diameter of Flare Tip
Example: $I.D._M$ = 17 inches N_M = 6 X_T = 3 A_{ST} = 3 Sq. inches	Example: $I.D._T$ = 41.5 inches
$A_{\text{tip-unob}} = 6 * (\pi * (17)^2 / 4 - 3 * 3)$ $A_{\text{tip-unob}} = 1308 \text{ Sq. inches}$	$A_{\text{tip-unob}} = \pi (41.5)^2 / 4$ $A_{\text{tip-unob}} = 1353 \text{ Sq. inches}$

Appendix 2.1 - February 5, 2018, Johnson Letter



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
RESEARCH TRIANGLE PARK, NC 27711

Mr. Chuck DeCarlo
Marketing Manager
Extrel CMS, LLC
575 Epsilon Drive, Suite 2
Pittsburg, PA 15238-2838

FEB 05 2018

OFFICE OF
AIR QUALITY PLANNING
AND STANDARDS

Mr. Tony Slapikas
Product Manager for Mass Spectrometry
AMETEK, Energy & Process Division
150 Freeport Road
Pittsburgh, PA 15238

Dear Mr. DeCarlo and Mr. Slapikas,

I am writing in response to your letter dated August 18, 2017, requesting approval for use of process mass spectrometers as part of an alternative to testing procedures utilizing calorimeters or gas chromatographs to measure Net Heating Value (NHV_{VG}) in flare vent gas as required under 40 CFR Part 63, Subpart CC – National Emission Standards for Hazardous Air Pollutants from Petroleum Refineries. The owner or operator of facilities subject to Subpart CC must measure flare vent gas composition to determine NHV_{VG} in units of British Thermal Units per standard cubic foot (BTU/SCF). This BTU/SCF determination may be performed using a calorimeter capable of continuously measuring, calculating, and recording NHV_{VG} at standard conditions (40 CFR 63.670 (j)(3)) or equipment that determines the concentration of individual components in the flare vent gas (40 CFR 63.670 (j)(1)), such as a gas chromatograph, and, if desired, may directly measure the hydrogen concentration in the flare vent gas following the methods provided in 40 CFR 63.670 (j)(4). All monitoring equipment must meet the applicable minimum accuracy, calibration and quality control requirements specified in Table 13 and §63.671 of Subpart CC.

In your letter, you propose to use a process mass spectrometer analyzer and the following measurement approach as an alternative to measure NHV_{VG}:

- 1) The owner or operator of the affected facility will perform a pre-survey to determine the list and concentration of components that are present in flare vent gas feed. This pre-survey will be used in part to:
 - a) Determine an appropriate analysis method for the site-specific refinery flare vent gas;
 - b) Create a list of vent gas components to be included in calibration gas cylinders to be used to evaluate the quality of the measurement procedure used to determine NHV_{VG};
 - c) Define calibration standards to be prepared by a vendor at a certified accuracy of 2 percent and traceable to NIST; and
 - d) Perform an initial calibration to identify mass fragment overlap and response factors for the target compounds.

Appendix 2.1 - February 5, 2018, Johnson Letter

- 2) The process mass spectrometer will be calibrated using calibration gas standards consisting of a mix of the compounds identified in the site specific flare gas pre-survey.
- 3) During flare gas analysis, compounds that are not identified during the pre-survey and that have mass fragments identical to the compounds found during the pre-survey will be included in the calculation of NH_{VVG} .
- 4) Calibration error (CE) for each component in the calibration blend will be calculated using the following equation:

$$CE = \frac{C_m - C_a}{C_a} \times 100$$

Where :

C_m = Average instrument response, (ppm)

C_a = Cylinder gas value or tag value, (ppm)

- 5) The average instrument CE for each calibration compound at any calibration concentration must not differ by more than 10 percent from the cylinder gas value or tag value.
- 6) For each set of triplicate injections at each calibration concentration for each calibration compound, any one introduction shall not deviate more than 5 percent from the average concentration measured at that level.

Your supporting information included Method 301 calculations that showed acceptable bias and precision when you measured a mixture of gases from a vendor certified gas cylinder. Your request also includes reference to facilities needing to monitor flare gas composition continuously to effectively maintain flare efficiency while compensating for changes in the flare gas composition.

With this letter, we are approving your request to substitute continuous process mass spectrometry for continuous gas chromatography as allowed in 40 CFR 63.670 and 63.671 predicated on both your proposed use of these process mass spectrometers as described above and the additional provisos listed below:

- 1) You must meet the requirements in 40 CFR 63.671 (e)(1) and (2) including Table 13 requirements for Net Heating Value by Gas Chromatograph.
- 2) You may use the alternative sampling line temperature allowed in 40 CFR 63, Subpart CC, Table 13, under Net Heating Value by Gas Chromatograph.
- 3) You must meet applicable Performance Specification 9 (40 CFR part 60, appendix B) requirements for initial continuous monitoring system acceptance including, but not limited to:
 - Performing a multi-point calibration check at three concentrations following the procedure in Section 10.1; and
 - Performing periodic process mass spectrometer calibrations as directed for gas chromatographs in 40 CFR 63, Subpart CC, Table 13.
- 4) You may augment the minimum list of calibration gas components found in 40 CFR 63.671(e) with compounds found during the pre-survey as needed to develop a site-specific analysis method.

Appendix 2.1 - February 5, 2018, Johnson Letter

- 5) For unknown gas components that have similar analytical mass fragments to calibration compounds, you may report the unknowns as an increase in the overlapped calibration gas compound.
- 6) For unknown compounds that do not produce mass fragments that overlap calibration compounds, you may use the response factor for the nearest molecular weight hydrocarbon in the calibration mix to quantify the unknown component's $NHVV_G$. This requirement parallels the requirements in 40 CFR Part 63.671 (e)(3) for gas chromatographs.
- 7) You may use the response factor for n-pentane to quantify any unknown components detected with a higher molecular weight than n-pentane.
- 8) You must meet all other applicable generic requirements of §§63.670 and 63.671 for measurement of $NHVV_G$ (i.e., measurement requirements not specifically targeted to gas chromatographs).
- 9) A copy of this approval letter must be included in the report for each testing program where these alternative testing procedures are applied.

Since this alternative test method approval under 40 CFR 63.7 (f) is appropriate for use at all facilities subject to 40 CFR 63, Subpart CC, we will announce on EPA's Web site (<https://www.epa.gov/emc/broadly-applicable-approved-alternative-test-methods>) that the alternative method is broadly applicable to determination of $NHVV_G$ under this subpart.

If you have any questions regarding this approval or need further assistance, please contact Ray Merrill at (919) 541-5225 or merrill.raymond@epa.gov, or Robin Segall at (919) 541-0893 or segall.robin@epa.gov.

Sincerely,



Steffan M. Johnson, Group Leader
Measurement Technology Group

cc.

Gerri Garwood, EPA/OAQPS/SPPD
Maria Malave, EPA/OECA/OC
Brenda Shine, EPA/OAQPS/SPPD
EPA Regional Testing Contacts

Appendix 2.2 – Fenceline Monitoring Requirements

1. **Applicability.** The requirements of this Fenceline Monitoring Project apply to the Port Arthur Plant.
 - A. The Port Arthur Plant must install a Fenceline Monitoring System in accordance with Paragraphs 2-3 of this Appendix.
 - B. Reserved
2. **Timing and Public Transparency.** No later than 270 Days after the June 2, 2022, the site must submit in writing to EPA a report: a) showing the location of all monitors that will be utilized to comply with the Monitoring Requirements of Paragraph 3 below; b) providing an active/live/not password protected URL to a mockup of the publicly available website to be used to report monitoring data pursuant to this Fenceline Monitoring Project; and c) a statement indicating that the website is properly indexed (including, but not limited to the following search terms, “benzene,” “fenceline monitoring,” and the Plant name and location) with the major search engines (*e.g.*, Google, Bing, Yahoo) to allow the public to easily find the website.

The Fenceline Monitoring Systems described in the Paragraph 3 below must commence collecting data no later than 365 Days after the June 2, 2022.

The site must post to a publicly available website each individual sample result for each monitor, each biweekly annual average concentration difference value (once annual averages are available), and any corrective action plan submitted to EPA pursuant to Paragraph 3(h) (corrective action plans posted to the website may be redacted to protect confidential business information). The site must post each individual sample result for each monitor within 30 Days of the end of the bi-weekly sampling period or within 30 Days after sampling collected pursuant to the “alternative sampling frequency for burden reduction” requirements set forth in Paragraph 3(f)(3) below. The site must post each annual average difference value within 45 Days of the sampling period that allows the creation of a new annual average difference value. The data must be presented in a tabular format.

3. **Monitoring Requirements.**
 - A. The site must commence sampling along the property boundary of each of the Covered Plants. The Site must collect and analyze the samples in accordance with Methods 325A and 325B of Rule Appendix A and sub-Paragraphs 3(a) through 3(i).
 - B. The target analyte for the Fenceline Monitoring Systems is benzene.
 - C. Siting of monitors. The site must determine the passive monitor locations comprising each Fenceline Monitoring System in accordance with Section 8.2 of Method 325A of Rule Appendix A, with the exception of the number of duplicates and blanks, which will be determined pursuant to 40 C.F.R. § 63.658(c)(3).
 - (1) As it pertains to this Fenceline Monitoring Project, known sources of VOCs, as used in Section 8.2.1.3 in Method 325A of Rule Appendix A for siting passive monitors means a wastewater treatment unit, process unit, or any emission source requiring HAP control according to the requirements of any state or federal air permit applicable to the plant, including marine vessel loading operations. For marine vessel loading operations that are located offshore, one passive monitor should be sited on the shoreline

adjacent to the dock. For purposes of this Appendix, an additional monitor is not required if the only emission sources within 50 meters of the monitoring boundary are equipment leak sources satisfying all of the requirements in 40 C.F.R. § 63.658(c)(1)(i) through (iv).

- (2) If there are 19 or fewer monitoring locations, the site shall collect at least one co-located duplicate sample per sampling period and at least one field blank per sampling period. If there are 20 or more monitoring locations, the site shall collect at least two co-located duplicate samples per sampling period and at least one field blank per sampling period. The co-located duplicates may be collected at any one of the perimeter sampling locations.
 - (3) The site must follow the procedure in Section 9.6 of Method 325B of Rule Appendix A to determine the detection limit of benzene for each sampler used to collect samples and co-located samples and blanks. Each monitor used to conduct sampling in accordance with this Appendix must have a detection limit that is at least an order of magnitude lower than the benzene action level.
 - (4) With respect to Section 8.2.3 in Method 325A of Rule Appendix A, the Port Arthur Plant will include property owned by a third-party refinery in its Fenceline Monitoring System. Additionally, the Site will install one monitor at the Port Arthur Hydrocarbon Vapor Recovery Unit (HVRU).
- D. The site may submit and discuss additional data collected by it or by third parties in the reports required pursuant to Paragraph 3.h of this Appendix. If the site concludes that an exceedance of the Action Level described in Paragraph 3.g is caused by an offsite source(s), such a conclusion does not relieve the Site of its obligation to perform the Root Cause investigation described in Paragraph 3.h.
- E. Collection of meteorological data. The site must collect and record meteorological data according to the applicable requirements in sub-Paragraphs 3(e)(1) and 3(e)(2).
- (1) The site must collect and record the average temperature and barometric pressure during each sampling period using either an on-site meteorological station in accordance with Section 8.3 of Method 325A of Rule Appendix A or, alternatively, using data from a United States Weather Service (USWS) meteorological station provided the USWS meteorological station is within 40 kilometers (25 miles).
 - (2) If an on-site meteorological station is used, the site must follow the calibration and standardization procedures for meteorological measurements in EPA-454/B-08-002 and at:
http://www3.epa.gov/ttnamti1/files/ambient/met/Volume_IV_Meteorological_Measurements.pdf
- F. Sampling Frequency. The site must use a sampling period and sampling frequency as specified in this sub-Paragraph 3(f).
- (1) Sampling period. A 14-Day sampling period must be used, unless a shorter sampling period is determined to be necessary under Paragraph 3(h). A sampling period is defined as the period during which a sampling tube is deployed at a specific sampling location with the diffusive sampling end cap in-place. The sampling period does not include the time required to analyze the sample. For the purpose of this sub-Paragraph, a 14-Day sampling period may be no shorter than 13 calendar days and no

longer than 15 calendar days, but the routine sampling period must be 14 calendar days.

- (2) Base sampling frequency. Except as provided in Paragraph 3(f)(3), the frequency of sample collection must be once each contiguous 14-Day sampling period, such that the next 14-Day sampling period begins immediately upon the completion of the previous 14- Day sampling period.
- (3) Alternative sampling frequency for burden reduction. When an individual monitor consistently, as defined in sub-Paragraph 3(f)(3)(i) through (v), yields results at or below 0.9 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$), the Site may elect to use the applicable minimum sampling frequency specified in Paragraph 3(f)(3)(i) through (v), for that individual monitoring site. When calculating Δc (as defined in Paragraph 3(g)) for the monitoring period when using this alternative for burden reduction, zero must be substituted for the sample result for the monitoring site for any period where a sample is not taken.
 - (a) If every sample at an individual monitoring site is at or below 0.9 $\mu\text{g}/\text{m}^3$ for 2 years (52 consecutive samples), every other sampling period can be skipped for that individual monitoring site, i.e., sampling can occur approximately once per month.
 - (b) If every sample at an individual monitoring site that is monitored at the frequency specified in Paragraph 3(f)(3)(i) is at or below 0.9 $\mu\text{g}/\text{m}^3$ for 2 years (i.e., 26 consecutive "monthly" samples), five 14-Day sampling periods can be skipped for that individual monitoring site following each period of sampling, i.e., sampling will occur approximately once per quarter.
 - (c) If every sample at an individual monitoring site that is monitored at the frequency specified in Paragraph 3(f)(3)(ii) is at or below 0.9 $\mu\text{g}/\text{m}^3$ for 2 years (i.e., 8 consecutive quarterly samples), twelve 14-Day sampling periods can be skipped for that individual monitoring site following each period of sampling, i.e., sampling will occur twice a year.
 - (d) If every sample at an individual monitoring site that is monitored at the frequency specified in Paragraph 3(f)(3)(iii) is at or below 0.9 $\mu\text{g}/\text{m}^3$ for 2 years (i.e., 4 consecutive semi-annual samples), only one sample per year is required for that individual monitoring site. For yearly sampling, samples must occur at least 10 months but no more than 14 months apart.
 - (e) If at any time a sample for an individual monitoring site that is monitored at the frequency specified in Paragraphs 3(f)(3)(i) through (iv) returns a result that is above 0.9 $\mu\text{g}/\text{m}^3$, that sampling site must return to the original sampling requirements of contiguous 14-Day sampling periods with no skip periods for one quarter (six 14-Day sampling periods). If every sample collected during this quarter is at or below 0.9 $\mu\text{g}/\text{m}^3$, the Sites may revert back to the reduced monitoring frequency applicable for that individual monitoring site immediately prior to the sample reading exceeding 0.9 $\mu\text{g}/\text{m}^3$. If any sample collected during this quarter is above 0.9 $\mu\text{g}/\text{m}^3$, that individual monitoring site must return to the original sampling requirements of contiguous 14-Day sampling periods with no skip periods for a minimum of two years. The burden reduction requirements can be used again for that monitoring site once the requirements of Paragraph 3(f)(3)(i) are met again, i.e., after 52 contiguous 14-Day samples with no results above 0.9 $\mu\text{g}/\text{m}^3$.

- G. Action Level. Within 45 Days of completion of each sampling period, the site must determine whether the results are above or below the action level as follows:
- (1) Calculation of the Δc . The site must determine the benzene difference concentration (Δc) for each 14-Day sampling period by determining the highest and lowest sample results for benzene concentrations from the sample pool and calculating the Δc as the difference in these concentrations. The site must adhere to the following procedures when one or more samples for the sampling period are below the method detection limit for benzene:
 - (a) If the lowest detected value of benzene is below detection, the site must use zero as the lowest sample result when calculating Δc .
 - (b) If all sample results are below the method detection limit, the site must use the method detection limit as the highest sample result.
 - (2) The site must calculate the annual average Δc based on the average of the 26 most recent 14-Day sampling periods. The site must update this annual average value after receiving the results of each subsequent 14-Day sampling period (i.e., on a "rolling" basis).
 - (3) The action level for benzene is $9 \mu\text{g}/\text{m}^3$ on an annual average basis. If the annual average Δc value for benzene is less than or equal to $9 \mu\text{g}/\text{m}^3$, the concentration is below the action level. If the annual average Δc value for benzene is greater than $9 \mu\text{g}/\text{m}^3$, the concentration is above the action level, and the site must conduct a root cause analysis and corrective action in accordance with Paragraph 3(h)
- H. Root Cause Analysis and Corrective Action. Within 5 Days of determining that the action level has been exceeded for any annual average Δc and no longer than 50 Days after completion of the sampling period, the site must initiate a root cause analysis to determine the cause of such exceedance and to determine appropriate corrective action, such as those described in Paragraphs 3(h)(1) through (4). The root cause analysis and initial corrective action analysis must be completed and initial corrective actions taken no later than 45 Days after determining there is an exceedance. Root cause analysis and corrective action may include, but is not limited to:
- (1) Leak inspection using Method 21 of 40 C.F.R. Part 60, Appendix A-7 and repairing any leaks found.
 - (2) Leak inspection using optical gas imaging and repairing any leaks found.
 - (3) Visual inspection to determine the cause of the high benzene emissions and implementing repairs to reduce the level of emissions.
 - (4) Employing progressively more frequent sampling, analysis and meteorology (e.g., using shorter sampling periods for Methods 325A and 325B of Appendix A of 40 C.F.R. Part 63, or using active sampling techniques).

If, after completing the corrective action analysis and corrective actions such as those described in Paragraph 3(h), the Δc value for the next 14-Day sampling period for which the sampling start time begins after the completion of the corrective actions is greater than $9 \mu\text{g}/\text{m}^3$ or if all corrective action measures identified require more than 45 Days to implement, the Site must develop a corrective action plan that describes the corrective action(s) completed to date, additional measures that the site proposes to employ to reduce fenceline benzene concentrations below the action level, and a schedule for completion of these

measures. The Site must submit the corrective action plan to EPA within 60 Days after receiving the analytical results indicating that the Δc value for the 14-Day sampling period following the completion of the initial corrective action is greater than $9 \mu\text{g}/\text{m}^3$ or, if no initial corrective actions were identified, no later than 60 Days following the completion of the corrective action analysis required in Paragraph 3(h).

- (a) The site may submit for review and approval a request to use an alternative test method as provided in 40 C.F.R. § 63.658(k).

Date: September 28, 2023

Emission Sources - Maximum Allowable Emission Rates

Permit Numbers 22690 and PSDTX751M2

This table lists the maximum allowable emission rates and all sources of air contaminants on the applicant's property covered by this permit. The emission rates shown are those derived from information submitted as part of the application for permit and are the maximum rates allowed for these facilities, sources, and related activities. Any proposed increase in emission rates may require an application for a modification of the facilities covered by this permit.

Air Contaminants Data

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
22-36-1	22 Cracking Furnace 1	CO	37.48	29.74
		NO _x	15.60	16.99
		PM	0.97	3.17
		PM ₁₀	0.97	3.17
		PM _{2.5}	0.97	3.17
		SO ₂	4.33	7.48
		VOC	0.70	2.29
22-36-2	22 Cracking Furnace 2	CO	37.48	29.74
		NO _x	15.60	16.99
		PM	0.97	3.17
		PM ₁₀	0.97	3.17
		PM _{2.5}	0.97	3.17
		SO ₂	4.33	7.48
		VOC	0.70	2.29
22-36-3	22 Cracking Furnace 3	CO	37.48	29.74
		NO _x	15.60	16.99
		PM	0.97	3.17
		PM ₁₀	0.97	3.17
		PM _{2.5}	0.97	3.17
		SO ₂	4.33	7.48
		VOC	0.70	2.29
22-36-4	22 Cracking Furnace 4	CO	37.48	29.74
		NO _x	15.60	16.99
		PM	0.97	3.17
		PM ₁₀	0.97	3.17
		PM _{2.5}	0.97	3.17
		SO ₂	4.33	7.48
		VOC	0.70	2.29

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
22-36-6	22 Cracking Furnace 6	CO	37.48	29.74
		NO _x	15.60	16.99
		PM	0.97	3.17
		PM ₁₀	0.97	3.17
		PM _{2.5}	0.97	3.17
		SO ₂	4.33	7.48
		VOC	0.70	2.29
22-36-7	22 Cracking Furnace 7	CO	37.48	29.74
		NO _x	15.60	16.99
		PM	0.97	3.17
		PM ₁₀	0.97	3.17
		PM _{2.5}	0.97	3.17
		SO ₂	4.33	7.48
		VOC	0.70	2.29
22-36-8	22 Furnace Cracking 8	CO	37.48	29.74
		NO _x	15.60	16.99
		PM	0.97	3.17
		PM ₁₀	0.97	3.17
		PM _{2.5}	0.97	3.17
		SO ₂	4.33	7.48
		VOC	0.70	2.29
22-36-9	22 Cracking Furnace 9	CO	10.96	21.60
		CO (10)	32.88	
		NO _x	2.25	5.91
		NO _x (10)	5.06	
		PM	1.12	4.41
		PM ₁₀	1.12	4.41
		PM _{2.5}	1.12	4.41
		SO ₂	6.54	8.28
		VOC	0.81	3.19
		NH ₃	0.67	2.62
22-36-9DC	Ethylene Cracking Furnace No. F-9 Decoking	CO	556.00	25.13
		PM	10.39	0.45

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
		PM ₁₀	10.39	0.45
		PM _{2.5}	8.31	0.36
24-36-1	24 Cracking Furnace 1 (2 stacks)	CO	72.08	76.65
		NO _x	30.00	87.60
		PM	1.86	8.16
		PM ₁₀	1.86	8.16
		PM _{2.5}	1.86	8.16
		SO ₂	7.82	18.11
		VOC	1.35	5.90
24-36-2	24 Cracking Furnace 2 (2 stacks)	CO	72.08	76.65
		NO _x	30.00	87.60
		PM	1.86	8.16
		PM ₁₀	1.86	8.16
		PM _{2.5}	1.86	8.16
		SO ₂	7.82	18.11
		VOC	1.35	5.90
24-36-3	24 Cracking Furnace 3 (2 stacks)	CO	72.08	76.65
		NO _x	30.00	87.60
		PM	1.86	8.16
		PM ₁₀	1.86	8.16
		PM _{2.5}	1.86	8.16
		SO ₂	7.82	18.11
		VOC	1.35	5.90
24-36-4	24 Cracking Furnace 4 (2 stacks)	CO	72.08	76.65
		NO _x	30.00	87.60
		PM	1.86	8.16
		PM ₁₀	1.86	8.16
		PM _{2.5}	1.86	8.16
		SO ₂	7.82	18.11
		VOC	1.35	5.90

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
24-36-5	24 Cracking Furnace 5 (2 stacks)	CO	72.08	76.65
		NO _x	30.00	87.60
		PM	1.86	8.16
		PM ₁₀	1.86	8.16
		PM _{2.5}	1.86	8.16
		SO ₂	7.82	18.11
		VOC	1.35	5.90
24-36-6	24 Cracking Furnace 6 (2 stacks)	CO	72.08	76.65
		NO _x	30.00	87.60
		PM	1.86	8.16
		PM ₁₀	1.86	8.16
		PM _{2.5}	1.86	8.16
		SO ₂	7.82	18.11
		VOC	1.35	5.90
24-36-7	24 Steam Superheater 7	CO	63.72	67.76
		NO _x	26.52	96.80
		PM	1.65	7.21
		PM ₁₀	1.65	7.21
		PM _{2.5}	1.65	7.21
		SO ₂	6.92	16.01
		VOC	1.19	5.22
24-36-8	24 DAC Hydrotreater Heater 8	CO	0.98	1.08
		NO _x	0.57	2.23
		PM	0.02	0.10
		PM ₁₀	0.02	0.10
		PM _{2.5}	0.02	0.10
		SO ₂	0.09	0.19
		VOC	0.02	0.07

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
24-36-9	24 Cracking Furnace 9	CO	97.17	103.32
		NO _x	40.44	118.08
		PM	2.51	11.00
		PM ₁₀	2.51	11.00
		PM _{2.5}	2.51	11.00
		SO ₂	10.55	24.41
		VOC	1.82	7.96
33-36-1	33 Cracking Furnace 1	CO (7)	93.71	97.81
		NO _x (7)	39.00	83.83
		PM	2.42	10.41
		PM ₁₀	2.42	10.41
		PM _{2.5}	2.42	10.41
		SO ₂ (7)	15.85	10.80
		VOC	1.75	7.53
33-36-2	33 Cracking Furnace 2	CO (7)	93.71	97.81
		NO _x (7)	39.00	83.83
		PM	2.42	10.41
		PM ₁₀	2.42	10.41
		PM _{2.5}	2.42	10.41
		SO ₂ (7)	15.85	10.80
		VOC	1.75	7.53
33-36-3	33 Cracking Furnace 3	CO (7)	93.71	97.81
		NO _x (7)	39.00	83.83
		PM	2.42	10.41
		PM ₁₀	2.42	10.41
		PM _{2.5}	2.42	10.41
		SO ₂ (7)	15.85	10.80
		VOC	1.75	7.53

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
33-36-4	33 Cracking Furnace 4	CO (7)	93.71	97.81
		NO _x (7)	39.00	83.83
		PM	2.42	10.41
		PM ₁₀	2.42	10.41
		PM _{2.5}	2.42	10.41
		SO ₂ (7)	15.85	10.80
		VOC	1.75	7.53
33-36-5	33 Cracking Furnace 5	CO (7)	93.71	97.81
		NO _x (7)	39.00	83.83
		PM	2.42	10.41
		PM ₁₀	2.42	10.41
		PM _{2.5}	2.42	10.41
		SO ₂ (7)	15.85	10.80
		VOC	1.75	7.53
33-36-6	33 Cracking Furnace 6	CO (7)	93.71	97.81
		NO _x (7)	39.00	83.83
		PM	2.42	10.41
		PM ₁₀	2.42	10.41
		PM _{2.5}	2.42	10.41
		SO ₂ (7)	15.85	10.80
		VOC	1.75	7.53
33-36-7	33 Cracking Furnace 7	CO (7)	93.71	83.09
		NO _x (7)	39.00	71.22
		PM	2.42	8.84
		PM ₁₀	2.42	8.84
		PM _{2.5}	2.42	8.84
		SO ₂ (7)	15.85	9.17
		VOC	1.75	6.40

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
33-36-8	33 Cracking Furnace 8	CO (7)	93.71	82.78
		NO _x (7)	39.00	70.96
		PM	2.42	8.81
		PM ₁₀	2.42	8.81
		PM _{2.5}	2.42	8.81
		SO ₂ (7)	15.85	9.14
		VOC	1.75	6.38
33-36-9	33 Cracking Furnace 9	CO (7)	93.71	82.78
		NO _x (7)	39.00	70.96
		PM	2.42	8.81
		PM ₁₀	2.42	8.81
		PM _{2.5}	2.42	8.81
		SO ₂ (7)	15.85	9.14
		VOC	1.75	6.38
33-36-10	33 Cracking Furnace 10	CO	93.90	37.60
		NH ₃	1.50	4.78
		NO _x	19.50	17.08
		PM	2.42	8.49
		PM ₁₀	2.42	8.49
		PM _{2.5}	2.42	8.49
		SO ₂	8.65	8.04
		VOC	1.75	6.14
56-61-4	Unit 10D/18 Process Flare (Flare #4)	CO	22.58	19.68
		H ₂ S	0.02	0.06
		NO _x	4.43	3.86
		SO ₂	1.49	4.82
		VOC	20.55	3.94
56-61-8	Unit 10, 12 Low-Pressure Flare (Flare #8)	CO	46.08	40.99
		H ₂ S	0.03	0.14
		NO _x	6.71	7.10
		SO ₂	3.13	13.41
		VOC	20.68	28.23

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
56-61-9	Unit 10, 12 High-Pressure Flare (Flare #9)	CO	1.00	3.19
		H ₂ S	<0.01	<0.01
		NO _x	0.19	0.63
		SO ₂	0.21	0.68
		VOC	0.09	0.30
56-61-10	Unit 21, 22 Low-Pressure Flare (Flare #10)	CO	18.32	27.35
		H ₂ S	<0.01	0.06
		NO _x	3.59	5.37
		SO ₂	8.56	2.21
		VOC	11.10	10.96
56-61-12	Unit 22 High-Pressure Flare (Flare #12)	CO	0.34	1.48
		H ₂ S	<0.01	<0.01
		NO _x	0.07	0.29
		SO ₂	0.07	0.31
		VOC	0.03	0.14
56-61-14	Unit 24 High-Pressure Flare (Flare #14)	CO	0.99	4.33
		H ₂ S	<0.01	<0.01
		NO _x	0.12	0.50
		SO ₂	0.13	0.58
		VOC	0.06	0.26
56-61-20	Unit 24 Low-Pressure Flare (Flare #20)	CO	68.67	79.11
		H ₂ S	0.04	0.17
		NO _x	32.79	32.59
		SO ₂	10.79	15.75
		VOC	25.80	22.77
56-61-22	Unit 33 Process Flare (Flare #22)	CO (7)	40.09	88.48
		H ₂ S	0.02	0.09
		NO _x (7)	7.87	17.36
		SO ₂ (7)	9.52	9.50
		VOC	21.41	12.27

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
54-22-5	Unit 12 Cooling Tower (CT-5)	PM	1.62	7.10
		PM ₁₀	1.59	6.96
		PM _{2.5}	0.36	1.57
		VOC	1.70	2.13
54-22-6	Unit 10ABC Cooling Tower (CT-6)	PM	1.24	5.42
		PM ₁₀	1.21	5.31
		PM _{2.5}	0.27	1.20
		VOC	1.30	1.62
54-22-7	Unit 10ABC Cooling Tower (CT-7)	PM	1.56	6.85
		PM ₁₀	1.53	6.72
		PM _{2.5}	0.35	1.52
		VOC	1.64	2.05
54-22-9	Unit 10D/18 Cooling Tower (CT-9)	PM	1.40	6.15
		PM ₁₀	1.38	6.02
		PM _{2.5}	0.31	1.36
		VOC	1.47	1.84
54-22-12	Unit 21/22 Cooling Tower (CT-12)	PM	2.32	10.17
		PM ₁₀	2.28	9.97
		PM _{2.5}	0.51	2.25
		VOC	2.44	3.05
54-22-13	Unit 24 Cooling Tower (CT-13)	PM	3.17	13.89
		PM ₁₀	3.11	13.62
		PM _{2.5}	0.70	3.07
		VOC	3.33	4.16
54-22-17	Unit 33 Cooling Tower (CT-17)	PM	5.82	25.49
		PM ₁₀	5.71	24.99
		PM _{2.5}	1.29	5.64
		VOC	6.11	7.64
10.1-0-0	Unit 10AC Process Fugitives (5)	VOC	5.03	22.01
		Benzene (8)	<0.01	0.03
10.2-0-0	Unit 10D Process Fugitives (5)	VOC	2.50	10.92
		Benzene (8)	<0.01	0.01

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
10.3-0-0	Unit 10B Process Fugitives (5)	VOC	1.13	4.96
		Benzene (8)	<0.01	<0.01
12-0-0	Unit 12 Process Fugitives (5)	VOC	1.91	8.38
		Benzene (8)	0.11	0.48
18-0-0	Unit 18 Process Fugitives (5)	VOC	1.60	7.01
21-0-0	Unit 21 Process Fugitives (5)	VOC	0.84	3.69
		Benzene (8)	<0.01	0.02
22-0-0	Unit 22 Process Fugitives (5)	VOC	12.44	51.75
		Benzene (8)	0.13	0.57
		NH ₃	0.04	0.16
24-0-0	Unit 24 Process Fugitives (5)	VOC	19.82	86.82
		Benzene (8)	0.21	0.93
24.1-0-0	Unit 24.1 Process Fugitives (5)	VOC	2.90	12.71
		Benzene (8)	0.96	4.21
33-0-0	Unit 33 Process Fugitives (5)(6)	VOC	18.52	81.15
		Benzene (8)	0.35	1.49
33.1-0-0	U33 F-10 Fugitives (5)	NH ₃	0.23	0.98
		VOC	0.20	0.85
		Benzene (8)	<0.01	<0.01
68.1-0-0	West Pipe Rack Fugitives (5)	VOC	0.53	2.34
		Benzene (8)	0.16	0.71
24-95-314	Methanol Storage Tank	VOC	3.31	0.08
33-95-10	Methanol Storage Tank	VOC	3.31	0.08
33-95-14	TBC Storage Tank	VOC	0.03	<0.01
10-95-328	D-328 Seal Oil Reservoir	VOC	0.01	0.05
10-95-357	D-357 Lube/Seal Oil Reservoir	VOC	0.01	0.05
18-95-54	D-54 Lube/Seal Oil Reservoir	VOC	0.01	0.05
21-95-120	D-120 Lube/Seal Oil Reservoir	VOC	0.01	0.05
22-95-100	D-100 Lube Oil Reservoir	VOC	0.01	0.05
22-95-101	D-101 Lube Oil Reservoir	VOC	0.01	0.05
22-95-120	D-120 Lube/Seal Oil Reservoir	VOC	0.01	0.05
22-95-130	D-130 Lube/Seal Oil Reservoir	VOC	0.01	0.05
24-95-304	D-304 Lube/Seal Oil Reservoir	VOC	0.01	0.05

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
24-95-305	D-305 Lube/Seal Oil Reservoir	VOC	0.01	0.05
24-95-306	D-306 Lube/Seal Oil Reservoir	VOC	0.01	0.05
24-95-307	D-307 Seal Oil Reservoir	VOC	0.01	0.05
33-95-15	D-15 Lube/Seal Oil Reservoir	VOC	0.01	0.05
33-95-17	D-17 Lube/Seal Oil Reservoir	VOC	0.01	0.05
33-95-19	D-19 Lube/Seal Oil Reservoir	VOC	0.01	0.05
33-95-390	D-390 Seal Oil Reservoir	VOC	0.01	0.05
33-95-392	D-392 Seal Oil Reservoir	VOC	0.01	0.05
33-95-394	D-394 Seal Oil Reservoir	VOC	0.01	0.05
10-95-3572	D-357 LO Res. - 2nd Vent	VOC	0.01	0.05
10-95-357A	D-357A Degassing Chamber	VOC	0.01	0.05
24-95-319	D-319 Lube/Seal Oil Reservoir	VOC	0.01	0.05
24-95-320	D-320 Lube/Seal Oil Reservoir	VOC	0.01	0.05
24-95-321	D-321 Lube/Seal Oil Reservoir	VOC	0.01	0.05
10.1-SUMP1	10.1 Oily Water Sewer Sump	VOC	0.03	<0.01
12-SUMP1	12 Oily Water Sewer Sump	VOC	0.02	<0.01
21/22-SUMP1	21/22 Oily Water Sewer Sump	VOC	0.01	<0.01
24-SUMP2	24 Ethylene Sodium Hydroxide Sump	VOC	<0.01	0.01
24-SUMP3	24 Oily Water Sewer Sump	VOC	<0.01	0.01
33-SUMP1	33 Sodium Hydroxide Sump	VOC	<0.01	0.03
33-SUMP2	33 Water Sludge Pit	VOC	<0.01	<0.01
33-SUMP3	33 Oily Water Sewer Sump	VOC	0.01	<0.01
33-SUMP4	33 Blowdown Drum Sump	VOC	<0.01	<0.01
22-95-27	C-120 Propylene Compressor Turbine (9)	CO	12.05	52.77
		NOx	36.83	161.30
		PM	0.84	3.70
		PM ₁₀	0.84	3.70
		PM _{2.5}	0.84	3.70
		SO ₂	0.44	1.91
		VOC	1.41	6.17
10ABC-AV	Unit 10ABC Analyzer Vents	VOC	<0.01	<0.01
10D-AV	Unit 10D Analyzer Vents	VOC	<0.01	<0.01
12-AV	Unit 12 Analyzer Vents	VOC	<0.01	<0.01

Emission Sources - Maximum Allowable Emission Rates

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
18-AV	Unit 18 Analyzer Vents	VOC	<0.01	<0.01
21-AV	Unit 21 Analyzer Vents	VOC	<0.01	<0.01
22-AV	Unit 22 Analyzer Vents	VOC	<0.01	<0.01
24-AV	Unit 24 Analyzer Vents	VOC	<0.01	<0.01
33-AV	Unit 33 Analyzer Vents	VOC	0.16	0.70

Emission Sources - Maximum Allowable Emission Rates

Caps			
Emission Point Nos. (1)	Air Contaminant Name (3)	Emission Rates	
		lbs/hour	TPY (4)
EPNs: 22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-5, 22-36-6, 22-36-7, 22-36-8, 24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-7, 24-36-8, 24-36-9, 33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, 56-61-22	CO	478.74	-
EPNs: 56-61-4, 56-61-8, 56-61-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, 56-61-22	H ₂ S	0.06	0.26
EPNs: 22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-5, 22-36-6, 22-36-7, 22-36-8, 24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-7, 24-36-8, 24-36-9, 33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, 56-61-22, 22-95-27	NO _x	436.25	-
EPNs: 22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-5, 22-36-6, 22-36-7, 22-36-8, 24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-7, 24-36-8, 24-36-9, 33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9	PM ₁₀	41.44	-
EPNs: 22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-5, 22-36-6, 22-36-7, 22-36-8, 24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-7, 24-36-8, 24-36-9, 33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9	SO ₂	223.95	-
EPNs: 56-61-4, 56-61-8, 56-61-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, 56-61-22	SO ₂	18.05	24.72

Emission Sources - Maximum Allowable Emission Rates

Caps			
Emission Point Nos. (1)	Air Contaminant Name (3)	Emission Rates	
		lbs/hour	TPY (4)
EPNs: 22-36-1, 22-36-2, 22-36-3, 22-36-4, 22-36-5, 22-36-6, 22-36-7, 22-36-8, 24-36-1, 24-36-2, 24-36-3, 24-36-4, 24-36-5, 24-36-6, 24-36-7, 24-36-8, 24-36-9, 33-36-1, 33-36-2, 33-36-3, 33-36-4, 33-36-5, 33-36-6, 33-36-7, 33-36-8, 33-36-9, 56-61-4, 56-61-8, 56-61-9, 56-61-10, 56-61-12, 56-61-14, 56-61-20, 56-61-22, 54-22-5, 54-22-6, 54-22-7, 54-22-9, 54-22-12, 54-22-13, 54-22-17, 10.1-0-0, 10.2-0-0, 10.3-0-0, 12-0-0, 18-0-0, 21-0-0, 22-0-0, 24-0-0, 24.1-0-0, 33-0-0, 24-95-314, 33-95-10, 33-95-14, 10-95-328, 10-95-357, 18-95-54, 21-95-120, 22-95-120, 22-95-130, 22-95-101, 22-95-100, 24-95-304, 24-95-305, 24-95-306, 24-95-307, 33-95-15, 33-95-17, 33-95-19, 33-95-390, 33-95-392, 33-95-394, 10-95-3572, 10-95-357A, 24-95-319, 24-95-320, 24-95-321, 10.1-SUMP1, 12-SUMP1, 21/22-SUMP1, 24-SUMP2, 24-SUMP3, 33-SUMP1, 33-SUMP2, 33-SUMP3, 33-SUMP4, 10ABC-AV, 10D-AV, 12-AV, 18-AV, 21-AV, 22-AV, 24-AV, 33-AV, 68.1-0-0	VOC	127.95	494.24
EPNs: 10.1-0-0, 10.2-0-0, 10.3-0-0, 12-0-0, 21-0-0, 22-0-0, 24-0-0, 24.1-0-0, 33-0-0, 68.1-0-0	Benzene (8)	1.74	7.60

Emission Sources - Maximum Allowable Emission Rates

Planned Maintenance, Startup, and Shutdown (MSS) Caps				
Emission Point Nos. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
Decoking Equipment MSS 22-95-3, 22-95-3A, 22-95-3B, and 22-95-3C 24-95-300 33-95-376 and 33-95-376A	U22 Decoke U24 Decoke U33 Decoke	CO CO CO		
	Emission Cap for the EPNs Listed Above	CO	792.82	88.77
Flare System MSS 56-61-4 56-61-8 56-61-9 56-61-10 56-61-12 56-61-14 56-61-20 56-61-22	Unit 10D/18 Process Flare 4 Unit 10, 12 Low-Pressure Flare 8 Unit 10, 12 High-Pressure Flare 9 Unit 21, 22 Low-Pressure Flare 10 Unit 22 High-Pressure Flare 12 Unit 24 High-Pressure Flare 14 Unit 24 Low-Pressure Flare 20 Unit 33 Process Flare 22	CO CO CO CO CO CO CO CO		
	Emission Cap for the EPNs Listed Above	CO	7505.60	137.12
Flare System MSS 56-61-4 56-61-8 56-61-9 56-61-10 56-61-12 56-61-14 56-61-20 56-61-22	Unit 10D/18 Process Flare 4 Unit 10, 12 Low-Pressure Flare 8 Unit 10, 12 High-Pressure Flare 9 Unit 21, 22 Low-Pressure Flare 10 Unit 22 High-Pressure Flare 12 Unit 24 High-Pressure Flare 14 Unit 24 Low-Pressure Flare 20 Unit 33 Process Flare 22	NO _x NO _x NO _x NO _x NO _x NO _x NO _x NO _x		
	Emission Cap for the EPNs Listed Above	NO_x	1513.37	28.82
MSS 22-95-3, 22-95-3A, 22-95-3B, and 22-95-3C 24-95-300 33-95-376 and 33-95-376A CPC-ABLAST CPC-PAINT Catalyst	U22 Decoke U24 Decoke U33 Decoke Abrasive Blasting Painting Catalyst Handling	PM PM PM PM PM PM		
	Emission Cap for the EPNs Listed Above	PM	621.98	66.29

Emission Sources - Maximum Allowable Emission Rates

Planned Maintenance, Startup, and Shutdown (MSS) Caps				
Emission Point Nos. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates	
			lbs/hour	TPY (4)
MSS 56-61-4 56-61-8 56-61-9 56-61-10 56-61-12 56-61-14 56-61-20 56-61-22 CPC-Paint MSSATM	Unit 10D/18 Process Flare 4 Unit 10, 12 Low-Pressure Flare 8 Unit 10, 12 High-Pressure Flare 9 Unit 21, 22 Low-Pressure Flare 10 Unit 22 High-Pressure Flare 12 Unit 24 High-Pressure Flare 14 Unit 24 Low-Pressure Flare 20 Unit 33 Process Flare 22 Painting Atmospheric Venting/Purging (See Attachment B for a list of activities)	VOC VOC VOC VOC VOC VOC VOC VOC VOC VOC VOC		
	Emission Cap for the EPNs Listed Above	VOC	5247.80	124.41
MSS 56-61-4 56-61-8 56-61-9 56-61-10 56-61-12 56-61-14 56-61-20 56-61-22 MSSATM	Unit 10D/18 Process Flare 4 Unit 10, 12 Low-Pressure Flare 8 Unit 10, 12 High-Pressure Flare 9 Unit 21, 22 Low-Pressure Flare 10 Unit 22 High-Pressure Flare 12 Unit 24 High-Pressure Flare 14 Unit 24 Low-Pressure Flare 20 Unit 33 Process Flare 22 Atmospheric Venting/Purging (See Attachment B for a list of activities)	Benzene Benzene Benzene Benzene Benzene Benzene Benzene Benzene Benzene Benzene		
	Emission Cap for the EPNs Listed Above	Benzene	176.72	2.88

Emission Sources - Maximum Allowable Emission Rates

- (1) Emission point identification – either specific equipment designation or emission point number from plot plan.
- (2) Specific point source name. For fugitive sources, use area name or fugitive source name.
- (3)

CO	- carbon monoxide
H ₂ S	- hydrogen sulfide
NH ₃	- Ammonia
NO _x	- total oxides of nitrogen
PM	- total particulate matter, suspended in the atmosphere, including PM ₁₀ and PM _{2.5} , as represented
PM ₁₀	- total particulate matter equal to or less than 10 microns in diameter, including PM _{2.5} , as represented
PM _{2.5}	- particulate matter equal to or less than 2.5 microns in diameter
SO ₂	- sulfur dioxide
- (4) Compliance with annual emission limits (tons per year) is based on a 12-month rolling period.
- (5) Emission rate is an estimate and is enforceable through compliance with the applicable special condition(s) and permit application representations.
- (6) Excluding fugitives associated with Furnace 10.
- (7) This pollutant is also covered by Permit No. PSDTX751M1.
- (8) Benzene emissions are included in the VOC emissions limit.
- (9) Emissions from the Propylene Compressor Turbine (EPN 22-95-27) are prohibited upon commencement of operation of TCEQ Project No. 346268. See Special Condition No. 64.
- (10) Short-term emission limit applicable to operating scenarios defined in SC No. 7.C.

Date: August 19, 2025

Emission Sources - Maximum Allowable Emission Rates

Permit Number GHGPSDTX226

This table lists the maximum allowable emission rates of greenhouse gas (GHG) emissions associated with TCEQ Project No. 346268, as defined in Title 30 Texas Administrative Code § 101.1, for all sources of GHG air contaminants on the applicant's property that are authorized by this permit. The emission rates shown are those derived from information submitted as part of the application for permit and are the maximum rates allowed for these facilities, sources, and related activities. Any proposed increase in emission rates may require an application for a modification of the facilities authorized by this permit.

Air Contaminants Data

Emission Point No. (1)	Source Name (2)	Air Contaminant Name (3)	Emission Rates
			TPY (4)
22-36-9	22 Furnace 9	CO ₂ (5)	77,694.00
		CH ₄ (5)	3.91
		N ₂ O (5)	0.78
		CO ₂ e	78,024.19
56-61-10	Unit 21/22 Low-Pressure Flare (6)	CO ₂ (5)	12,870.98
		CH ₄ (5)	0.52
		N ₂ O (5)	0.10
		CO ₂ e	12,915.15
22-0-0	Unit 22 Process Fugitives (6)	CH ₄ (5)	0.14
		CO ₂ e	3.38

(1) Emission point identification - either specific equipment designation or emission point number from plot plan.

(2) Specific point source name. For fugitive sources, use area name or fugitive source name.

(3) CO₂ - carbon dioxide
 N₂O - nitrous oxide
 CH₄ - methane
 HFCs - hydrofluorocarbons
 PFCs - perfluorocarbons
 SF₆ - sulfur hexafluoride
 CO₂e - carbon dioxide equivalents based on the following Global Warming Potentials (1/2015):
 CO₂ (1), N₂O (298), CH₄(25), SF₆ (22,800), HFC (various), PFC (various)

(4) Compliance with annual emission limits (tons per year) is based on a 12-month rolling period. These rates include emissions from maintenance, startup, and shutdown.

(5) Emission rate is given for informational purposes only and does not constitute enforceable limit.

(6) GHG emissions limited to project piping additions and flaring associated with TCEQ Project No. 346268.

Date: April 5, 2024