



Brazos River Authority

Application of HEFR at Brazos River at Richmond

Implementation and Suggested Improvements

Presented to the Trinity and San Jacinto
Rivers and Galveston Bay Basin and Bay
Expert Science Team

April 8, 2009






Overview

- BRA system
- Development of instream flow regime statistics for the Brazos
- Application of HEFR
 - Qualifying high flow pulse events
 - Interaction of HFP events and water diversions
 - Frequency criteria
- Summary and recommendations

Brazos River Authority System

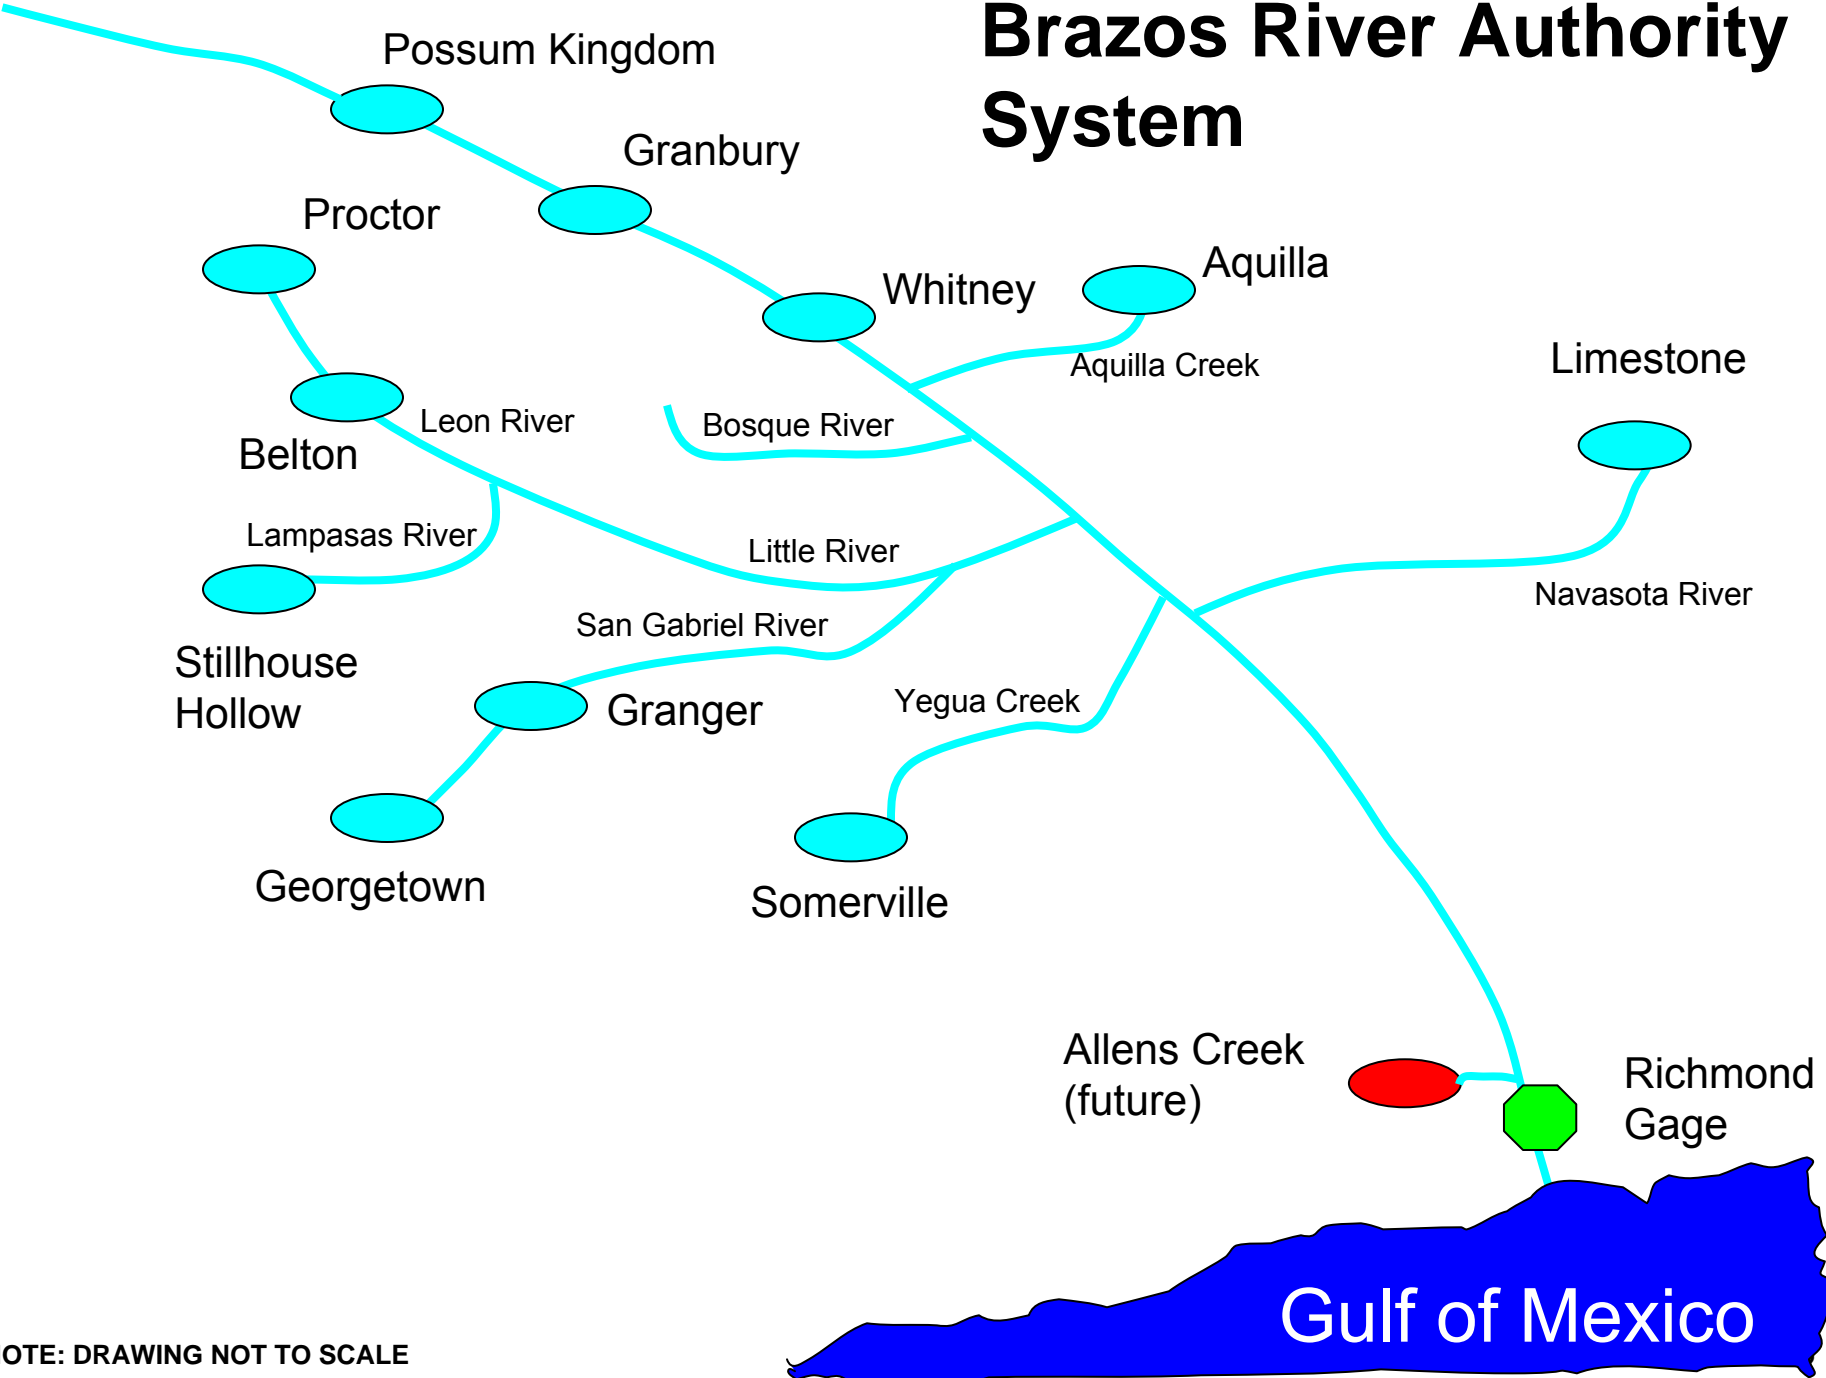

NOTE: DRAWING NOT TO SCALE



Flow Regime Statistics

- Statistics jointly developed by TPWD, TCEQ and BRA
- Consistent with flow regime approach of the TIFP
- Intended as a interim criteria until instream flow studies completed

HEFR Flow Regime Statistics

Brazos River at Richmond 1923-1959


Overbank Flows	Return Period (R) : 0.7 (years)					Duration (D) : 36 (days)						
	Volume (V) : 1,622,698 (ac-ft)					Peak Flow (Q) : 61,600 (cfs)						
High Flow Pulses	F: 1 D: 16		F: 1 D: 13		F: 1 D: 12		F: 1 D: 11					
	Q: 19,500 V: 297,551		Q: 19,150 V: 270,154		Q: 15,300 V: 166,116		Q: 13,175 V: 146,867					
	F: 1 D: 8		F: 1 D: 7		F: 1 D: 7		F: 1 D: 7					
	Q: 9670 V: 90,288		Q: 10200 V: 101,405		Q: 8830 V: 77,177		Q: 7730 V: 56,162					
	F: 1 D: 6		F: 1 D: 5		F: 1 D: 4		F: 1 D: 4					
	Q: 3748 V: 36,266		Q: 5640 V: 44,668		Q: 4880 V: 38,182		Q: 2500 V: 22,458					
Base Flows (cfs)	2,955			3,670			2,635			2,038		
	1,630			2,030			1,450			1,150		
	885			1,170			930			760		
Subsistence Flows (cfs)	460 (7Q2 743 cfs)			408 (7Q2 743 cfs)			359 (7Q2 743 cfs)			403 (7Q2 743 cfs)		
	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov
	Winter			Spring			Summer			Fall		

Hydrologic Conditions	Wet
	Average
	Dry
	Subsistence

High Flow Pulse Characteristics	F = Frequency (per season)
	D = Duration (days)
	Q = Peak Flows (cfs)
	V = Volume (ac-ft)



Qualifying High Flow Pulse Event Conceptual Description

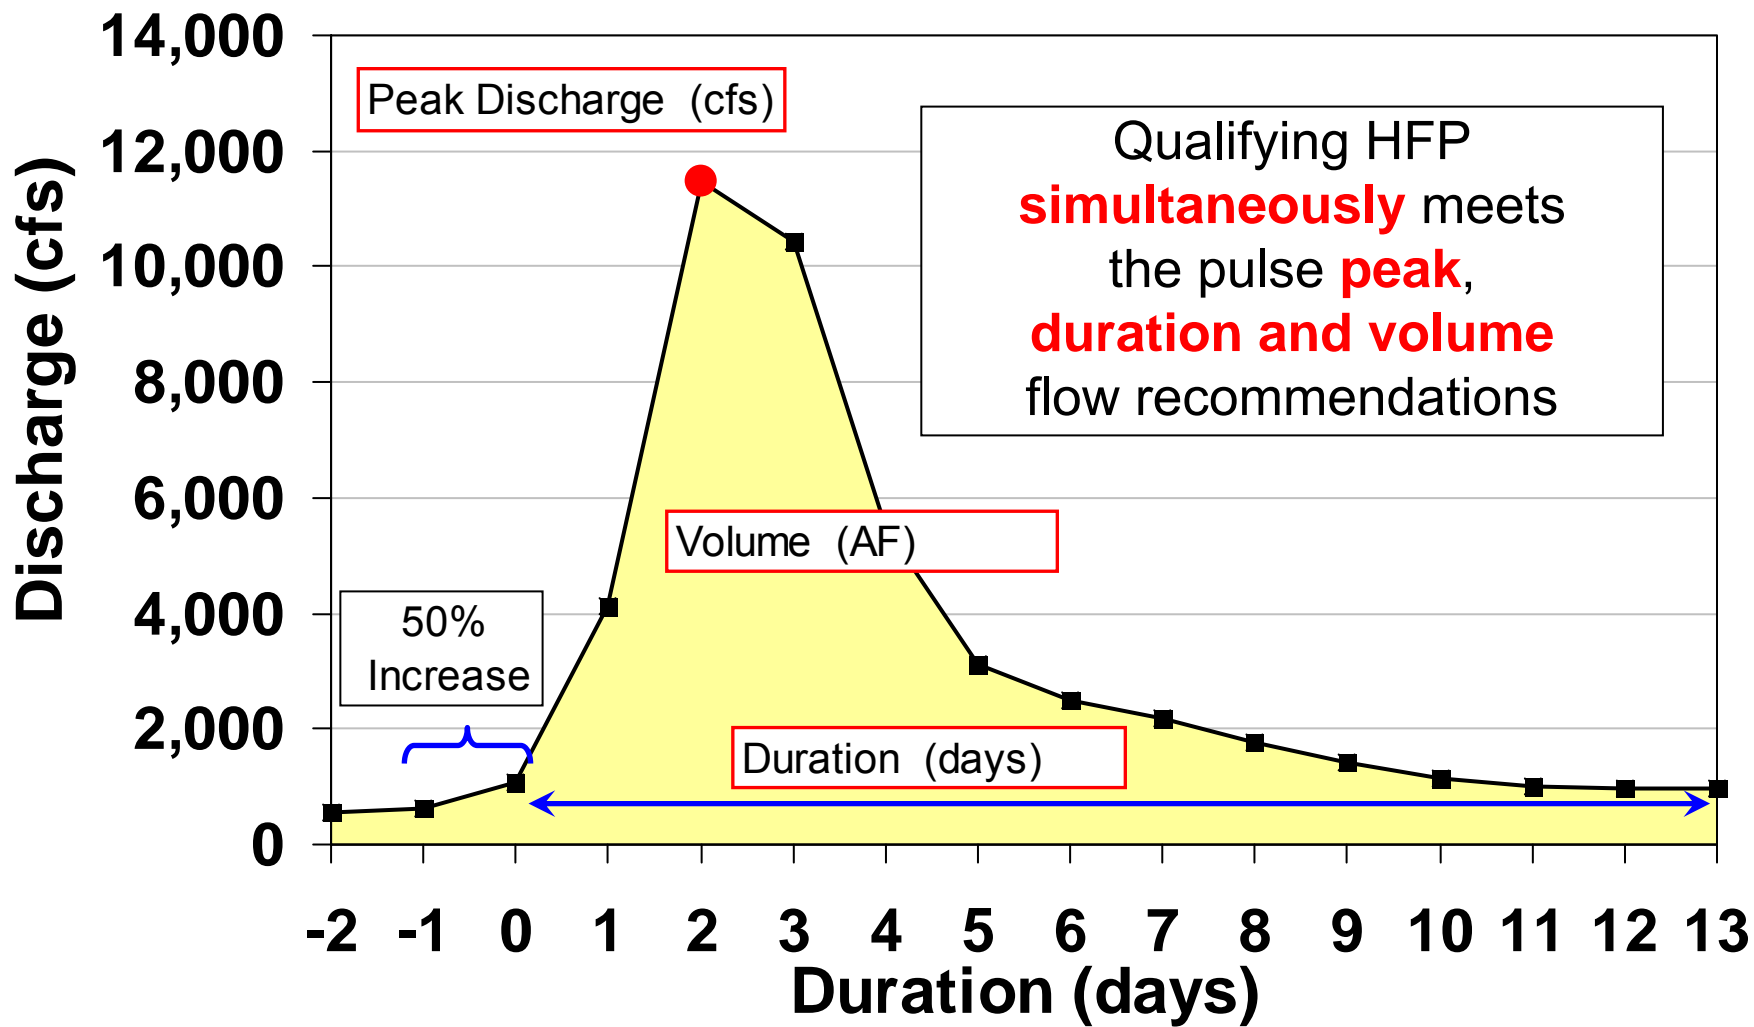




WAM Modeling

Brazos River at Richmond 1940 -1997

- Brazos WAM Run 3 modified to include
 - Return flows from BRA sources
 - System diversions at Richmond
 - 111,574 af/yr firm
 - 670,000 af/yr interruptible
- Daily flows
 - Regulated flows before system diversion
 - Distributed to daily using historical percentage of monthly flow
 - Appropriated flow reserved for senior rights



Regulated Flows at Brazos River at Richmond Calendar Year 1968

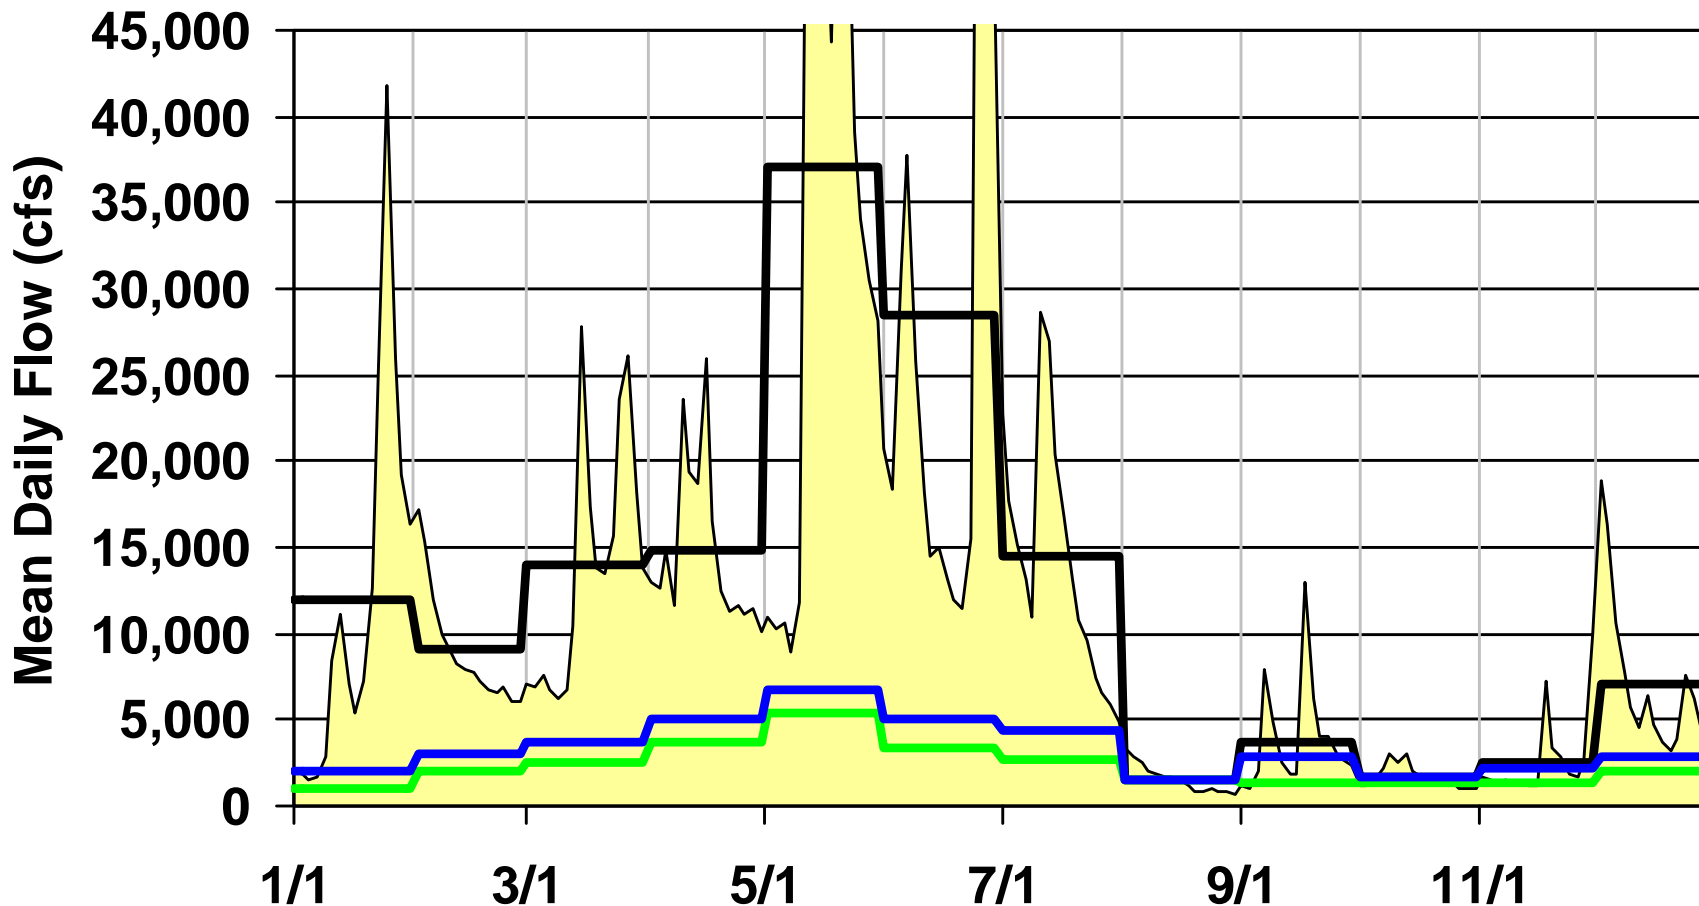





Average Annual Diversion of Run-of-River Streamflow

Brazos River at Richmond 1940 -1997

Average Annual Regulated Streamflow
4,771,228 AF


Average Annual Run-of-river Diversion
581,478 AF

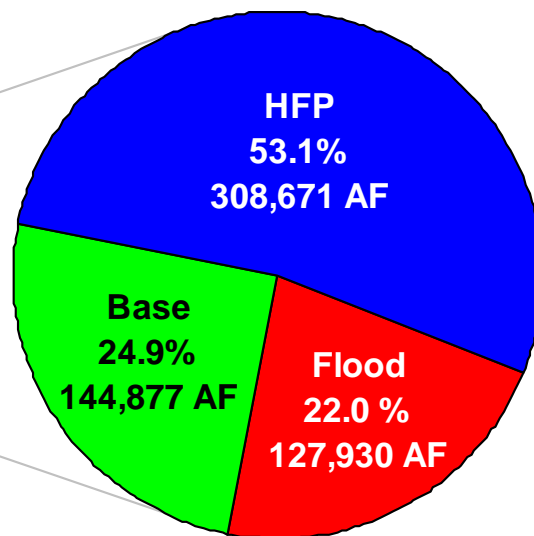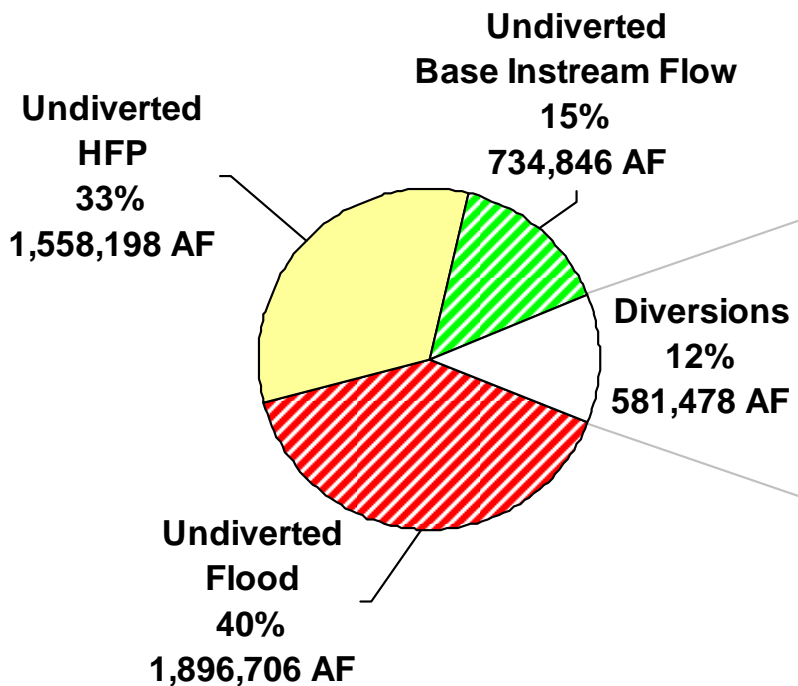




Average Annual Impacts of Diversions on HFP Volume

Brazos River at Richmond 1940 – 1997

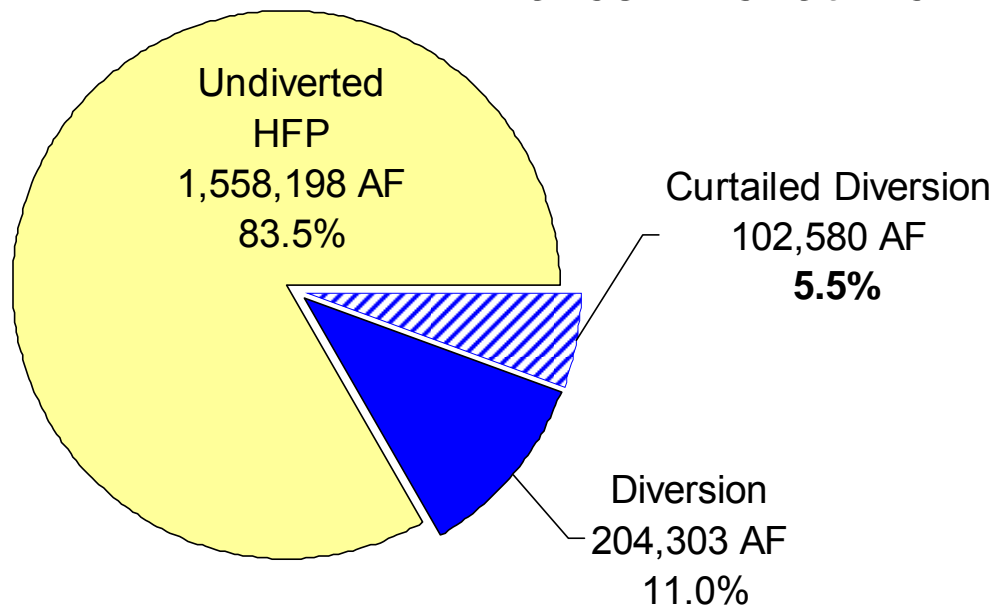

Continued diversion during HFP events impact pulse volume 5.5%.

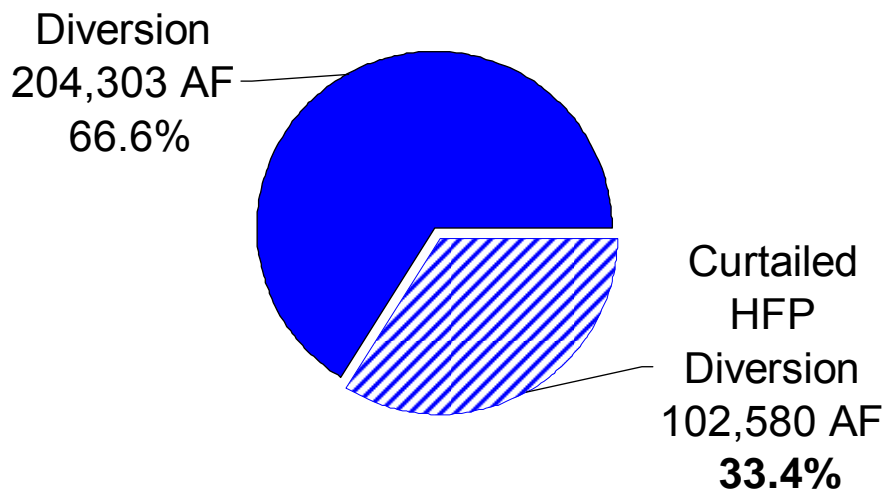


Curtailment during HFP events impact diversions 33.4%.



Impact of Diversions on HFP Peak

Calendar Year 1968

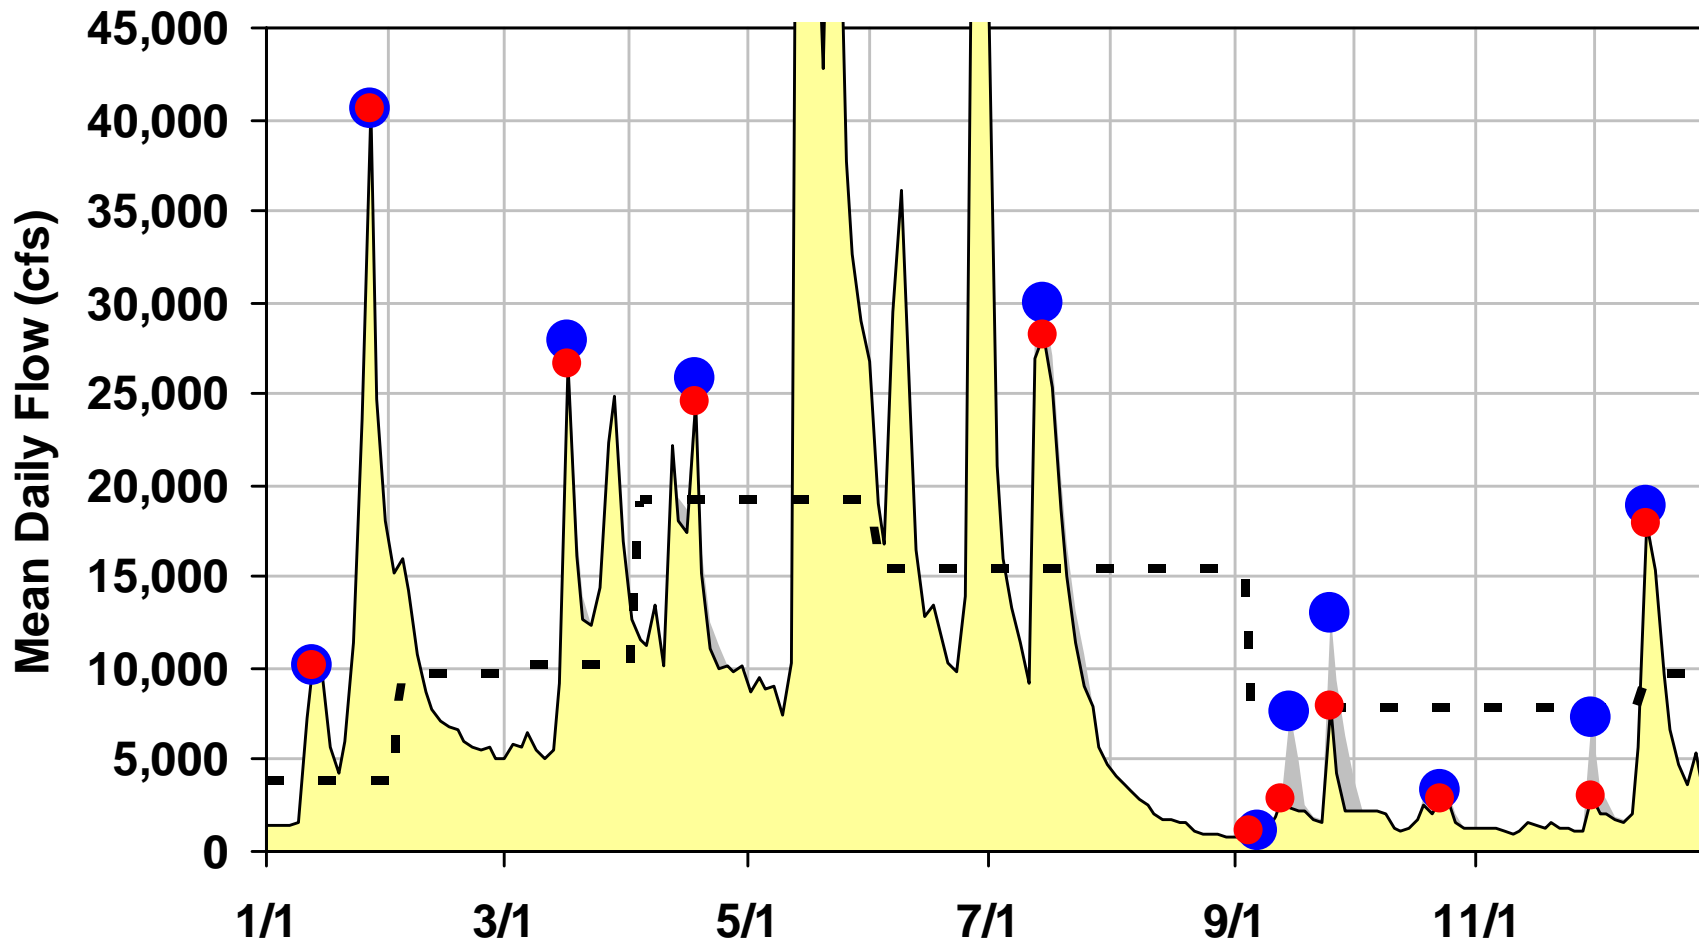

Streamflow after diversion

Peak - curtailed diversions

Peak - continued diversion

HFP Peak Flow Recommendation

Impact of Diversions to Occurrence of HFP


Brazos River at Richmond 1940 - 1997

Diversion Rate Threshold (cfs)	HFP Events that Meet Peak Criteria	Total HFP Events	Flood Events
Curtailed HFP Diversion (number of events)	250	584	72
Continued HFP Diversion (number of events)	230	567	72
Impact to Occurrence (number of events)	20	17	0
Impact to Occurrence (%)	8%	2.9%	0%
Return Period of Impacts (years)	2.9	3.4	N/A



Qualifying HFP By Hydrologic Condition

Brazos River at Richmond 1940 – 1997

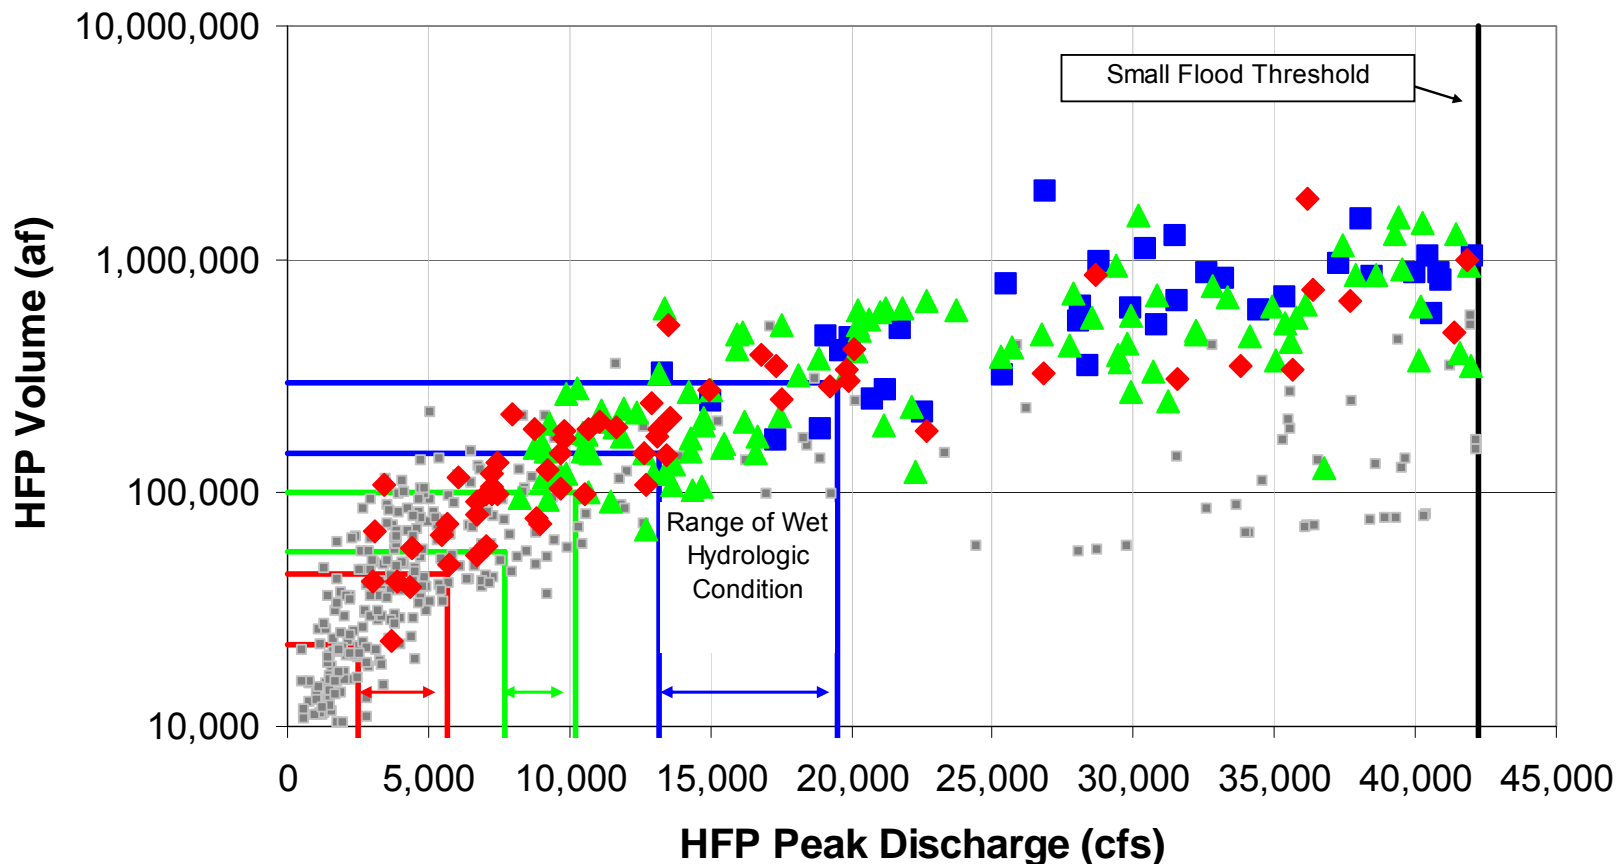


▪ Non-Qualifying HFP
▲ Avg Qualifying HFP

■ Wet Qualifying HFP
◆ Dry Qualifying HFP



Winter Season Qualifying HFP Frequency

Brazos River at Richmond 1940 – 1997 (Regulated Flows)

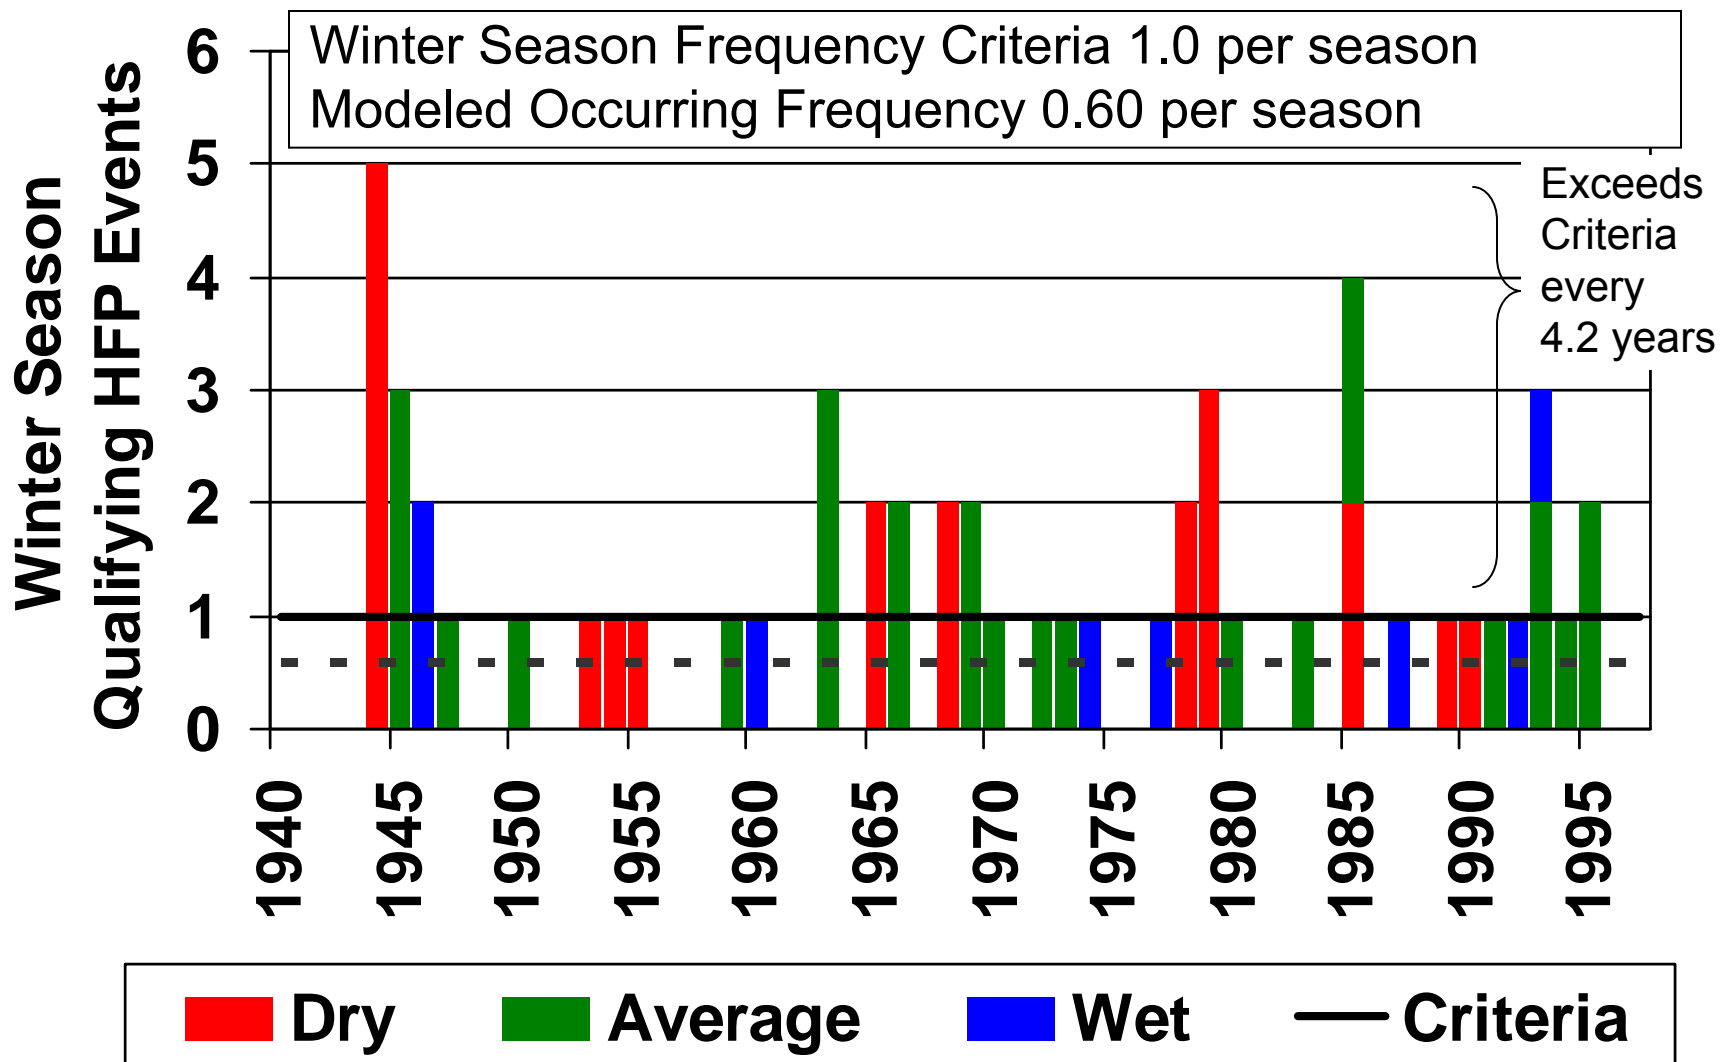



Summary

- Methodology is complex – implementation even more so
- Aggregated criteria increase complexity of application with minimal benefit to the environment
- Pulses are a significant source of water



Recommendations

- Methodology is complex – implementation even more so
 - Consider simplifying; are hydrologic conditions (wet, average, dry) needed to characterize HFP criteria?



Recommendations

- Over-constraining criteria increase complexity of implementation with minimal benefit to the environment
 - Consider relaxing criteria, such as meeting one of the three criteria to qualify
- Pulses are a significant source of water
 - Consider a diversion rate threshold, below which the Qualifying HFP criteria do not apply
 - The frequency distribution should incorporate multi-year variability (return period) and the corresponding accounting




Questions?





Duration of Curtailed Diversion During HFP

Brazos River at Richmond 1940 – 1997

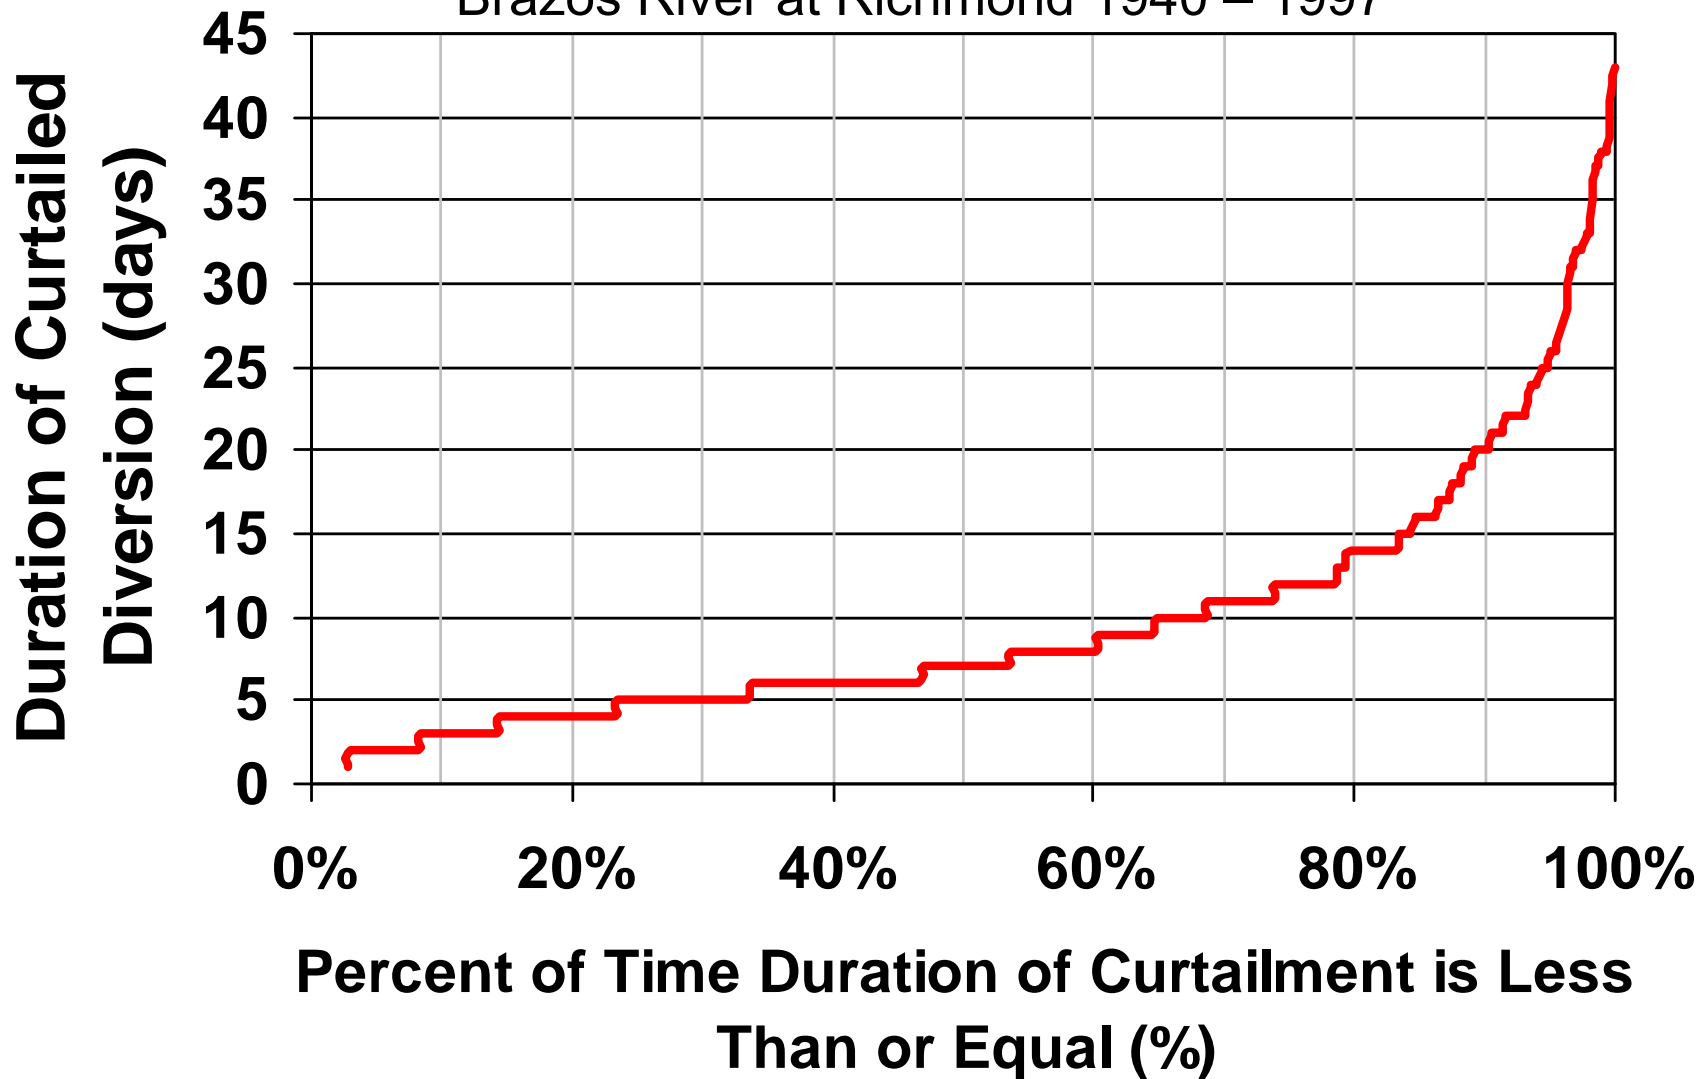



Qualifying HFP Frequency


Brazos River at Richmond 1940 – 1997 (Regulated Flows)

	Winter	Spring	Summer	Fall
Frequency Criteria (per season)	1.00	1.00	1.00	1.00
Frequency of Occurrence (per season)	0.60	0.66	0.50	0.71
Return Period of Occurrence (years)	1.66	1.45	2.00	1.41
Return Period of Exceeding Criteria (years)	4.46	3.41	6.44	3.22



Winter Season Qualifying HFP Frequency

Brazos River at Richmond 1923 – 1959 (Pre-Dam)

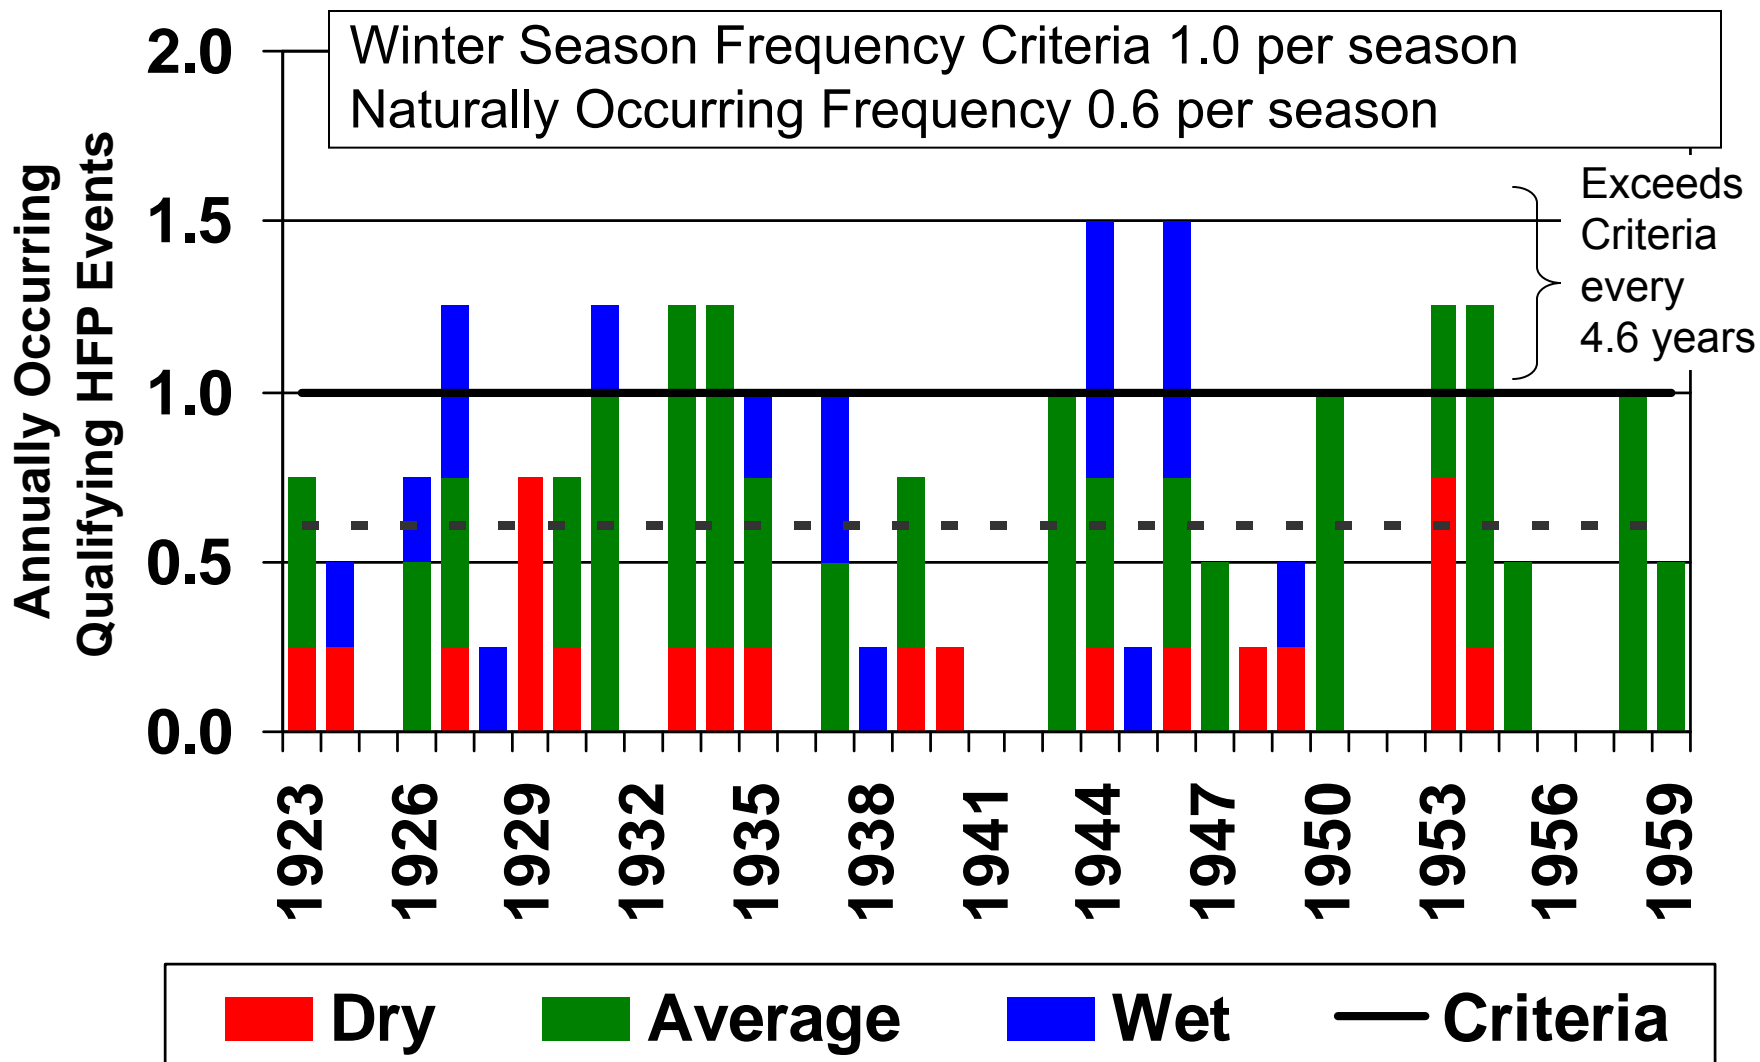



Qualifying HFP Frequency


Brazos River at Richmond 1923 – 1959 (Pre-Dam)

	Winter	Spring	Summer	Fall
Frequency Criteria (per season)	1.00	1.0	1.0	1.0
Frequency of Occurrence (per season)	0.6	0.6	0.5	0.5
Return Period of Occurrence (years)	1.6	1.6	2.0	2.0
Return Period of Exceeding Criteria (years)	4.6	5.3	9.3	7.4



Daily Diversion to Capture Monthly Appropriation

Brazos River at Richmond March thru April 1968

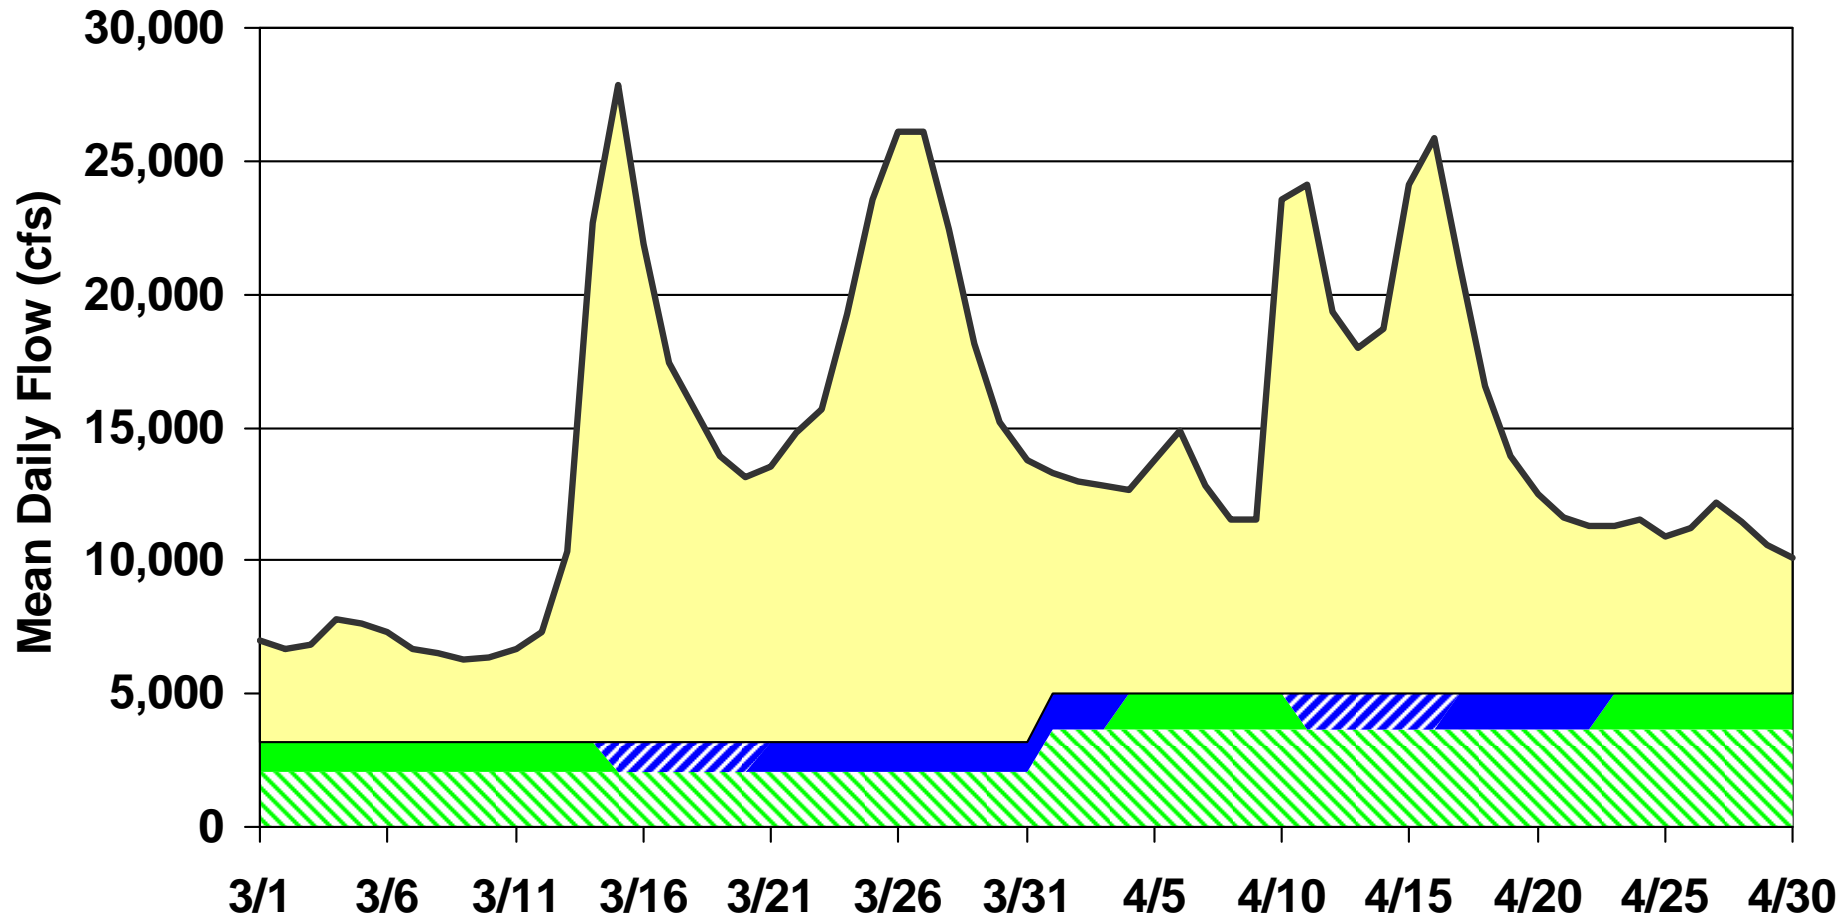

Base Flow Criteria

Diversion During Pulse



Undiverted Regulated flow

Diversion During Base

Diversion Passed During HFP

Daily Diversion to Capture Monthly Appropriation

Brazos River at Richmond September 1968

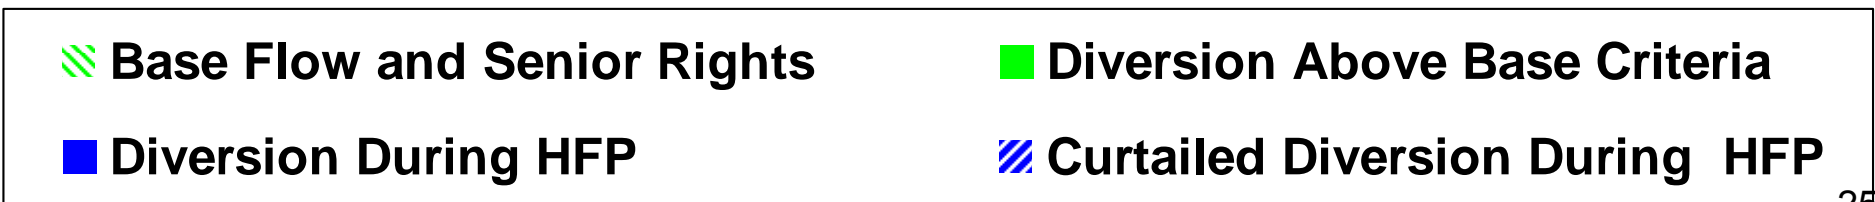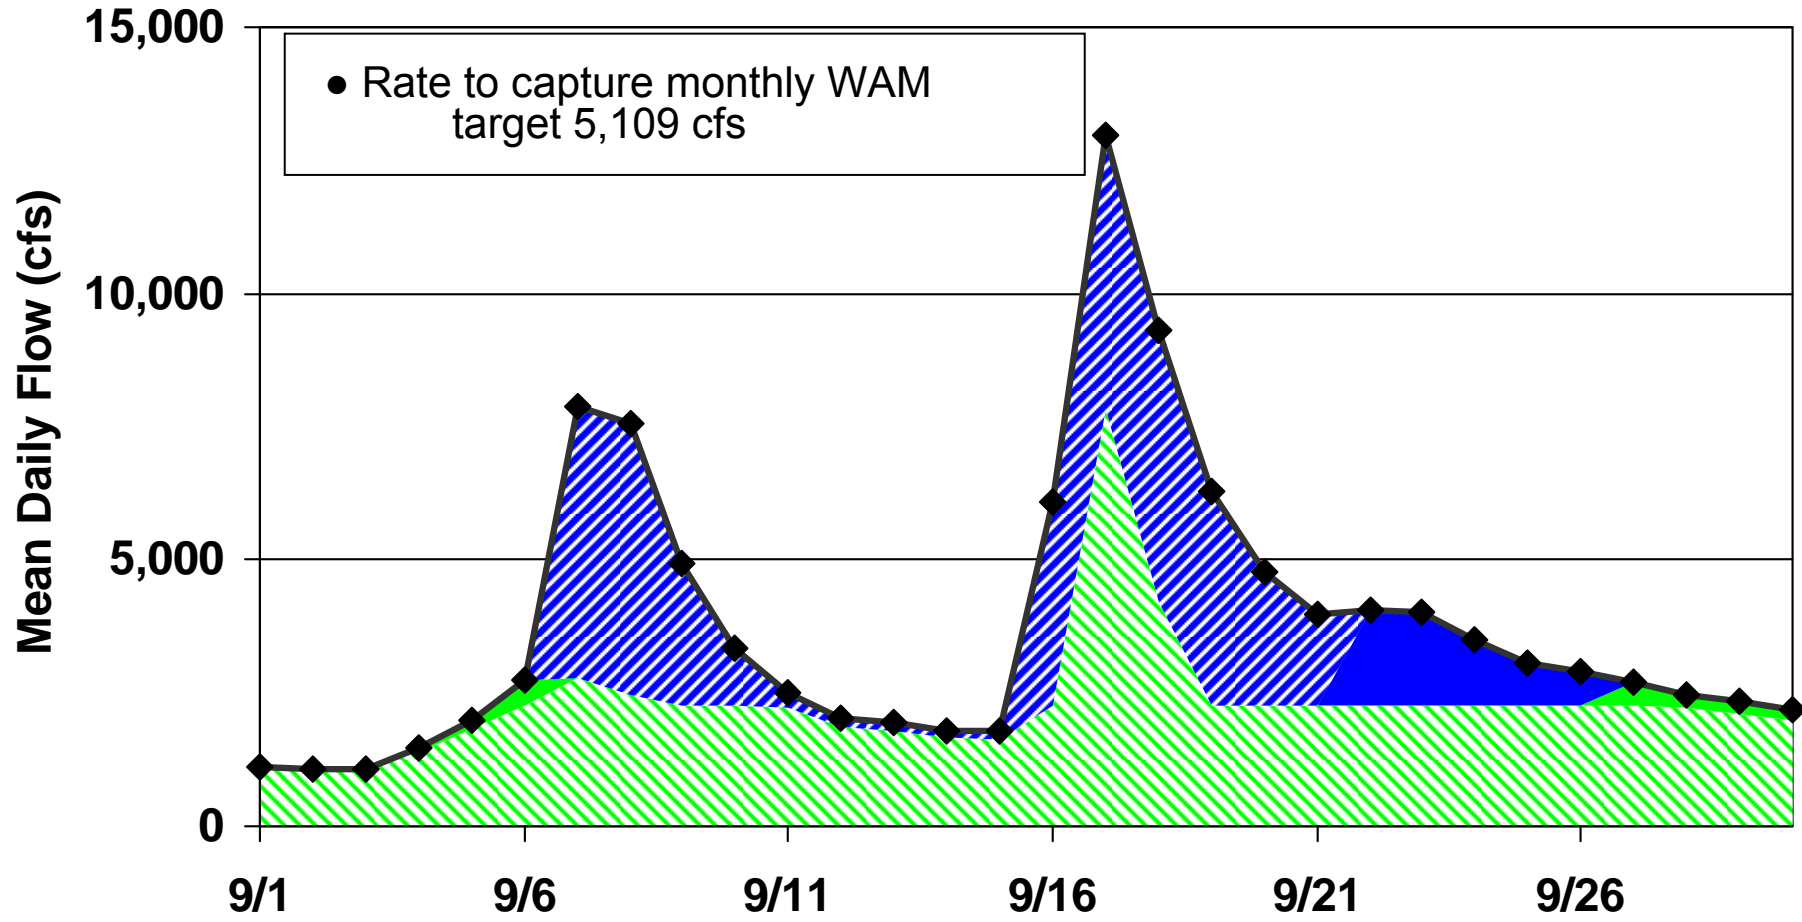



Overview

- Focus on pulse data
- System can be operated so that diversion during pulses has minimal impact on environment
- Curtailment of diversion during pulse flows increases complexity of operation and impacts water supply without significant benefit to environment
- Multi-year variability can be easily incorporated into the frequency recommendations