

CONTRIBUTING ZONE PLAN

FOR

PEC Cedar Park Campus

PREPARED FOR

Texas Commission on Environmental Quality

Region 13 – San Antonio

14250 Judson Road

San Antonio, Texas 78233

210-490-3096 (office)

210-545-4329 (fax)

PREPARED BY



F-13351

James Ingalls, P.E.

2021 SH 46W, Ste. 105

New Braunfels, TX 78132

Prepared

May 19, 2025



05/19/2025

TCEQ Application Cover Page	Page 3
Contributing Zone Plan Application	Page 7
A. Attachment A - Location Map	Page 18
B. Attachment B - USGS Quadrangle Map	Page 19
C. Attachment C – Project Narrative	Page 20
D. Attachment D– Factors Affecting Surface Water Quality	Page 21
E. Attachment E – Volume and Character of Stormwater	Page 21
F. Attachment F – OSSF Suitability Letter	Page 21
G. Attachment G – Alternative Secondary Containment Methods	Page 21
H. Attachment H – AST Containment Structure Drawings	Page 21
I. Attachment I – 20% or Less Impervious Cover Declaration	Page 22
J. Attachment J – BMPs for Upgradient Stormwater	Page 22
K. Attachment K – BMPs for On-site Stormwater	Page 22
L. Attachment L – BMPs for Surface Streams	Page 22
M. Attachment M – Construction Plans	Page 26-34
N. Attachment N – Inspection, Maintenance, Repair and Retrofit Plan	Page 23-32
O. Attachment O – Pilot-Scale Field Testing Plan	Page 35
P. Attachment P – Measures for Minimizing Surface Stream Contamination	Page 35
Temporary Stormwater Section	Page 36
A. Attachment A – Spill Response Actions	Page 41
B. Attachment B – Potential Sources of Contamination	Page 45
C. Attachment C – Sequence of Major Construction	Page 45
D. Attachment D – Temporary BMP and Measures	Page 45
E. Attachment E – Request to Temporarily Seal a Feature	Page 46
F. Attachment F – Structural Practices	Page 46
G. Attachment G – Drainage Area Map	Page 46-49
H. Attachment H – Temporary Sediment Pond Plan & Calculation	N/A
I. Attachment I – Inspection and Maintenance for BMPs	Page 50
J. Attachment J – Schedule of Interim & Permanent Soil Stabilization Practices	Page 52
Copy of Notice of Intent	N/A
Agent Authorization Form	Page 54
Application Fee Form	Page 56
Core Data Form	Page 58

Texas Commission on Environmental Quality

Edwards Aquifer Application Cover Page

Our Review of Your Application

The Edwards Aquifer Program staff conducts an administrative and technical review of all applications. The turnaround time for administrative review can be up to 30 days as outlined in 30 TAC 213.4(e). Generally administrative completeness is determined during the intake meeting or within a few days of receipt. The turnaround time for technical review of an administratively complete Edwards Aquifer application is 90 days as outlined in 30 TAC 213.4(e). Please know that the review and approval time is directly impacted by the quality and completeness of the initial application that is received. In order to conduct a timely review, it is imperative that the information provided in an Edwards Aquifer application include final plans, be accurate, complete, and in compliance with [30 TAC 213](#).

Administrative Review

1. [Edwards Aquifer applications](#) must be deemed administratively complete before a technical review can begin. To be considered administratively complete, the application must contain completed forms and attachments, provide the requested information, and meet all the site plan requirements. The submitted application and plan sheets should be final plans. Please submit one full-size set of plan sheets with the original application, and half-size sets with the additional copies.

To ensure that all applicable documents are included in the application, the program has developed tools to guide you and web pages to provide all forms, checklists, and guidance. Please visit the below website for assistance: <http://www.tceq.texas.gov/field/eapp>.

2. This Edwards Aquifer Application Cover Page form (certified by the applicant or agent) must be included in the application and brought to the administrative review meeting.
3. Administrative reviews are scheduled with program staff who will conduct the review. Applicants or their authorized agent should call the appropriate regional office, according to the county in which the project is located, to schedule a review. The average meeting time is one hour.
4. In the meeting, the application is examined for administrative completeness. Deficiencies will be noted by staff and emailed or faxed to the applicant and authorized agent at the end of the meeting, or shortly after. Administrative deficiencies will cause the application to be deemed incomplete and returned.

An appointment should be made to resubmit the application. The application is re-examined to ensure all deficiencies are resolved. The application will only be deemed administratively complete when all administrative deficiencies are addressed.

5. If an application is received by mail, courier service, or otherwise submitted without a review meeting, the administrative review will be conducted within 30 days. The applicant and agent will be contacted with the results of the administrative review. If the application is found to be administratively incomplete, it can be retrieved from the regional office or returned by regular mail. If returned by mail, the regional office may require arrangements for return shipping.
6. If the geologic assessment was completed before October 1, 2004 and the site contains “possibly sensitive” features, the assessment must be updated in accordance with the *Instructions to Geologists* (TCEQ-0585 Instructions).

Technical Review

1. When an application is deemed administratively complete, the technical review period begins. The regional office will distribute copies of the application to the identified affected city, county, and groundwater conservation district whose jurisdiction includes the subject site. These entities and the public have 30 days to provide comments on the application to the regional office. All comments received are reviewed by TCEQ.
2. A site assessment is usually conducted as part of the technical review, to evaluate the geologic assessment and observe existing site conditions. The site must be accessible to our staff. The site boundaries should be

clearly marked, features identified in the geologic assessment should be flagged, roadways marked and the alignment of the Sewage Collection System and manholes should be staked at the time the application is submitted. If the site is not marked the application may be returned.

3. We evaluate the application for technical completeness and contact the applicant and agent via Notice of Deficiency (NOD) to request additional information and identify technical deficiencies. There are two deficiency response periods available to the applicant. There are 14 days to resolve deficiencies noted in the first NOD. If a second NOD is issued, there is an additional 14 days to resolve deficiencies. If the response to the second notice is not received, is incomplete or inadequate, or provides new information that is incomplete or inadequate, the application must be withdrawn or will be denied. Please note that because the technical review is underway, whether the application is withdrawn or denied **the application fee will be forfeited**.
4. The program has 90 calendar days to complete the technical review of the application. If the application is technically adequate, such that it complies with the Edwards Aquifer rules, and is protective of the Edwards Aquifer during and after construction, an approval letter will be issued. Construction or other regulated activity may not begin until an approval is issued.

Mid-Review Modifications

It is important to have final site plans prior to beginning the permitting process with TCEQ to avoid delays.

Occasionally, circumstances arise where you may have significant design and/or site plan changes after your Edwards Aquifer application has been deemed administratively complete by TCEQ. This is considered a "Mid-Review Modification". Mid-Review Modifications may require redistribution of an application that includes the proposed modifications for public comment.

If you are proposing a Mid-Review Modification, two options are available:

- If the technical review has begun your application can be denied/withdrawn, your fees will be forfeited, and the plan will have to be resubmitted.
- TCEQ can continue the technical review of the application as it was submitted, and a modification application can be submitted at a later time.

If the application is denied/withdrawn, the resubmitted application will be subject to the administrative and technical review processes and will be treated as a new application. The application will be redistributed to the affected jurisdictions.

Please contact the regional office if you have questions. If your project is located in Williamson, Travis, or Hays County, contact TCEQ's Austin Regional Office at 512-339-2929. If your project is in Comal, Bexar, Medina, Uvalde, or Kinney County, contact TCEQ's San Antonio Regional Office at 210-490-3096

Please fill out all required fields below and submit with your application.

1. Regulated Entity Name: PEC Cedar Park Campus				2. Regulated Entity No.: N/A			
3. Customer Name: Pedernales Electric Cooperative Inc.				4. Customer No.: 601327927			
5. Project Type: (Please circle/check one)	<input checked="" type="checkbox"/> New	Modification			Extension		Exception
6. Plan Type: (Please circle/check one)	WPAP	<input checked="" type="checkbox"/> CZP	SCS	UST	AST	EXP	EXT
7. Land Use: (Please circle/check one)	Residential		<input checked="" type="checkbox"/> Non-residential			8. Site (acres):	
						3.41	
9. Application Fee:	\$4,000		10. Permanent BMP(s):			Batch Detention Pond, Vegetative Filter Strips	
11. SCS (Linear Ft.):	N/A		12. AST/UST (No. Tanks):			N/A	
13. County:	Williamson		14. Watershed:			Turkey Creek-Brushy Creek	

Application Distribution

Instructions: Use the table below to determine the number of applications required. One original and one copy of the application, plus additional copies (as needed) for each affected incorporated city, county, and groundwater conservation district are required. Linear projects or large projects, which cross into multiple jurisdictions, can require additional copies. Refer to the "Texas Groundwater Conservation Districts within the EAPP Boundaries" map found at:

http://www.tceq.texas.gov/assets/public/compliance/field_ops/eapp/EAPP%20GWCD%20map.pdf

For more detailed boundaries, please contact the conservation district directly.

Austin Region			
County:	Hays	Travis	Williamson
Original (1 req.)	—	—	✓
Region (1 req.)	—	—	✓
County(ies)	—	—	✓
Groundwater Conservation District(s)	<input type="checkbox"/> Edwards Aquifer Authority <input type="checkbox"/> Barton Springs/ Edwards Aquifer <input type="checkbox"/> Hays Trinity <input type="checkbox"/> Plum Creek	<input type="checkbox"/> Barton Springs/ Edwards Aquifer	NA
City(ies) Jurisdiction	<input type="checkbox"/> Austin <input type="checkbox"/> Buda <input type="checkbox"/> Dripping Springs <input type="checkbox"/> Kyle <input type="checkbox"/> Mountain City <input type="checkbox"/> San Marcos <input type="checkbox"/> Wimberley <input type="checkbox"/> Woodcreek	<input type="checkbox"/> Austin <input type="checkbox"/> Bee Cave <input type="checkbox"/> Pflugerville <input type="checkbox"/> Rollingwood <input type="checkbox"/> Round Rock <input type="checkbox"/> Sunset Valley <input type="checkbox"/> West Lake Hills	<input checked="" type="checkbox"/> Austin <input type="checkbox"/> Cedar Park <input type="checkbox"/> Florence <input type="checkbox"/> Georgetown <input type="checkbox"/> Jerrell <input type="checkbox"/> Leander <input type="checkbox"/> Liberty Hill <input type="checkbox"/> Pflugerville <input type="checkbox"/> Round Rock

San Antonio Region					
County:	Bexar	Comal	Kinney	Medina	Uvalde
Original (1 req.)	—	—	—	—	—
Region (1 req.)	—	—	—	—	—
County(ies)	—	—	—	—	—
Groundwater Conservation District(s)	<input type="checkbox"/> Edwards Aquifer Authority <input type="checkbox"/> Trinity-Glen Rose	<input type="checkbox"/> Edwards Aquifer Authority	<input type="checkbox"/> Kinney	<input type="checkbox"/> EAA <input type="checkbox"/> Medina	<input type="checkbox"/> EAA <input type="checkbox"/> Uvalde
City(ies) Jurisdiction	<input type="checkbox"/> Castle Hills <input type="checkbox"/> Fair Oaks Ranch <input type="checkbox"/> Helotes <input type="checkbox"/> Hill Country Village <input type="checkbox"/> Hollywood Park <input type="checkbox"/> San Antonio (SAWS) <input type="checkbox"/> Shavano Park	<input type="checkbox"/> Bulverde <input type="checkbox"/> Fair Oaks Ranch <input type="checkbox"/> Garden Ridge <input type="checkbox"/> New Braunfels <input type="checkbox"/> Schertz	NA	<input type="checkbox"/> San Antonio ETJ (SAWS)	NA

I certify that to the best of my knowledge, that the application is complete and accurate. This application is hereby submitted to TCEQ for administrative review and technical review.

James Ingalls, PE

Print Name of Customer/Authorized Agent



5/13/2025

Signature of Customer/Authorized Agent

Date

****FOR TCEQ INTERNAL USE ONLY****

Date(s) Reviewed:		Date Administratively Complete:	
Received From:		Correct Number of Copies:	
Received By:		Distribution Date:	
EAPP File Number:		Complex:	
Admin. Review(s) (No.):		No. AR Rounds:	
Delinquent Fees (Y/N):		Review Time Spent:	
Lat./Long. Verified:		SOS Customer Verification:	
Agent Authorization Complete/Notarized (Y/N):		Fee Check:	Payable to TCEQ (Y/N):
Core Data Form Complete (Y/N):			Signed (Y/N):
Core Data Form Incomplete Nos.:			Less than 90 days old (Y/N):

Contributing Zone Plan Application

Texas Commission on Environmental Quality

for Regulated Activities on the Contributing Zone to the Edwards Aquifer and Relating to 30 TAC §213.24(1), Effective June 1, 1999

To ensure that the application is administratively complete, confirm that all fields in the form are complete, verify that all requested information is provided, consistently reference the same site and contact person in all forms in the application, and ensure forms are signed by the appropriate party.

Note: Including all the information requested in the form and attachments contributes to more streamlined technical reviews.

Signature

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. This **Contributing Zone Plan Application** is hereby submitted for TCEQ review and Executive Director approval. The application was prepared by:

Print Name of Customer/Agent: James Ingalls, PE

Date: 6/3/2025

Signature of Customer/Agent:



Regulated Entity Name: PEC Cedar Park Campus

Project Information

1. County: Williamson
2. Stream Basin: San Gabriel River Sub basin
3. Groundwater Conservation District (if applicable): N/A
4. Customer (Applicant):

Contact Person: Bud Collora

Entity: Pedernales Electric Cooperative, Inc.

Mailing Address: PO Box 1

City, State: Johnson City, TX

Telephone: 830-868-6056

Email Address: bud.collora@peci.com

Zip: 78636

Fax: _____

5. Agent/Representative (If any):

Contact Person: James Ingalls, PE

Entity: INK Civil

Mailing Address: 2021 SH 46W, Ste. 105

City, State: New Braunfels, TX

Zip: 78132

Telephone: 830-358-7127

Fax:

Email Address: plats@ink-civil.com

6. Project Location:

- ☒ The project site is located inside the city limits of Cedar Park.
- ☐ The project site is located outside the city limits but inside the ETJ (extra-territorial jurisdiction) of .
- ☐ The project site is not located within any city's limits or ETJ.

7. ☒ The location of the project site is described below. Sufficient detail and clarity has been provided so that the TCEQ's Regional staff can easily locate the project and site boundaries for a field investigation. Being 3.41 acres of land out of the Jane Glasscock Survey, Abstract No. 257 in Williamson County, Texas as described in Vol. 2578, Pg 478, DPRWCT.

8. ☒ **Attachment A - Road Map.** A road map showing directions to and the location of the project site is attached. The map clearly shows the boundary of the project site.

9. ☒ **Attachment B - USGS Quadrangle Map.** A copy of the official 7 ½ minute USGS Quadrangle Map (Scale: 1" = 2000") is attached. The map(s) clearly show:

- ☒ Project site boundaries.
- ☒ USGS Quadrangle Name(s).

10. ☒ **Attachment C - Project Narrative.** A detailed narrative description of the proposed project is attached. The project description is consistent throughout the application and contains, at a minimum, the following details:

- ☒ Area of the site
- ☒ Offsite areas
- ☒ Impervious cover
- ☒ Permanent BMP(s)
- ☒ Proposed site use
- ☒ Site history
- ☒ Previous development
- ☒ Area(s) to be demolished

11. Existing project site conditions are noted below:

- ☐ Existing commercial site
- ☐ Existing industrial site
- ☐ Existing residential site

- ☐ Existing paved and/or unpaved roads
☐ Undeveloped (Cleared)
☒ Undeveloped (Undisturbed/Not cleared)
☐ Other: _____

12. The type of project is:

- ☐ Residential: # of Lots: _____
☐ Residential: # of Living Unit Equivalents: _____
☐ Commercial
☒ Industrial
☐ Other: _____

13. Total project area (size of site): 3.41 Acres

Total disturbed area: 2.75 Acres

14. Estimated projected population: N/A

15. The amount and type of impervious cover expected after construction is complete is shown below:

Table 1 - Impervious Cover

<i>Impervious Cover of Proposed Project</i>	<i>Sq. Ft.</i>	<i>Sq. Ft./Acre</i>	<i>Acres</i>
Structures/Rooftops	0	÷ 43,560 =	
Parking	0	÷ 43,560 =	
Other paved surfaces	111,558	÷ 43,560 =	2.56
Total Impervious Cover	111,558	÷ 43,560 =	2.56

Total Impervious Cover 2.56 ÷ **Total Acreage** 3.41 X 100 = 75.1 % Impervious Cover

16. ☒ **Attachment D - Factors Affecting Surface Water Quality.** A detailed description of all factors that could affect surface water quality is attached. If applicable, this includes the location and description of any discharge associated with industrial activity other than construction.

17. ☒ Only inert materials as defined by 30 TAC 330.2 will be used as fill material.

For Road Projects Only

Complete questions 18 - 23 if this application is exclusively for a road project.

☒ N/A

18. Type of project:

- ☐ TXDOT road project.
- ☐ County road or roads built to county specifications.
- ☐ City thoroughfare or roads to be dedicated to a municipality.
- ☐ Street or road providing access to private driveways.

19. Type of pavement or road surface to be used:

- ☐ Concrete
- ☐ Asphaltic concrete pavement
- ☐ Other: _____

20. Right of Way (R.O.W.):

Length of R.O.W.: _____ feet.

Width of R.O.W.: _____ feet.

$L \times W = \text{_____ Ft}^2 \div 43,560 \text{ Ft}^2/\text{Acre} = \text{_____ acres.}$

21. Pavement Area:

Length of pavement area: _____ feet.

Width of pavement area: _____ feet.

$L \times W = \text{_____ Ft}^2 \div 43,560 \text{ Ft}^2/\text{Acre} = \text{_____ acres.}$

Pavement area _____ acres \div R.O.W. area _____ acres $\times 100 = \text{_____ \%}$ impervious cover.

22. ☐ A rest stop will be included in this project.

☐ A rest stop will not be included in this project.

23. ☐ Maintenance and repair of existing roadways that do not require approval from the TCEQ Executive Director. Modifications to existing roadways such as widening roads/adding shoulders totaling more than one-half (1/2) the width of one (1) existing lane require prior approval from the TCEQ.

Stormwater to be generated by the Proposed Project

24. ☒ **Attachment E - Volume and Character of Stormwater.** A detailed description of the volume (quantity) and character (quality) of the stormwater runoff which is expected to occur from the proposed project is attached. The estimates of stormwater runoff quality and quantity are based on area and type of impervious cover. Include the runoff coefficient of the site for both pre-construction and post-construction conditions.

Wastewater to be generated by the Proposed Project

25. ☐ Wastewater is to be discharged in the contributing zone. Requirements under 30 TAC §213.6(c) relating to Wastewater Treatment and Disposal Systems have been satisfied.

☒ N/A

26. Wastewater will be disposed of by:

☐ On-Site Sewage Facility (OSSF/Septic Tank):

☐ **Attachment F - Suitability Letter from Authorized Agent.** An on-site sewage facility will be used to treat and dispose of the wastewater from this site. The appropriate licensing authority's (authorized agent) written approval is attached. It states that the land is suitable for the use of private sewage facilities and will meet or exceed the requirements for on-site sewage facilities as specified under 30 TAC Chapter 285 relating to On-site Sewage Facilities.

☐ Each lot in this project/development is at least one (1) acre (43,560 square feet) in size. The system will be designed by a licensed professional engineer or registered sanitarian and installed by a licensed installer in compliance with 30 TAC Chapter 285.

☐ Sewage Collection System (Sewer Lines):

The sewage collection system will convey the wastewater to the _____ (name) Treatment Plant. The treatment facility is:

☐ Existing.

☐ Proposed.

☒ N/A

Permanent Aboveground Storage Tanks(ASTs) ≥ 500 Gallons

Complete questions 27 - 33 if this project includes the installation of AST(s) with volume(s) greater than or equal to 500 gallons.

☒ N/A

27. Tanks and substance stored:

Table 2 - Tanks and Substance Storage

<i>AST Number</i>	<i>Size (Gallons)</i>	<i>Substance to be Stored</i>	<i>Tank Material</i>
1			
2			
3			
4			
5			

Total x 1.5 = _____ Gallons

28. ☐ The AST will be placed within a containment structure that is sized to capture one and one-half (1 1/2) times the storage capacity of the system. For facilities with more than

5 of 11

one tank system, the containment structure is sized to capture one and one-half (1 1/2) times the cumulative storage capacity of all systems.

- ☐ **Attachment G - Alternative Secondary Containment Methods.** Alternative methods for providing secondary containment are proposed. Specifications showing equivalent protection for the Edwards Aquifer are attached.

29. Inside dimensions and capacity of containment structure(s):

Table 3 - Secondary Containment

<i>Length (L)(Ft.)</i>	<i>Width(W)(Ft.)</i>	<i>Height (H)(Ft.)</i>	<i>L x W x H = (Ft3)</i>	<i>Gallons</i>

Total: _____ Gallons

30. Piping:

- ☐ All piping, hoses, and dispensers will be located inside the containment structure.
- ☐ Some of the piping to dispensers or equipment will extend outside the containment structure.
- ☐ The piping will be aboveground
- ☐ The piping will be underground

31. ☐ The containment area must be constructed of and in a material impervious to the substance(s) being stored. The proposed containment structure will be constructed of: _____.

32. ☐ **Attachment H - AST Containment Structure Drawings.** A scaled drawing of the containment structure is attached that shows the following:

- ☐ Interior dimensions (length, width, depth and wall and floor thickness).
- ☐ Internal drainage to a point convenient for the collection of any spillage.
- ☐ Tanks clearly labeled
- ☐ Piping clearly labeled
- ☐ Dispenser clearly labeled

33. ☐ Any spills must be directed to a point convenient for collection and recovery. Spills from storage tank facilities must be removed from the controlled drainage area for disposal within 24 hours of the spill.

- ☐ In the event of a spill, any spillage will be removed from the containment structure within 24 hours of the spill and disposed of properly.

- ☐ In the event of a spill, any spillage will be drained from the containment structure through a drain and valve within 24 hours of the spill and disposed of properly. The drain and valve system are shown in detail on the scaled drawing.

Site Plan Requirements

Items 34 - 46 must be included on the Site Plan.

34. ☒ The Site Plan must have a minimum scale of 1" = 400'.
Site Plan Scale: 1" = 60'.
35. 100-year floodplain boundaries:
- ☒ Some part(s) of the project site is located within the 100-year floodplain. The floodplain is shown and labeled.
- ☐ No part of the project site is located within the 100-year floodplain.
The 100-year floodplain boundaries are based on the following specific (including date of material) sources(s): _____.
36. ☒ The layout of the development is shown with existing and finished contours at appropriate, but not greater than ten-foot contour intervals. Lots, recreation centers, buildings, roads, etc. are shown on the site plan.
- ☐ The layout of the development is shown with existing contours at appropriate, but not greater than ten-foot contour intervals. Finished topographic contours will not differ from the existing topographic configuration and are not shown. Lots, recreation centers, buildings, roads, etc. are shown on the site plan.
37. ☒ A drainage plan showing all paths of drainage from the site to surface streams.
38. ☒ The drainage patterns and approximate slopes anticipated after major grading activities.
39. ☒ Areas of soil disturbance and areas which will not be disturbed.
40. ☒ Locations of major structural and nonstructural controls. These are the temporary and permanent best management practices.
41. ☒ Locations where soil stabilization practices are expected to occur.
42. ☐ Surface waters (including wetlands).
☒ N/A
43. ☐ Locations where stormwater discharges to surface water.
☒ There will be no discharges to surface water.
44. ☐ Temporary aboveground storage tank facilities.
☒ Temporary aboveground storage tank facilities will not be located on this site.

45. ☐ Permanent aboveground storage tank facilities.
☒ Permanent aboveground storage tank facilities will not be located on this site.
46. ☒ Legal boundaries of the site are shown.

Permanent Best Management Practices (BMPs)

Practices and measures that will be used during and after construction is completed.

47. ☒ Permanent BMPs and measures must be implemented to control the discharge of pollution from regulated activities after the completion of construction.
☐ N/A
48. ☒ These practices and measures have been designed, and will be constructed, operated, and maintained to insure that 80% of the incremental increase in the annual mass loading of total suspended solids (TSS) from the site caused by the regulated activity is removed. These quantities have been calculated in accordance with technical guidance prepared or accepted by the executive director.
☒ The TCEQ Technical Guidance Manual (TGM) was used to design permanent BMPs and measures for this site.
☐ A technical guidance other than the TCEQ TGM was used to design permanent BMPs and measures for this site. The complete citation for the technical guidance that was used is: _____.
☐ N/A
49. ☒ Owners must insure that permanent BMPs and measures are constructed and function as designed. A Texas Licensed Professional Engineer must certify in writing that the permanent BMPs or measures were constructed as designed. The certification letter must be submitted to the appropriate regional office within 30 days of site completion.
☐ N/A
50. Where a site is used for low density single-family residential development and has 20 % or less impervious cover, other permanent BMPs are not required. This exemption from permanent BMPs must be recorded in the county deed records, with a notice that if the percent impervious cover increases above 20% or land use changes, the exemption for the whole site as described in the property boundaries required by 30 TAC §213.4(g) (relating to Application Processing and Approval), may no longer apply and the property owner must notify the appropriate regional office of these changes.
☐ The site will be used for low density single-family residential development and has 20% or less impervious cover.
☐ The site will be used for low density single-family residential development but has more than 20% impervious cover.
☒ The site will not be used for low density single-family residential development.

51. The executive director may waive the requirement for other permanent BMPs for multi-family residential developments, schools, or small business sites where 20% or less impervious cover is used at the site. This exemption from permanent BMPs must be recorded in the county deed records, with a notice that if the percent impervious cover increases above 20% or land use changes, the exemption for the whole site as described in the property boundaries required by 30 TAC §213.4(g) (relating to Application Processing and Approval), may no longer apply and the property owner must notify the appropriate regional office of these changes.

- ☐ **Attachment I - 20% or Less Impervious Cover Waiver.** The site will be used for multi-family residential developments, schools, or small business sites and has 20% or less impervious cover. A request to waive the requirements for other permanent BMPs and measures is attached.
- ☐ The site will be used for multi-family residential developments, schools, or small business sites but has more than 20% impervious cover.
- ☒ The site will not be used for multi-family residential developments, schools, or small business sites.

52. ☒ **Attachment J - BMPs for Upgradient Stormwater.**

- ☐ A description of the BMPs and measures that will be used to prevent pollution of surface water, groundwater, or stormwater that originates upgradient from the site and flows across the site is attached.
- ☐ No surface water, groundwater or stormwater originates upgradient from the site and flows across the site, and an explanation is attached.
- ☒ Permanent BMPs or measures are not required to prevent pollution of surface water, groundwater, or stormwater that originates upgradient from the site and flows across the site, and an explanation is attached.

53. ☒ **Attachment K - BMPs for On-site Stormwater.**

- ☒ A description of the BMPs and measures that will be used to prevent pollution of surface water or groundwater that originates on-site or flows off the site, including pollution caused by contaminated stormwater runoff from the site is attached.
- ☐ Permanent BMPs or measures are not required to prevent pollution of surface water or groundwater that originates on-site or flows off the site, including pollution caused by contaminated stormwater runoff, and an explanation is attached.

54. ☒ **Attachment L - BMPs for Surface Streams.** A description of the BMPs and measures that prevent pollutants from entering surface streams is attached.

☐ N/A

55. ☒ **Attachment M - Construction Plans.** Construction plans and design calculations for the proposed permanent BMPs and measures have been prepared by or under the direct supervision of a Texas Licensed Professional Engineer, and are signed, sealed, and dated. Construction plans for the proposed permanent BMPs and measures are

attached and include: Design calculations, TCEQ Construction Notes, all proposed structural plans and specifications, and appropriate details.

☐ N/A

56. ☒ **Attachment N - Inspection, Maintenance, Repair and Retrofit Plan.** A site and BMP specific plan for the inspection, maintenance, repair, and, if necessary, retrofit of the permanent BMPs and measures is attached. The plan fulfills all of the following:

- ☒ Prepared and certified by the engineer designing the permanent BMPs and measures
- ☒ Signed by the owner or responsible party
- ☒ Outlines specific procedures for documenting inspections, maintenance, repairs, and, if necessary, retrofit.
- ☒ Contains a discussion of record keeping procedures

☐ N/A

57. ☐ **Attachment O - Pilot-Scale Field Testing Plan.** Pilot studies for BMPs that are not recognized by the Executive Director require prior approval from the TCEQ. A plan for pilot-scale field testing is attached.

☒ N/A

58. ☒ **Attachment P - Measures for Minimizing Surface Stream Contamination.** A description of the measures that will be used to avoid or minimize surface stream contamination and changes in the way in which water enters a stream as a result of the construction and development is attached. The measures address increased stream flashing, the creation of stronger flows and in-stream velocities, and other in-stream effects caused by the regulated activity, which increase erosion that result in water quality degradation.

☐ N/A


Responsibility for Maintenance of Permanent BMPs and Measures after Construction is Complete.

59. ☒ The applicant is responsible for maintaining the permanent BMPs after construction until such time as the maintenance obligation is either assumed in writing by another entity having ownership or control of the property (such as without limitation, an owner's association, a new property owner or lessee, a district, or municipality) or the ownership of the property is transferred to the entity. Such entity shall then be responsible for maintenance until another entity assumes such obligations in writing or ownership is transferred.
60. ☒ A copy of the transfer of responsibility must be filed with the executive director at the appropriate regional office within 30 days of the transfer if the site is for use as a multiple single-family residential development, a multi-family residential development,

or a non-residential development such as commercial, industrial, institutional, schools, and other sites where regulated activities occur.

Administrative Information

- 61. ☒ Submit one (1) original and one (1) copy of the application, plus additional copies as needed for each affected incorporated city, groundwater conservation district, and county in which the project will be located. The TCEQ will distribute the additional copies to these jurisdictions.
- 62. ☒ Any modification of this Contributing Zone Plan may require TCEQ review and Executive Director approval prior to construction, and may require submission of a revised application, with appropriate fees.
- 63. ☐ The site description, controls, maintenance, and inspection requirements for the storm water pollution prevention plan (SWPPP) developed under the EPA NPDES general permits for stormwater discharges have been submitted to fulfill paragraphs 30 TAC §213.24(1-5) of the technical report. All requirements of 30 TAC §213.24(1-5) have been met by the SWPPP document.
- ☒ The Temporary Stormwater Section (TCEQ-0602) is included with the application.


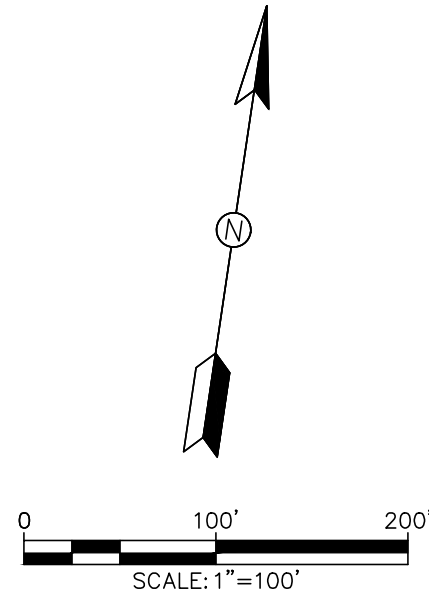


2021 W SH46, STE 105
NEW BRAUNFELS, TX, 78132
PH: 830-358-7127 ink-civil.com
TBE FIRM F-13351

PEC CEDAR PARK CAMPUS
1875 W WHITESTONE BLVD
LEANDER, TX 78641
AERIAL EXHIBIT

JOB:	
DATE:	
DESIGN:	PM:
PEER:	DM:
REVISIONS:	
DELTA	DESCRIPTION

SHEET:
3

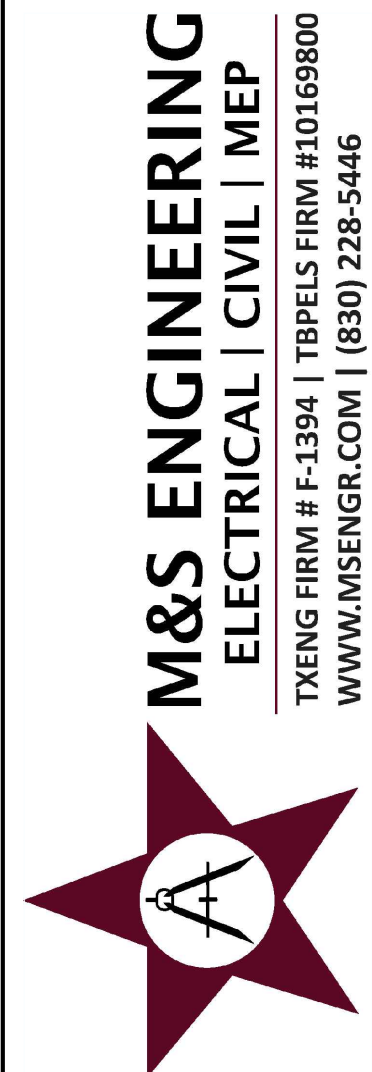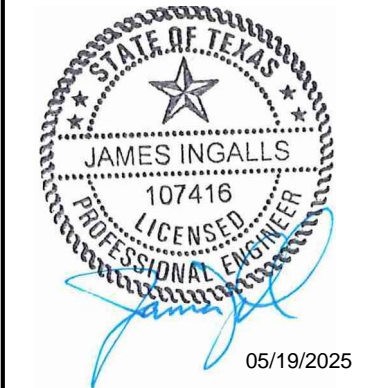



Produced by the United States Geological Survey

North American Datum of 1983 (NAD83)

World Geodetic System of 1984 (WGS84) Projection and

1 000-meter grid: UNIVERSAL TRANSVERSE MERCATOR, ZONE 14R

Data is provided by The National Map (TNM), is the best available at the time of map

generation, and includes data content from supporting themes of Elevation,

Hydrography, Geographic Names, Boundaries, Transportation, Structures, Land Cover,

and Orthoregistry. Refer to associated Federal Geographic Data Committee (FGDC)

Metadata for additional source data information.



This map is not a legal document. Boundaries may be generalized for this map scale.

Private lands within government reservations may not be shown. Obtain permission

before entering private lands. Temporal changes may have occurred since these data

were collected and some data may no longer represent actual surface conditions.

Learn About The National Map: <https://nationalmap.gov>

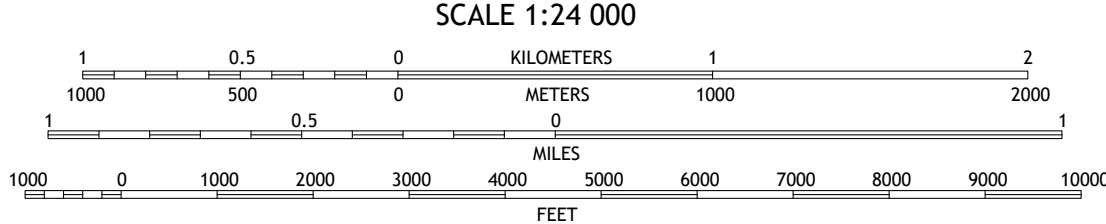

CONTOUR INTERVAL 10 FEET
NORTH AMERICAN VERTICAL DATUM OF 1988
CONTOUR SMOOTHNESS = High



Liberty Hill	Leander NE	Georgetown
Marble Falls	Leander	Round Rock
Marble Falls	Jollyville	Rugbyville West

ADJOINING QUADRANGLES

ROAD CLASSIFICATION	
Expressway	Local Connector
Secondary Hwy	Local Road
Ramp	4WD
Interstate Route	US Route
	State Route

LEANDER, TX
2025

ATTACHMENT “C”
Project Narrative

PEC Cedar Park Campus is a 3.41-acres site located at 1875 W Whitestone Blvd, Leander, TX 78641. The site is in the city limits of Cedar Park within Williamson County, Texas. There is no site history of previous development.

According to the Flood Insurance Rate Map No. 48491C0463F, effective 12/20/2019, the site is in of the 100-year flood plain. The entire site drains into the proposed floodplain channel Creek and ultimately drains to the South Fork of the San Gabriel River.

The proposed site will be disturbed with 2.56-acres of impervious cover (75.1%). Current site conditions are undeveloped with dense, grassy vegetation and some trees. The proposed development includes the construction of a paved base yard with a driveway, and detention pond with associated drainage and water quality infrastructure.

The proposed Permanent Best Management Practices (PBMPs) will be a batch detention ponds and vegetative filter strips. The pond will outfall into a proposed earthen channel offsite of the property below existing flow conditions. A portion of the base yard will flow to engineered vegetative filter strips. The paved driveway along the panhandle of the drive will be treated with Engineered vegetative filter strips. Approximately 0.70 acres bypasses the BMP catchment area, however the batch pond facility will overtreat for the TSS load associated with the impervious cover of the bypass area. Both batch pond facilities will be designed to mitigate the increase in stormwater runoff as well as treat TSS pollution from the site.

ATTACHMENT “D”

Factors Affecting Water Quality

The development will consist of an equipment storage baseyard with landscaped area and associated drainage facilities. Total impervious cover for the site is 2.56-acres (75.1%). To minimize TSS pollution from the site, a Batch Pond Detention facility will be constructed to capture TSS from the baseyard and Vegetative Filter Strips will be used to capture TSS derived from the paved driveway and a portion of the baseyard. Potential sources of pollution that may reasonably be expected to affect the quality of storm water discharges from the site during construction include: dirt and dust, vehicle drippings, cleaning chemicals, and improperly disposed of waste or litter from people, which may affect surface water by sediments leaving the site after a rainfall event.

ATTACHMENT “E”

Volume and Character of Stormwater

The development of this site will not result in an increase in stormwater run-off. The character of the stormwater will also not be affected by the development. Stormwater from the base yard will be sheet flow towards the Batch pond, which will effectively treat the detained stormwater. The stormwater along the paved drive of the panhandle of the property will be captured and treated by engineered vegetative filter strips. Downstream from the ponds is an existing earthen channel that will receive the proposed flows and ultimately return the stormwater to pre-development conditions.

ATTACHMENT “F”

Suitability Letter from Authorized Agent

No OSSF is to be installed on-site. No suitability letter is required.

ATTACHMENT “G”

Alternative Secondary Containment Methods

No AST is proposed on-site.

ATTACHMENT “H”

AST Containment Structure Drawings

No AST is proposed on-site.

ATTACHMENT “I”

20% or Less Impervious Cover Declaration

The 20% Impervious Cover Waiver does not apply. Permanent BMP’s will be designed in accordance with TCEQ requirements for the removal of TSS generated by the proposed development.

ATTACHMENT “J”

BMP’s for Upgradient Stormwater

Approximately 1.89-acres of existing upgradient flow from the adjacent and offsite adjacent properties is received onto the site. The offsite drainage area will bypass the site baseyard and be rerouted to be captured by the vegetative filter strips and treated for TSS pollution.

ATTACHMENT “K”

BMP’s for On-Site Stormwater

The proposed Permanent BMP’s used to treat on-site stormwater runoff is a Batch Detention Pond and Engineered Vegetative Filter Strips, designed according to TCEQs TGM RG-348. Please refer to the Treatment Area Map in the Temporary Stormwater Section for areas of treatment and BMP structures used.

ATTACHMENT “L”

BMP’s for Surface Streams

The proposed Permanent BMP’s used to treat runoff that may enter surface streams and the aquifer is a SmartBatch Pond facility designed according to TCEQs TGM RG-348.

ATTACHMENT “M”

Construction Plans

See the construction plans attached at the end of this section.

ATTACHMENT “O”
Pilot-Scale Field Testing Plan

The BMPs are designed to comply with Edwards Aquifer Rules: Technical Guidance Manual RG-348 for BMPs.

ATTACHMENT “P”
Measures for Minimizing Surface Stream Contamination

All surface streams will be protected from erosion by not allowing runoff to exceed existing velocities. The storm water runoff patterns for the site will remain. The natural vegetation downgradient of the site will continue to provide additional filtration to help prevent pollutants from entering streams, sensitive features, and the aquifer.

Temporary Stormwater Section

Texas Commission on Environmental Quality

for Regulated Activities on the Edwards Aquifer Recharge Zone and Relating to 30 TAC §213.5(b)(4)(A), (B), (D)(I) and (G); Effective June 1, 1999

To ensure that the application is administratively complete, confirm that all fields in the form are complete, verify that all requested information is provided, consistently reference the same site and contact person in all forms in the application, and ensure forms are signed by the appropriate party.

Note: Including all the information requested in the form and attachments contributes to more streamlined technical reviews.

Signature

To the best of my knowledge, the responses to this form accurately reflect all information requested concerning the proposed regulated activities and methods to protect the Edwards Aquifer. This **Temporary Stormwater Section** is hereby submitted for TCEQ review and executive director approval. The application was prepared by:

Print Name of Customer/Agent: James Ingalls, PE

Date: 5/13/2025

Signature of Customer/Agent:



Regulated Entity Name: PEC Cedar Park Campus

Project Information

Potential Sources of Contamination

Examples: Fuel storage and use, chemical storage and use, use of asphaltic products, construction vehicles tracking onto public roads, and existing solid waste.

1. Fuels for construction equipment and hazardous substances which will be used during construction:

☐ The following fuels and/or hazardous substances will be stored on the site: _____

These fuels and/or hazardous substances will be stored in:

- ☐ Aboveground storage tanks with a cumulative storage capacity of less than 250 gallons will be stored on the site for less than one (1) year.

- ☐ Aboveground storage tanks with a cumulative storage capacity between 250 gallons and 499 gallons will be stored on the site for less than one (1) year.
- ☐ Aboveground storage tanks with a cumulative storage capacity of 500 gallons or more will be stored on the site. An Aboveground Storage Tank Facility Plan application must be submitted to the appropriate regional office of the TCEQ prior to moving the tanks onto the project.
- ☒ Fuels and hazardous substances will not be stored on the site.
- 2. ☒ **Attachment A - Spill Response Actions.** A site specific description of the measures to be taken to contain any spill of hydrocarbons or hazardous substances is attached.
- 3. ☒ Temporary aboveground storage tank systems of 250 gallons or more cumulative storage capacity must be located a minimum horizontal distance of 150 feet from any domestic, industrial, irrigation, or public water supply well, or other sensitive feature.
- 4. ☒ **Attachment B - Potential Sources of Contamination.** A description of any activities or processes which may be a potential source of contamination affecting surface water quality is attached.

Sequence of Construction

- 5. ☒ **Attachment C - Sequence of Major Activities.** A description of the sequence of major activities which will disturb soils for major portions of the site (grubbing, excavation, grading, utilities, and infrastructure installation) is attached.
 - ☒ For each activity described, an estimate (in acres) of the total area of the site to be disturbed by each activity is given.
 - ☒ For each activity described, include a description of appropriate temporary control measures and the general timing (or sequence) during the construction process that the measures will be implemented.
- 6. ☒ Name the receiving water(s) at or near the site which will be disturbed or which will receive discharges from disturbed areas of the project: Turkey Creek-Brushy Creek

Temporary Best Management Practices (TBMPs)

Erosion control examples: tree protection, interceptor swales, level spreaders, outlet stabilization, blankets or matting, mulch, and sod. Sediment control examples: stabilized construction exit, silt fence, filter dikes, rock berms, buffer strips, sediment traps, and sediment basins. Please refer to the Technical Guidance Manual for guidelines and specifications. All structural BMPs must be shown on the site plan.

- 7. ☒ **Attachment D – Temporary Best Management Practices and Measures.** TBMPs and measures will prevent pollution of surface water, groundwater, and stormwater. The construction-phase BMPs for erosion and sediment controls have been designed to retain sediment on site to the extent practicable. The following information is attached:

- ☒ A description of how BMPs and measures will prevent pollution of surface water, groundwater or stormwater that originates upgradient from the site and flows across the site.
 - ☒ A description of how BMPs and measures will prevent pollution of surface water or groundwater that originates on-site or flows off site, including pollution caused by contaminated stormwater runoff from the site.
 - ☒ A description of how BMPs and measures will prevent pollutants from entering surface streams, sensitive features, or the aquifer.
 - ☒ A description of how, to the maximum extent practicable, BMPs and measures will maintain flow to naturally-occurring sensitive features identified in either the geologic assessment, TCEQ inspections, or during excavation, blasting, or construction.
8. ☒ The temporary sealing of a naturally-occurring sensitive feature which accepts recharge to the Edwards Aquifer as a temporary pollution abatement measure during active construction should be avoided.
- ☐ **Attachment E - Request to Temporarily Seal a Feature.** A request to temporarily seal a feature is attached. The request includes justification as to why no reasonable and practicable alternative exists for each feature.
- ☒ There will be no temporary sealing of naturally-occurring sensitive features on the site.
9. ☒ **Attachment F - Structural Practices.** A description of the structural practices that will be used to divert flows away from exposed soils, to store flows, or to otherwise limit runoff discharge of pollutants from exposed areas of the site is attached. Placement of structural practices in floodplains has been avoided.
10. ☒ **Attachment G - Drainage Area Map.** A drainage area map supporting the following requirements is attached:
- ☐ For areas that will have more than 10 acres within a common drainage area disturbed at one time, a sediment basin will be provided.
 - ☐ For areas that will have more than 10 acres within a common drainage area disturbed at one time, a smaller sediment basin and/or sediment trap(s) will be used.
 - ☐ For areas that will have more than 10 acres within a common drainage area disturbed at one time, a sediment basin or other equivalent controls are not attainable, but other TBMPs and measures will be used in combination to protect down slope and side slope boundaries of the construction area.
 - ☐ There are no areas greater than 10 acres within a common drainage area that will be disturbed at one time. A smaller sediment basin and/or sediment trap(s) will be used in combination with other erosion and sediment controls within each disturbed drainage area.

- ☒ There are no areas greater than 10 acres within a common drainage area that will be disturbed at one time. Erosion and sediment controls other than sediment basins or sediment traps within each disturbed drainage area will be used.
11. ☐ **Attachment H - Temporary Sediment Pond(s) Plans and Calculations.** Temporary sediment pond or basin construction plans and design calculations for a proposed temporary BMP or measure have been prepared by or under the direct supervision of a Texas Licensed Professional Engineer. All construction plans and design information must be signed, sealed, and dated by the Texas Licensed Professional Engineer. Construction plans for the proposed temporary BMPs and measures are attached.
- ☒ N/A
12. ☒ **Attachment I - Inspection and Maintenance for BMPs.** A plan for the inspection of each temporary BMP(s) and measure(s) and for their timely maintenance, repairs, and, if necessary, retrofit is attached. A description of the documentation procedures, recordkeeping practices, and inspection frequency are included in the plan and are specific to the site and/or BMP.
13. ☒ All control measures must be properly selected, installed, and maintained in accordance with the manufacturer's specifications and good engineering practices. If periodic inspections by the applicant or the executive director, or other information indicate a control has been used inappropriately, or incorrectly, the applicant must replace or modify the control for site situations.
14. ☒ If sediment escapes the construction site, off-site accumulations of sediment must be removed at a frequency sufficient to minimize offsite impacts to water quality (e.g., fugitive sediment in street being washed into surface streams or sensitive features by the next rain).
15. ☒ Sediment must be removed from sediment traps or sedimentation ponds not later than when design capacity has been reduced by 50%. A permanent stake will be provided that can indicate when the sediment occupies 50% of the basin volume.
16. ☒ Litter, construction debris, and construction chemicals exposed to stormwater shall be prevented from becoming a pollutant source for stormwater discharges (e.g., screening outfalls, picked up daily).

Soil Stabilization Practices

Examples: establishment of temporary vegetation, establishment of permanent vegetation, mulching, geotextiles, sod stabilization, vegetative buffer strips, protection of trees, or preservation of mature vegetation.

17. ☒ **Attachment J - Schedule of Interim and Permanent Soil Stabilization Practices.** A schedule of the interim and permanent soil stabilization practices for the site is attached.

- 18. ☒ Records must be kept at the site of the dates when major grading activities occur, the dates when construction activities temporarily or permanently cease on a portion of the site, and the dates when stabilization measures are initiated.
- 19. ☒ Stabilization practices must be initiated as soon as practicable where construction activities have temporarily or permanently ceased.

Administrative Information

- 20. ☒ All structural controls will be inspected and maintained according to the submitted and approved operation and maintenance plan for the project.
- 21. ☒ If any geologic or manmade features, such as caves, faults, sinkholes, etc., are discovered, all regulated activities near the feature will be immediately suspended. The appropriate TCEQ Regional Office shall be immediately notified. Regulated activities must cease and not continue until the TCEQ has reviewed and approved the methods proposed to protect the aquifer from any adverse impacts.
- 22. ☒ Silt fences, diversion berms, and other temporary erosion and sediment controls will be constructed and maintained as appropriate to prevent pollutants from entering sensitive features discovered during construction.

ATTACHMENT “A”
Spill Response Actions

Spill Prevention and Control

The objective of this section is to describe measures to prevent or reduce the discharge of pollutants to drainage systems or watercourses from leaks and spills by reducing the chance for spills, stopping the source of spills, containing, and cleaning up spills, properly disposing of spill materials, and training employees.

The following steps will help reduce the stormwater impacts of leaks and spills:

Education

- (1) Be aware that different materials pollute in different amounts. Make sure that each employee knows what a “significant spill” is for each material they use, and what is the appropriate response for “significant” and “insignificant” spills. Employees should also be aware of when spills must be reported to the TCEQ. Information is available in 30 TAC 327.4 and 40 CFR 302.4.
- (2) Educate employees and subcontractors on potential dangers to humans and the environment from spills and leaks.
- (3) Hold regular meetings to discuss and reinforce appropriate disposal procedures (incorporate into regular safety meetings).
- (4) Establish a continuing education program to indoctrinate new employees.
- (5) Have contractor’s superintendent or representative oversee and enforce proper spill prevention and control measures.

General Measures

- (1) To the extent that the work can be accomplished safely, spills of oil, petroleum products, and substances listed under 40 CFR parts 110, 117, and 302, and sanitary and septic wastes should be contained and cleaned up immediately.
- (2) Store hazardous materials and wastes in covered containers and protect from vandalism.
- (3) Place a stockpile of spill cleanup materials where it will be readily accessible.
- (4) Train employees in spill prevention and cleanup.
- (5) Designate responsible individuals to oversee and enforce control measures.

(6) Spills should be covered and protected from stormwater runoff during rainfall to the extent that it doesn't compromise clean up activities.

(7) Do not bury or wash spills with water.

(8) Store and dispose of used clean up materials, contaminated materials, and recovered spill material that is no longer suitable for the intended purpose in conformance with the provisions in applicable BMP's.

(9) Do not allow water used for cleaning and decontamination to enter storm drains or watercourses. Collect and dispose of contaminated water in accordance with applicable regulations.

(10) Contain water overflow or minor water spillage, and do not allow it to discharge into drainage facilities or watercourses.

(11) Place Material Safety Data Sheets (MSDS), as well as proper storage, cleanup, and spill reporting instructions for hazardous materials stored or used on the project site in an open, conspicuous, and accessible location.

(12) Keep waste storage areas clean, well organized, and equipped with ample cleanup supplies as appropriate for the materials being stored. Perimeter controls, containment structures, covers, and liners should be repaired or replaced as needed to maintain proper function.

Cleanup

(1) Clean up leaks and spills immediately.

(2) Use a rag for small spills on paved surfaces, a damp mop for general cleanup, and absorbent material for larger spills. If the spilled material is hazardous, then the used cleanup materials are also hazardous and must be disposed of as hazardous waste.

(3) Never hose down or bury dry material spills. Clean up as much of the material as possible and dispose of properly. See the waste management BMP's in this section for specific information.

Minor Spills

(1) Minor spills typically involve small quantities of oil, gasoline, paint, etc. which can be controlled by the first responder at the discovery of the spill.

(2) Use absorbent materials on small spills rather than hosing down or burying the spill.

(3) Absorbent materials should be promptly removed and disposed of properly.

- (4) Follow the practice below for a minor spill:
- (5) Contain the spread of the spill.
- (6) Recover spilled materials.
- (7) Clean the contaminated area and properly dispose of contaminated materials.

Semi-Significant Spills

Semi-significant spills still can be controlled by the first responder along with the aid of other personnel such as laborers and the foreman, etc. This response may require the cessation of all other activities.

Spills should be cleaned up immediately:

- (1) Contain spread of the spill.
- (2) Notify the project foreman immediately.
- (3) If the spill occurs on paved or impermeable surfaces, clean up using "dry" methods (absorbent materials, cat litter and/or rags). Contain the spill by encircling with absorbent materials and do not let the spill spread widely.
- (4) If the spill occurs in dirt areas, immediately contain the spill by constructing an earthen dike. Dig up and properly dispose of contaminated soil.
- (5) If the spill occurs during rain, cover spill with tarps or other material to prevent contaminating runoff.

Significant/Hazardous Spills

For significant or hazardous spills that are in reportable quantities:

- (1) Notify the TCEQ by telephone as soon as possible and within 24 hours at 512-339-2929 (Austin) or 210-490-3096 (San Antonio) between 8 AM and 5 PM. After hours, contact the Environmental Release Hotline at 1-800-832-8224. It is the contractor's responsibility to have all emergency phone numbers at the construction site.
- (2) For spills of federal reportable quantities, in conformance with the requirements in 40 CFR parts 110, 119, and 302, the contractor should notify the National Response Center at (800) 424-8802.
- (3) Notification should first be made by telephone and followed up with a written report.

(4) The services of a spills contractor or a Haz-Mat team should be obtained immediately. Construction personnel should not attempt to clean up until the appropriate and qualified staffs have arrived at the job site.

(5) Other agencies which may need to be consulted include, but are not limited to, the City Police Department, County Sheriff Office, Fire Departments, etc.

More information on spill rules and appropriate responses is available on the TCEQ website at: http://www.tnrcc.state.tx.us/enforcement/emergency_response.html

Vehicle and Equipment Maintenance

(1) If maintenance must occur onsite, use a designated area and a secondary containment, located away from drainage courses, to prevent the runoff of stormwater and the runoff of spills.

(2) Regularly inspect onsite vehicles and equipment for leaks and repair immediately

(3) Check incoming vehicles and equipment (including delivery trucks, and employee and subcontractor vehicles) for leaking oil and fluids. Do not allow leaking vehicles or equipment onsite.

(4) Always use secondary containment, such as a drain pan or drop cloth, to catch spills or leaks when removing or changing fluids.

(5) Place drip pans or absorbent materials under paving equipment when not in use.

(6) Use absorbent materials on small spills rather than hosing down or burying the spill. Remove the absorbent materials promptly and dispose of properly.

(7) Promptly transfer used fluids to the proper waste or recycling drums. Don't leave full drip pans or other open containers lying around.

(8) Oil filters disposed of in trashcans or dumpsters can leak oil and pollute stormwater. Place the oil filter in a funnel over a waste oil-recycling drum to drain excess oil before disposal. Oil filters can also be recycled. Ask the oil supplier or recycler about recycling oil filters.

(9) Store cracked batteries in a non-leaking secondary container. Do this with all cracked batteries even if you think all the acid has drained out. If you drop a battery, treat it as if it is cracked. Put it into the containment area until you are sure it is not leaking.

Vehicle and Equipment Fueling

(1) If fueling must occur on site, use designated areas, located away from drainage courses, to prevent the runoff of stormwater and the runoff of spills.

(2) Discourage "topping off" of fuel tanks.

(3) Always use secondary containment, such as a drain pan, when fueling to catch spills/ leaks.

ATTACHMENT “B”
Potential Sources of Contamination

The only potential sources of contamination are construction equipment leaks, re-fueling spills, port-o-lets, and the total suspended solids (TSS) due to the construction activities on-site. There are no other anticipated potential sources of contamination.

ATTACHMENT “C”
Sequence of Major Activities

Stages of Construction:

1. Installation of temporary BMP's.
2. Minor site grading: This includes the removal of organic material and other debris within the proposed site. Approximate total disturbed area = 2.25 acres.
3. Grading: Cutting and filling of the proposed site to prepare the site for pavement and foundation construction. Approximate total disturbed area = 2.5 acres
4. Finished grading: Final landscaping and building infrastructure are installed. Final fill and grading. Approximate total disturbed area = 2.75 acres.

ATTACHMENT “D”
Temporary BMP's and Measures

The following sequence will be followed for installing temporary BMP's:

1. Silt fence will be constructed on the downgradient side of proposed site.
2. A stabilized construction exit will be installed prior to any site work.

A. Silt Fence will be installed on the most downgradient side of the site and will reduce potential pollution from any stormwater that originates onsite or offsite. A stabilized construction exit will be constructed at the entrance of the site; this will reduce the amount of contaminants leaving the site.

B. Silt fence will be placed on the downgradient side of each proposed improvement to contain pollutants generated from onsite runoff. Disturbed areas will be seeded to replace destroyed vegetation. The existing vegetation located downgradient of each proposed improvement will work in conjunction with the silt fence and stabilized construction entrance to prevent pollution of water originating onsite and/or flowing offsite.

C. The proposed silt fences, and stabilized construction entrance constructed upgradient of the existing streams will prevent pollutants from entering them, as well as the aquifer. According to the Geologic Assessment, there are no sensitive features within the project boundary.

D. There was not a Geologic Assessment prior to development. If sensitive features are identified during construction, work shall stop and appropriate notification shall be given to the Engineer of record.

ATTACHMENT “E”

Request to Temporarily Seal a Feature

There will be no request to temporarily seal a geologic feature.

ATTACHMENT “F”

Structural Practices

Stabilized Construction Entrance/Exit, concrete washout pit, and silt fence will be used to protect disturbed soils and to prevent contamination from leaving the project site as shown in the Erosion Control Plan.

ATTACHMENT “G”

Drainage Area Map

No more than 10 acres will be disturbed within a common drainage area. All TBMPs utilized are adequate for the drainage areas served. See Treatment Area Map at the end of this section.

ATTACHMENT “I”
Inspection and Maintenance for BMP’s

Inspection and Maintenance Plan: The contractor is required to inspect the control and fences at weekly intervals and after any rainfall events to ensure that they are functioning properly. The contractor is required to document any changes on the Site Plan, documentation must include person performing task, task performed, and date. The contractor must also document if proper inspection measures have been taken while making changes. The person(s) responsible for maintenance controls and fences shall immediately make any necessary repairs to damaged areas.

Temporary Construction Entrance/Exit: The entrance should be maintained in a condition which will prevent tracking or flowing of sediment onto public rights-of-way. This may require periodic top dressing with additional stone as conditions demand and repair and/or cleanout of any measures used to trap sediment. All sediment spilled, dropped, washed, or tracked onto public rights-of-way should be removed immediately by the contractor. When necessary, wheels should be cleaned to remove sediment prior to entrance onto public right-of-way. When washing is required, it should be done on an area stabilized with crushed stone that drains into an approved sediment trap or sediment basin. All sediment should be prevented from entering any storm drain, ditch, or water course by using approved methods.

Concrete Washout Pit: Incorporate requirements for concrete waste management into material supplier and subcontractor agreements. Avoid mixing excess amounts of fresh concrete. Perform washout of concrete trucks in designated areas only. Do not wash out concrete trucks into storm drains, open ditches, streets, or streams. Do not allow excess concrete to be dumped onsite, except in designated areas. Locate washout area at least 50 feet from sensitive features, storm drains, open ditches, or water bodies. Do not allow runoff from this area by constructing a temporary pit or bermed area large enough for liquid and solid waste. Wash out wastes into the temporary pit where the concrete can set, be broken up, and then disposed properly.

Silt Fence: Remove sediment when buildup reaches 6 inches. Replace any torn fabric or install a second line of fencing parallel to the torn section. Replace or repair any sections crushed or collapsed during construction activity. If a section of fence is obstructing vehicular access, consider relocating it to a spot where it will provide equal protection, but will not obstruct vehicles. A triangular filter dike may be preferable to a silt fence at common vehicle access points. When construction is complete, the sediment should be disposed of in a manner that will not cause additional siltation and the prior location of the silt fence should be revegetated. The fence itself should be disposed of in an approved landfill.

TCEQ staff will be allowed full access to the property during construction of the project for inspecting controls and fences and to verify that the accepted plan is being utilized in the field. TCEQ staff has the right to speak with the contractor to verify plan changes and modifications.

Documentation: All scheduled inspection and maintenance measures made to the temporary BMPs must be documented clearly on the WPAP Site Plan showing inspection/maintenance

measures performed, date, and person responsible for inspection and maintenance. Any changes made to the location or type of controls shown on the accepted plans, due to onsite conditions, shall be documented on the site plan that is part of this Water Pollution Abatement Plan. No other changes shall be made unless approved by TCEQ and the Design Engineer.

Documentation shall clearly show changes made, date, person responsible for the change, and the reason for the change.

Owner Information:

Company: Pedernales Electric Cooperative, Inc.
Contact: Bud Collora
Address: PO Box 1
Johnson City, Texas 78636

she

Design Engineer:

Company: INK Civil
Contact: James Ingalls, P.E.
Phone: (830) 358-7127
Address: 2021 SH 46W, Ste. 105
New Braunfels, Texas 78132

Person or Firm Responsible for Erosion/Sedimentation Control Maintenance:

Company: _____
Contact: _____
Phone: _____
Address: _____

Signature of Responsible Party: _____

This portion of the form shall be filled out and signed by the responsible party prior to construction.

ATTACHMENT “J”

Schedule of Interim and Permanent Soil Stabilization Practices

Bare soils should be seeded or otherwise stabilized within 14 calendar days after final grading or where construction activity has temporarily ceased for more than 21 days. Areas which are disturbed by construction staging and storage areas will be hydro mulched with the appropriate seed mixture. Areas between the edge of pavement and property line will also be hydro mulched. There will be no fill slopes exceeding a 3:1 slope, and all fill slopes will be hydro mulched. Installation and acceptable mixtures of hydro mulch are as follows:

Materials:

Hydraulic Mulches: Wood fiber mulch can be applied alone or as a component of hydraulic matrices. Wood fiber applied alone is typically applied at the rate of 2,000 to 4,000 lb/acre. Wood fiber mulch is manufactured from wood or wood waste from lumber mills or from urban sources.

Hydraulic Matrices: Hydraulic matrices include a mixture of wood fiber and acrylic polymer or other tackifier as binder. Apply as a liquid slurry using a hydraulic application machine (i.e., hydro seeder) at the following minimum rates, or as specified by the manufacturer to achieve complete coverage of the target area: 2,000 to 4,000 lb/acre wood fiber mulch, and 5 to 10% (by weight) of tackifier (acrylic copolymer, guar, psyllium, etc.)

Bonded Fiber Matrix: Bonded fiber matrix (BFM) is a hydraulically applied system of fibers and adhesives that upon drying forms an erosion resistant blanket that promotes vegetation, and prevents soil erosion. BFMs are typically applied at rates from 3,000 lb/acre to 4,000 lb/acre based on the manufacturer's recommendation. A biodegradable BFM is composed of materials that are 100% biodegradable. The binder in the BFM should also be biodegradable and should not dissolve or disperse upon re-wetting. Typically, biodegradable BFMs should not be applied immediately before, during or immediately after rainfall if the soil is saturated. Depending on the product, BFMs typically require 12 to 24 hours to dry and become effective.



Seed Mixtures:

Dates	Climate	Species	(lb/ac.)
Sept. 1 to Nov. 30	Temporary Cool Season	Tall Fescue	4.0
		Oats	21.0
		Wheats	30.0
		Total	55.0
Sept. 1 to Nov. 30	Cool Season Legume	Hairy Vetch	8.0
May 1 to Aug. 31	Temporary Warm Season	Foxtail Millet	30.0

Fertilizer: Fertilizer should be applied at the rate of 40 pounds of nitrogen and 40 pounds of phosphorus per acre, which is equivalent to about 1.0 pounds of nitrogen and phosphorus per 1000 square feet.

Installation:

- (1) Prior to application, roughen embankment and fill areas by rolling with a crimping or punching type roller or by track walking. Track walking shall only be used where other methods are impractical.
- (2) To be effective, hydraulic matrices require 24 hours to dry before rainfall occurs.
- (3) Avoid mulch over spray onto roads, sidewalks, drainage channels, existing vegetation, etc.

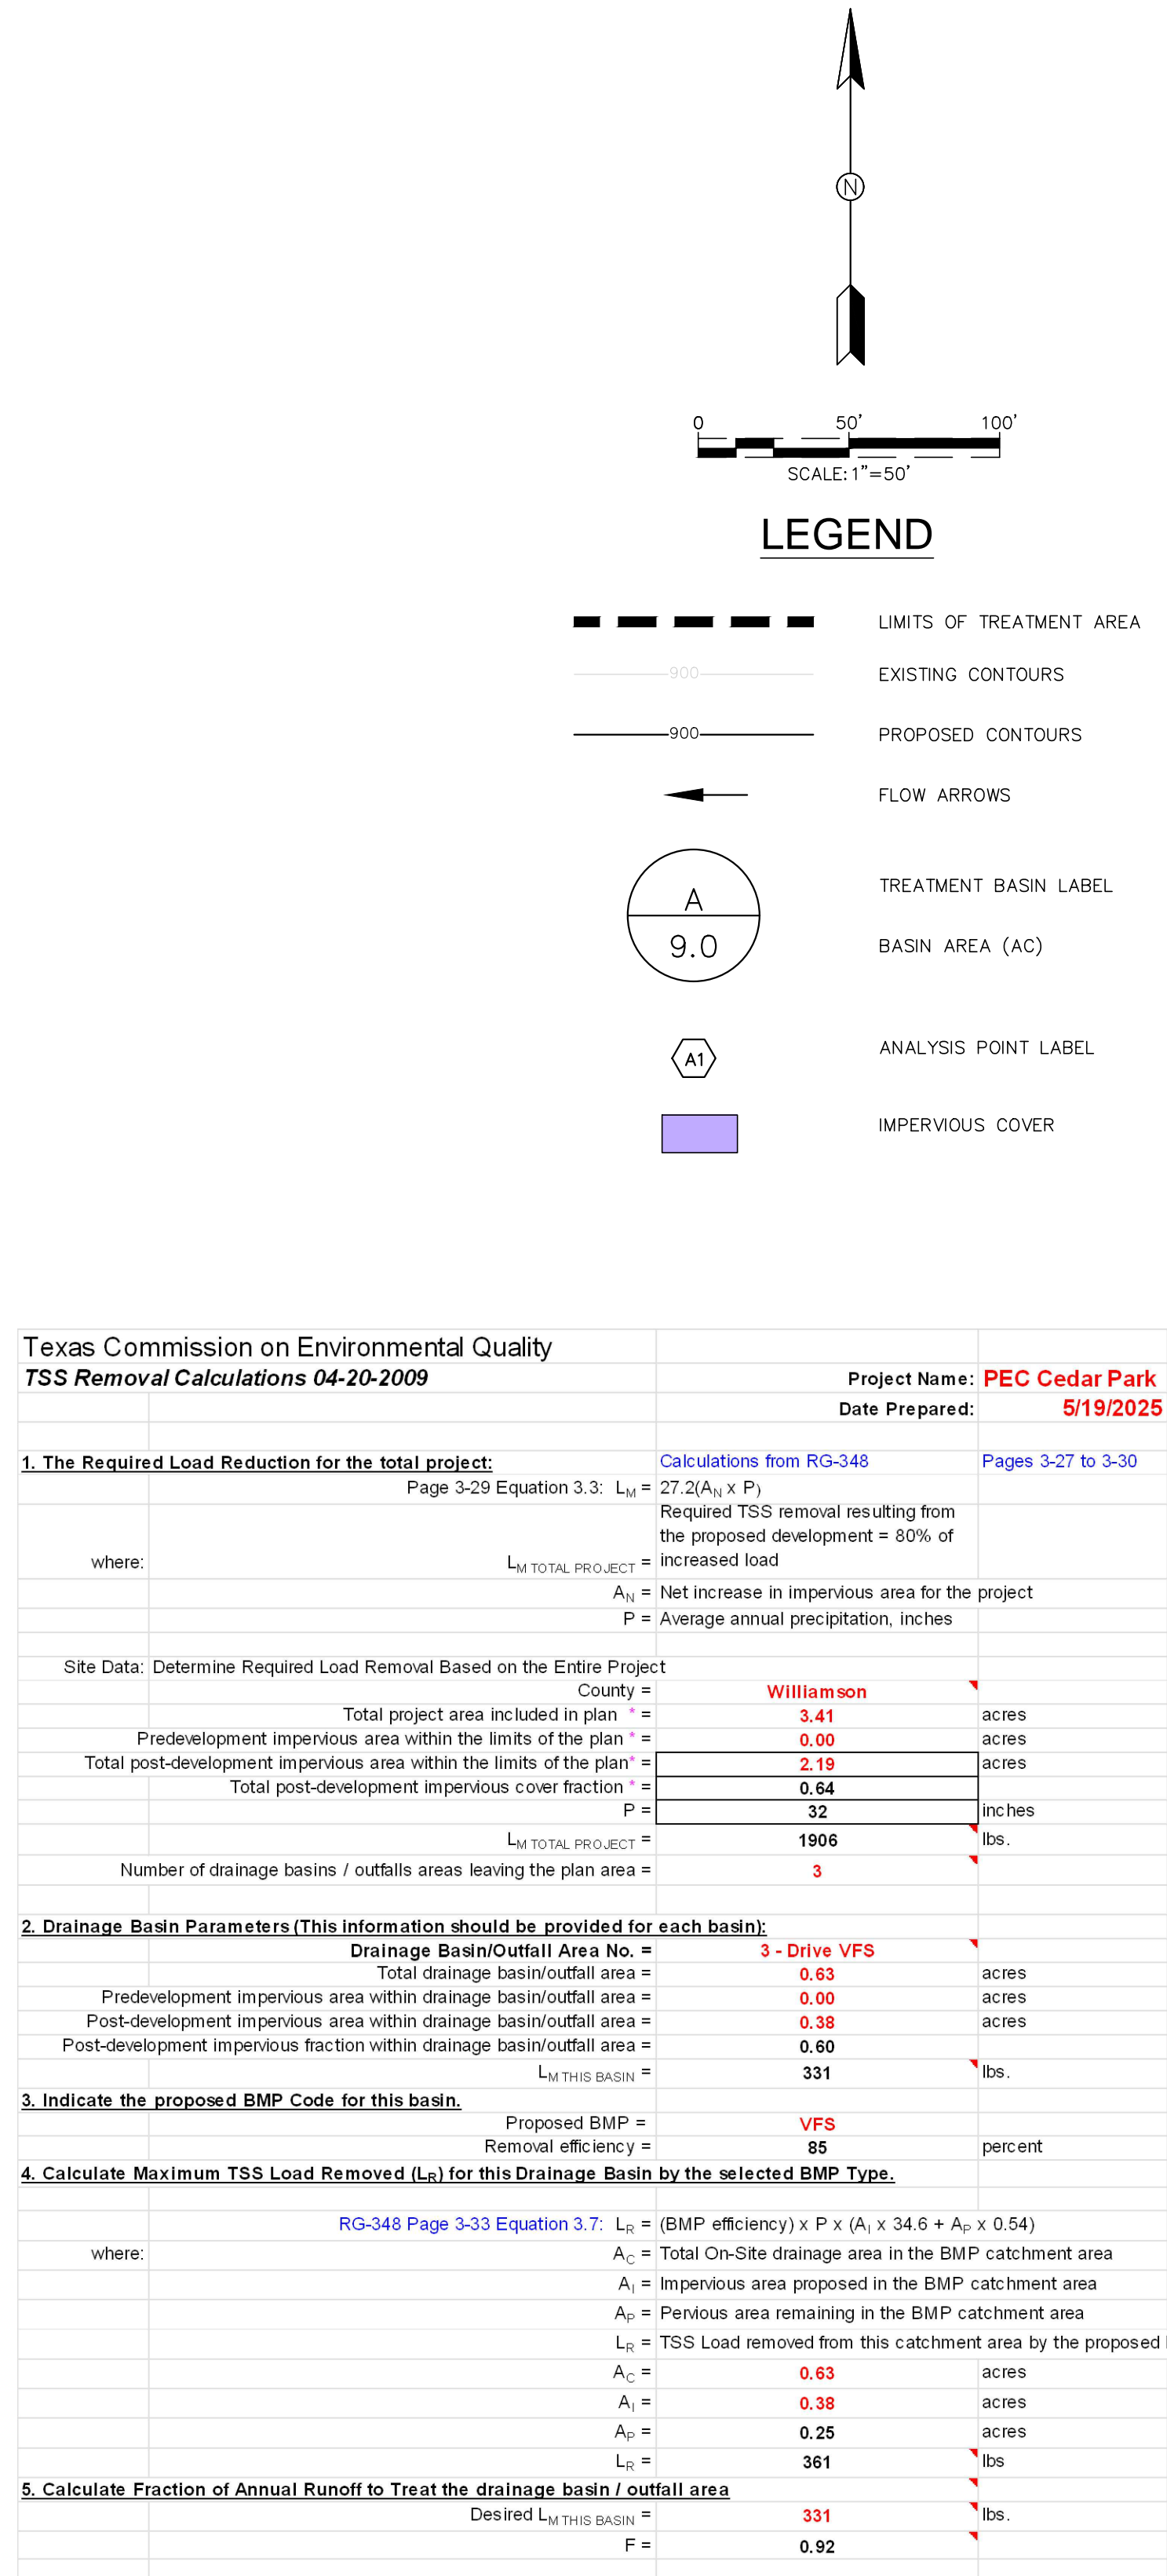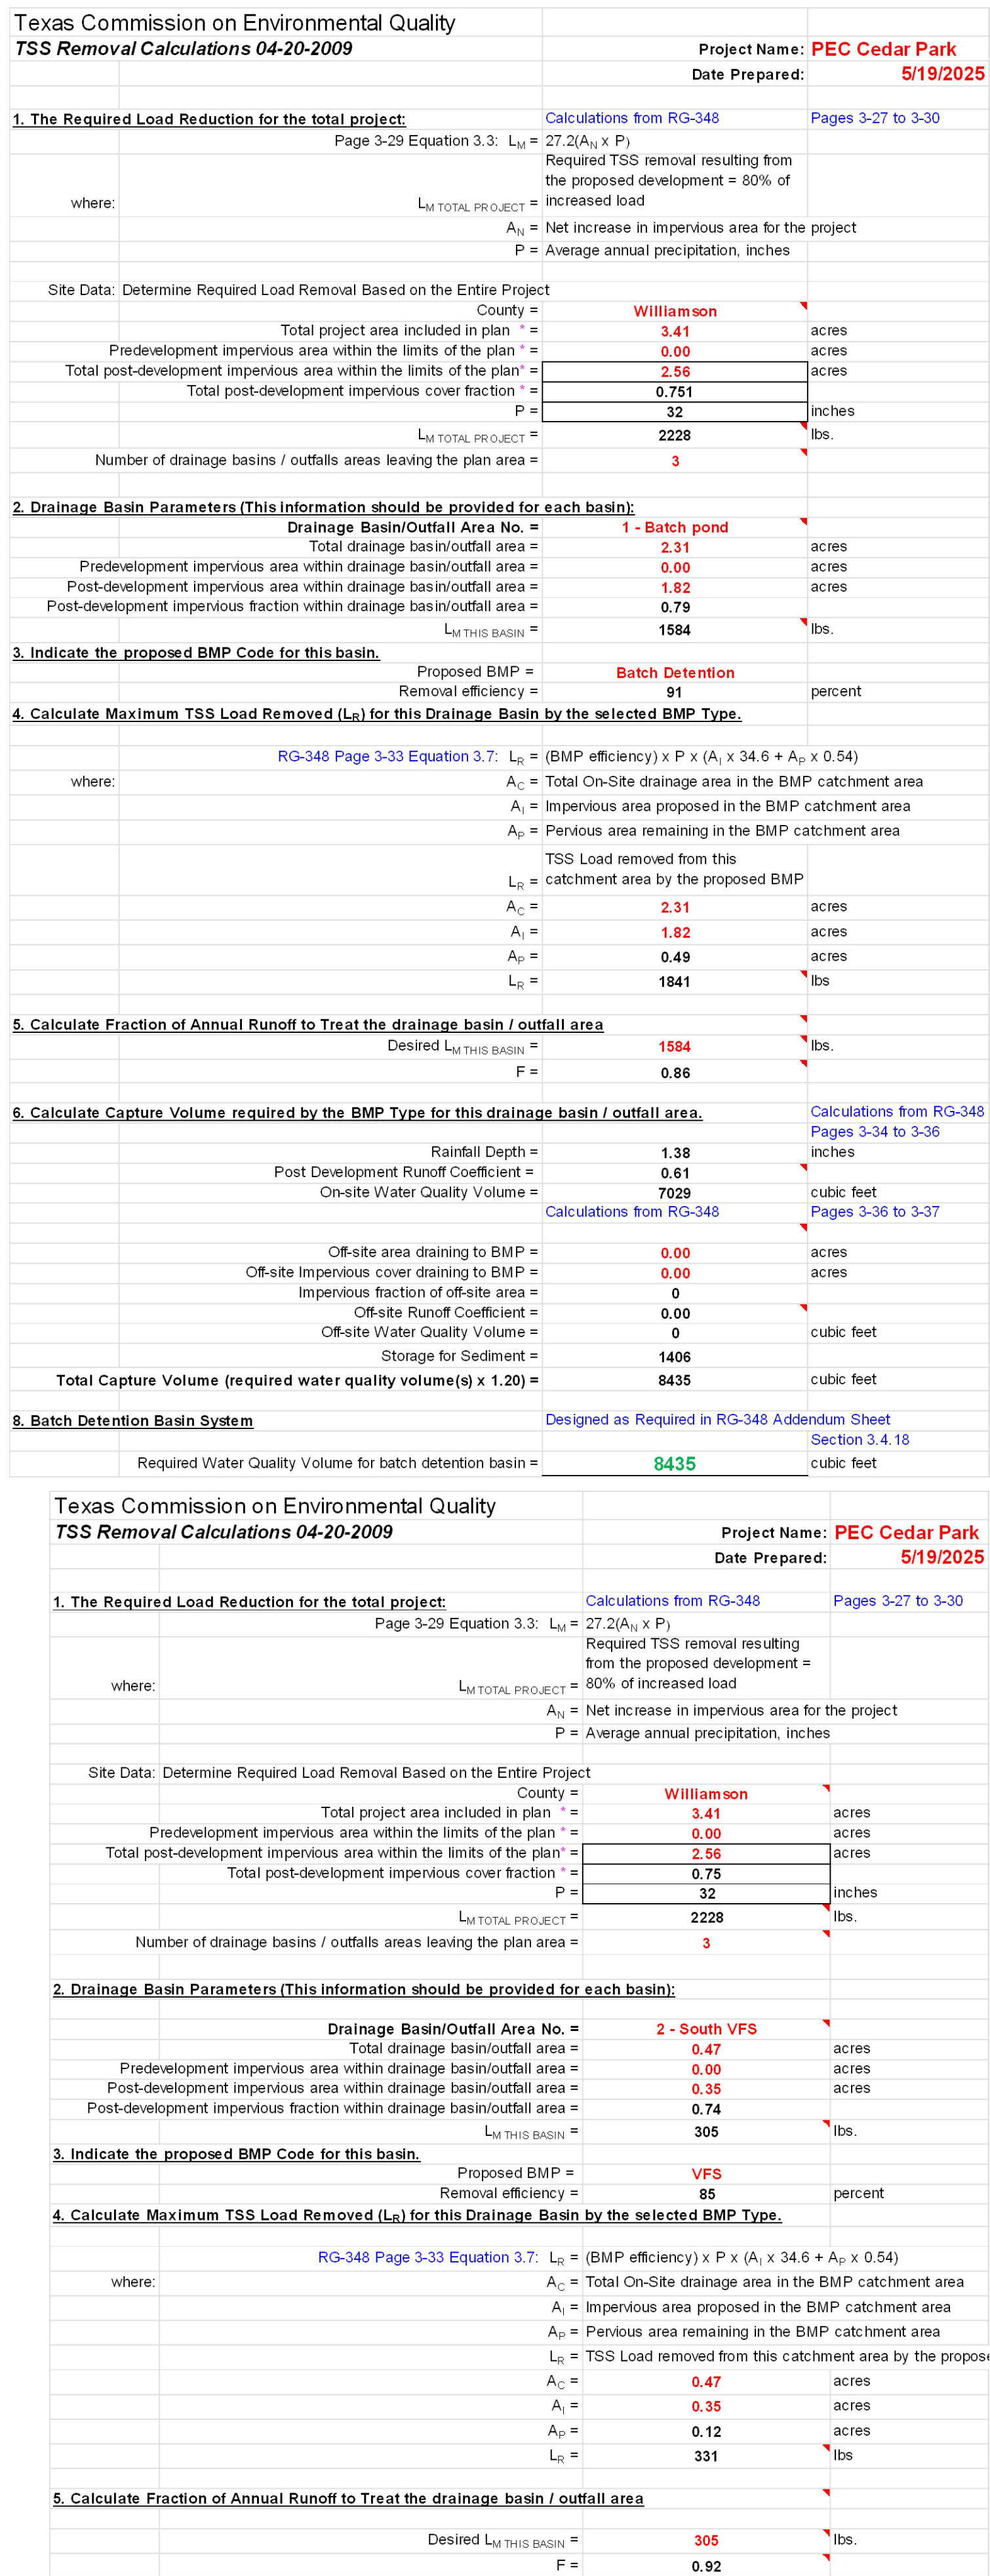

ATTACHMENT “N”

Inspection, Maintenance, Repair, and Retrofit Plan

MAINTENANCE GUIDELINES FOR BATCH DETENTION BASINS

Batch detention basins may have somewhat higher maintenance requirements than an extended detention basin since they are active stormwater controls. The maintenance activities are identical to those of extended detention basins with the addition of maintenance and inspections of the automatic controller and the valve at the outlet.

Inspections. Inspections should take place a minimum of twice a year. One inspection should take place during wet weather to determine if the basin is meeting the target detention time of 12 hours and a drawdown time of no more than 48 hours. The remaining inspections should occur between storm events so that manual operation of the valve and controller can be verified. The level sensor in the basin should be inspected and any debris or sediment in the area should be removed. The outlet structure and the trash screen should be inspected for signs of clogging. Debris and sediment should be removed from the orifice and outlet(s) as described in previous sections. Debris obstructing the valve should be removed. During each inspection, erosion areas inside and downstream of this BMP should be identified and repaired/revegetated immediately.

Mowing. The basin, basin side-slopes, and embankment of the basin must be mowed to prevent woody growth and control weeds. A mulching mower should be used, or the grass clippings should be caught and removed. Mowing should take place at least twice a year, or more frequently if vegetation exceeds 18 inches in height. More frequent mowing to maintain aesthetic appeal may be necessary in landscaped areas.

Litter and Debris Removal. Litter and debris removal should take place at least twice a year, as part of the periodic mowing operations and inspections. Debris and litter should be removed from the surface of the basin. Particular attention should be paid to floatable debris around the outlet structure. The outlet should be checked for possible clogging or obstructions and any debris removed.

Erosion control. The basin side slopes and embankment all may periodically suffer from slumping and erosion. To correct these problems, corrective action, such as regrading and revegetation, may be necessary. Correction of erosion control should take place whenever required based on the periodic inspections.

Nuisance Control. Standing water or soggy conditions may occur in the basin. Some standing water may occur after a storm event since the valve may close with 2 to 3 inches of water in the basin. Some flow into the basin may also occur

between storms due to spring flow and residential water use that enters the storm sewer system. Twice a year, the facility should be evaluated in terms of nuisance control (insects, weeds, odors, algae, etc.).

Structural Repairs and Replacement. With each inspection, any damage to structural elements of the basin (pipes, concrete drainage structures, retaining walls, etc.) should be identified and repaired immediately. An example of this type of repair can include patching of cracked concrete, sealing of voids, removal of vegetation from cracks and joints. The various inlet/outlet structures in a basin will eventually deteriorate and must be replaced.

Sediment Removal. A properly designed batch detention basin will accumulate quantities of sediment over time. The accumulated sediment can detract from the appearance of the facility and reduce the pollutant removal performance of the facility. The sediment also tends to accumulate near the outlet structure and can interfere with the level sensor operation. Sediment shall be removed from the basin at least every 5 years, when sediment depth exceeds 6 inches, when the sediment interferes with the level sensor or when the basin does not drain within 48 hours. Care should be taken not to compromise the basin lining during maintenance.

Logic Controller. The Logic Controller should be inspected as part of the twice yearly investigations. Verify that the external indicators (active, cycle in progress) are operating properly by turning the controller off and on, and by initiating a cycle by triggering the level sensor in the basin. The valve should be manually opened and closed using the open/close switch to verify valve operation and to assist in inspecting the valve for debris. The solar panel should be inspected and any dust or debris on the panel should be carefully removed. The controller and all other circuitry and wiring should be inspected for signs of corrosion, damage from insects, water leaks, or other damage. At the end of the inspection, the controller should be reset.

MAINTENANCE GUIDELINES FOR VEGETATIVE FILTER STRIPS

Pest Management. An Integrated Pest Management (IPM) Plan should be developed for vegetated areas. This plan should specify how problem insects and weeds will be controlled with minimal or no use of insecticides and herbicides.

Seasonal Mowing and Lawn Care. If the filter strip is made up of turf grass, it should be mowed as needed to limit vegetation height to 18 inches, using a mulching mower (or removal of clippings). If native grasses are used, the filter may require less frequent mowing, but a minimum of twice annually. Grass clippings and brush debris should not be deposited on vegetated filter strip areas. Regular mowing should also include weed control practices, however herbicide use should be kept to a minimum (Urbonas et al., 1992). Healthy grass can be maintained without using fertilizers because runoff usually contains sufficient nutrients. Irrigation of the site can help assure a dense and healthy vegetative cover.

Inspection. Inspect filter strips at least twice annually for erosion or damage to vegetation; however, additional inspection after periods of heavy runoff is most desirable. The strip should be checked for uniformity of grass cover, debris and litter, and areas of sediment accumulation. More frequent inspections of the grass cover during the first few years after establishment will help to determine if any problems are developing, and to plan for long-term restorative maintenance needs. Bare spots and areas of erosion identified during semi-annual inspections must be replanted and restored to meet specifications. Construction of a level spreader device may be necessary to reestablish shallow overland flow.

Debris and Litter Removal. Trash tends to accumulate in vegetated areas, particularly along highways. Any filter strip structures (i.e. level spreaders) should be kept free of obstructions to reduce floating debris being flushed downstream, and for aesthetic reasons. The need for this practice is determined through periodic inspection but should be performed no less than 4 times per year.

Sediment Removal. Sediment removal is not normally required in filter strips, since the vegetation normally grows through it and binds it to the soil. However, sediment may accumulate along the upstream boundary of the strip preventing uniform overland flow. Excess sediment should be removed by hand or with flat-bottomed shovels.

Grass Reseeding and Mulching. A healthy dense grass should be maintained on the filter strip. If areas are eroded, they should be filled, compacted, and reseeded so that the final grade is level. Grass damaged during the sediment removal process should be promptly replaced using the same seed mix used during filter strip establishment. If possible, flow should be diverted from the damaged areas until the grass is firmly established. Bare spots and areas of erosion identified during semi-annual inspections must be replanted and restored to meet specifications. Corrective maintenance, such as weeding or replanting should be done more frequently in the first two to three years after installation to ensure stabilization. Dense vegetation may require irrigation immediately after planting, and during particularly dry periods, particularly as the vegetation is initially established.

Maintenance Plan for Permanent BMP's

Owner: Pedernales Electric Cooperative, Inc.
PO Box 1
Johnson City, TX 78636

Contact: Name: Bud Collora
Phone: 830-868-6065

This document has been prepared to provide a description and schedule for the performance of maintenance on permanent pollution abatement measures. Maintenance measures to be performed will be dependent on what permanent pollution abatement measures are incorporated into the project. The project specific water pollution abatement plan should be reviewed to determine what permanent pollution abatement measures are incorporated into the project.

It should also be noted that the timing and procedures presented herein are general guidelines, adjustment to the timing and procedures may have to be made depending on project specific characteristics as well as weather related conditions but may not be altered without TCEQ approval.

Where a project is occupied by the owner, the owner may provide for maintenance with his own skilled forces or contract for recommended maintenance of Permanent Best Management Practices. Where a project is occupied or leased by a tenant, the owner shall require tenants to contract for such maintenance services either through a lease agreement, property owners' association covenants, or other binding document.

I understand that I am responsible for maintenance of the Permanent Best Management Practices included in this project until such time as the maintenance obligation is either assumed in writing by another entity having ownership or control of the property or ownership is transferred.

I, the owner, have read and understand the requirements of the attached Maintenance Plan and Schedule.

Bud Collora
Name: Bud Collora
Pedernales Electric Cooperative, Inc.

05/13/2025
Date

SEQUENCE OF CONSTRUCTION:

1. OBTAIN CITY APPROVED SITE PREPARATION PLANS, AND TPDES PERMIT (NOT A COPY OF THE TPDES APPLICATION TO TCEQ), IF APPLICABLE.
2. INSTALL TEMPORARY EROSION AND SEDIMENTATION CONTROLS.
3. BEGIN DEMOLITION ACTIVITIES, IF APPLICABLE.
4. BEGIN SITE CLEARING AND GRADING.
5. RESTORE AND REVEGETATE ALL DISTURBED AREAS NOT UNDER IMPERMEABLE IMPROVEMENTS.
6. COMPLETE ANY REMAINING "PUNCH LIST" ITEMS.
7. CONTRACTOR SHALL REMOVE TEMPORARY EROSION CONTROLS AFTER PERMANENT STABILIZATION IS AT LEAST 70% EVENLY ESTABLISHED. RYE IS NOT ACCEPTED. THE SITE WILL BE PERMANENTLY STABILIZED WHEN ALL IMPROVEMENTS ARE CONSTRUCTED PER THE DESIGN PLANS WHICH INCLUDES PAVEMENT, BUILDING, AND OTHER LANDSCAPE IMPROVEMENTS PER LANDSCAPE PLANS. ALL PVIOUS SURFACES TO BE SOD OR OTHER PVIOUS IMPROVEMENTS PER LANDSCAPE PLAN.

TOTAL LAND AREA = 3.41 AC
APPROX. TOTAL DISTURBED AREA = 2.75 AC
EXISTING IMPERVIOUS AREA = 0.0 AC
PROPOSED IMPERVIOUS AREA = 2.56 AC

CEDAR PARK EROSION CONTROL NOTES:


ALL DISTURBED AREAS SHALL BE RE-VEGETATED TO MEET THE REQUIREMENTS OF THE CITY OF CEDAR PARK'S ORDINANCES.

ADDITIONAL EROSION CONTROL MEASURES MAY BE REQUIRED BY INSPECTOR AT TIME OF CONSTRUCTION.

SOIL STABILIZATION NOTE

PER TPDES REQUIREMENTS, DISTURBED AREAS ON WHICH CONSTRUCTION ACTIVITIES HAVE CEASED (TEMPORARILY OR PERMANENTLY) SHALL BE STABILIZED WITHIN 14 DAYS UNLESS ACTIVITY RESUMES WITHIN 21 DAYS. SEEDING DOES NOT CONSTITUTE AS STABILIZATION.

SUBSTANTIAL GRADING IS PROPOSED WITH THIS UNIT. PER THE NEW BRAUNFELS DRAINAGE AND EROSION CONTROL DESIGN MANUAL SEC. 13.2(N), STRIPPING OF VEGETATION FROM PROJECT SITES SHALL BE PHASED SO AS TO EXPOSE THE MINIMUM AMOUNT OF AREA TO SOIL EROSION FOR THE SHORTEST POSSIBLE TIME.

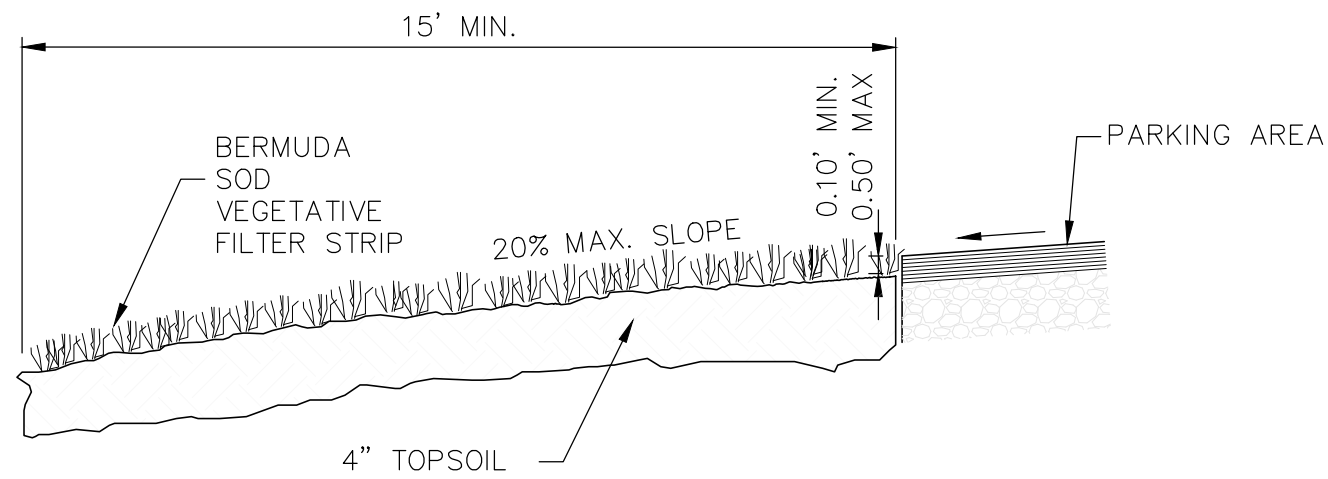

SECTION A-A
VEGETATIVE FILTER STRIP

HYDRAULIC MULCH

MATERIALS:

HYDRAULIC MULCHES: WOOD FIBER MULCH CAN BE APPLIED ALONE OR AS A COMPONENT OF HYDRAULIC MATRICES. WOOD FIBER APPLIED ALONE IS TYPICALLY APPLIED AT THE RATE OF 2,000 TO 4,000 LB/ACRE. WOOD FIBER MULCH IS MANUFACTURED FROM WOOD OR WOOD WASTE FROM LUMBER MILLS OR FROM URBAN SOURCES.

HYDRAULIC MATRICES: HYDRAULIC MATRICES INCLUDE A MIXTURE OF WOOD FIBER AND ACRYLIC POLYMER OR OTHER TACKIFIER AS BINDER. APPLY AS A LIQUID SLURRY USING A HYDRAULIC APPLICATION MACHINE (I.E., HYDRO SEEDER) AT THE FOLLOWING MINIMUM RATES, OR AS SPECIFIED BY THE MANUFACTURER TO ACHIEVE COMPLETE COVERAGE OF THE TARGET AREA: 2,000 TO 4,000 LB/ACRE WOOD FIBER MULCH, AND 5 TO 10% (BY WEIGHT) OF TACKIFIER (ACRYLIC COPOLYMER, GUAR, PSYLLIUM, ETC.)

BONDED FIBER MATRIX: BONDED FIBER MATRIX (BFM) IS A HYDRAULICALLY APPLIED SYSTEM OF FIBERS AND ADHESIVES THAT UPON DRYING FORMS AN EROSION RESISTANT BLANKET THAT PROMOTES VEGETATION, AND PREVENTS SOIL EROSION. BFMS ARE TYPICALLY APPLIED AT RATES FROM 3,000 LB/ACRE TO 4,000 LB/ACRE BASED ON THE MANUFACTURER'S RECOMMENDATION. A BIODEGRADABLE BFM IS COMPOSED OF MATERIALS THAT ARE 100% BIODEGRADABLE. THE BFM BINDER IN THE BFM SHOULD ALSO BE BIODEGRADABLE AND SHOULD NOT DISSOLVE OR DISPERSE UPON RE-WETTING. TYPICALLY, BIODEGRADABLE BFMS SHOULD NOT BE APPLIED IMMEDIATELY BEFORE, DURING OR IMMEDIATELY AFTER RAINFALL IF THE SOIL IS SATURATED. DEPENDING ON THE PRODUCT, BFMS TYPICALLY REQUIRE 12 TO 24 HOURS TO DRY AND BECOME EFFECTIVE.

INSTALLATION:

1. PRIOR TO APPLICATION, ROUGHEN EMBANKMENT AND FILL AREAS BY ROLLING WITH A CRIMPING OR PUNCHING TYPE ROLLER OR BY TRACK WALKING. TRACK WALKING SHALL ONLY BE USED WHERE OTHER METHODS ARE IMPRACTICAL.
2. TO BE EFFECTIVE, HYDRAULIC MATRICES REQUIRE 24 HOURS TO DRY BEFORE RAINFALL OCCURS.
3. AVOID MULCH OVER SPRAY ONTO ROADS, SIDEWALKS, DRAINAGE CHANNELS, EXISTING VEGETATION, ETC.
4. 4" OF TOP SOIL SHALL BE PLACED.

INSPECTION AND MAINTENANCE GUIDELINES:

1. MULCHED AREAS SHOULD BE INSPECTED WEEKLY AND AFTER EACH RAIN EVENT TO LOCATE AND REPAIR ANY DAMAGE.
2. AREAS DAMAGED BY STORMS OR NORMAL CONSTRUCTION ACTIVITIES SHOULD BE REGRADED AND HYDRAULIC MULCH REAPPLIED AS SOON AS PRACTICAL.


TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

CONTRIBUTING ZONE PLAN
GENERAL CONSTRUCTION NOTES
EDWARDS AQUIFER PROTECTION PROGRAM CONSTRUCTION NOTES

1. A WRITTEN NOTICE OF CONSTRUCTION MUST BE SUBMITTED TO THE TCEQ REGIONAL OFFICE AT LEAST 48 HOURS PRIOR TO THE START OF ANY REGULATED ACTIVITIES. THIS NOTICE MUST INCLUDE:
 - THE NAME OF THE APPROVED PROJECT;
 - THE ACTIVITY START DATE; AND
 - THE CONTACT INFORMATION OF THE PRIME CONTRACTOR.
2. ALL CONTRACTORS CONDUCTING REGULATED ACTIVITIES ASSOCIATED WITH THIS PROJECT MUST BE PROVIDED WITH COMPLETE COPIES OF THE APPROVED CONTRIBUTING ZONE PLAN (CZP) AND THE TCEQ LETTER INDICATING THE SPECIFIC CONDITIONS OF ITS APPROVAL. DURING THE COURSE OF THESE REGULATED ACTIVITIES, THE CONTRACTOR(S) ARE REQUIRED TO KEEP COPIES OF THE APPROVED PLAN AND APPROVAL LETTER ON-SITE.
3. NO HAZARDOUS SUBSTANCE STORAGE TANK SHALL BE INSTALLED WITHIN 150 FEET OF A WATER SUPPLY SOURCE, DISTRIBUTION SYSTEM, WELL, OR SENSITIVE FEATURE.
4. PRIOR TO BEGINNING ANY CONSTRUCTION ACTIVITY, ALL TEMPORARY EROSION AND SEDIMENTATION (E&S) CONTROL MEASURES MUST BE PROPERLY INSTALLED AND MAINTAINED IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS. IF INSPECTIONS INDICATE A CONTROL HAS BEEN USED INAPPROPRIATELY, OR INCORRECTLY, THE APPLICANT MUST REPLACE OR MODIFY THE CONTROL FOR SITE SITUATIONS. THESE CONTROLS MUST REMAIN IN PLACE UNTIL THE DISTURBED AREAS HAVE BEEN PERMANENTLY STABILIZED.
5. ANY SEDIMENT THAT ESCAPES THE CONSTRUCTION SITE MUST BE COLLECTED AND PROPERLY DISPOSED OF BEFORE THE NEXT RAIN EVENT TO ENSURE IT IS NOT WASHED INTO SURFACE STREAMS, SENSITIVE FEATURES, ETC.
6. SEDIMENT MUST BE REMOVED FROM THE SEDIMENT TRAPS OR SEDIMENTATION BASINS WHEN IT OCCUPIES 50% OF THE BASIN'S DESIGN CAPACITY.
7. LITTER, CONSTRUCTION DEBRIS, AND CONSTRUCTION CHEMICALS EXPOSED TO STORMWATER SHALL BE PREVENTED FROM BEING DISCHARGED OFFSITE.
8. ALL EXCAVATED MATERIAL THAT WILL BE STORED NON-SITE MUST HAVE PROPER E&S CONTROLS.
9. IF PORTIONS OF THE SITE WILL HAVE A CEASE IN CONSTRUCTION ACTIVITY LASTING LONGER THAN 14 DAYS, SOIL STABILIZATION IN THOSE AREAS SHALL BE INITIATED AS SOON AS POSSIBLE PRIOR TO THE 14TH DAY OF INACTIVITY. IF ACTIVITY WILL RESUME PRIOR TO THE 21ST DAY, STABILIZATION MEASURES ARE NOT REQUIRED. IF DROUGHT CONDITIONS OR INCLEMENT WEATHER PREVENT ACTION BY THE 14TH DAY, STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS POSSIBLE.
10. THE FOLLOWING RECORDS SHALL BE MAINTAINED AND MADE AVAILABLE TO THE TCEQ UPON REQUEST:
 - THE DATES WHEN MAJOR GRADING ACTIVITIES OCCUR;
 - THE DATES WHEN CONSTRUCTION ACTIVITIES TEMPORARILY OR PERMANENTLY CEASE ON A PORTION OF THE SITE; AND
 - THE DATES WHEN STABILIZATION MEASURES ARE INITIATED.
11. THE HOLDER OF ANY APPROVED CZP MUST NOTIFY THE APPROPRIATE REGIONAL OFFICE IN WRITING AND OBTAIN APPROVAL FROM THE EXECUTIVE DIRECTOR PRIOR TO INITIATING ANY OF THE FOLLOWING:
 - A. ANY PHYSICAL OR OPERATIONAL MODIFICATION OF ANY BEST MANAGEMENT PRACTICES (BMPs) OR STRUCTURES(S), INCLUDING BUT NOT LIMITED TO TEMPORARY OR PERMANENT PONDS, DAMS, BERMS, SILT FENCES, AND DIVERSIONARY STRUCTURES;
 - B. ANY CHANGE IN THE NATURE OR CHARACTER OF THE REGULATED ACTIVITY FROM THAT WHICH WAS ORIGINALLY APPROVED;
 - C. A CHANGE WHICH WOULD SIGNIFICANTLY IMPACT THE ABILITY TO PREVENT POLLUTION OF THE EDWARDS AQUIFER; OR
 - C. ANY DEVELOPMENT OF LAND PREVIOUSLY IDENTIFIED AS UNDEVELOPED IN THE ORIGINAL CONTRIBUTING ZONE PLAN.

AUSTIN REGIONAL OFFICE
12100 PARK 35 CIRCLE, BUILDING A
AUSTIN, TEXAS 78733-1808
PHONE (512) 339-2929
FAX (512) 339-3795

SAN ANTONIO REGIONAL OFFICE
14250 JUDSON ROAD
SAN ANTONIO, TEXAS 78233-4480
PHONE (210) 490-3096
FAX (210) 545-4329

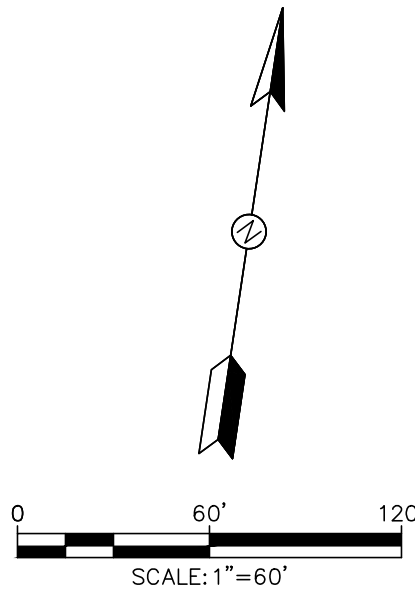

LEGEND

- SF SILT FENCE
- LOC LIMITS OF CONSTRUCTION
- EXISTING CONTOURS
- PROPOSED CONTOURS
- FLOW ARROWS
- STABILIZED CONSTRUCTION ENTRANCE/EXIT (FIELD LOCATE)
- TRUCK WASH OUT PIT (FIELD LOCATE)
- CONSTRUCTION STAGING AREA (FIELD LOCATE)
- ENGINEERED VEGETATIVE FILTER STRIPS
- ROCK BERM



M&S ENGINEERING
ELECTRICAL | CIVIL | MEP
TXENG FIRM # E-1394 | TBPELS FIRM #10159800
WWW.MSENGR.COM | (830) 228-5446



PEC CEDAR PARK CAMPUS
1875 W WHITESTONE BLVD
LEANDER, TX 78641
EROSION AND SEDIMENT
CONTROL PLAN

JOB:

DATE:

DESIGN:

PM:

PEER:





DM:

REVISIONS:

DELTA	DESCRIPTION

SHEET:

12

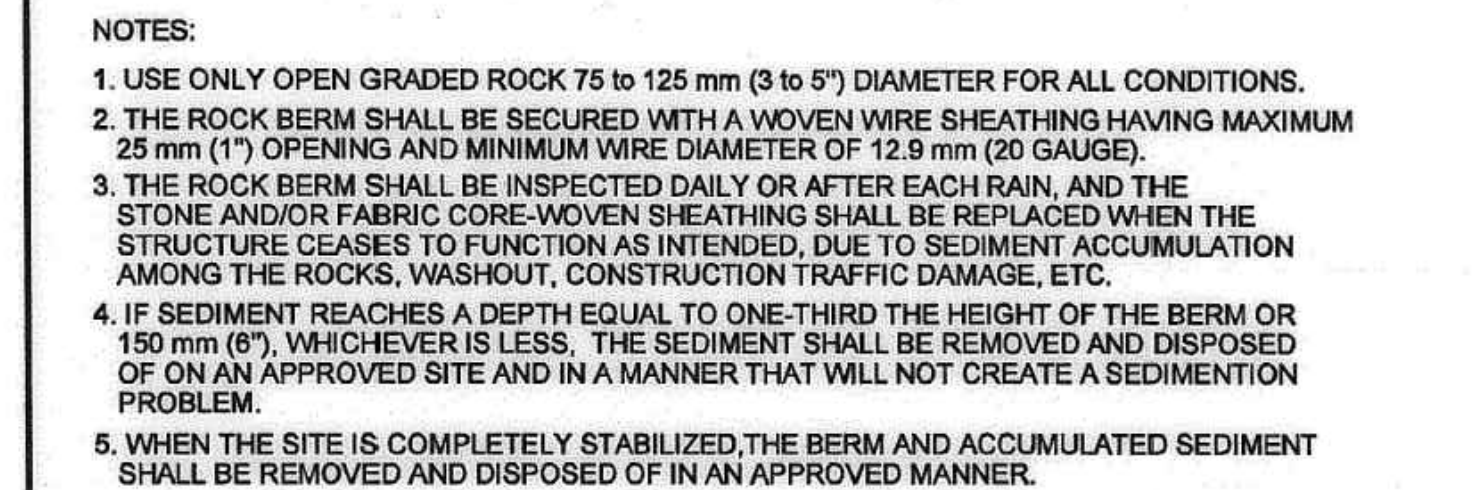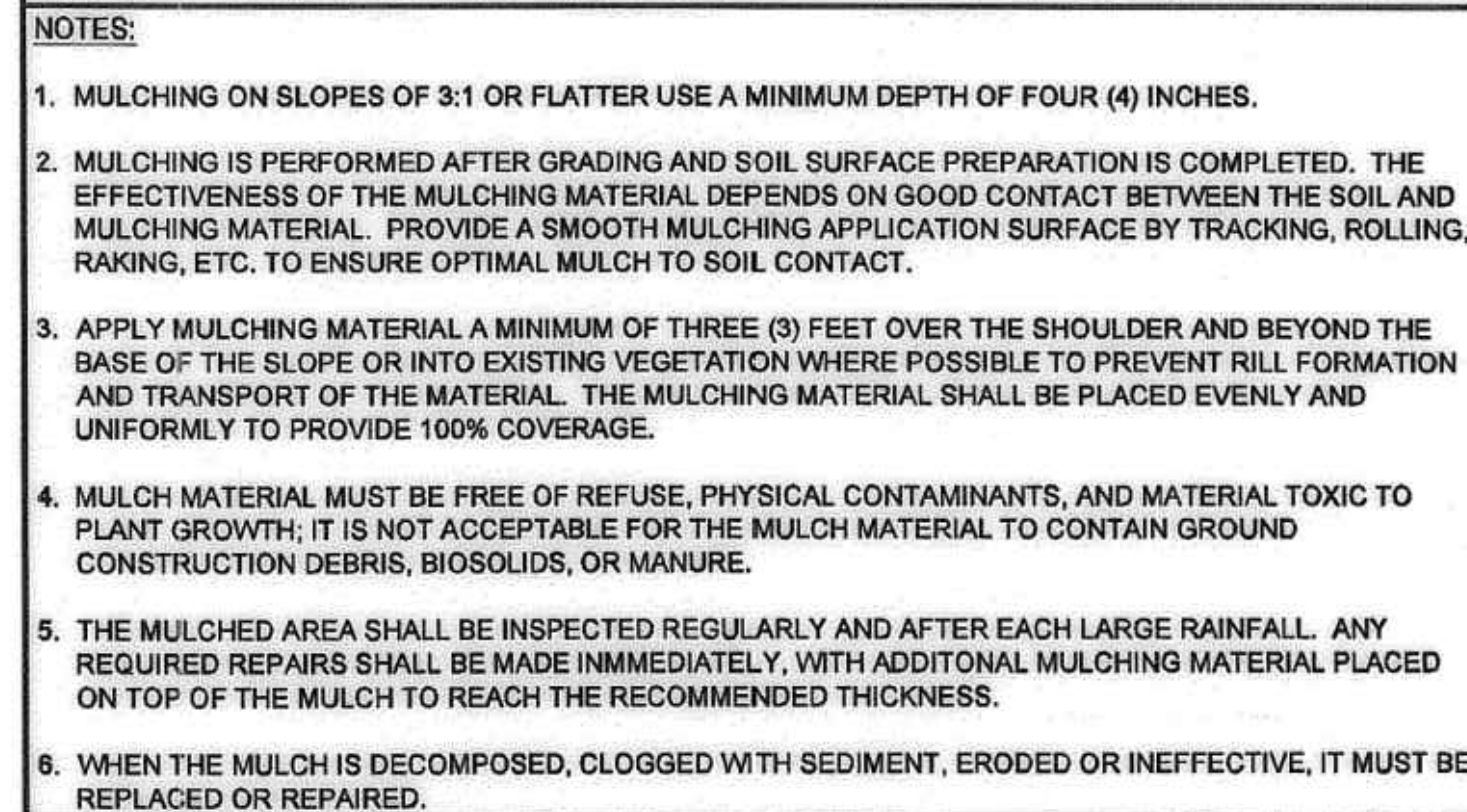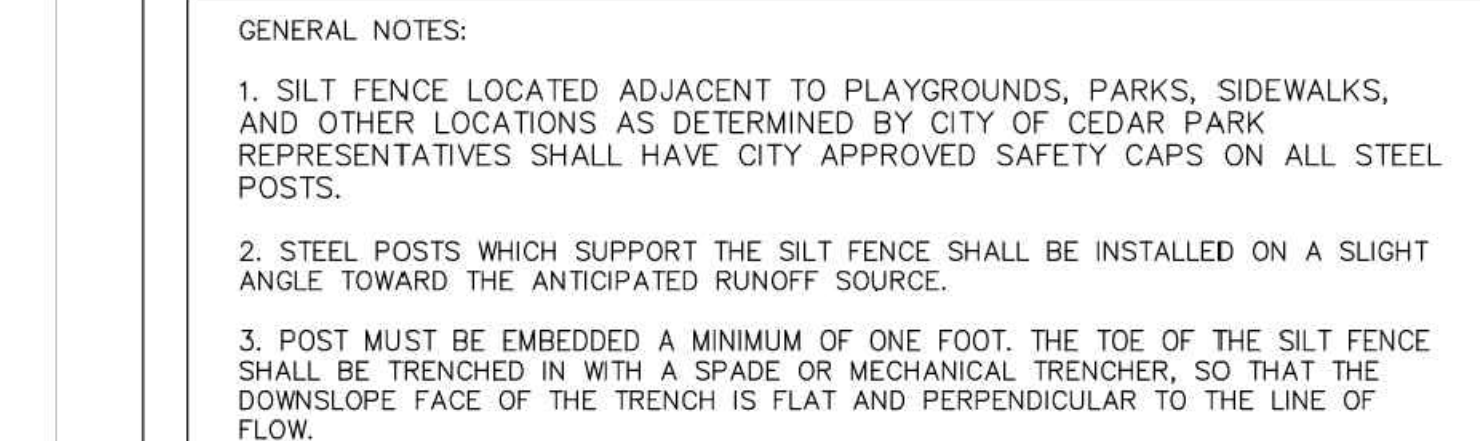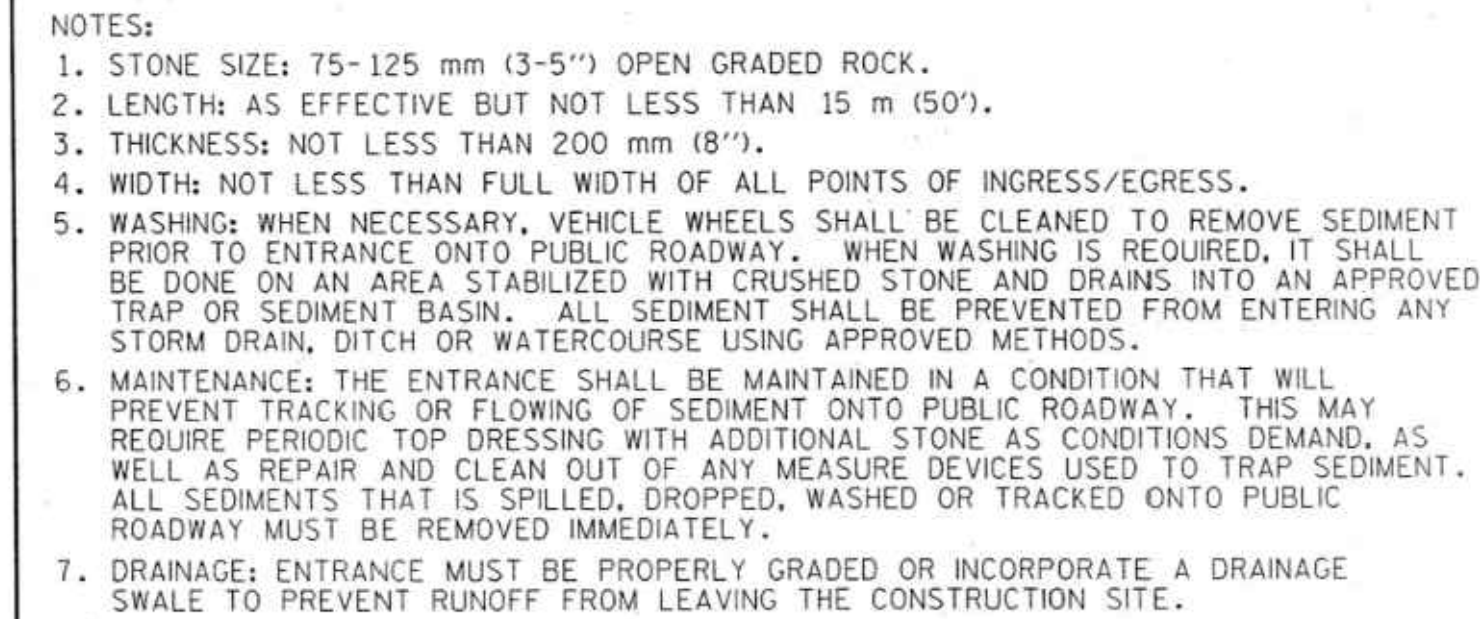

DETENTION POND NOTES

EARTHFILL

1. SCOPE
THE WORK CONSISTS OF THE CONSTRUCTION OF EARTH EMBANKMENTS, OTHER EARTHFILLS, AND EARTH BACKFILLS REQUIRED BY THE DRAWINGS AND SPECIFICATIONS.
- EARTHFILL IS COMPOSED OF NATURAL EARTH MATERIALS THAT CAN BE PLACED AND COMPACTED BY CONSTRUCTION EQUIPMENT OPERATED IN A CONVENTIONAL MANNER.
- EARTH BACKFILL IS COMPOSED OF NATURAL EARTH MATERIAL PLACED AND COMPACTED IN CONFINED SPACES OR ADJACENT TO STRUCTURES (INCLUDING PIPES) BY HAND TAMPING, MANUALLY DIRECTED POWER TAMPERS OR VIBRATING PLATES, OR THEIR EQUIVALENT.

2. MATERIAL
FILL MATERIALS SHALL CONTAIN NO FROZEN SOIL, SOD, BRUSH, ROOTS, OR OTHER PERISHABLE MATERIAL. UNLESS OTHERWISE NOTED ON THE PLANS, ROCK PARTICLES LARGER THAN 6" SHALL BE REMOVED PRIOR TO COMPACTION OF THE FILL.

THE TYPES OF MATERIAL USED IN THE VARIOUS FILLS SHALL BE AS LISTED AND DESCRIBED IN THE SPECIFICATIONS AND DRAWINGS.

3. FOUNDATION PREPARATION
FOUNDATIONS FOR EARTHFILL SHALL BE STRIPPED TO REMOVE VEGETATION AND OTHER UNSUITABLE MATERIAL OR SHALL BE EXCAVATED AS SPECIFIED.

EXCEPT AS OTHERWISE SPECIFIED, EARTH FOUNDATION SURFACES SHALL BE GRADED TO REMOVE SURFACE IRREGULARITIES AND SHALL BE SCARIFIED PARALLEL TO THE AXIS OF THE FILL OR OTHERWISE ACCEPTABLY SCORED AND LOOSENED TO A MINIMUM DEPTH OF 2 INCHES. THE MOISTURE CONTENT OF THE LOOSENED MATERIAL SHALL BE CONTROLLED AS SPECIFIED FOR THE EARTHFILL, AND THE SURFACE MATERIAL OF THE FOUNDATION SHALL BE COMPACTED AND BONDED WITH THE FIRST LAYER OF EARTHFILL AS SPECIFIED OR SUBSEQUENT LAYERS OF EARTHFILL.

EARTH ABUTMENT SURFACES SHALL BE FREE OF LOOSE, UNCOMPACTED EARTH IN EXCESS OF 2 INCHES IN DEPTH NORMAL TO THE SLOPE AND SHALL BE AT SUCH A MOISTURE CONTENT THAT THE EARTHFILL CAN BE COMPACTED AGAINST THEM TO PRODUCE A GOOD BOND BETWEEN THE FILL AND THE ABUTMENTS.

ROCK FOUNDATION AND ABUTMENT SURFACES SHALL BE CLEARED OF ALL LOOSE MATERIAL BY HAND OR OTHER EFFECTIVE MEANS AND SHALL BE FREE OF STANDING WATER WHEN FILL IS PLACED UPON THEM. OCCASIONAL ROCK OUTCROPS IN EARTH FOUNDATIONS FOR EARTHFILL, EXCEPT IN DAMS AND OTHER STRUCTURES DESIGNED TO RESTRAIN THE MOVEMENT OF WATER, SHALL NOT REQUIRE SPECIAL TREATMENT IF THEY DO NOT INTERFERE WITH COMPACTION OF THE FOUNDATION AND INITIAL LAYERS OF THE FILL OR THE BOND BETWEEN THE FOUNDATION AND THE FILL.

FOUNDATION AND ABUTMENT SURFACES SHALL BE NO STEEPER THAN ONE HORIZONTAL TO ONE VERTICAL UNLESS OTHERWISE SPECIFIED. TEST PITS OR OTHER CAVITIES SHALL BE FILLED WITH COMPACTED EARTHFILL CONFORMING TO THE SPECIFICATIONS FOR THE EARTHFILL TO BE PLACED UPON THE FOUNDATION.

4. PLACEMENT
EARTHFILL SHALL BE PLACED IN APPROXIMATELY HORIZONTAL LAYERS. THE THICKNESS OF EACH LAYER BEFORE COMPACTION SHALL NOT EXCEED THE MAXIMUM THICKNESS SPECIFIED AS SHOWN ON THE DRAWINGS. MATERIALS PLACED BY DUMPING IN PILES OR WINDOWS SHALL BE SPREAD UNIFORMLY TO NOT MORE THAN THE SPECIFIED THICKNESS BEFORE BEING COMPACTED.

HAND COMPACTED EARTH BACKFILL SHALL BE PLACED IN LAYERS WHOSE THICKNESS BEFORE COMPACTION DOES NOT EXCEED THE MAXIMUM THICKNESS SPECIFIED FOR LAYERS OF EARTH BACKFILL COMPACTED BY MANUALLY DIRECTED POWER TAMPERS.

EARTH BACKFILL SHALL BE PLACED IN A MANNER THAT PREVENTS DAMAGE TO THE STRUCTURES AND ALLOWS THE STRUCTURES TO ASSUME THE LOADS FROM THE EARTH BACKFILL GRADUALLY AND UNIFORMLY. THE HEIGHT OF THE EARTH BACKFILL ADJACENT TO A STRUCTURE SHALL BE INCREASED AT APPROXIMATELY THE SAME RATE ON ALL SIDES OF THE STRUCTURE.

EARTHFILL AND EARTH BACKFILL IN DAMS, LEVEES, AND OTHER STRUCTURES DESIGNED TO RESTRAIN THE MOVEMENT OF WATER SHALL BE PLACED TO MEET THE FOLLOWING ADDITIONAL REQUIREMENTS:

- (a) THE DISTRIBUTION OF MATERIALS THROUGHOUT EACH ZONE SHALL BE ESSENTIALLY UNIFORM, AND THE EARTHFILL SHALL BE FREE FROM LENSES, POCKETS, STREAKS, OR LAYERS OF MATERIAL DIFFERING SUBSTANTIALLY IN TEXTURE, MOISTURE CONTENT, OR GRADATION FROM THE SURROUNDING MATERIAL. ZONE EARTHFILLS SHALL BE CONSTRUCTED CONCURRENTLY UNLESS OTHERWISE SPECIFIED.
- (b) IF THE SURFACE OF ANY LAYER BECOMES TOO HARD AND SMOOTH FOR PROPER BOND WITH THE SUCCEEDING LAYER, IT SHALL BE SCARIFIED PARALLEL TO THE AXIS OF THE FILL TO A DEPTH OF NOT LESS THAN 2 INCHES BEFORE THE NEXT LAYER IS PLACED.
- (c) THE TOP SURFACE OF EMBANKMENTS SHALL BE MAINTAINED APPROXIMATELY LEVEL DURING CONSTRUCTION WITH TWO EXCEPTIONS: A CROWN OR CROSS-SLOPE OF ABOUT 2 PERCENT SHALL BE MAINTAINED TO ENSURE EFFECTIVE DRAINAGE, OR AS OTHERWISE SPECIFIED FOR DRAINILL OR SECTIONAL ZONES.
- (d) DAM EMBANKMENTS SHALL BE CONSTRUCTED IN CONTINUOUS LAYERS FROM ABUTMENT TO ABUTMENT EXCEPT WHERE OPENINGS TO FACILITATE CONSTRUCTION OR TO ALLOW THE PASSAGE OF STREAM FLOW DURING CONSTRUCTION ARE SPECIFICALLY AUTHORIZED IN THE CONTRACT.
- (e) EMBANKMENTS BUILT AT DIFFERENT LEVELS AS DESCRIBED UNDER (C) OR (D) ABOVE SHALL BE CONSTRUCTED SO THAT THE SLOPE OF THE BONDING SURFACES BETWEEN EMBANKMENT IN PLACE AND EMBANKMENT TO BE PLACED IS NOT STEEPER THAN 3 FEET HORIZONTAL TO 1 FOOT VERTICAL. THE BONDING SURFACE OF THE EMBANKMENT IN PLACE SHALL BE STRIPPED OF ALL MATERIAL NOT MEETING THE REQUIREMENTS OF THIS SPECIFICATION AND SHALL BE SCARIFIED, MOISTENED, AND RECOMPACTED WHEN THE NEW EARTHFILL IS PLACED AGAINST IT. THIS ENSURES A GOOD BOND WITH THE NEW EARTHFILL AND OBTAINS THE SPECIFIED MOISTURE CONTENT AND DENSITY AT THE CONTACT OF THE INPLACE AND NEW EARTHFILLS.

- (f) THE FILL MATERIAL SHALL BE FREE OF ORGANIC MATTER AND OTHER OBJECTIONABLE MATERIAL. PLACING AND SPREADING OF FILL SHALL BEGIN ON THE LOWEST PART OF THE WORKING AREA AND CONTINUE IN HORIZONTAL LAYERS OF APPROXIMATE UNIFORM THICKNESS, NOT EXCEEDING 9 INCHES BEFORE COMPACTION. WHERE THE BORROW YIELDS MATERIALS OF VARYING TEXTURE AND GRADATION, THE MORE IMPERVIOUS MATERIAL SHALL BE PLACED TOWARD THE WATERSIDE OF THE BERM. THE CONSTRUCTION EQUIPMENT SHALL BE OPERATED OVER THE AREA OF EACH LAYER IN A MANNER TO BREAK UP LARGE CLODS AND OBTAIN COMPACTION.

5. CONTROL OF MOISTURE CONTENT
DURING PLACEMENT AND COMPACTION OF EARTHFILL AND EARTH BACKFILL, THE MOISTURE CONTENT OF THE MATERIAL BEING PLACED SHALL BE MAINTAINED WITHIN THE SPECIFIED RANGE.

THE APPLICATION OF WATER TO THE EARTHFILL MATERIAL SHALL BE ACCOMPLISHED AT THE BORROW AREAS INsofar AS PRACTICABLE. WATER MAY BE APPLIED BY SPRINKLING THE MATERIAL AFTER PLACEMENT ON THE EARTHFILL. IF NECESSARY, UNIFORM MOISTURE DISTRIBUTION SHALL BE OBTAINED BY DISKING.

MATERIAL THAT IS TOO WET WHEN DEPOSITED ON THE EARTHFILL SHALL EITHER BE REMOVED OR BE DRIED TO THE SPECIFIED MOISTURE CONTENT PRIOR TO COMPACTION.

IF THE TOP SURFACE OF THE PRECEDING LAYER OF COMPACTED EARTHFILL OR A FOUNDATION OR ABUTMENT SURFACE IN THE ZONE OF CONTACT WITH THE EARTHFILL BECOMES TOO DRY TO PERMIT SUITABLE BOND, IT SHALL EITHER BE REMOVED OR SCARIFIED AND MOISTENED BY SPRINKLING TO AN ACCEPTABLE MOISTURE CONTENT BEFORE PLACEMENT OF THE NEXT LAYER OF EARTHFILL.

6. COMPACTION
EARTHFILL - EARTHFILL SHALL BE COMPACTED ACCORDING TO THE FOLLOWING REQUIREMENTS FOR THE CLASS OF COMPACTION SPECIFIED:

CLASS A COMPACTION - EACH LAYER OF EARTHFILL SHALL BE COMPACTED AS NECESSARY TO PROVIDE THE DENSITY OF THE EARTHFILL MATRIX NOT LESS THAN THE MINIMUM DENSITY SPECIFIED ON THE DRAWINGS. THE EARTHFILL MATRIX IS DEFINED AS THE PORTION OF THE EARTHFILL MATERIAL FINER THAN THE MAXIMUM PARTICLE SIZE USED IN THE COMPACTION TEST METHOD SPECIFIED.

COMPACTION OF ALL EARTHEN EMBANKMENTS SHALL HAVE A NON-PERMEABLE CORE, SHALL BE BASED ON A GEOTECHNICAL INVESTIGATION OF THE SITE, AND SHALL BE COMPACTED TO 90% STANDARD PROCTOR.

7. REWORKING OR REMOVAL AND REPLACEMENT OF DEFECTIVE EARTHFILL
EARTHFILL PLACED AT DENSITIES LOWER THAN THE SPECIFIED MINIMUM DENSITY OR AT MOISTURE CONTENTS OUTSIDE THE SPECIFIED ACCEPTABLE RANGE OF MOISTURE CONTENT OR OTHERWISE NOT CONFORMING TO THE REQUIREMENTS OF THE SPECIFICATIONS SHALL BE REWORKED TO MEET THE REQUIREMENTS OR REMOVED AND REPLACED BY ACCEPTABLE EARTHFILL. THE REPLACEMENT EARTHFILL AND THE FOUNDATION, ABUTMENT, AND EARTHFILL SURFACES UPON WHICH IT IS PLACED SHALL CONFORM TO ALL REQUIREMENTS OF THIS SPECIFICATION FOR FOUNDATION PREPARATION, APPROVAL, PLACEMENT, MOISTURE CONTROL, AND COMPACTION.

8. TESTING
DURING THE COURSE OF THE WORK, THE CONTRACTOR WILL PERFORM QUALITY CONTROL TEST REQUIRED TO IDENTIFY MATERIAL, DETERMINE COMPACTION CHARACTERISTICS, DETERMINE MOISTURE CONTENT, AND DETERMINE DENSITY OF EARTHFILL IN PLACE. TESTS PERFORMED WILL BE SUBMITTED TO THE ENGINEER OF RECORD TO VERIFY THAT THE EARTHFILLS CONFORM TO CONTRACT REQUIREMENTS OF THE SPECIFICATIONS.

DENSITIES OF EARTHFILL REQUIRING CLASS A COMPACTION WILL BE DETERMINED IN ACCORDANCE WITH ASTM D 698, D 1556, D 2167, D 2922, OR D 2937 EXCEPT THAT THE VOLUME AND MOST WEIGHT OF INCLUDED ROCK PARTICLES LARGER THAN THOSE USED IN THE COMPACTION TEST METHOD SPECIFIED FOR THE TYPE OF FILL WILL BE DETERMINED AND DEDUCTED FROM THE VOLUME AND MOST WEIGHT OF THE TOTAL SAMPLE BEFORE COMPUTATION OF DENSITY OR, IF USING THE NUCLEAR GAUGE, ADDED TO THE SPECIFIED DENSITY TO BRING IT TO THE MEASURE OF EQUIVALENT COMPOSITION FOR COMPARISON (SEE ASTM D 4718). THE DENSITY SO COMPUTED IS USED TO DETERMINE THE PERCENT COMPACTION OF THE EARTHFILL MATRIX. UNLESS OTHERWISE SPECIFIED, MOISTURE CONTENT IS DETERMINED BY ONE OF THE FOLLOWING METHODS: ASTM D 2216, D 3017, D 4643, D 4944, OR D 4959.

DETENTION POND NOTES

CONSTRUCTION SPECIFICATION - TOP SOIL

1. VEGETATION OF POND BOTTOM - THE WORK CONSISTS OF PLACEMENT OF TOP SOIL ON NEW EARTH EMBANKMENTS, OTHER EARTHFILLS, AND EARTH BACKFILLS REQUIRED BY THE DRAWINGS.

2. MATERIAL - THE TOPSOIL SHALL BE FERTILE SOIL, CONSISTING PRIMARILY OF CLAY AND CLAYEY MATERIALS, WITH A PLASTICITY INDEX GREATER THAN 15, AND SHALL BE FREE OF LARGE ORGANIC OR ROCK MATERIAL.

3. APPLICATION - TOPSOIL SHALL BE PLACED AT GRADES INDICATED ON THE PLANS AND ROLLED TO REDUCE EROSION. PERIODIC INSPECTION ARE REQUIRED AND ADDITIONAL TOPSOIL ADDED AS NEEDED UNTIL VEGETATION HAS ESTABLISHED.

CONSTRUCTION SPECIFICATION - VEGETATION

1. VEGETATION OF EMBANKMENT - THE WORK CONSISTS OF ESTABLISHING VEGETATION ON NEW EARTH EMBANKMENTS, OTHER EARTHFILLS, AND EARTH BACKFILLS REQUIRED BY THE DRAWINGS.

2. MATERIAL - VEGETATION SHALL CONSIST OF "NATIVE SUN TURF GRASS" AS SUPPLIED BY NATIVE AMERICAN SEED IN JUNCTION, TX, CONSISTING OF 34% BLUE GRAMA AND 64% BUFFALO GRASS, OR ENGINEER APPROVED EQUAL. SEED MIXTURE SHALL CONSIST OF A PURE LIVE SEED OF 90-95%.

3. APPLICATION - THE SEED MIXTURE SHALL BE INSTALLED PER DISTRIBUTORS RECOMMENDATIONS AT A RATE OF 1 LB PER 400 SQFT. SEED MIXTURE SHALL BE WATERED AS REQUIRED UNTIL VEGETATION IS ESTABLISHED.


DRAINAGE INFRASTRUCTURE MAINTENANCE AND MONITORING GUIDELINES

- SEASONAL MOWING AND LAWN CARE - IF THE DETENTION POND IS MADE UP OF TURF GRASS, IT SHOULD BE MOWED AS NEEDED TO LIMIT VEGETATION HEIGHT TO 18 INCHES, USING A MULCHING MOWER (OR REMOVAL OF CLIPPINGS). IF NATIVE GRASSES ARE USED, THE POND MAY REQUIRE LESS FREQUENT MOWING, BUT A MINIMUM OF TWICE ANNUALLY. REGULAR MOWING SHOULD ALSO INCLUDE WEED CONTROL PRACTICES, HOWEVER HERBICIDE USE SHOULD BE KEPT TO A MINIMUM. HEALTHY GRASS CAN BE MAINTAINED WITHOUT USING FERTILIZERS BECAUSE RUNOFF USUALLY CONTAINS SUFFICIENT NUTRIENTS. IRRIGATION OF THE SITE CAN HELP ASSURE A DENSE AND HEALTHY VEGETATIVE COVER.
- INSPECTION - INSPECT DETENTION POND AT LEAST TWICE ANNUALLY FOR EROSION OR DAMAGE TO VEGETATION. HOWEVER, ADDITIONAL INSPECTION AFTER PERIODS OF HEAVY RUNOFF IS MOST DESIRABLE. MORE FREQUENT INSPECTIONS OF THE GRASS COVER DURING THE FIRST FEW YEARS AFTER ESTABLISHMENT WILL HELP TO DETERMINE IF ANY PROBLEMS ARE DEVELOPING, AND TO PLAN FOR LONG-TERM RESTORATIVE MAINTENANCE NEEDS. BARE SPOTS AND AREAS OF EROSION IDENTIFIED DURING SEM-ANNUAL INSPECTIONS MUST BE REPLANTED AND RESTORED TO MEET SPECIFICATIONS.
- DEBRIS AND LITTER REMOVAL - THE DETENTION POND SHOULD BE KEPT FREE OF OBSTRUCTIONS TO REDUCE FLOATABLES BEING FLUSHED DOWNSTREAM, AND FOR AESTHETIC REASONS. THE NEED FOR THIS PRACTICE IS DETERMINED THROUGH PERIODIC INSPECTION, BUT SHOULD BE PERFORMED NO LESS THAN 2 TIMES PER YEAR.
- SEDIMENT REMOVAL - SEDIMENT MAY ACCUMULATE WITHIN THE DETENTION POND, PREVENTING UNIFORM OVERLAND FLOW. SEE ATTACHED EXHIBIT FOR SEDIMENT WARNER LOCATION NEAR THE POND OUTFALL. SEDIMENT IS TO BE REMOVED WHEN THE ACCUMULATED OR AT LEAST EVERY 10 YEARS.

Basin Volume	16,051	Cubic Feet
Basin Water Storage Depth	4.5	Feet
Sand Surface Area	0	Square Feet
Sand Depth	0.0	Feet
Outlet Pipe Diameter	6	Inches
Outlet Pipe Slope	0.5	Percent

Flow Rate for 24 Hour Drawdown

16,051	CF	=	11.15 CF/Min	=	0.19 CF/Sec	or	1.39 Gal/Sec
1440	Min/Day						




0 10' 20'
SCALE: 1"=10'

LEGEND

- 900 EXISTING CONTOUR
- 900 PROPOSED CONTOUR
- DRAINAGE FLOW ARROW
- EARTHEN FILL

Pond A Volume	
Stage	Storage
Elev. (cu-ft)	
1,026.50	0
1,027.00	201
1,027.50	707
1,028.00	1636
1,028.50	2949
1,029.00	4665
Water Quality Volume ----->>	1029.08 8435
	1,029.50 6802
	1,030.00 9381
	1,030.50 12437
	1,031.00 15999

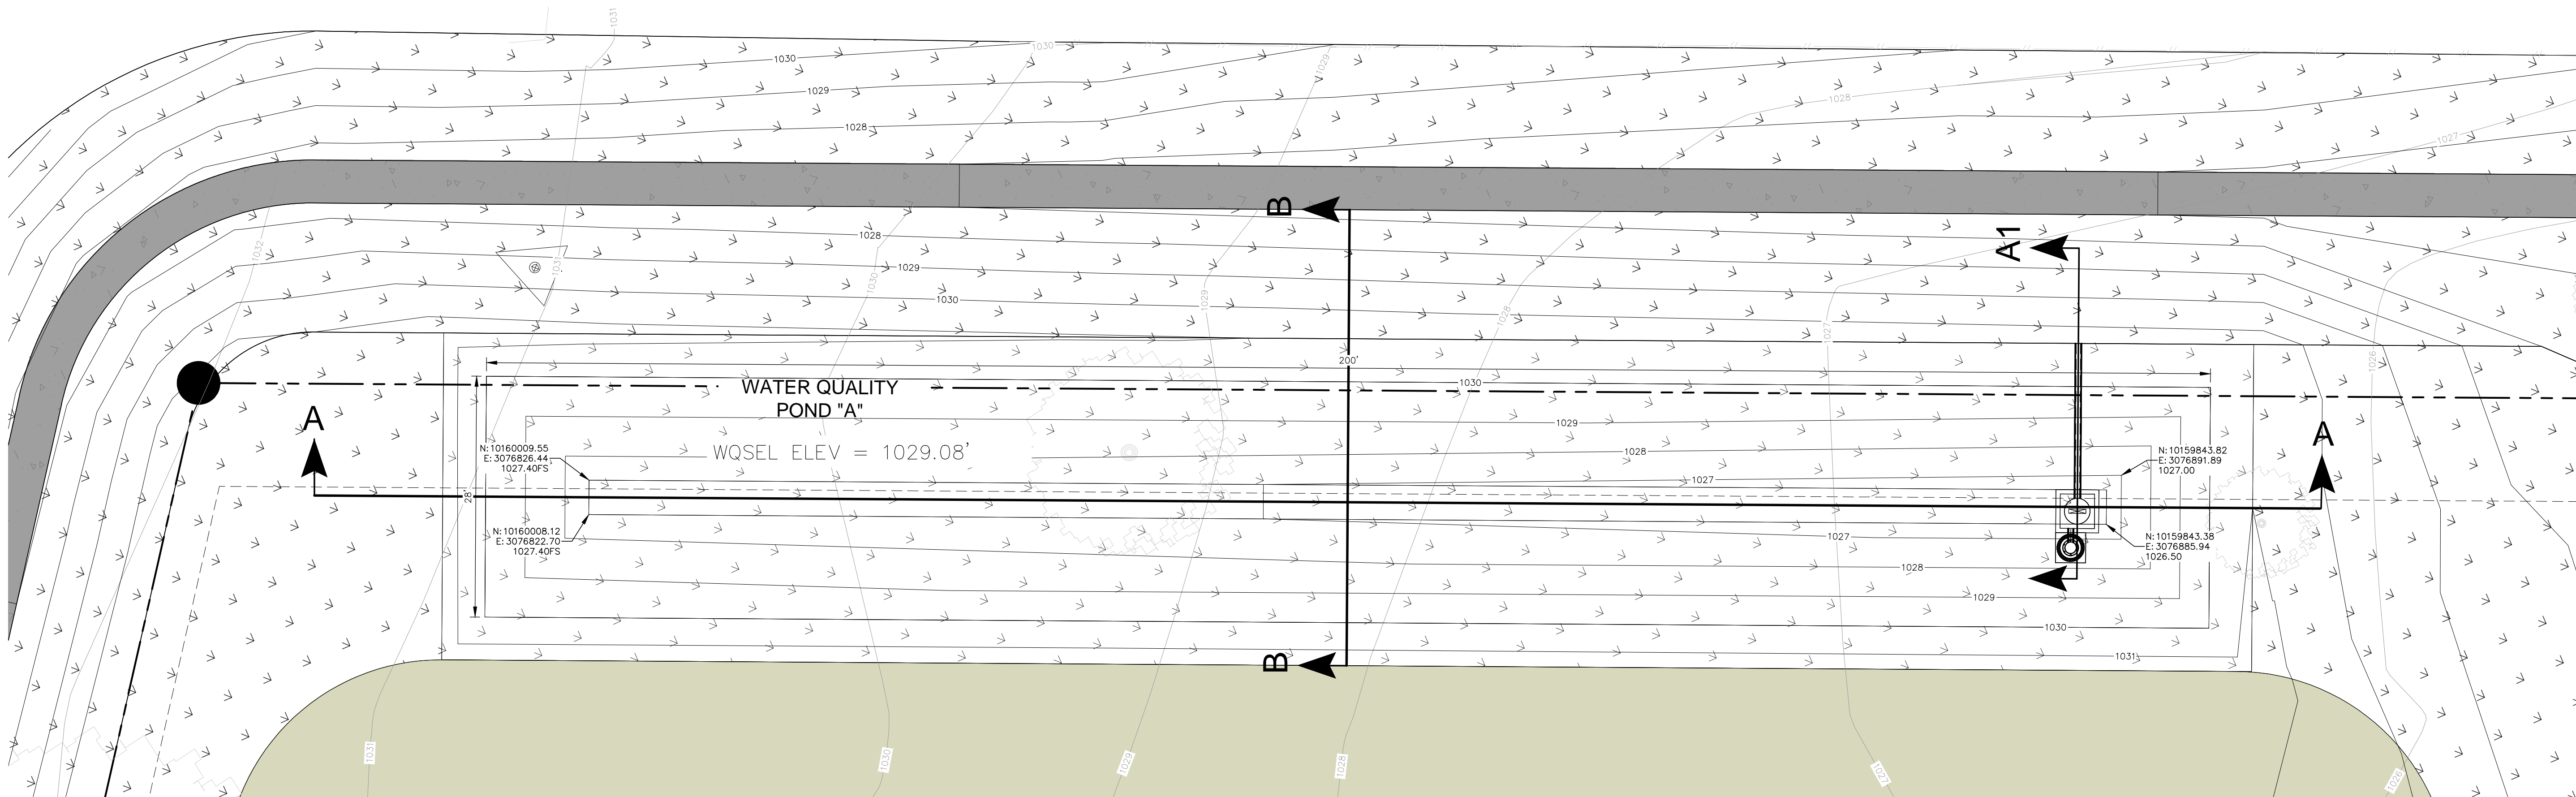

2021 W SH46, STE 105
NEW BRAUNFELS, TX, 78132
PH: 830-358-7127 ink-civil.com
TBE FIRM F-13351

PEC CEDAR PARK CAMPUS

1875 W WHITESTONE BLVD
LEANDER, TX 78641

WATER QUALITY POND PLAN

JOB:

DATE:

DESIGN: PM:


PEER: DM:

REVISIONS:

DELTA DESCRIPTION


SHEET:

7

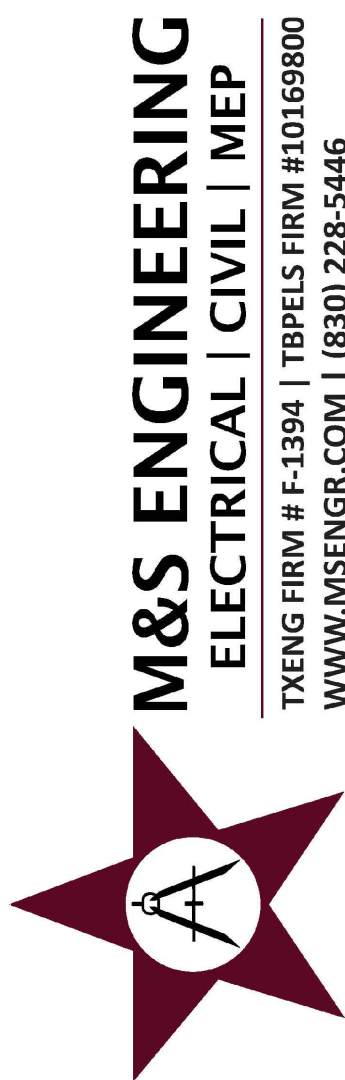

DATE: 15 JULY 2024
FILE: N:\Projects\M&S Engineering\MSEN015.101 PEC Cedar Park\Civil\Construction Drawings\8 POND CROSS-SECTIONS.dwg USER: catharinehaagelin May 19, 2025 - 5:52PM


SECTION A - A

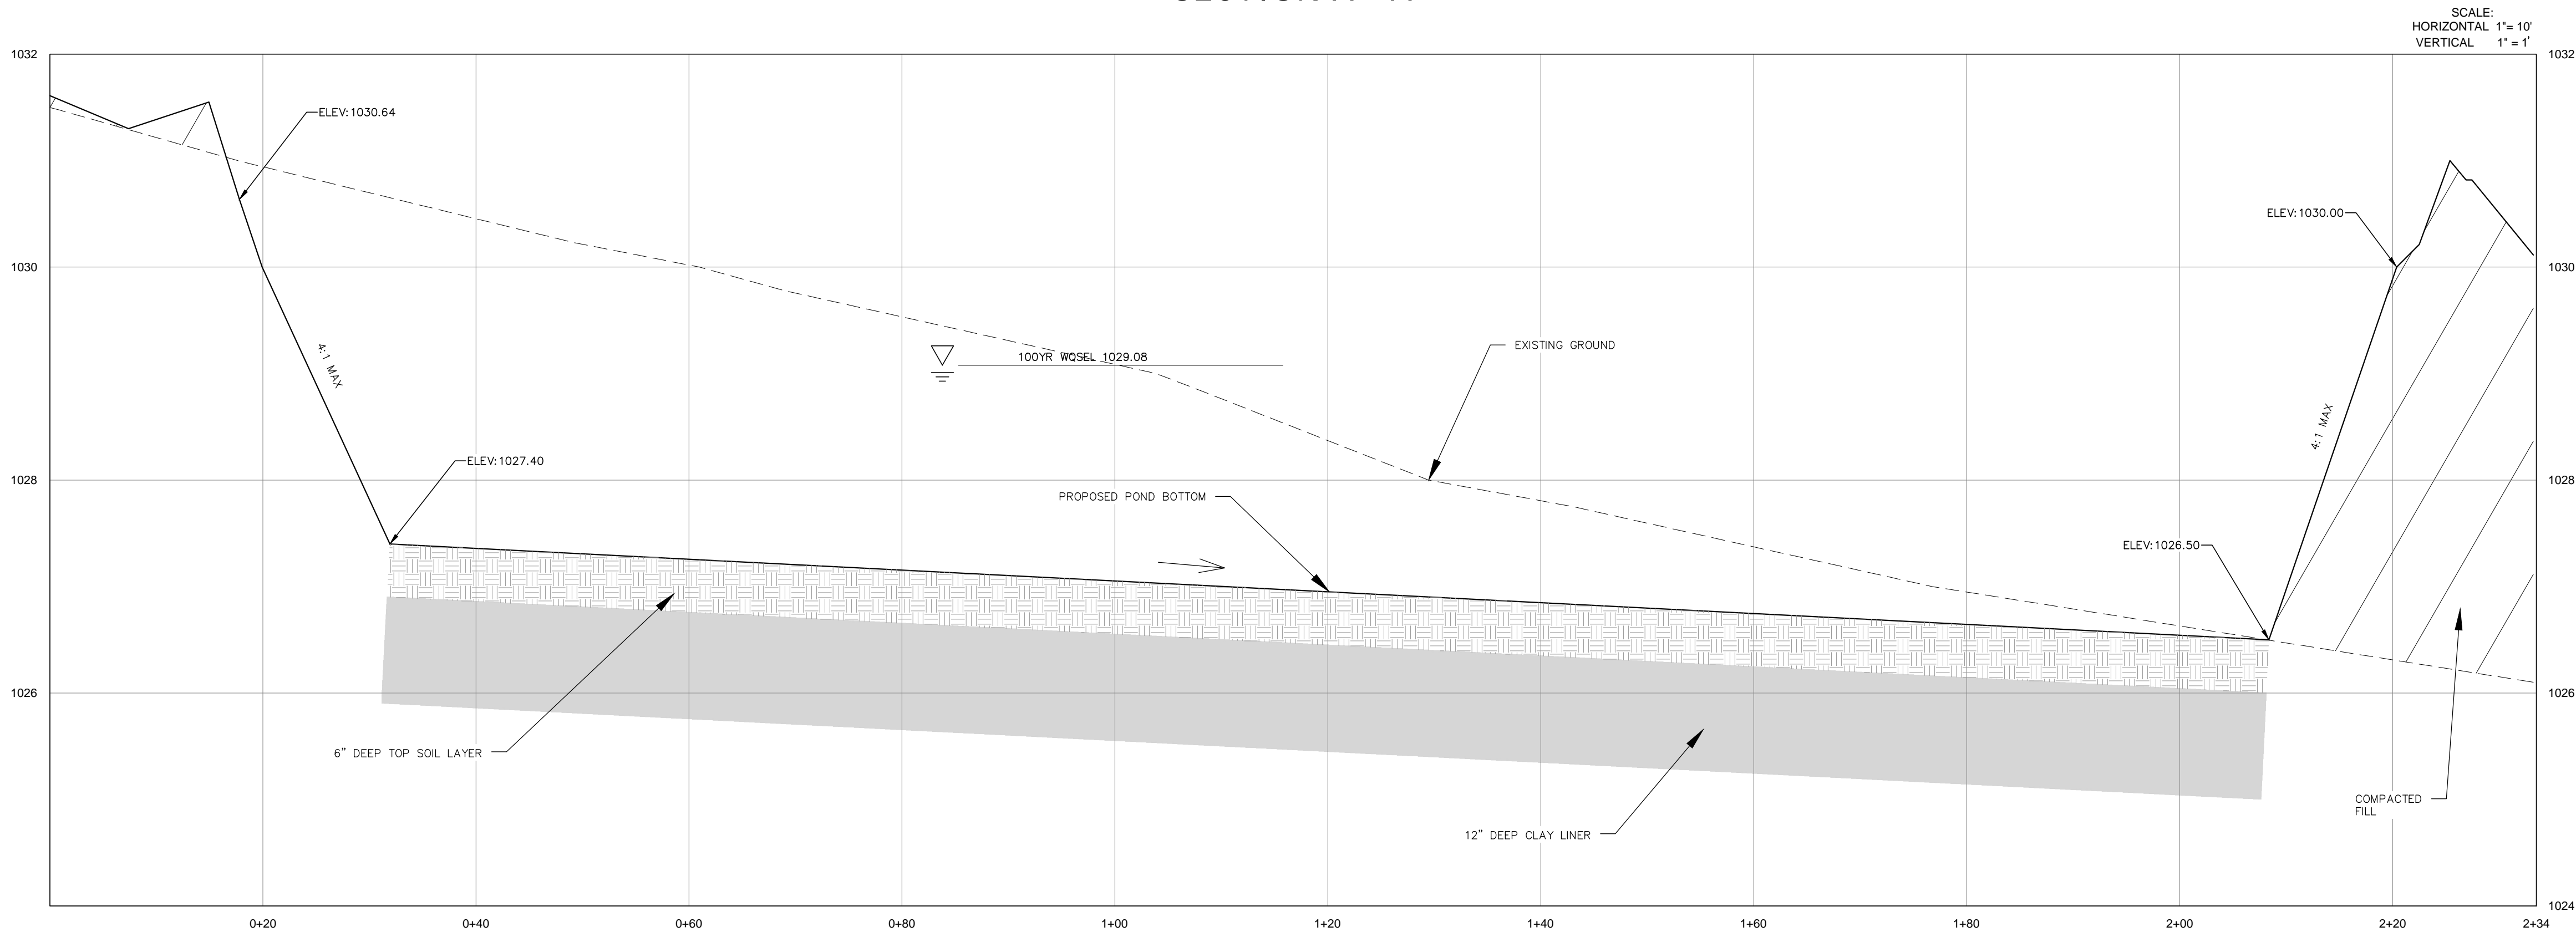



SEE SHEET 7 - WATER QUALITY
POND PLAN FOR SECTION
MARKER LOCATIONS

WATER QUALITY VOLUME REQ'D = X SF
WATER QUALITY VOLUME PROVIDED = X SF

TABLE 3.6 (CLAY LINER SPECIFICATION)			
PROPERTY	TEST METHOD	UNIT	SPECIFICATION
PERMEABILITY	ASTM D-2434	CM/SEC	1 x 10 ⁻⁶
PLASTICITY INDEX OF CLAY	ASTM D-423 & D-424	%	NOT LESS THAN 15
LIQUID LIMIT OF CLAY	ASTM D-2216	%	NOT LESS THAN 30
CLAY PARTICLES PASSING	ASTM D-422	%	NOT LESS THAN 30
CLAY COMPACTION	ASTM D-2216	%	95% OF STANDARD PROCTOR DENSITY

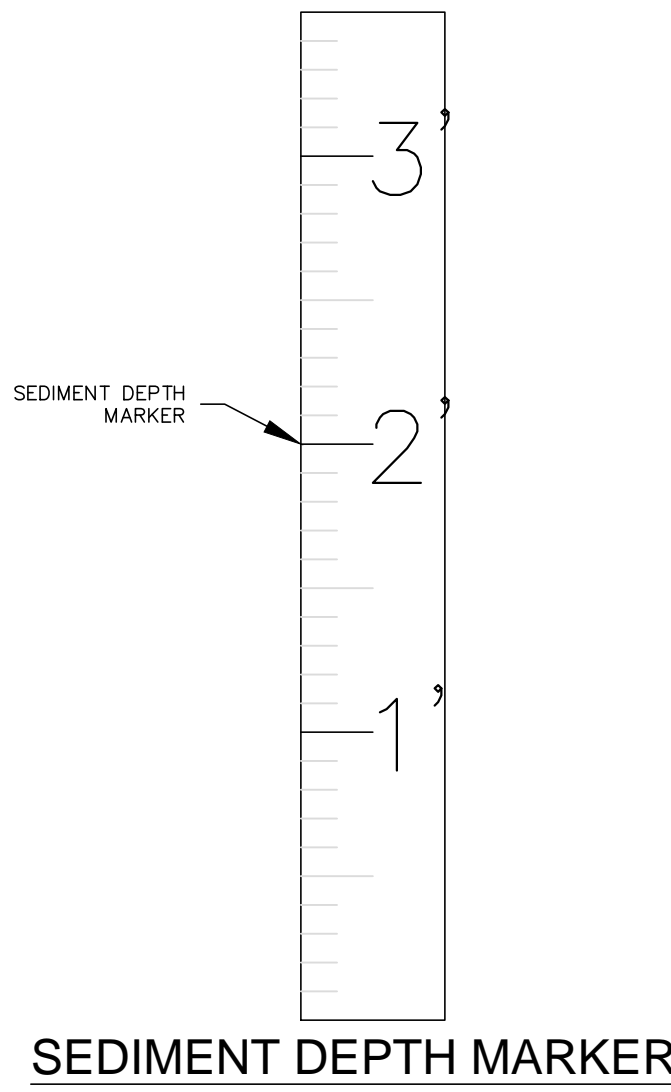

SECTION B - B

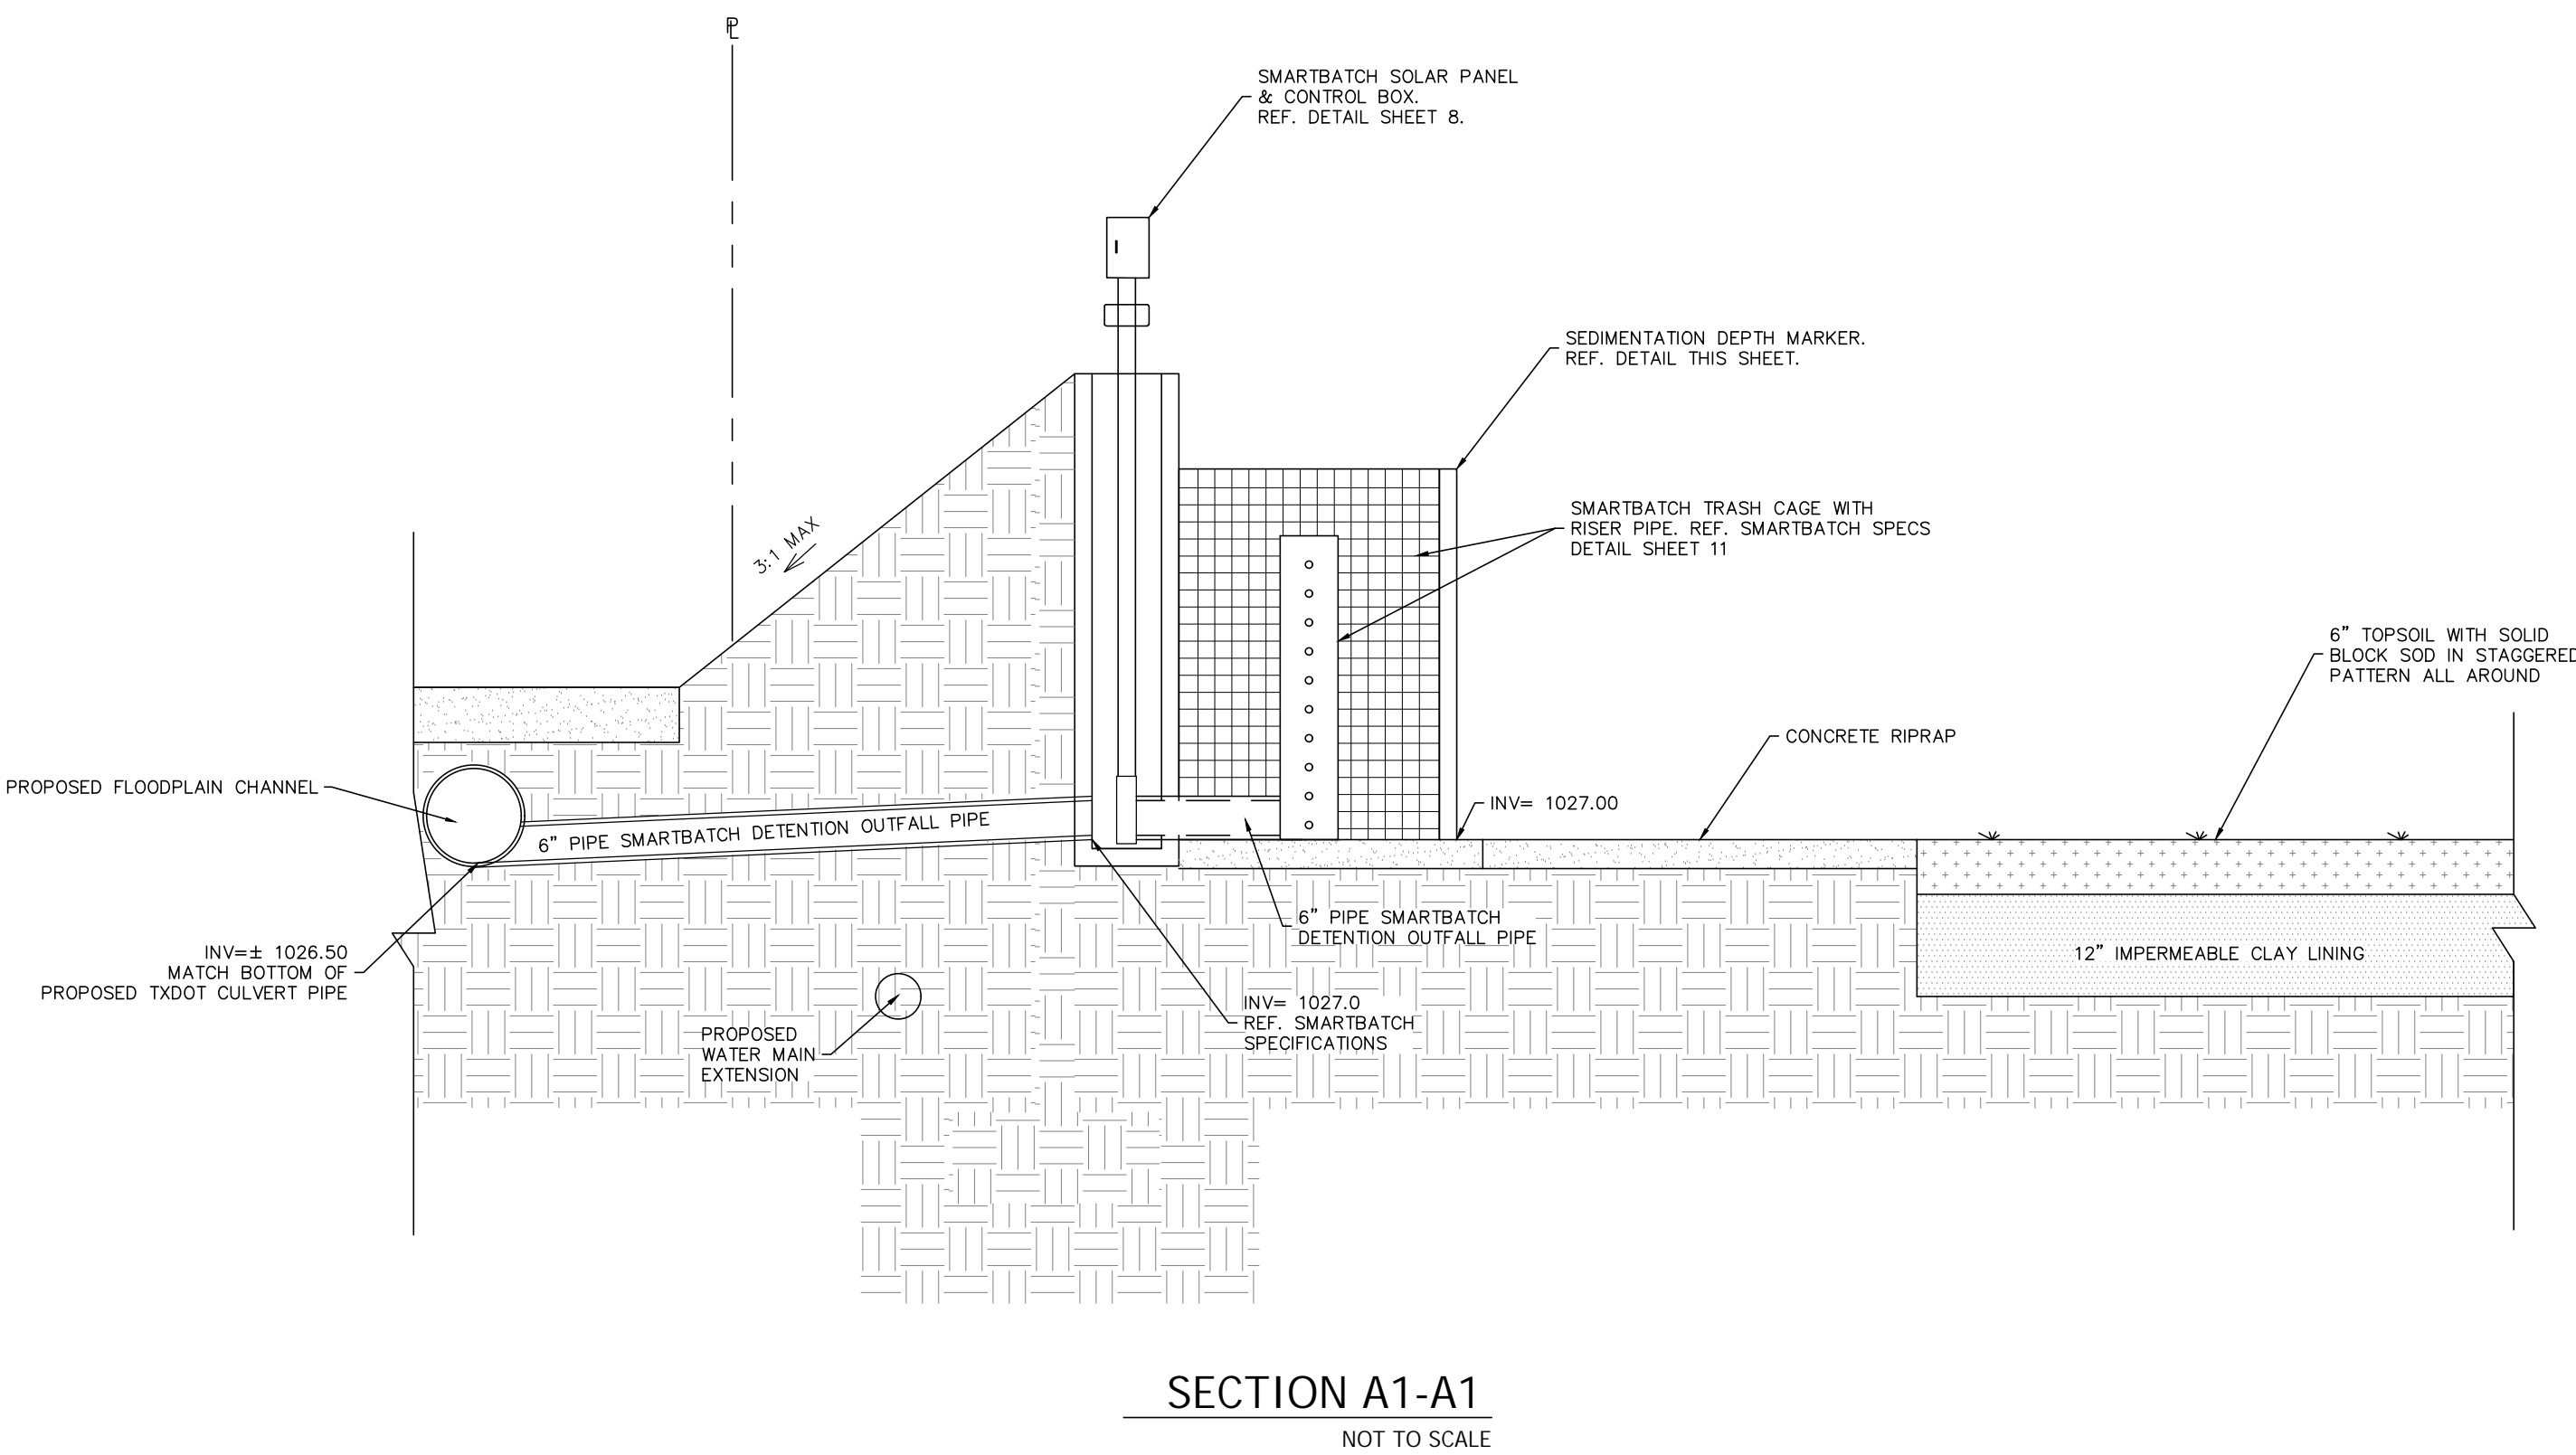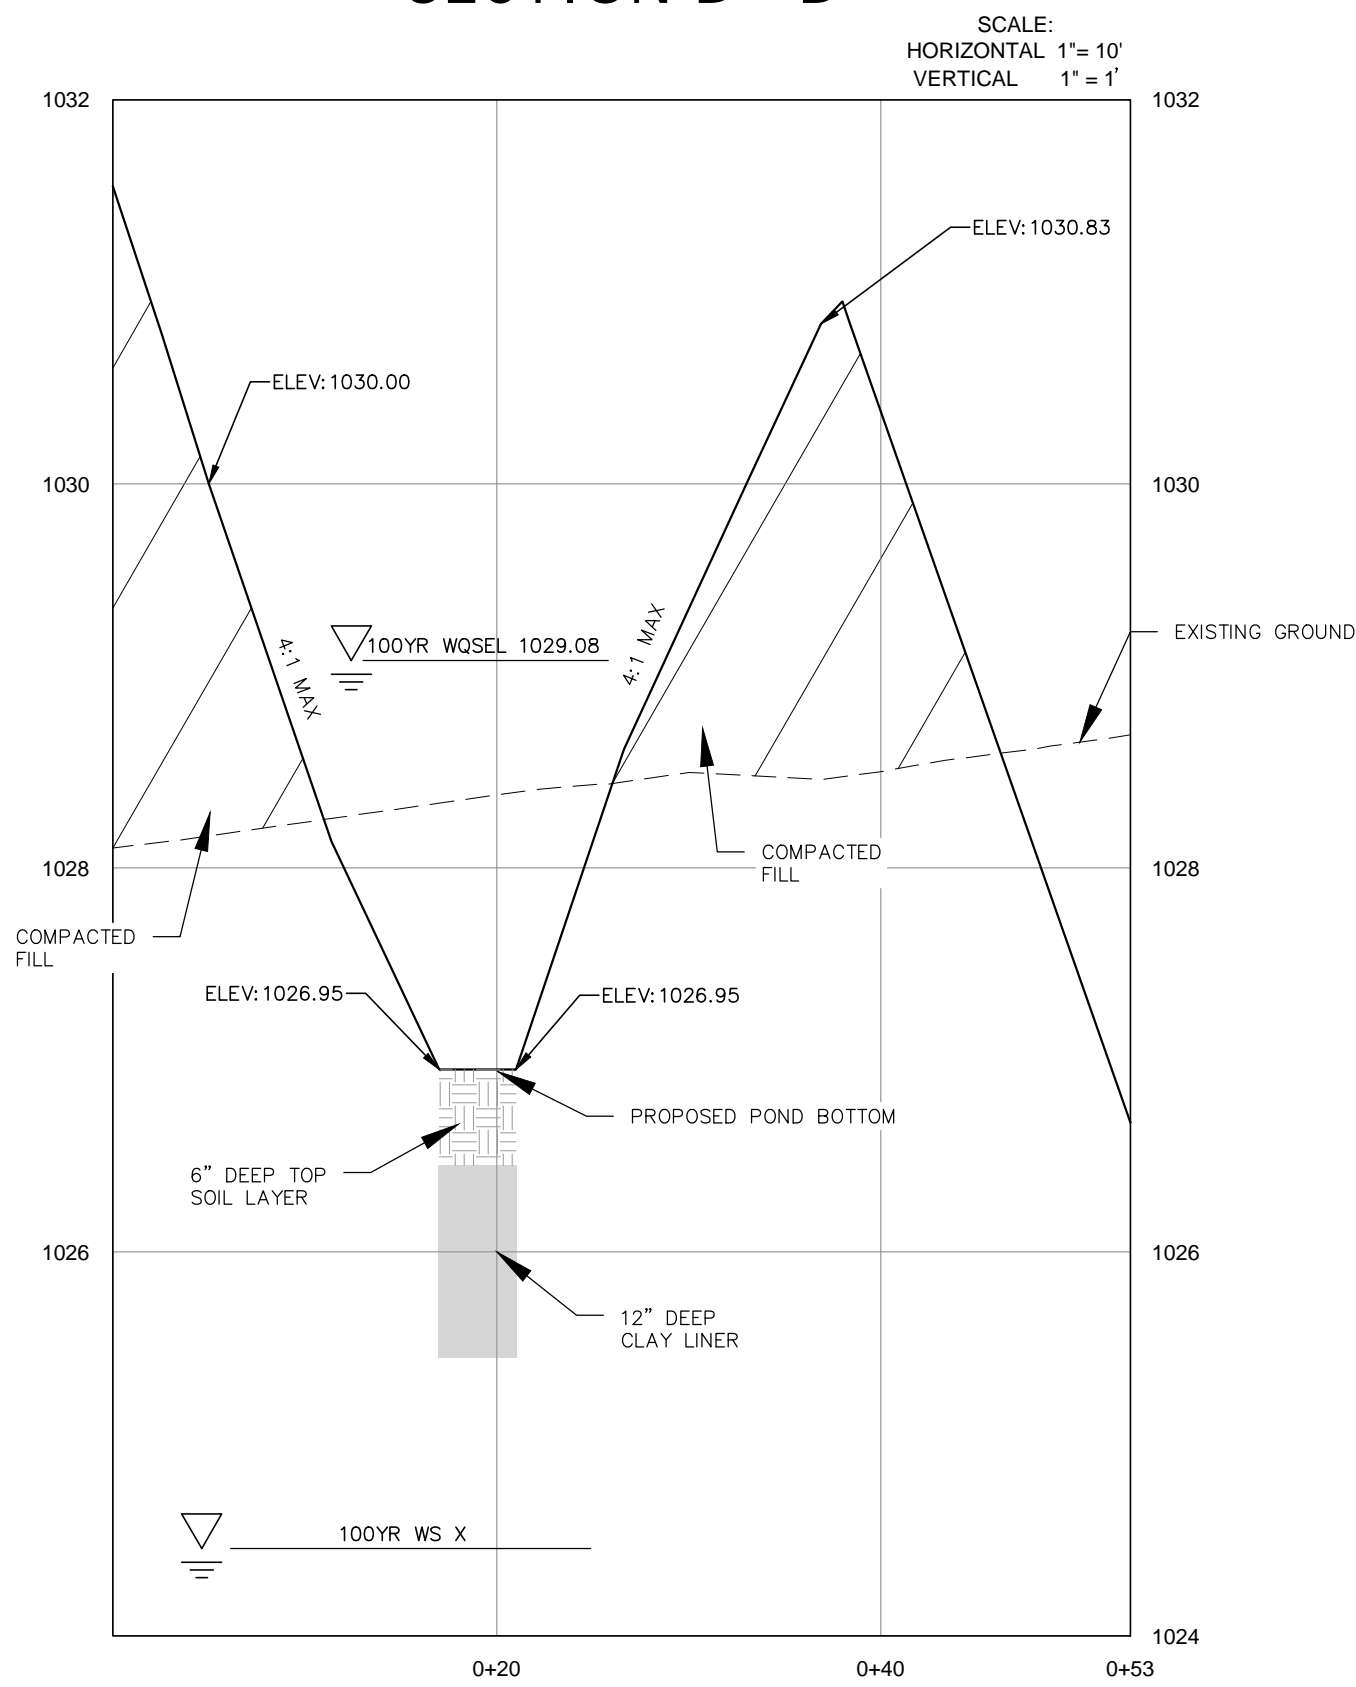

2021 W SH46, STE 105
NEW BRAUNFELS, TX, 78132
PH: 830-358-7127 ink-civil.com
T&E FIRM F-13351

PEC CEDAR PARK CAMPUS

1875 W WHITESTONE BLVD
LEANDER, TX 78641

POND
CROSS-SECTIONS

JOB:

DATE:

DESIGN: PM:


PEER: DM:

REVISIONS:

DELTA DESCRIPTION

SHEET:



8

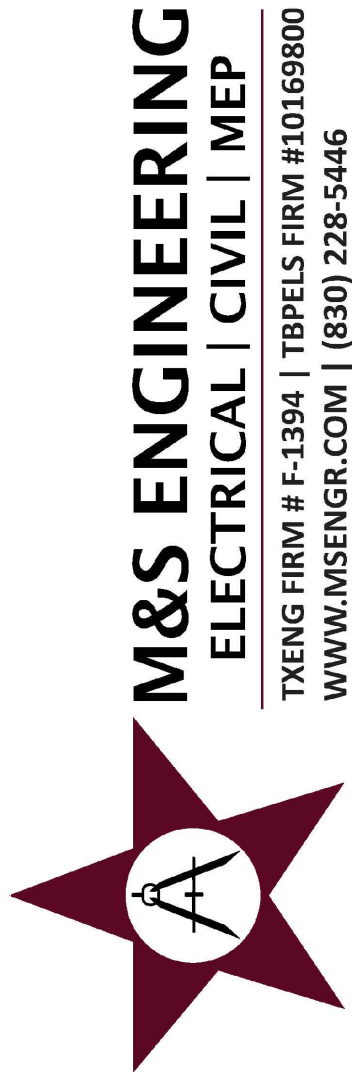

M&S ENGINEERING
ELECTRICAL | CIVIL | MEP
TXENG FIRM # F-1394 | T&E FIRM #10159800
WWW.MSENGR.COM | (830) 228-5446




DATE: 15 JULY 2024
FILE: N:\Projects\M&S Engineering\MSEN015.101 PEC Cedar Park\Civil\Construction Drawings\11 DRAINAGE DETAILS II.dwg USER: jonathangullen May 19, 2025 - 3:30PM

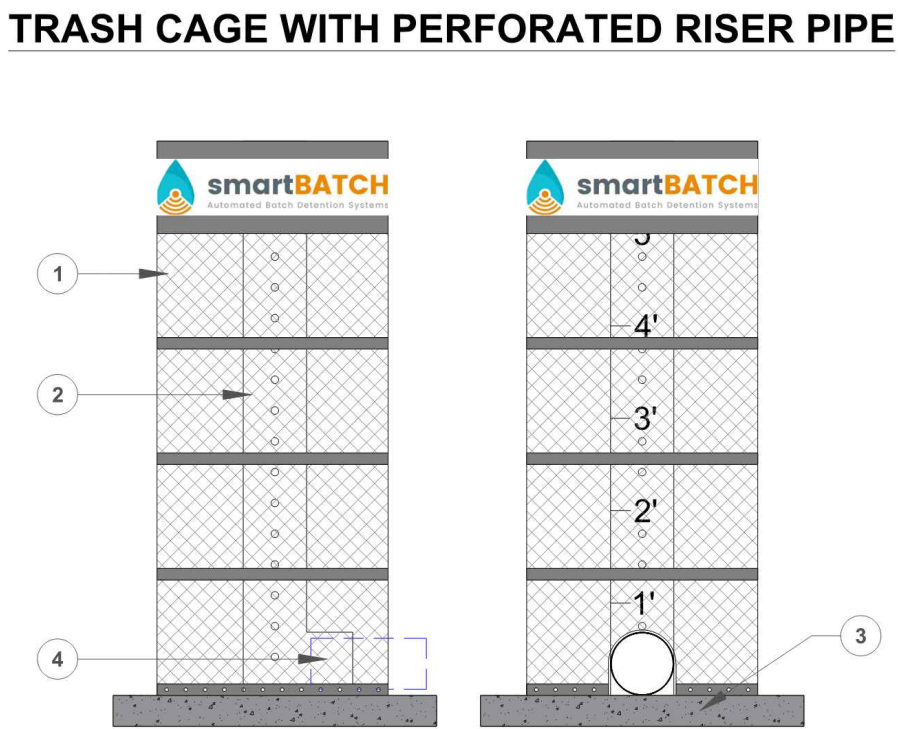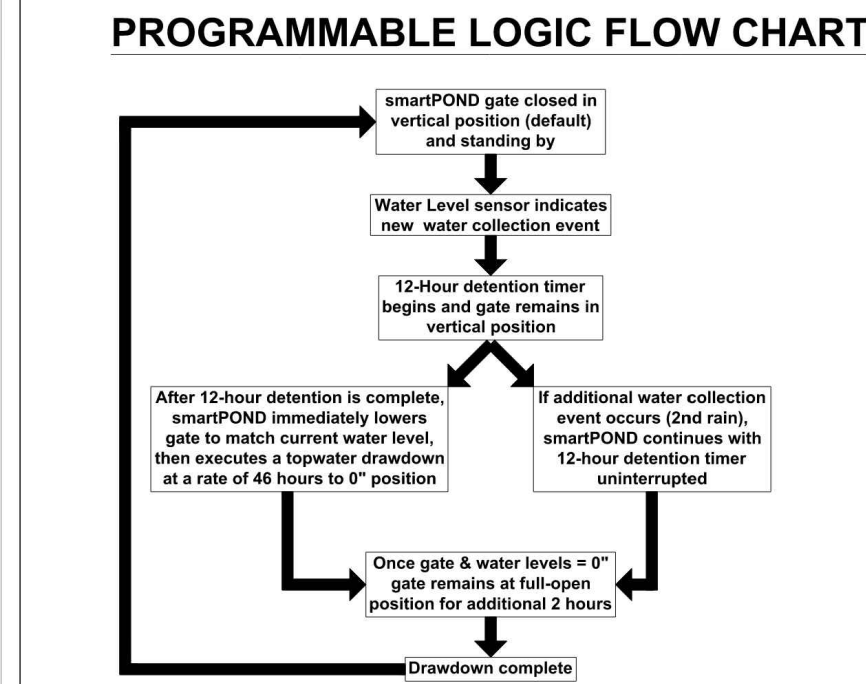


Parts List	
smartPOND Valve Component	
1	30" DIAMETER CAGE WITH 1 1/2" GALVANIZED MESH SCREEN
2	8" SQUARE PERFORATED TUBING WITH 1" PERFORATION, WITH 4" VERTICAL SPACING ON CENTERS WITH WATER DEPTH MARKER
3	3 1/2' X 3 1/2' X 4" CONCRETE PAD (BY OTHERS)
4	6" PVC OUTFALL PIPE (BY OTHERS)
5	WEATHERPROOF ELECTRONIC BOX
6	CONTROL BOX
7	PEDESTAL
8	ACTUATOR
9	MOTOR
10	6" VALVE
11	LEVEL TRANSDUCER
12	SOLAR PANEL
13	OUTLET PIPE (BY OTHERS)
14	30" DRAIN BASIN
15	VALVE STEM
16	QUICK DISCONNECT VALVE CONNECTION




PLAN VIEW OF ENCLOSER

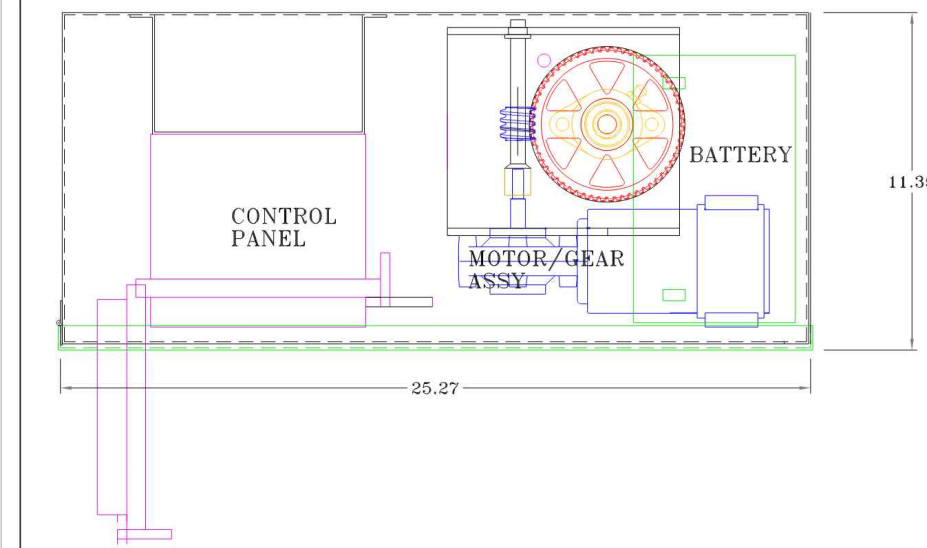

SECTION VIEW OF SMARTBATCH

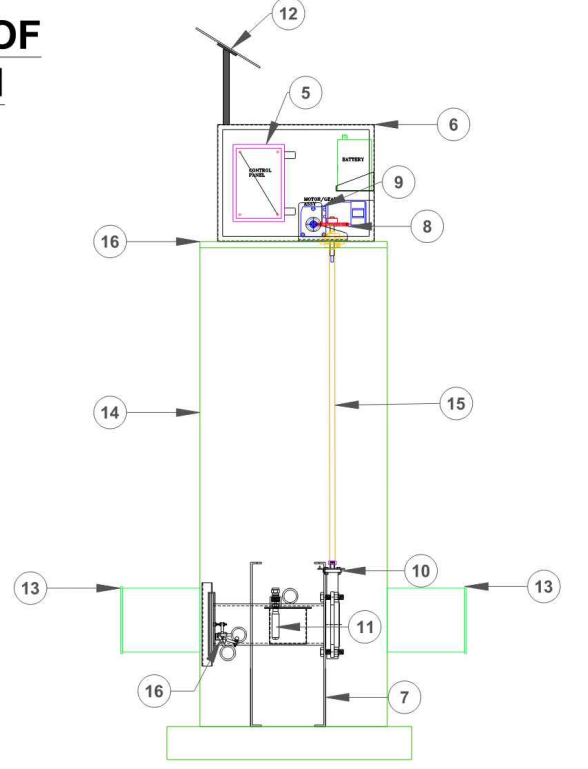

FRONT VIEW OF SMARTBATCH

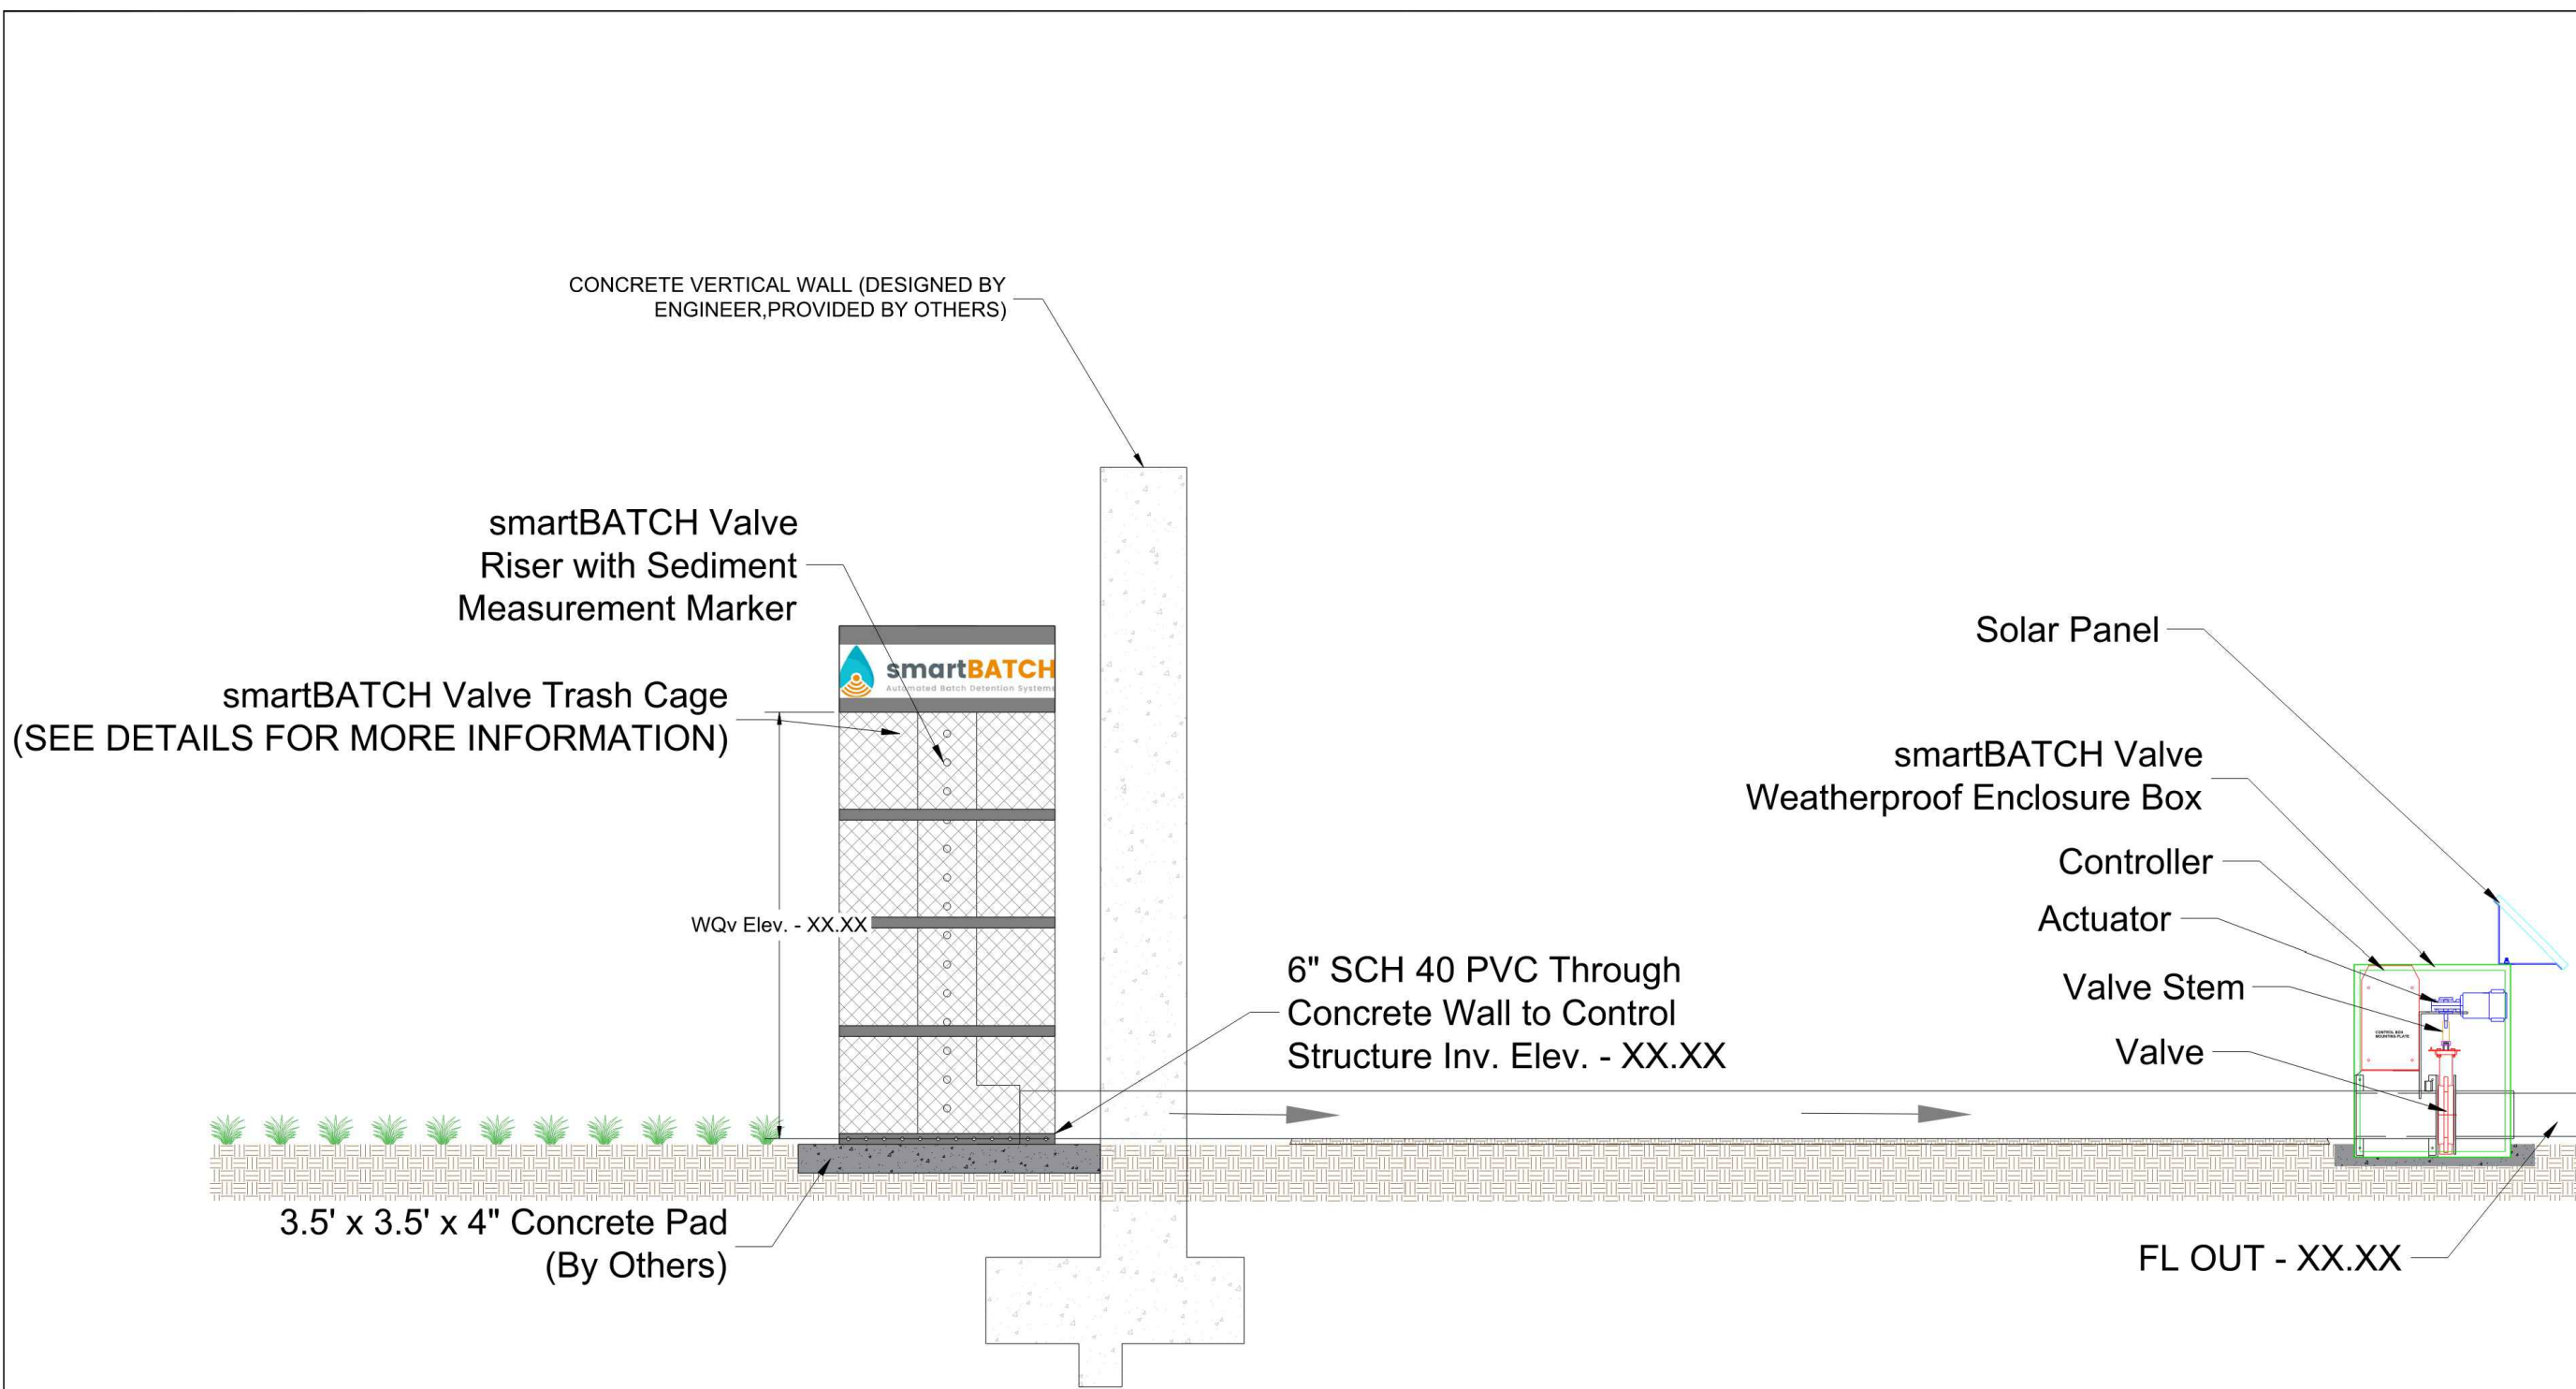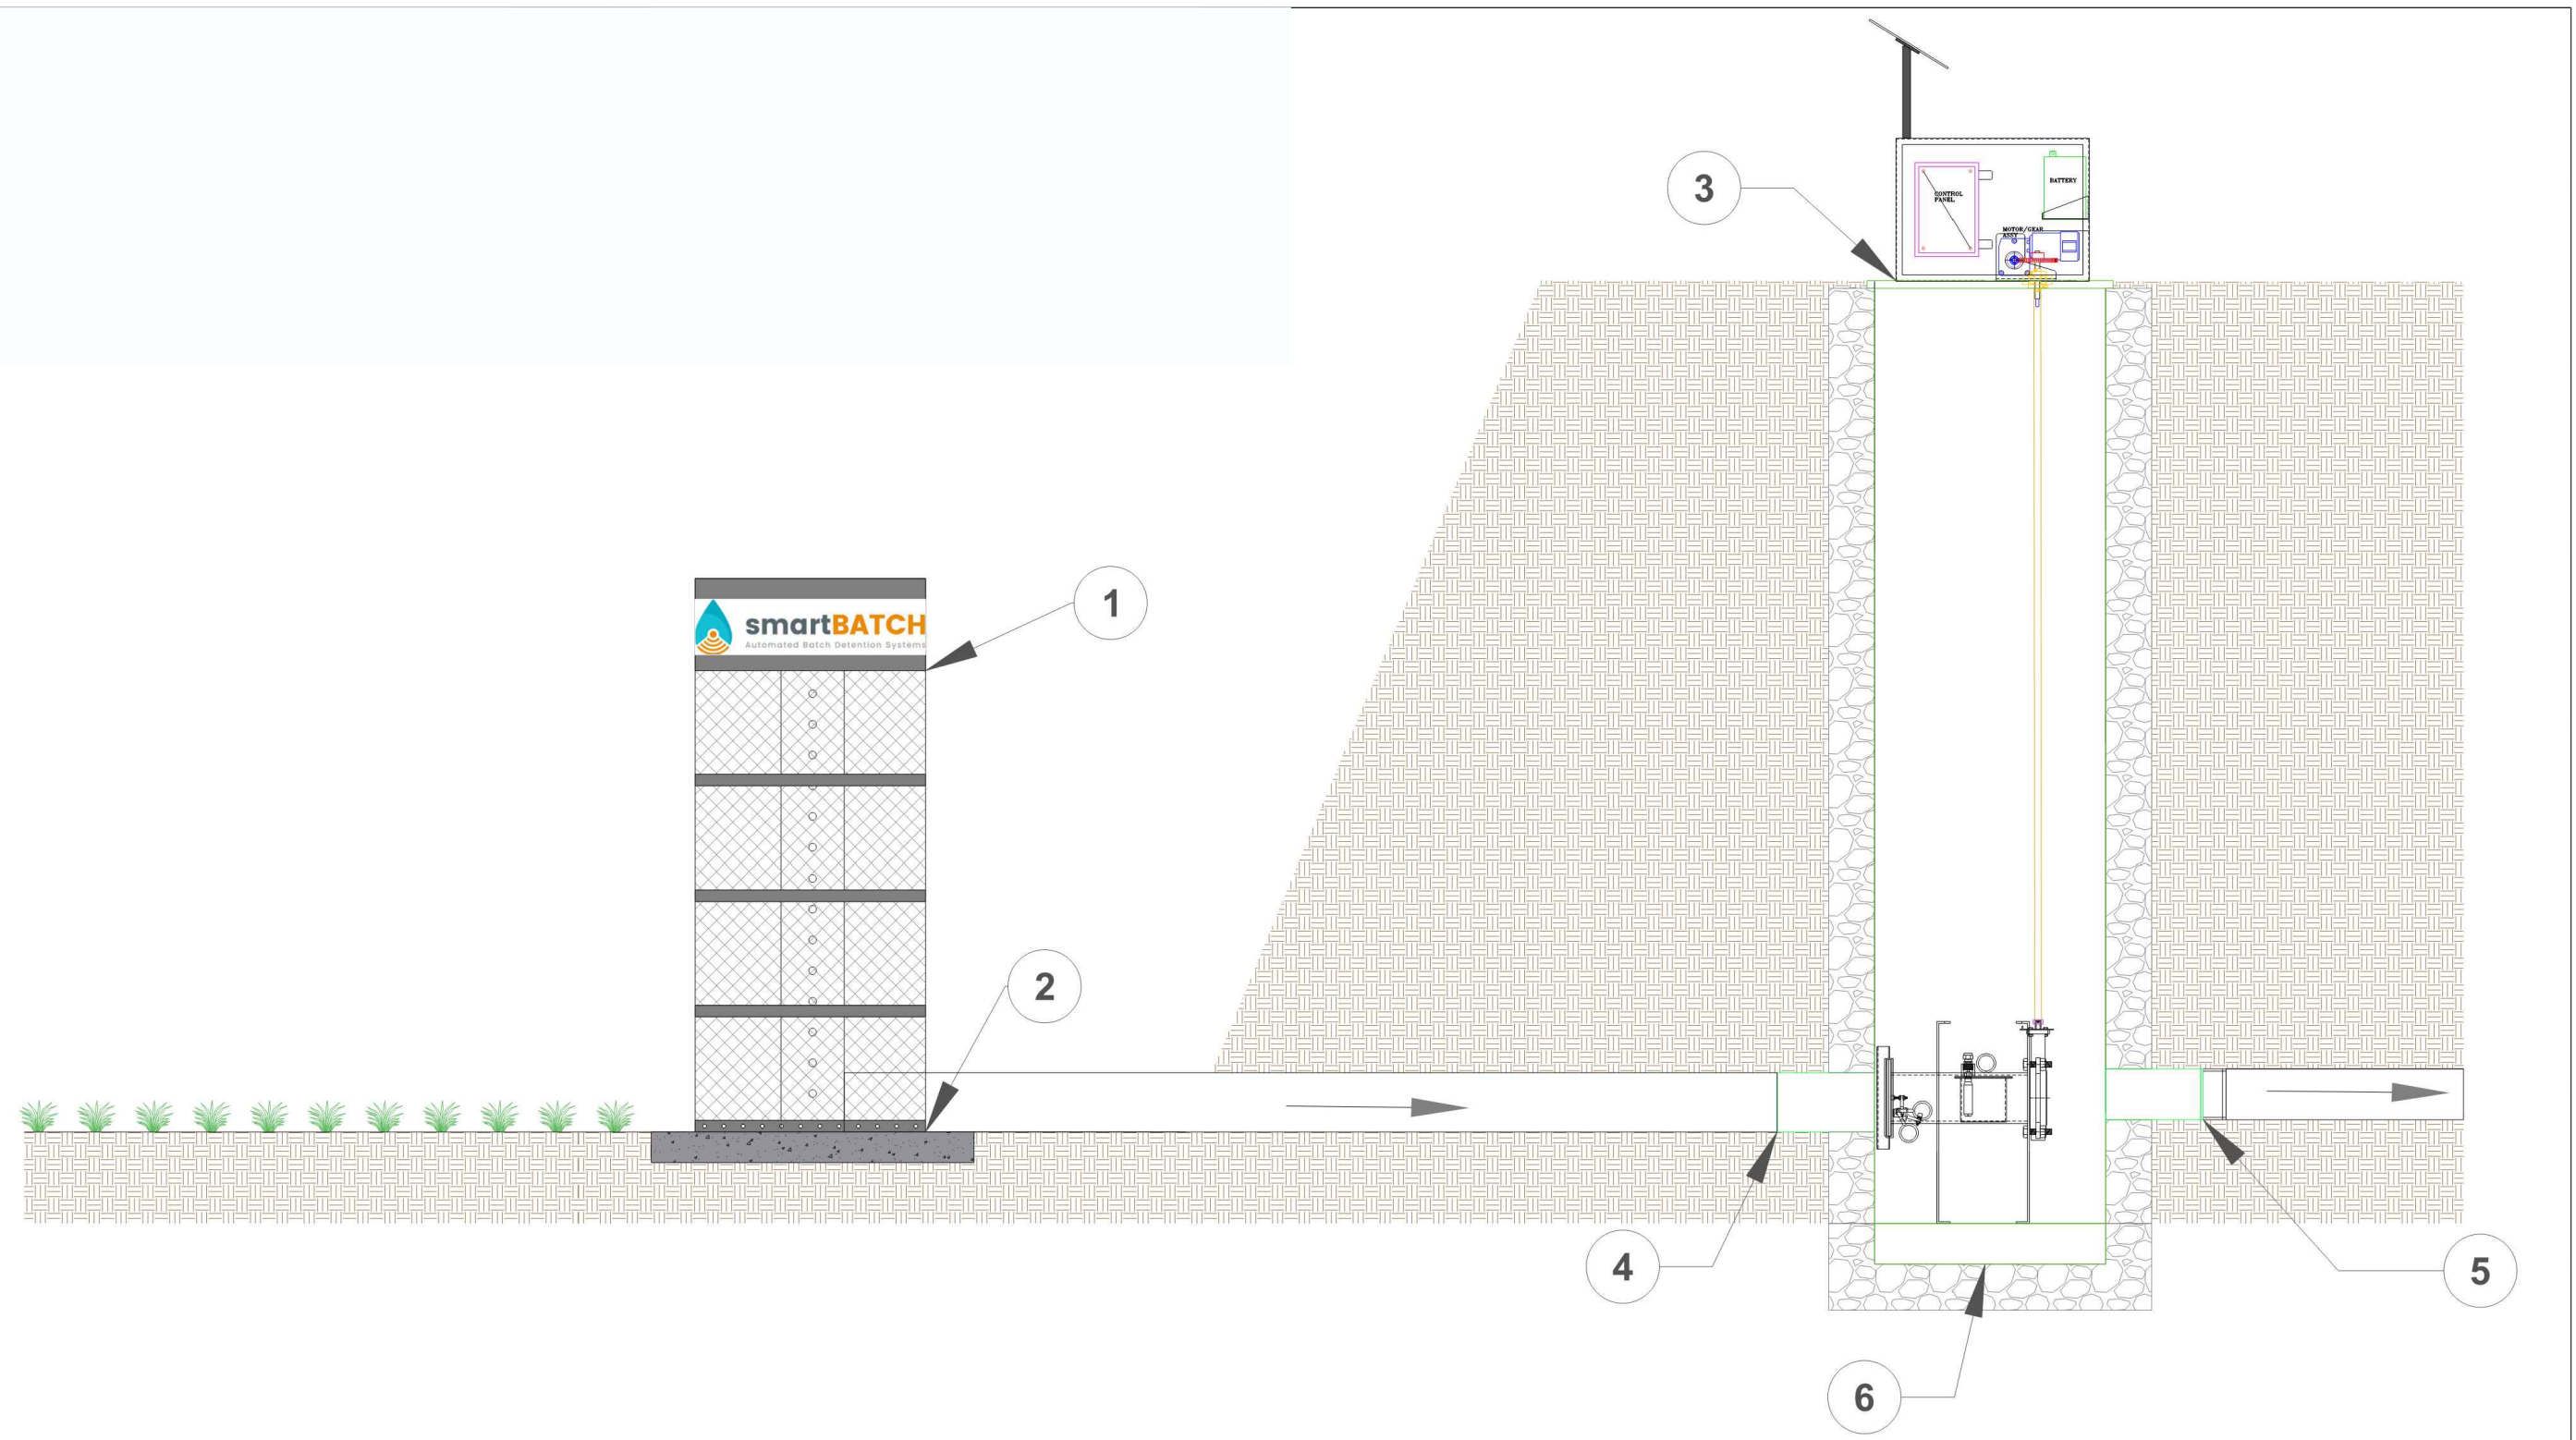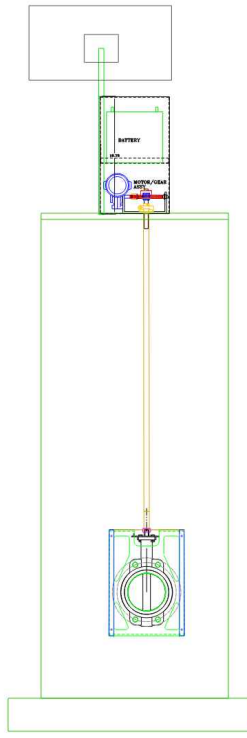

smartPOND
Automated Stormwater Control.

CONSTRUCTION ECO SERVICES

smartBATCH Valve with VERTICAL WALL

REVISIONS
0
5/29/2020
SHEET NO.

NOTE: ENGINEER OF RECORD TO REVIEW, APPROVE AND ENDORSE FINAL SITE SPECIFIC DESIGN.




PEC CEDAR PARK CAMPUS
1875 W WHITESTONE BLVD
LEANDER, TX 78641
DRAINAGE DETAILS II

JOB:
DATE:
DESIGN: PM:
PEER: DM:

REVISIONS:
DELTA DESCRIPTION

SHEET:
11

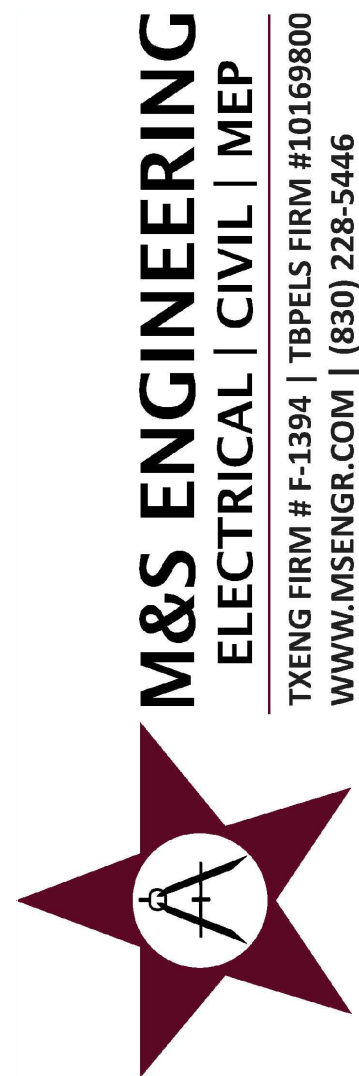

Agent Authorization Form
For Required Signature
Edwards Aquifer Protection Program
Relating to 30 TAC Chapter 213
Effective June 1, 1999

I _____ Bud Collora _____
Print Name

Owner/Operator
Title - Owner/President/Other
of _____ Pedernales Electric Cooperative, Inc. _____
Corporation/Partnership/Entity Name
have authorized _____ James Ingalls, PE _____
Print Name of Agent/Engineer
of _____ INK Civil _____
Print Name of Firm

to represent and act on the behalf of the above named Corporation, Partnership, or Entity for the purpose of preparing and submitting this plan application to the Texas Commission on Environmental Quality (TCEQ) for the review and approval consideration of regulated activities.

I also understand that:

1. The applicant is responsible for compliance with 30 Texas Administrative Code Chapter 213 and any condition of the TCEQ's approval letter. The TCEQ is authorized to assess administrative penalties of up to \$10,000 per day per violation.
2. For those submitting an application who are not the property owner, but who have the right to control and possess the property, additional authorization is required from the owner.
3. Application fees are due and payable at the time the application is submitted. The application fee must be sent to the TCEQ cashier or to the appropriate regional office. The application will not be considered until the correct fee is received by the commission.
4. A notarized copy of the Agent Authorization Form must be provided for the person preparing the application, and this form must accompany the completed application.
5. No person shall commence any regulated activity on the Edwards Aquifer Recharge Zone, Contributing Zone or Transition Zone until the appropriate application for the activity has been filed with and approved by the Executive Director.

SIGNATURE PAGE:

Bud Collora
Applicant's Signature


5-19-25
Date

THE STATE OF Texas §

County of Blanco §

BEFORE ME, the undersigned authority, on this day personally appeared Bud Collora known to me to be the person whose name is subscribed to the foregoing instrument, and acknowledged to me that (s)he executed same for the purpose and consideration therein expressed.

GIVEN under my hand and seal of office on this 13 day of May, 2025.

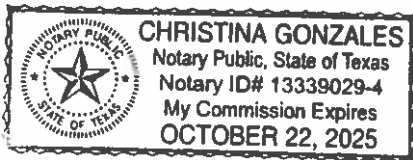

Christina Gonzales
NOTARY PUBLIC

Christina Gonzales
Typed or Printed Name of Notary

MY COMMISSION EXPIRES: 10/22/25

Application Fee Form

Texas Commission on Environmental Quality

Name of Proposed Regulated Entity: PEC Cedar Park Campus

Regulated Entity Location: 1875 W Whitestone Blvd, Leander, TX 78641

Name of Customer: Pedernales Electric Cooperative, Inc.

Contact Person: Bud Collora

Phone: 830-868-6056

Customer Reference Number (if issued): CN 601327927

Regulated Entity Reference Number (if issued): RN N/A

Austin Regional Office (3373)

☐ Hays

☐ Travis

☒ Williamson

San Antonio Regional Office (3362)

☐ Bexar

☐ Medina

☐ Uvalde

☐ Comal

☐ Kinney

Application fees must be paid by check, certified check, or money order, payable to the **Texas Commission on Environmental Quality**. Your canceled check will serve as your receipt. **This form must be submitted with your fee payment.** This payment is being submitted to:

☒ Austin Regional Office

☐ San Antonio Regional Office

☐ Mailed to: TCEQ - Cashier

☐ Overnight Delivery to: TCEQ - Cashier

Revenues Section

Mail Code 214

P.O. Box 13088

Austin, TX 78711-3088

12100 Park 35 Circle

Building A, 3rd Floor

Austin, TX 78753

(512)239-0357

Site Location (Check All That Apply):

☐ Recharge Zone

☒ Contributing Zone

☐ Transition Zone

Type of Plan	Size	Fee Due
Water Pollution Abatement Plan, Contributing Zone Plan: One Single Family Residential Dwelling	Acres	\$
Water Pollution Abatement Plan, Contributing Zone Plan: Multiple Single Family Residential and Parks	Acres	\$
Water Pollution Abatement Plan, Contributing Zone Plan: Non-residential	3.41 Acres	\$ 4,000
Sewage Collection System	L.F.	\$
Lift Stations without sewer lines	Acres	\$
Underground or Aboveground Storage Tank Facility	Tanks	\$
Piping System(s)(only)	Each	\$
Exception	Each	\$
Extension of Time	Each	\$

Signature: 

Date: 5/13/2025

Application Fee Schedule

Texas Commission on Environmental Quality

Edwards Aquifer Protection Program 30 TAC Chapter 213 (effective 05/01/2008)

Water Pollution Abatement Plans and Modifications

Contributing Zone Plans and Modifications

<i>Project</i>	<i>Project Area in Acres</i>	<i>Fee</i>
One Single Family Residential Dwelling	< 5	\$650
Multiple Single Family Residential and Parks	< 5	\$1,500
	5 < 10	\$3,000
	10 < 40	\$4,000
	40 < 100	\$6,500
	100 < 500	\$8,000
	≥ 500	\$10,000
Non-residential (Commercial, industrial, institutional, multi-family residential, schools, and other sites where regulated activities will occur)	< 1	\$3,000
	1 < 5	\$4,000
	5 < 10	\$5,000
	10 < 40	\$6,500
	40 < 100	\$8,000
	≥ 100	\$10,000

Organized Sewage Collection Systems and Modifications

<i>Project</i>	<i>Cost per Linear Foot</i>	<i>Minimum Fee- Maximum Fee</i>
Sewage Collection Systems	\$0.50	\$650 - \$6,500

Underground and Aboveground Storage Tank System Facility Plans and Modifications

<i>Project</i>	<i>Cost per Tank or Piping System</i>	<i>Minimum Fee- Maximum Fee</i>
Underground and Aboveground Storage Tank Facility	\$650	\$650 - \$6,500

Exception Requests

<i>Project</i>	<i>Fee</i>
Exception Request	\$500

Extension of Time Requests

<i>Project</i>	<i>Fee</i>
Extension of Time Request	\$150



TCEQ Core Data Form

For detailed instructions on completing this form, please read the Core Data Form Instructions or call 512-239-5175.

SECTION I: General Information

1. Reason for Submission (If other is checked please describe in space provided.)		
<input checked="" type="checkbox"/> New Permit, Registration or Authorization (Core Data Form should be submitted with the program application.)		
<input type="checkbox"/> Renewal (Core Data Form should be submitted with the renewal form)		<input type="checkbox"/> Other
2. Customer Reference Number (if issued)	Follow this link to search for CN or RN numbers in Central Registry**	3. Regulated Entity Reference Number (if issued)
CN 601327927		RN

SECTION II: Customer Information

4. General Customer Information		5. Effective Date for Customer Information Updates (mm/dd/yyyy)			
<input type="checkbox"/> New Customer		<input checked="" type="checkbox"/> Update to Customer Information		<input type="checkbox"/> Change in Regulated Entity Ownership	
<input type="checkbox"/> Change in Legal Name (Verifiable with the Texas Secretary of State or Texas Comptroller of Public Accounts)					
<i>The Customer Name submitted here may be updated automatically based on what is current and active with the Texas Secretary of State (SOS) or Texas Comptroller of Public Accounts (CPA).</i>					
6. Customer Legal Name (If an individual, print last name first: eg: Doe, John)				<i>If new Customer, enter previous Customer below:</i>	
Pedernales Electric Cooperative Inc.					
7. TX SOS/CPA Filing Number		8. TX State Tax ID (11 digits)		9. Federal Tax ID (9 digits)	10. DUNS Number (if applicable)
0007336401		17408284127			
11. Type of Customer:		<input checked="" type="checkbox"/> Corporation		<input type="checkbox"/> Individual	Partnership: <input type="checkbox"/> General <input type="checkbox"/> Limited
Government: <input type="checkbox"/> City <input type="checkbox"/> County <input type="checkbox"/> Federal <input type="checkbox"/> Local <input type="checkbox"/> State <input type="checkbox"/> Other		<input type="checkbox"/> Sole Proprietorship		<input type="checkbox"/> Other:	
12. Number of Employees				13. Independently Owned and Operated?	
<input type="checkbox"/> 0-20 <input type="checkbox"/> 21-100 <input type="checkbox"/> 101-250 <input type="checkbox"/> 251-500 <input checked="" type="checkbox"/> 501 and higher				<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
14. Customer Role (Proposed or Actual) – as it relates to the Regulated Entity listed on this form. Please check one of the following					
<input type="checkbox"/> Owner <input type="checkbox"/> Operator <input checked="" type="checkbox"/> Owner & Operator <input type="checkbox"/> Other:					
<input type="checkbox"/> Occupational Licensee <input type="checkbox"/> Responsible Party <input type="checkbox"/> VCP/BSA Applicant					
15. Mailing Address:		PO Box 1			
City	Johnson City	State	TX	ZIP	78636
				ZIP + 4	0001
16. Country Mailing Information (if outside USA)				17. E-Mail Address (if applicable)	
18. Telephone Number		19. Extension or Code		20. Fax Number (if applicable)	

SECTION III: Regulated Entity Information**21. General Regulated Entity Information** (If 'New Regulated Entity' is selected, a new permit application is also required.)
☒ New Regulated Entity ☐ Update to Regulated Entity Name ☐ Update to Regulated Entity Information

The Regulated Entity Name submitted may be updated, in order to meet TCEQ Core Data Standards (removal of organizational endings such as Inc, LP, or LLC).

22. Regulated Entity Name (Enter name of the site where the regulated action is taking place.)

PEC Cedar Park Campus

23. Street Address of the Regulated Entity:

1875 W Whitestone Blvd

(No PO Boxes)

City

Leander

State

TX

ZIP

78641

ZIP + 4

24. County

Williamson

If no Street Address is provided, fields 25-28 are required.

25. Description to Physical Location:

Called 3.41 acres out of the Jane Glasscock Survey, Abstract No. 257 in Williamson County, Texas, as described in Vol 2578, Pg 0478, DPRWCT.

26. Nearest City**State****Nearest ZIP Code**

Cedar Park

TX

78613

Latitude/Longitude are required and may be added/updated to meet TCEQ Core Data Standards. (Geocoding of the Physical Address may be used to supply coordinates where none have been provided or to gain accuracy).

27. Latitude (N) In Decimal:

30.515509

28. Longitude (W) In Decimal:

-97.855672

Degrees

Minutes

Seconds

Degrees

Minutes

Seconds

30

30

55.8324

-97

51

20.4186

29. Primary SIC Code**30. Secondary SIC Code****31. Primary NAICS Code****32. Secondary NAICS Code**

(4 digits)

(4 digits)

(5 or 6 digits)

(5 or 6 digits)

33. What is the Primary Business of this entity? (Do not repeat the SIC or NAICS description.)

Electrical supply equipment storage

34. Mailing Address:

PO BOX 1

City

JOHNSON CITY

State

TX

ZIP

78636

ZIP + 4

0001

35. E-Mail Address:

bud.collora@peci.com

36. Telephone Number**37. Extension or Code****38. Fax Number** (if applicable)

(830)868-6056

() -

39. TCEQ Programs and ID Numbers Check all Programs and write in the permits/registration numbers that will be affected by the updates submitted on this form. See the Core Data Form instructions for additional guidance.


<input type="checkbox"/> Dam Safety	<input type="checkbox"/> Districts	<input checked="" type="checkbox"/> Edwards Aquifer	<input type="checkbox"/> Emissions Inventory Air	<input type="checkbox"/> Industrial Hazardous Waste
<input type="checkbox"/> Municipal Solid Waste	<input type="checkbox"/> New Source Review Air	<input type="checkbox"/> OSSF	<input type="checkbox"/> Petroleum Storage Tank	<input type="checkbox"/> PWS
<input type="checkbox"/> Sludge	<input type="checkbox"/> Storm Water	<input type="checkbox"/> Title V Air	<input type="checkbox"/> Tires	<input type="checkbox"/> Used Oil
<input type="checkbox"/> Voluntary Cleanup	<input type="checkbox"/> Wastewater	<input type="checkbox"/> Wastewater Agriculture	<input type="checkbox"/> Water Rights	<input type="checkbox"/> Other:

SECTION IV: Preparer Information

40. Name:	Catherine Haegelin, EIT			41. Title:	Graduate Engineer
42. Telephone Number	43. Ext./Code	44. Fax Number	45. E-Mail Address		
(830)-358-7127		() -	plats@ink-civil.com		

SECTION V: Authorized Signature

46. By my signature below, I certify, to the best of my knowledge, that the information provided in this form is true and complete, and that I have signature authority to submit this form on behalf of the entity specified in Section II, Field 6 and/or as required for the updates to the ID numbers identified in field 39.

Company:	INK Civil	Job Title:	Engineer/Agent	
Name (In Print):	James Ingalls, PE	Phone:	(830)-358-7127	
Signature:			Date:	5/13/2025